



**Please note that Cypress is an Infineon Technologies Company.**

The document following this cover page is marked as “Cypress” document as this is the company that originally developed the product. Please note that Infineon will continue to offer the product to new and existing customers as part of the Infineon product portfolio.

**Continuity of document content**

The fact that Infineon offers the following product as part of the Infineon product portfolio does not lead to any changes to this document. Future revisions will occur when appropriate, and any changes will be set out on the document history page.

**Continuity of ordering part numbers**

Infineon continues to support existing part numbers. Please continue to use the ordering part numbers listed in the datasheet for ordering.

# 1-Mbit (128 K × 8) Serial (I<sup>2</sup>C) nvSRAM with Real Time Clock

## Features

- 1-Mbit nonvolatile static random access memory (nvSRAM)
  - Internally organized as 128 K × 8
  - STORE to QuantumTrap nonvolatile elements initiated automatically on power-down (AutoStore) or by using I<sup>2</sup>C command (Software STORE) or HSB pin (Hardware STORE)
  - RECALL to SRAM initiated on power-up (Power-Up RECALL) or by I<sup>2</sup>C command (Software RECALL)
  - Automatic STORE on power-down with a small capacitor
- High reliability
  - Infinite read, write, and RECALL cycles
  - 1 million STORE cycles to QuantumTrap
  - Data retention: 20 years at 85 °C
- Real Time Clock (RTC)
  - Full-featured RTC
  - Watchdog timer
  - Clock alarm with programmable interrupts
  - Backup power fail indication
  - Square wave output with programmable frequency (1 Hz, 512 Hz, 4096 Hz, 32.768 kHz)
  - Capacitor or battery backup for RTC
  - Backup current of 0.45 μA (typical)
- High-speed I<sup>2</sup>C interface<sup>[1]</sup>
  - Industry standard 100 kHz and 400 kHz speed
  - Fast mode Plus: 1 MHz speed
  - High speed: 3.4 MHz
  - Zero cycle delay reads and writes
- Write protection
  - Hardware protection using Write Protect (WP) pin
  - Software block protection for 1/4, 1/2, or entire array


- I<sup>2</sup>C access to special functions
  - Nonvolatile STORE/RECALL
  - 8-byte serial number
  - Manufacturer ID and Product ID
  - Sleep mode
- Low power consumption
  - Average active current of 1 mA at 3.4 MHz operation
  - Average standby mode current of 250 μA
  - Sleep mode current of 8 μA
- Industry standard configurations
  - Operating voltages:
    - CY14C101I: V<sub>CC</sub> = 2.4 V to 2.6 V
    - CY14B101I: V<sub>CC</sub> = 2.7 V to 3.6 V
    - CY14E101I: V<sub>CC</sub> = 4.5 V to 5.5 V
  - Industrial temperature
  - 16-pin small outline integrated circuit (SOIC) package
  - Restriction of hazardous substances (RoHS) compliant

## Overview

The Cypress CY14C101I/CY14B101I/CY14E101I combines a 1-Mbit nvSRAM<sup>[2]</sup> with a full-featured RTC in a monolithic integrated circuit with serial I<sup>2</sup>C interface. The memory is organized as 128 K words of 8 bits each. The embedded nonvolatile elements incorporate the QuantumTrap technology, creating the world's most reliable nonvolatile memory. The SRAM provides infinite read and write cycles, while the QuantumTrap cells provide highly reliable nonvolatile storage of data. Data transfers from SRAM to the nonvolatile elements (STORE operation) take place automatically at power-down. On power-up, data is restored to the SRAM from the nonvolatile memory (RECALL operation). The STORE and RECALL operations can also be initiated by the user through I<sup>2</sup>C commands.

For a complete list of related documentation, click [here](#).

## Logic Block Diagram

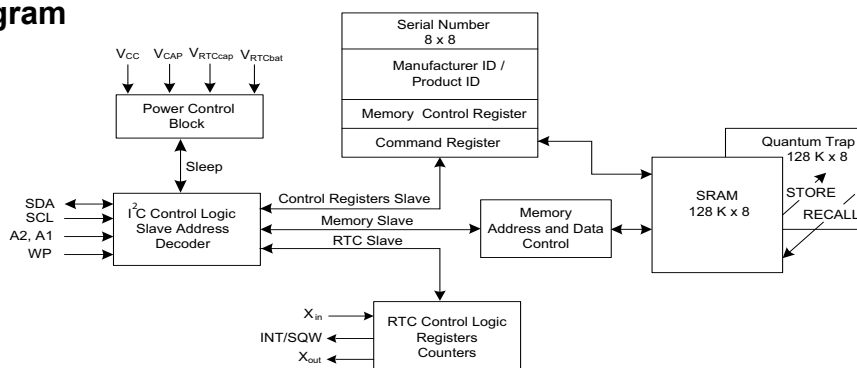

### Notes


1. The I<sup>2</sup>C nvSRAM is a single solution which is usable for all four speed modes of operation. As a result, some I/O parameters are slightly different than those on chips which support only one mode of operation. Refer to [AN87209](#) for more details.
2. Serial (I<sup>2</sup>C) nvSRAM will be referred to as nvSRAM throughout the datasheet.

## Contents

|                                                 |           |                                                      |           |
|-------------------------------------------------|-----------|------------------------------------------------------|-----------|
| <b>Pinout</b> .....                             | <b>3</b>  | Watchdog Timer .....                                 | 21        |
| <b>Pin Definitions</b> .....                    | <b>3</b>  | Programmable Square Wave Generator .....             | 22        |
| <b>I2C Interface</b> .....                      | <b>4</b>  | Power Monitor .....                                  | 22        |
| <b>Protocol Overview</b> .....                  | <b>4</b>  | Backup Power Monitor .....                           | 22        |
| I2C Protocol – Data Transfer .....              | 4         | Interrupts .....                                     | 22        |
| Data Validity .....                             | 5         | Interrupt Register .....                             | 22        |
| START Condition (S) .....                       | 5         | Flags Register .....                                 | 23        |
| STOP Condition (P) .....                        | 5         | RTC External Components .....                        | 24        |
| Repeated START (Sr) .....                       | 5         | <b>PCB Design Considerations for RTC</b> .....       | <b>25</b> |
| Byte Format .....                               | 5         | Layout requirements .....                            | 25        |
| Acknowledge / No-acknowledge .....              | 5         | <b>Maximum Ratings</b> .....                         | <b>30</b> |
| High-Speed Mode (Hs-mode) .....                 | 6         | <b>Operating Range</b> .....                         | <b>30</b> |
| Slave Device Address .....                      | 7         | <b>DC Electrical Characteristics</b> .....           | <b>30</b> |
| Write Protection (WP) .....                     | 9         | <b>Data Retention and Endurance</b> .....            | <b>31</b> |
| AutoStore Operation .....                       | 9         | <b>Thermal Resistance</b> .....                      | <b>31</b> |
| Hardware STORE and HSB pin Operation .....      | 9         | <b>AC Test Loads and Waveforms</b> .....             | <b>32</b> |
| Hardware RECALL (Power-Up) .....                | 10        | <b>AC Test Conditions</b> .....                      | <b>32</b> |
| Write Operation .....                           | 10        | <b>RTC Characteristics</b> .....                     | <b>32</b> |
| Read Operation .....                            | 10        | <b>AC Switching Characteristics</b> .....            | <b>33</b> |
| Memory Slave Access .....                       | 10        | <b>Switching Waveforms</b> .....                     | <b>33</b> |
| RTC Registers Slave Access .....                | 14        | <b>nvSRAM Specifications</b> .....                   | <b>34</b> |
| Control Registers Slave .....                   | 16        | <b>Switching Waveforms</b> .....                     | <b>34</b> |
| <b>Serial Number</b> .....                      | <b>18</b> | <b>Software Controlled STORE/RECALL Cycles</b> ..... | <b>35</b> |
| Serial Number Write .....                       | 18        | <b>Switching Waveforms</b> .....                     | <b>35</b> |
| Serial Number Lock .....                        | 18        | <b>Hardware STORE Cycle</b> .....                    | <b>36</b> |
| Serial Number Read .....                        | 18        | <b>Switching Waveforms</b> .....                     | <b>36</b> |
| <b>Device ID</b> .....                          | <b>19</b> | <b>Ordering Information</b> .....                    | <b>37</b> |
| Executing Commands Using Command Register ..... | 19        | Ordering Code Definitions .....                      | 37        |
| <b>Real Time Clock Operation</b> .....          | <b>20</b> | <b>Package Diagram</b> .....                         | <b>38</b> |
| nvTIME Operation .....                          | 20        | <b>Acronyms</b> .....                                | <b>39</b> |
| Clock Operations .....                          | 20        | <b>Document Conventions</b> .....                    | <b>39</b> |
| Reading the Clock .....                         | 20        | Units of Measure .....                               | 39        |
| Setting the Clock .....                         | 20        | <b>Document History Page</b> .....                   | <b>40</b> |
| Backup Power .....                              | 20        | <b>Sales, Solutions, and Legal Information</b> ..... | <b>43</b> |
| Stopping and Starting the Oscillator .....      | 20        | Worldwide Sales and Design Support .....             | 43        |
| Calibrating the Clock .....                     | 21        | Products .....                                       | 43        |
| Alarm .....                                     | 21        | PSoC Solutions .....                                 | 43        |

## Pinout

**Figure 1. 16-pin SOIC pinout**

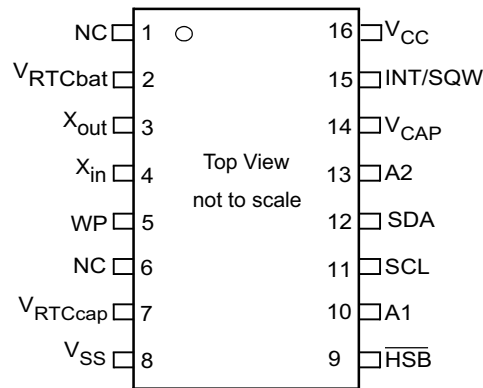

## Pin Definitions

| Pin Name                           | I/O Type     | Description                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------------------------|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SCL                                | Input        | Clock: Runs at speeds up to a maximum of $f_{SCL}$                                                                                                                                                                                                                                                                                                                                                      |
| SDA                                | Input/Output | I/O: Input/output of data through I <sup>2</sup> C interface.<br>Output: Is open-drain and requires an external pull-up resistor.                                                                                                                                                                                                                                                                       |
| WP                                 | Input        | Write Protect: Protects the memory from all writes. This pin is internally pulled LOW and hence can be left open if not connected.                                                                                                                                                                                                                                                                      |
| A2-A1                              | Input        | Slave Address: Defines the slave address for I <sup>2</sup> C. These pins are internally pulled LOW and hence can be left open if not connected.                                                                                                                                                                                                                                                        |
| HSB                                | Input/Output | Hardware STORE Busy:<br>Output: Indicates busy status of nvSRAM when LOW. After each Hardware and Software STORE operation HSB is driven HIGH for a short time ( $t_{HHHD}$ ) with standard output high current and then a weak internal pull-up resistor keeps this pin HIGH (External pull-up resistor connection optional).<br>Input: Hardware STORE implemented by pulling this pin LOW externally. |
| V <sub>CAP</sub>                   | Power supply | AutoStore capacitor: Supplies power to the nvSRAM during power loss to STORE data from the SRAM to nonvolatile elements. If not required, AutoStore must be disabled and this pin left as No Connect. It must never be connected to ground.                                                                                                                                                             |
| V <sub>RTCcap</sub> <sup>[3]</sup> | Power supply | Capacitor backup for RTC: Left unconnected if V <sub>RTCbat</sub> is used.                                                                                                                                                                                                                                                                                                                              |
| V <sub>RTCbat</sub> <sup>[3]</sup> | Power supply | Battery backup for RTC: Left unconnected if V <sub>RTCcap</sub> is used.                                                                                                                                                                                                                                                                                                                                |
| X <sub>out</sub> <sup>[3]</sup>    | Output       | Crystal output connection                                                                                                                                                                                                                                                                                                                                                                               |
| X <sub>in</sub> <sup>[3]</sup>     | Input        | Crystal input connection                                                                                                                                                                                                                                                                                                                                                                                |
| INT/SQW <sup>[3]</sup>             | Output       | Interrupt output/calibration/square wave. Programmable to respond to the clock alarm, the watchdog timer, and the power monitor. Also programmable to either active HIGH (push or pull) or LOW (open drain). In Calibration mode, a 512 Hz square wave is driven out. In Square Wave mode, the user may select a frequency of 1 Hz, 512 Hz, 4096 Hz, or 32768 Hz to be used as a continuous output.     |
| NC                                 | No connect   | No connect. This pin is not connected to the die.                                                                                                                                                                                                                                                                                                                                                       |
| V <sub>SS</sub>                    | Power supply | Ground                                                                                                                                                                                                                                                                                                                                                                                                  |
| V <sub>CC</sub>                    | Power supply | Power supply                                                                                                                                                                                                                                                                                                                                                                                            |

### Note

3. Left unconnected if RTC feature is not used.



## Data Validity

The data on the SDA line must be stable during the HIGH period of the clock. The state of the data line can only change when the clock on the SCL line is LOW for the data to be valid. There are only two conditions under which the SDA line may change state with SCL line held HIGH: START and STOP condition. The START and STOP conditions are generated by the master to signal the beginning and end of a communication sequence on the I<sup>2</sup>C bus.

## START Condition (S)

A HIGH to LOW transition on the SDA line while SCL is HIGH indicates a START condition. Every transaction in I<sup>2</sup>C begins with the master generating a START condition.

## STOP Condition (P)


A LOW to HIGH transition on the SDA line while SCL is HIGH indicates a STOP condition. This condition indicates the end of the ongoing transaction.

START and STOP conditions are always generated by the master. The bus is considered to be busy after the START condition. The bus is considered to be free again after the STOP condition.


## Repeated START (Sr)

If a Repeated START condition is generated instead of a STOP condition, the bus continues to be busy. The ongoing transaction on the I<sup>2</sup>C lines is stopped and the bus waits for the master to send a slave ID for communication to restart.

**Figure 3. START and STOP Conditions**

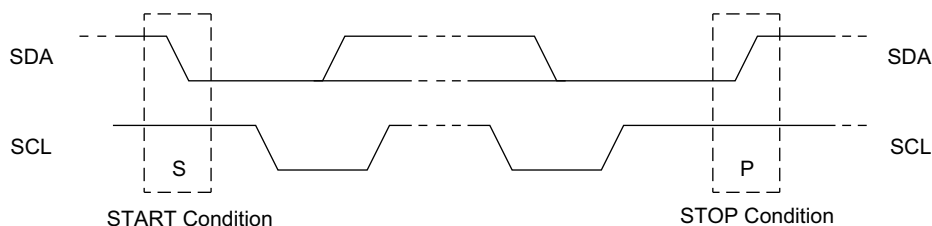

**Figure 4. Data Transfer on the I<sup>2</sup>C Bus**

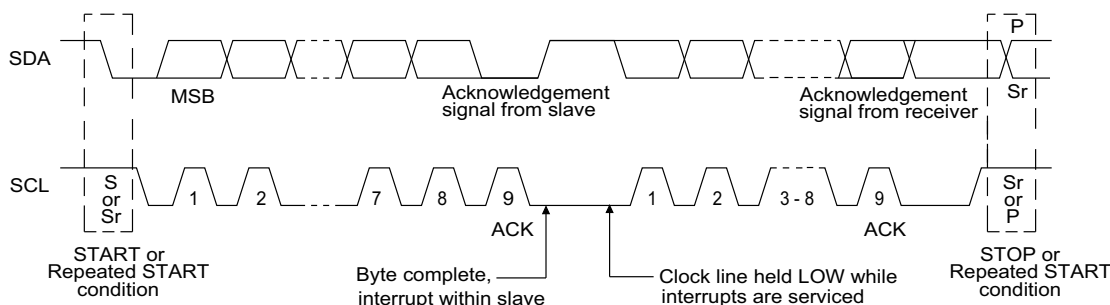

## Byte Format

Each operation in I<sup>2</sup>C is done using 8-bit words. The bits are sent in MSB first format on SDA line and each byte is followed by an ACK signal by the receiver.

An operation continues until a NACK is sent by the receiver or STOP or Repeated START condition is generated by the master. The SDA line must remain stable when the clock (SCL) is HIGH except for a START or STOP condition.

## Acknowledge / No-acknowledge

After transmitting one byte of data or address, the transmitter releases the SDA line. The receiver pulls the SDA line LOW to acknowledge the receipt of the byte. Every byte of data transferred on the I<sup>2</sup>C bus needs a response with an ACK signal by the receiver to continue the operation. Failing to do so is considered as a NACK state. NACK is the state where receiver

does not acknowledge the receipt of data and the operation is aborted.


NACK can be generated by master during a READ operation in following cases:

- The master did not receive valid data due to noise.
- The master generates a NACK to abort the READ sequence. After a NACK is issued by the master, nvSRAM slave releases control of the SDA pin and the master is free to generate a Repeated START or STOP condition.

NACK can be generated by nvSRAM slave during a WRITE operation in these cases:

- nvSRAM did not receive valid data due to noise.
- The master tries to access write protected locations on the nvSRAM. Master must restart the communication by generating a STOP or Repeated START condition.

**Figure 5. Acknowledge on the I<sup>2</sup>C Bus**

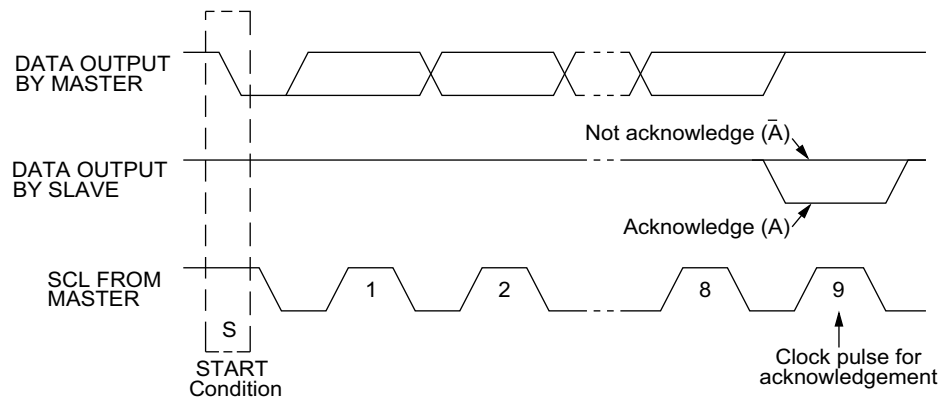

### High-Speed Mode (Hs-mode)

In Hs-mode, nvSRAM can transfer data at bit rates of up to 3.4 Mbit/s. A master code (0000 1XXXb) must be issued to place the device in high-speed mode. This enables master/slave communication for speeds up to 3.4 MHz. A stop condition will exit Hs-mode.

#### Serial Data Format in Hs-mode


Serial data transfer format in Hs-mode meets the standard-mode I<sup>2</sup>C-bus specification. Hs-mode can only commence after the following conditions (all of which are in F/S-modes):

1. START condition (S)
2. 8-bit master code (0000 1XXXb)
3. No-acknowledge bit ( $\bar{A}$ )

Single and multiple-byte reads and writes are supported. After the device enters into Hs-mode, data transfer continues in Hs-mode until stop condition is sent by master device. The slave switches back to F/S-mode after a STOP condition (P). To continue data transfer in Hs-mode, the master sends Repeated START (Sr).

See [Figure 13 on page 11](#) and [Figure 16 on page 12](#) for Hs-mode timings for read and write operation.

**Figure 6. Data Transfer Format in Hs-mode**

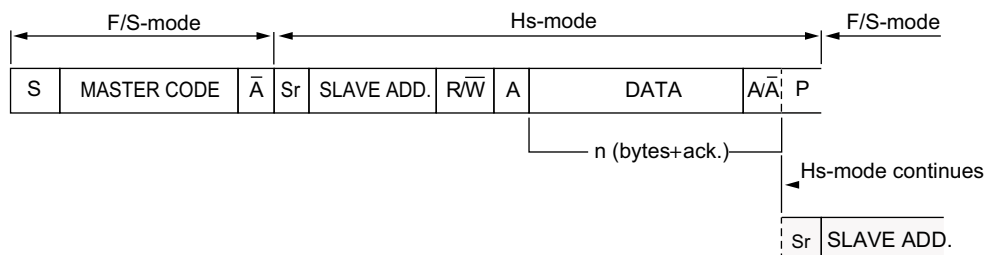



## Slave Device Address

Every slave device on an I<sup>2</sup>C bus has a device select address. The first byte after START condition contains the slave device address with which the master intends to communicate. The seven MSBs are the device address and the LSB (R/W bit) is used for indicating Read or Write operation. The CY14X101I reserves three sets of upper 4 MSBs [7:4] in the slave device address field for accessing the Memory, RTC Registers, and

Control Registers. The accessing mechanism is described in the following section.

The nvSRAM product provides three different functionalities: Memory, RTC Registers and Control Registers functions (such as serial number and product ID). The three functions of the device are accessed through different slave device addresses.

The first four most significant bits [7:4] in the device address register are used to select between the nvSRAM functions.

**Table 1. Slave Device Addressing**


| Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3            | Bit 2 | Bit 1 | Bit 0 | nvSRAM Function Select    |                                                                                                                                                                                                                                                         |
|-------|-------|-------|-------|------------------|-------|-------|-------|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1     | 0     | 1     | 0     | Device select ID |       | A16   | R/W   | Selects Memory            | <b>CY14X101I Slave Devices</b><br><div>Memory, 128 K × 8</div> <div>RTC Registers, 16 × 8</div> <div> Control Registers<br/> - Memory Control Register, 1 × 8<br/> - Serial Number, 8 × 8<br/> - Device ID, 4 × 8<br/> - Command Register, 1 × 8 </div> |
| 1     | 1     | 0     | 1     | Device select ID |       | X     | R/W   | Selects RTC Registers     |                                                                                                                                                                                                                                                         |
| 0     | 0     | 1     | 1     | Device select ID |       | X     | R/W   | Selects Control Registers |                                                                                                                                                                                                                                                         |

### Memory Slave Device

The nvSRAM device is selected for read/write if the master issues the slave address as 1010b followed by two bits of device select. If the slave address sent by the master matches with the Memory Slave device address then depending on the R/W bit of the slave address, the data will be either read from (R/W = '1') or written to (R/W = '0') the nvSRAM.

The address length for CY14X101I is 17 bits, and thus it requires three address bytes to map the entire memory address location. To save an extra byte for memory addressing, the 17th bit (A16) is mapped to the slave address select bit (A0). The dedicated two address bytes represent bit A0 to A15.

**Figure 7. Memory Slave Device Address**

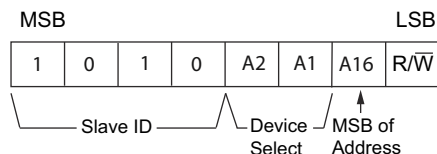


### RTC Registers Slave Device

The RTC Registers is selected for read/write if the master issues the slave address as 1101b followed by two bits of device select. Then, depending on the R/W bit of the slave address, data is

either read from (R/W = '1') or written to (R/W = '0') the RTC Registers. The RTC Registers slave address is followed by one byte address of RTC Register for read/write operation. The RTC Registers map is explained in the Table 10.

**Figure 8. RTC Registers Slave Device Address**

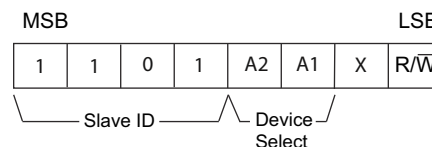


### Control Registers Slave Device

The Control Registers Slave device includes the serial number, product ID, Memory Control, and Command Register.

The nvSRAM Control Register Slave device is selected for read/write if the master issues the slave address as 0011b followed by two bits of device select. Then, depending on the R/W bit of the slave address, data is either read from (R/W = '1') or written to (R/W = '0') the device.

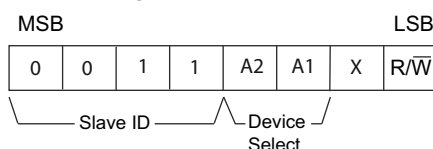

**Figure 9. Control Registers Slave Device Address**

**Table 2. Control Registers Map**

| Address | Description              | Read/Write                                | Details                                                                                                         |
|---------|--------------------------|-------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| 0x00    | Memory Control Register  | Read/Write                                | Contains Block Protect bits and Serial Number lock bit                                                          |
| 0x01    | Serial Number<br>8 bytes | Read/Write<br>(Read only when SNL is set) | Programmable Serial Number. Locked by setting the Serial Number lock bit in the Memory Control Register to '1'. |
| 0x02    |                          |                                           |                                                                                                                 |
| 0x03    |                          |                                           |                                                                                                                 |
| 0x04    |                          |                                           |                                                                                                                 |
| 0x05    |                          |                                           |                                                                                                                 |
| 0x06    |                          |                                           |                                                                                                                 |
| 0x07    |                          |                                           |                                                                                                                 |
| 0x08    |                          |                                           |                                                                                                                 |
| 0x09    | Device ID                | Read only                                 | Device ID is factory programmed                                                                                 |
| 0x0A    |                          |                                           |                                                                                                                 |
| 0x0B    |                          |                                           |                                                                                                                 |
| 0x0C    |                          |                                           |                                                                                                                 |
| 0x0D    | Reserved                 | Reserved                                  | Reserved                                                                                                        |
| 0xAA    | Command Register         | Write only                                | Allows commands for STORE, RECALL, AutoStore Enable/Disable, SLEEP Mode                                         |

#### Memory Control Register

The Memory Control Register contains the following bits:

**Table 3. Memory Control Register Bits**

| Bit 7 | Bit 6   | Bit 5 | Bit 4 | Bit 3   | Bit 2   | Bit 1 | Bit 0 |
|-------|---------|-------|-------|---------|---------|-------|-------|
| 0     | SNL (0) | 0     | 0     | BP1 (0) | BP0 (0) | 0     | 0     |

- **BP1:BP0:** Block protect bits are used to protect 1/4, 1/2 or full memory array. These bits can be written through a write instruction to the 0x00 location of the Control Register Slave device. However, any STORE cycle transfers SRAM data into a nonvolatile cell regardless of whether or not the block is protected. The default value shipped from the factory for BP0 and BP1 is '0'.

**Table 4. Block Protection**

| Level | BP1:BP0 | Block Protection |
|-------|---------|------------------|
| 0     | 00      | None             |
| 1/4   | 01      | 0x18000–0x1FFFF  |
| 1/2   | 10      | 0x10000–0x1FFFF  |
| 1     | 11      | 0x00000–0x1FFFF  |

- **SNL (S/N Lock) Bit:** Serial Number Lock bit (SNL) is used to lock the serial number. Once the bit is set to '1', the serial

number registers are locked and no modification is allowed. This bit cannot be cleared to '0'. The serial number is secured on the next STORE operation (Software STORE or AutoStore). If AutoStore is not enabled, user must perform the Software STORE operation to secure the lock bit status. If a STORE was not performed, the serial number lock bit will not survive the power cycle. The default value shipped from the factory for SNL is '0'.

#### Command Register

The Command Register resides at address 'AA' of the Control Registers Slave device. This is a write only register. The byte written to this register initiates a STORE, RECALL, AutoStore Enable, AutoStore Disable, and Sleep mode operation as listed in Table 5. The section [Executing Commands Using Command Register on page 19](#) explains how you can execute Command Register bytes.

**Table 5. Command Register Bytes**

| Data Byte [7:0] | Command | Description                                 |
|-----------------|---------|---------------------------------------------|
| 0011 1100       | STORE   | STORE SRAM data to nonvolatile memory       |
| 0110 0000       | RECALL  | RECALL data from nonvolatile memory to SRAM |
| 0101 1001       | ASENB   | Enable AutoStore                            |
| 0001 1001       | ASDISB  | Disable AutoStore                           |
| 1011 1001       | SLEEP   | Enter Sleep Mode for low power consumption  |

- **STORE:** Initiates nvSRAM Software STORE. The nvSRAM cannot be accessed for  $t_{STORE}$  time after this instruction has been executed. When initiated, the device performs a STORE operation regardless of whether or not a write has been performed since the last NV operation. After the  $t_{STORE}$  cycle time is completed, the SRAM is activated again for read/write operations.

- **RECALL:** Initiates nvSRAM Software RECALL. The nvSRAM cannot be accessed for  $t_{RECALL}$  time after this instruction has been executed. The RECALL operation does not alter the data in the nonvolatile elements. A RECALL may be initiated in two ways: Hardware RECALL, initiated on power-up; and Software RECALL, initiated by a I<sup>2</sup>C RECALL instruction.

- **ASENB:** Enables nvSRAM AutoStore. The nvSRAM cannot be accessed for  $t_{SS}$  time after this instruction has been executed. This setting is not nonvolatile and needs to be followed by a manual STORE sequence if this is desired to survive the power cycle. The part comes from the factory with AutoStore Enabled and 0x00 written in all cells.

- **ASDISB:** Disables nvSRAM AutoStore. The nvSRAM cannot be accessed for  $t_{SS}$  time after this instruction has been executed. This setting is not nonvolatile and needs to be followed by a manual STORE sequence if this is desired to survive power cycle.

**Note** If AutoStore is disabled and  $V_{CAP}$  is not required, it is required that the  $V_{CAP}$  pin is left open.  $V_{CAP}$  pin must never be connected to ground. Power-Up RECALL operation cannot be disabled in any case.

■ **SLEEP:** SLEEP instruction puts the nvSRAM in a sleep mode. When the SLEEP instruction is registered, the nvSRAM takes  $t_{SS}$  time to process the SLEEP request. Once the SLEEP command is successfully registered and processed, the nvSRAM toggles HSB LOW, performs a STORE operation to secure the data to nonvolatile memory and then enters into SLEEP mode. Whenever nvSRAM enters into sleep mode, it initiates non volatile STORE cycle which results in losing an endurance cycle per sleep command execution. A STORE cycle starts only if a write to the SRAM has been performed since the last STORE or RECALL cycle.

The nvSRAM enters sleep mode in the following manner:

1. The master sends a START command.
2. The master sends Control Registers Slave device ID with  $I^2C$  write bit set ( $R/\bar{W} = '0'$ ).
3. The slave (nvSRAM) sends an ACK back to the master.
4. The master sends Command Register address (0xAA).
5. The slave (nvSRAM) sends an ACK back to the master.
6. The master sends Command Register byte for entering into sleep mode.
7. The slave (nvSRAM) sends an ACK back to the master.
8. The master generates a STOP condition.

After entering sleep mode, the device starts consuming  $I_{ZZ}$  current  $t_{SLEEP}$  time after SLEEP instruction is registered. The device is not accessible for normal operations until it is out of sleep mode. The nvSRAM wakes up after  $t_{WAKE}$  duration after the device slave address is transmitted by the master.

Transmitting any of the three slave addresses wakes the nvSRAM from sleep mode. The nvSRAM device is not accessible during  $t_{SLEEP}$  and  $t_{WAKE}$  interval and any attempt to access the nvSRAM device by the master is ignored and nvSRAM sends NACK to the master. An alternate method to determine when the device is ready is for the master to send read or write commands and look for an ACK.

### Write Protection (WP)

The Write Protect (WP) pin is an active HIGH pin and protects the entire memory and all registers from write operations. To inhibit all the write operations, this pin must be held HIGH. When this pin is HIGH, all memory and register writes are prohibited and the address counter is not incremented. This pin is internally pulled LOW and, therefore, can be left open if not used.

### AutoStore Operation

The AutoStore operation is a unique feature of nvSRAM that automatically stores the SRAM data to QuantumTrap cells during power-down. This STORE makes use of an external capacitor ( $V_{CAP}$ ) and enables the device to safely STORE the data in the nonvolatile memory when power goes down.


During normal operation, the device draws current from  $V_{CC}$  to charge the capacitor connected to the  $V_{CAP}$  pin. When the voltage on the  $V_{CC}$  pin drops below  $V_{SWITCH}$  during power-down, the device inhibits all memory accesses to nvSRAM and automatically performs a conditional STORE operation using the

charge from the  $V_{CAP}$  capacitor. The AutoStore operation is not initiated if no write cycle has been performed since the last STORE or RECALL.

**Note** If a capacitor is not connected to the  $V_{CAP}$  pin, AutoStore must be disabled by issuing the AutoStore Disable instruction specified in [Command Register on page 8](#). If AutoStore is enabled without a capacitor on  $V_{CAP}$  pin, the device attempts an AutoStore operation without sufficient charge to complete the Store. This corrupts the data stored in nvSRAM and the serial number, and it unlocks the SNL bit.

[Figure 10](#) shows the proper connection of the storage capacitor ( $V_{CAP}$ ) for AutoStore operation. See the [DC Electrical Characteristics on page 30](#) for the size of the  $V_{CAP}$ .

**Figure 10. AutoStore Mode**

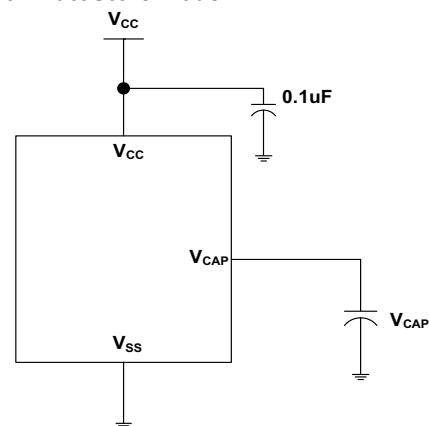

### Hardware STORE and $\overline{HSB}$ pin Operation

The  $\overline{HSB}$  pin in CY14X101I is used to control and acknowledge STORE operations. If no STORE or RECALL is in progress, this pin can be used to request a Hardware STORE cycle. When the  $\overline{HSB}$  pin is driven LOW, the device conditionally initiates a STORE operation after  $t_{DELAY}$  duration. An actual STORE cycle starts only if a write to the SRAM has been performed since the last STORE or RECALL cycle. Reads and Writes to the memory are inhibited for  $t_{STORE}$  duration or as long as  $\overline{HSB}$  pin is LOW.

The  $\overline{HSB}$  pin also acts as an open drain driver (internal 100 k $\Omega$  weak pull-up resistor) that is internally driven LOW to indicate a busy condition when the STORE (initiated by any means) is in progress.

**Note** After each Hardware and Software STORE operation  $\overline{HSB}$  is driven HIGH for a short time ( $t_{HHHD}$ ) with standard output high current and then remains HIGH by internal 100 k $\Omega$  pull-up resistor.

**Note** For successful last data byte STORE, a hardware STORE should be initiated at least one clock cycle after the last data bit D0 is received.

Upon completion of the STORE operation, the nvSRAM memory access is inhibited for  $t_{LZHSB}$  time after  $\overline{HSB}$  pin returns HIGH. Leave the  $\overline{HSB}$  pin unconnected if not used.

## Hardware RECALL (Power-Up)

During power-up, when  $V_{CC}$  crosses  $V_{SWITCH}$ , an automatic RECALL sequence is initiated that transfers the content of nonvolatile memory to the SRAM. The data may have been previously stored on the nonvolatile memory through a STORE sequence.

A Power-Up RECALL cycle takes  $t_{FA}$  time to complete and the memory access is disabled during this time. The HSB pin can be used to detect the ready status of the device.

## Write Operation

The last bit of the slave device address indicates a read or a write operation. In case of a write operation, the slave device address is followed by the memory or register address and data. A write operation continues as long as a STOP or Repeated START condition is generated by the master or if a NACK is issued by the nvSRAM.

A NACK is issued from the nvSRAM under the following conditions:

1. A valid Device ID is not received.
2. A write (burst write) access to a protected memory block address returns a NACK from nvSRAM after the data byte is received. However, the address counter is set to this address and the following current read operation starts from this address.
3. A write/random read access to an invalid or out-of-bound memory address returns a NACK from the nvSRAM after the address is received. The address counter remains unchanged in such a case.

After a NACK is sent out from the nvSRAM, the write operation is terminated and any data on the SDA line is ignored until a STOP or a Repeated START condition is generated by the master.

For example, consider a case where the burst write access is performed on the Control Register Slave address 0x01 for writing the serial number and continued to the address 0x09, which is a read-only register. The device returns a NACK and the address counter is not incremented. A following read operation is started from the address 0x09. Further, any write operation which starts from a write protected address (say, 0x09) is responded by the nvSRAM with a NACK after the data byte is sent and set the address counter to this address. A following read operation starts from the address 0x09 in this case also.

**Note** If you try to read/write access an address that does not exist (for example 0x0D in Control Register Slave or 0x3F in RTC registers), nvSRAM responds with a NACK immediately after the out-of-bound address is transmitted. The address counter remains unchanged and holds the previous successful read or write operation address.

A write operation is performed internally with no delay after the eighth bit of data is transmitted. If a write operation is not intended, the master must terminate the write operation before the eighth clock cycle by generating a STOP or Repeated START condition.

More details on write instructions are provided in the section [Memory Slave Access](#).

## Read Operation

If the last bit of the slave device address is '1', a read operation is assumed and the nvSRAM takes control of the SDA line immediately after the slave device address byte is sent out by the master. The read operation starts from the current address location (the location following the previous successful write or read operation). When the last address is reached, the address counter loops back to the first address.

In case of the Control Register Slave, whenever a burst read is performed such that it flows to a non-existent address, the reads operation loops back to 0x00. This is applicable, in particular, for the Command Register.

Read operation can be ended using the following methods:

1. The master issues a NACK on the ninth clock cycle followed by a STOP or a Repeated START condition on the tenth clock cycle.
2. The master generates a STOP or Repeated START condition on the ninth clock cycle.

More details on write instruction are provided in the section [Memory Slave Access](#).

## Memory Slave Access

The following sections describe the data transfer sequence required to perform read or write operations from nvSRAM.


### Write nvSRAM

Each write operation consists of a slave address being transmitted after the start condition. The last bit of slave address must be set as '0' to indicate a Write operation. The master may write one byte of data or continue writing multiple consecutive address locations while the internal address counter keeps incrementing automatically. The address register is reset to 0x00000 after the last address in memory is accessed. The write operation continues until a STOP or Repeated START condition is generated by the master or a NACK is issued by the nvSRAM.


A write operation is executed only after nvSRAM receives all the eight data bits. The nvSRAM sends an ACK signal after a successful write operation. A write operation may be terminated by the master by generating a STOP condition or a Repeated START operation. If the master desires to abort the current write operation without altering the memory contents, this should be done using a START/STOP condition prior to the eighth data bit.

If the master tries to access a write protected memory address on the nvSRAM, a NACK is returned after the data byte intended to write the protected address is transmitted and address counter will not be incremented. Similarly, in a burst mode write operation, a NACK is returned when the data byte that attempts to write a protected memory location and the address counter is not incremented.


**Figure 11. Single-Byte Write into nvSRAM (except Hs-mode)**

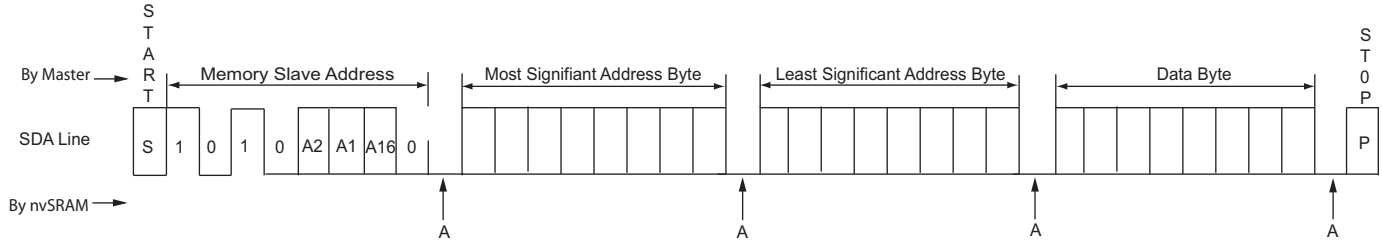


**Figure 12. Multi-Byte Write into nvSRAM (except Hs-mode)**

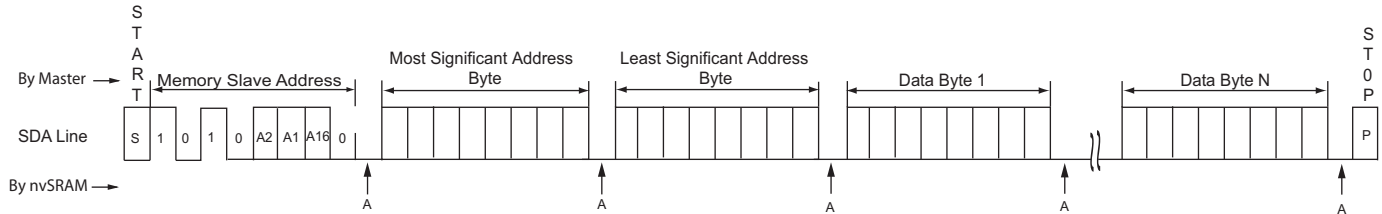

**Figure 13. Single-Byte Write into nvSRAM (Hs-mode)**

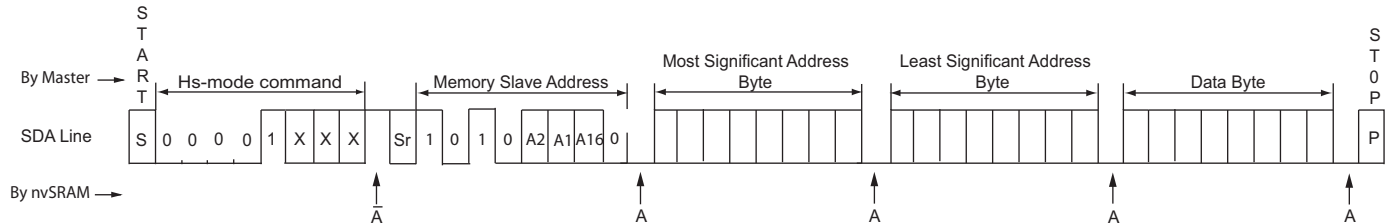

**Figure 14. Multi-Byte Write into nvSRAM (Hs-mode)**

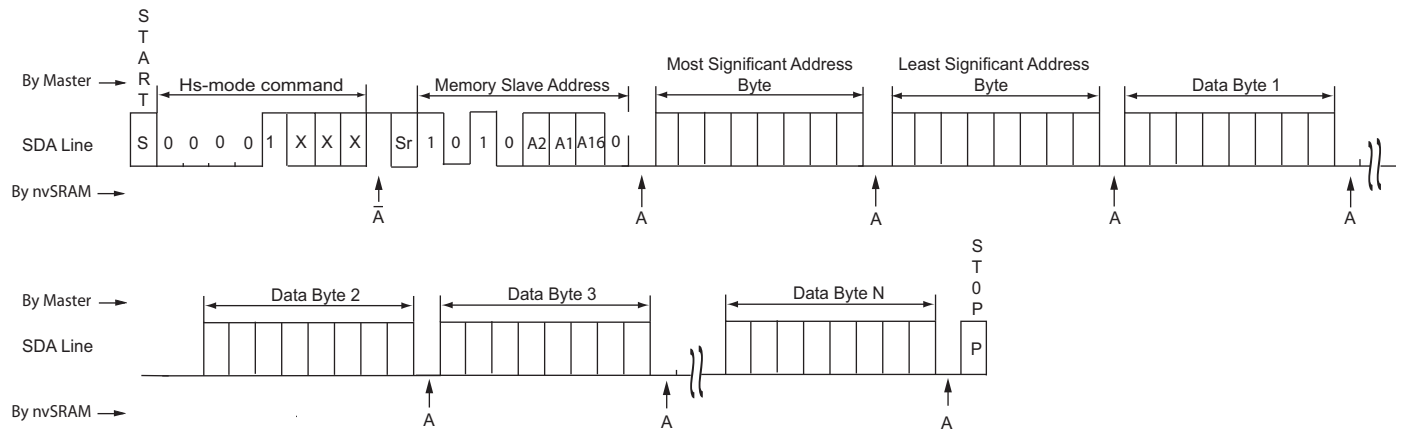


### Current nvSRAM Read


Each read operation starts with the master transmitting the nvSRAM slave address with the LSB set to '1' to indicate 'Read'. The reads start from the address on the address counter. The address counter is set to the address location next to the last accessed with a 'Write' or 'Read' operation. The master may terminate a read operation after reading 1 byte or continue reading addresses sequentially until the last address in the memory after which the address counter rolls back to the address 0x00000. The valid methods of terminating read access are described in Section [Read Operation on page 10](#).

**Note** A16-bit is ignored while using the current nvSRAM read.


**Figure 15. Current Location Single-Byte nvSRAM Read (except Hs-mode)**

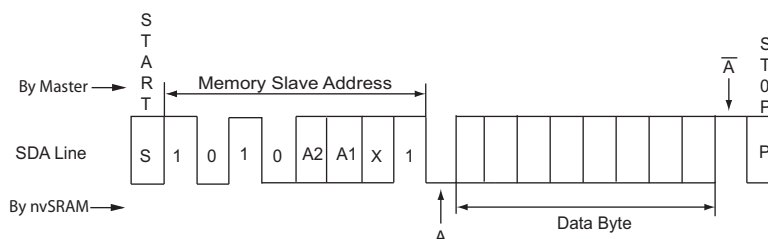


**Figure 16. Current Location Multi-Byte nvSRAM Read (except Hs-mode)**

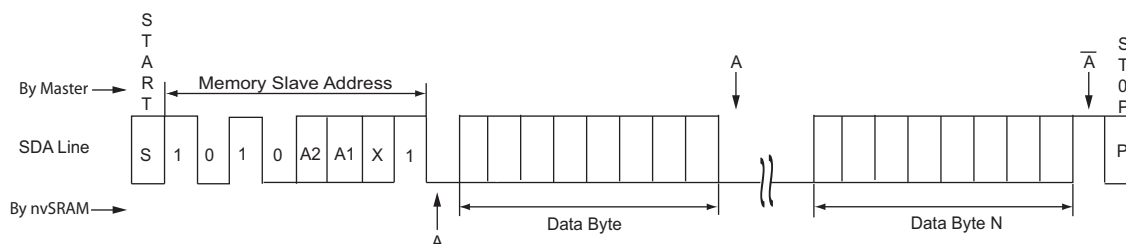

**Figure 17. Current Location Single-Byte nvSRAM Read (Hs-mode)**

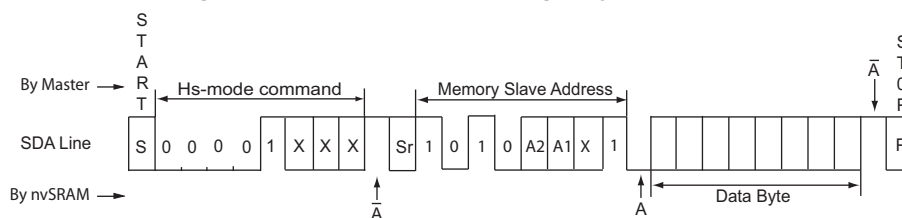


**Figure 18. Current Location Multi-Byte nvSRAM Read (Hs-mode)**

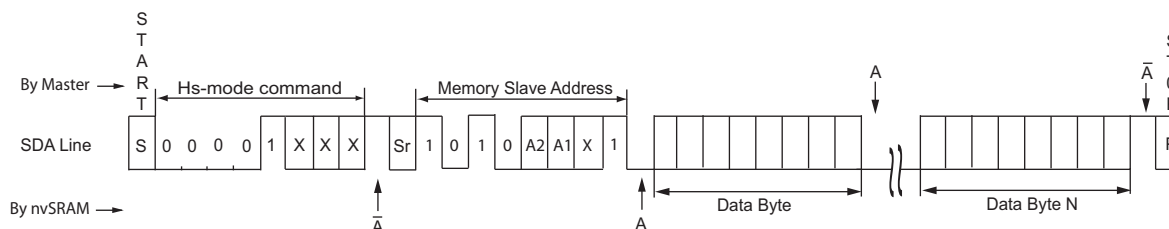


### Random Address Read

A random address read is performed by first initiating a write operation and generating a Repeated START immediately after the last address byte is acknowledged. The address counter is set to this address and the next read access to this slave initiates read operation from here. The master may terminate a read operation after reading 1 byte or continue reading addresses sequentially until the last address in the memory after which the address counter rolls back to the start address 0x00000.


**Figure 19. Random Address Single-Byte Read (except Hs-mode)**

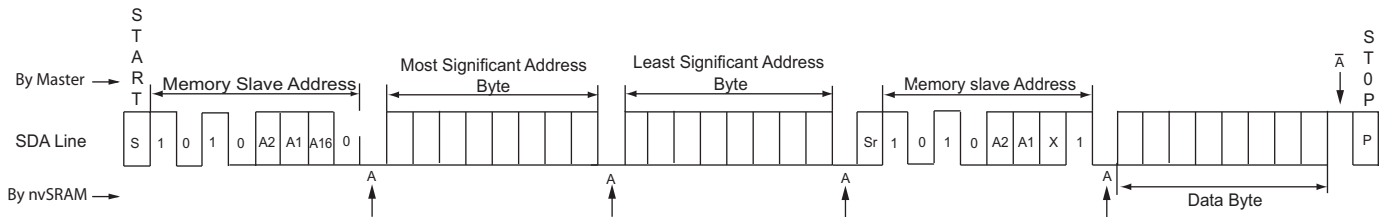

**Figure 20. Random Address Multi-Byte Read (except Hs-mode)**

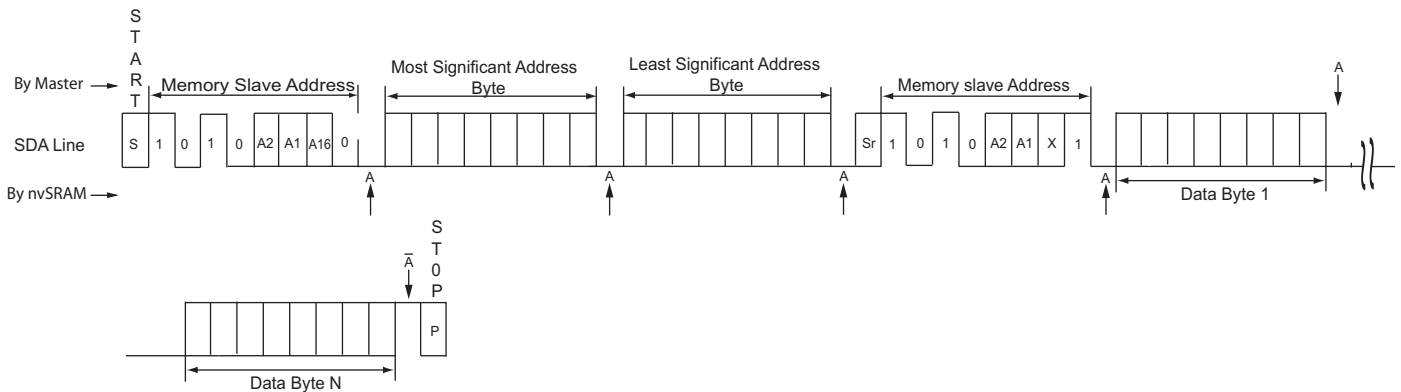


**Figure 21. Random Address Single-Byte Read (Hs-mode)**

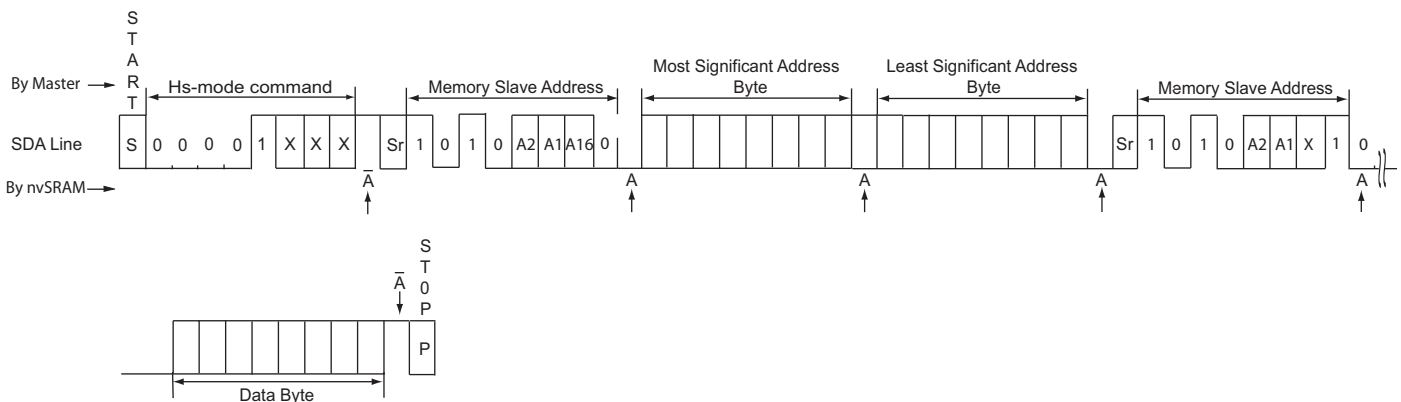



**Figure 22. Random Address Multi-Byte Read (Hs-mode)**

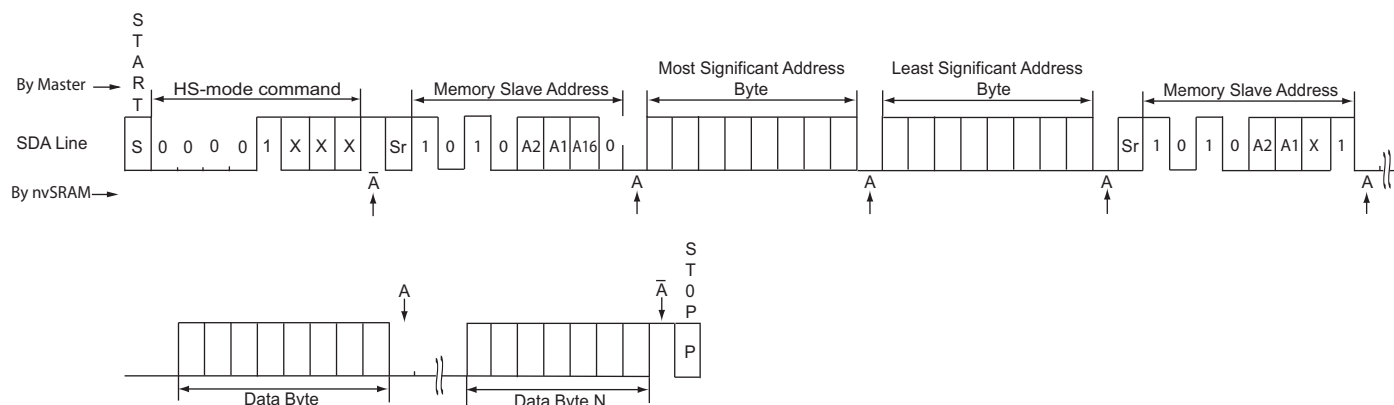

### RTC Registers Slave Access

The following sections describe the data transfer sequence required to perform read or write operations from RTC registers.

#### Write RTC Registers


A write to RTC registers is initiated with the RTC Registers Slave address followed by one byte of address and data. The master may write one byte of data or continue writing multiple consecutive address locations while the internal address counter keeps incrementing automatically. The address register is reset to 0x00 after the last RTC register is accessed. The write operation continues until a STOP or Repeated START condition

is generated by the master or a NACK is issued by the nvSRAM RTC Registers Slave.


A write operation is executed only after all the eight data bits have been received by the nvSRAM. The nvSRAM sends an ACK signal after the successful operation of the write instruction. A write operation may be terminated by the master by generating a STOP condition or a Repeated START operation before the last data bit is sent.

If the master tries to access an out of bound memory address on the RTC Registers Slave, a NACK is returned after the address byte is transmitted. The address counter remains unaffected and the following current read operation starts from the address value held in the address counter.

**Figure 23. Single-Byte Write into RTC Registers**

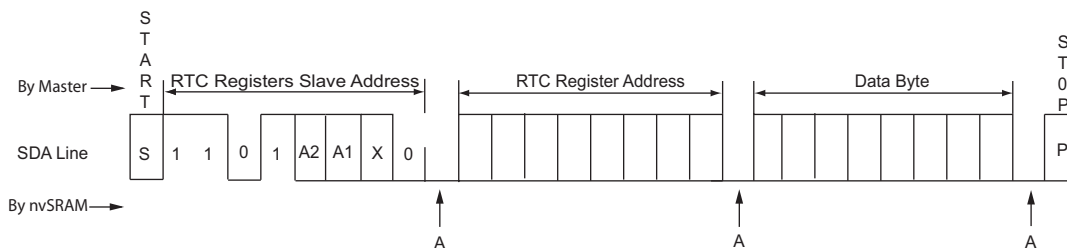

**Figure 24. Multi-Byte Write into RTC Registers**

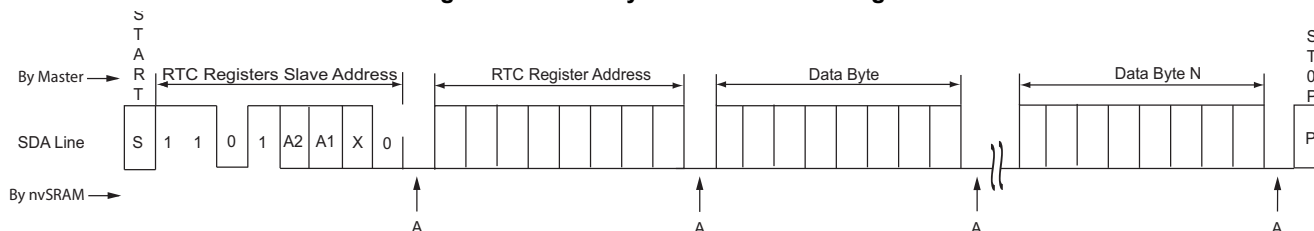





### Current Address RTC Registers Read

A current read of RTC registers starts with the master sending the RTC Registers Slave address after the START condition. All read operations begin from the current address (the address next to previously accessed address location). After the last address is read sequentially, the address latch loops back to the first location (0x00) and read operation continues. The master may terminate a read operation after reading one byte or continue reading addresses sequentially until the last address in the memory after which the address counter rolls back to the address 0x00. A read operation may be terminated by the master by generating a STOP condition or a Repeated START operation or a NACK.

**Figure 25. Current Address RTC Registers Single-Byte Read**

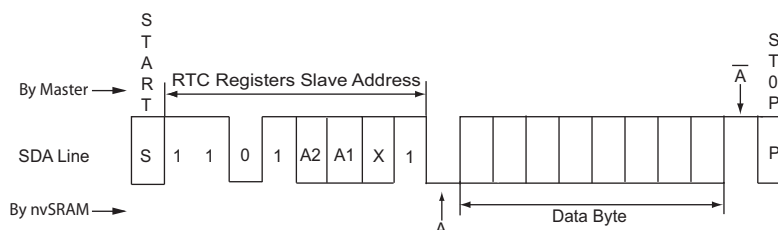

**Figure 26. Current Address RTC Registers Multi-Byte Read**

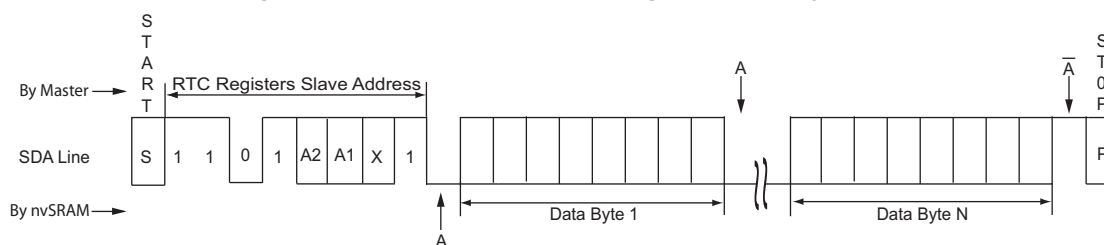


### Random Address RTC Registers Read

A random address read is performed by first initiating a write operation and generating a Repeated START immediately after the last address byte is acknowledged. The address counter is set to this address and the next read access to this slave initiates the read operation from here. The master may terminate a read operation after reading one byte or continue reading addresses sequentially until the last address in the memory after which the


address counter rolls back to the start address location of RTC (0x00).

A random address read attempt on an out of bound memory address on the RTC Registers Slave is responded back with a NACK from the nvSRAM after the address byte is transmitted. The address counter remains unaffected and the following current read operation starts from the address value held in the address counter.

**Figure 27. Random Address RTC Registers Single-Byte Read**

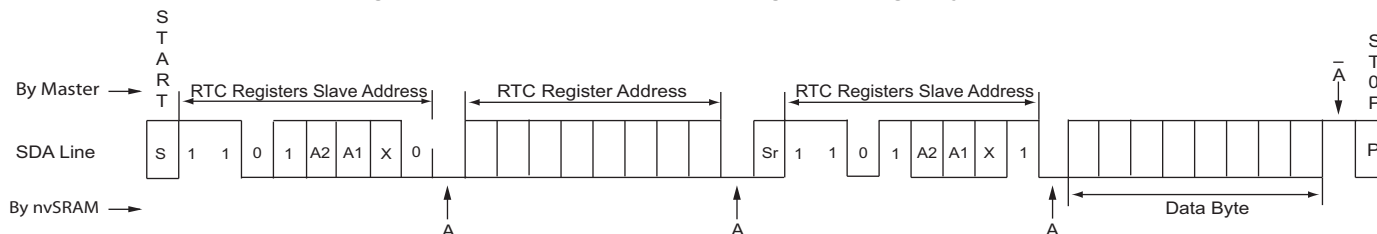

**Figure 28. Random Address RTC Registers Multi-Byte Read**

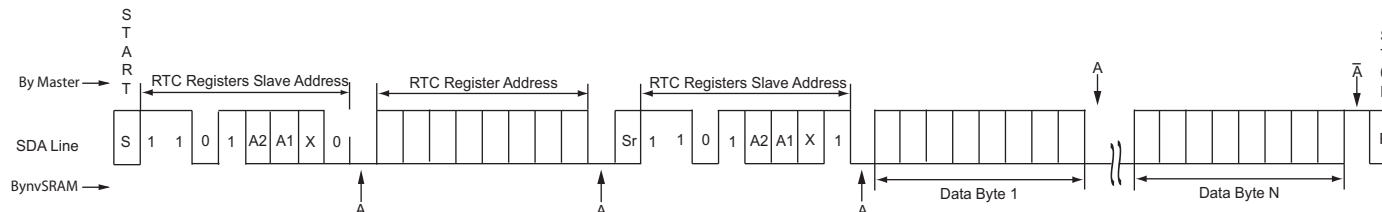

## Control Registers Slave

The following sections describe the data transfer sequence required to perform read or write operations from Control Registers Slave.

### Write Control Registers

To write the Control Registers Slave, the master transmits the Control Registers Slave address after generating the START condition. The write sequence continues from the address location specified by the master till the master generates a STOP condition or the last writable address location.

If a non-writable address location is accessed for write operation during a normal write or a burst, the slave generates a NACK after the data byte is sent and the write sequence terminates. Any following data bytes are ignored and the address counter is not incremented.


If a write operation is performed on the Command Register (0xAA), the following current read operation also begins from the

first address (0x00) as in this case, the current address is an out-of-bound address. The address is not incremented and the next current read operation begins from this address location. If a write operation is attempted on an out-of-bound address location, the nvSRAM sends a NACK immediately after the address byte is sent.


Further, if the serial number is locked, only two addresses (0xAA or Command Register, and 0x00 or Memory Control Register) are writable in the Control Registers Slave. On a write operation to any other address location, the device will acknowledge command byte and address bytes but it returns a NACK from the Control Registers Slave for data bytes. In this case, the address will not be incremented and a current read will happen from the last acknowledged address.

The nvSRAM Control Registers Slave sends a NACK when an out of bound memory address is accessed for write operation, by the master. In such a case, a following current read operation begins from the last acknowledged address.

**Figure 29. Single-Byte Write into Control Registers**

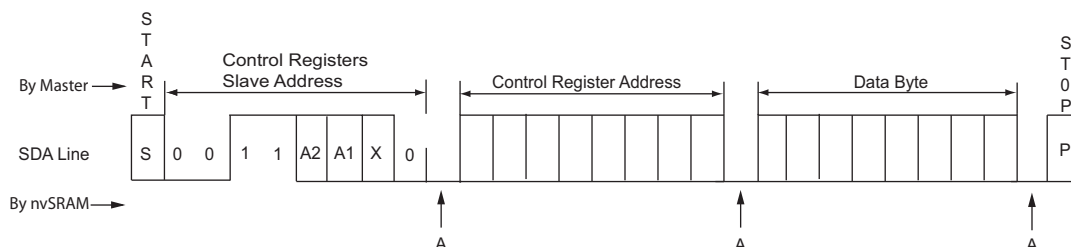


**Figure 30. Multi-Byte Write into Control Registers**

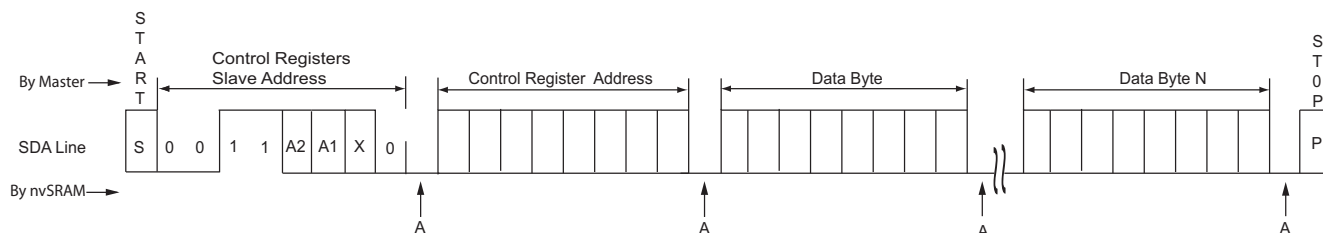


### Current Control Registers Read

A read of Control Registers Slave is started with master sending the Control Registers Slave address after the START condition with the LSB set to '1'. The reads begin from the current address which is the next address to the last accessed location. The reads to Control Registers Slave continues until the last readable address location and loops back to the first location (0x00). Note that the Command Register is a write only register and is not accessible through the sequential read operations. If a burst read operation begins from the Command Register (0xAA), the address counter wraps around to the first address in the register map (0x00).

**Figure 31. Control Registers Single-Byte Read**

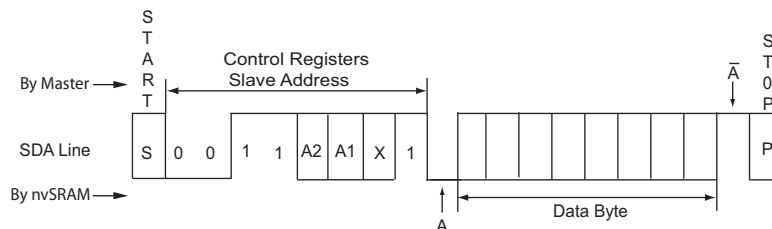

**Figure 32. Current Control Registers Multi-Byte Read**

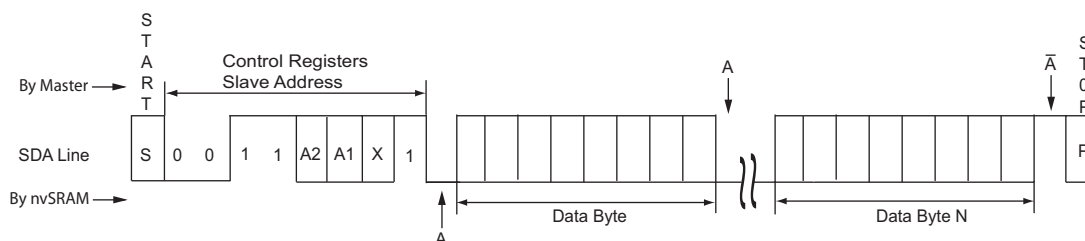


### Random Control Registers Read


A read of random address may be performed by initiating a write operation to the intended location of read and immediately following with a Repeated START operation. The reads to Control Registers Slave continues till the last readable address location and loops back to the first location (0x00). Note that the

Command Register is a write only register and is not accessible through the sequential read operations. A random read starting at the Command Register (0xAA) loops back to the first address in the Control Register register map (0x00). If a random read operation is initiated from an out-of-bound memory address, the nvSRAM sends a NACK after the address byte is sent.

**Figure 33. Random Control Registers Single-Byte Read**

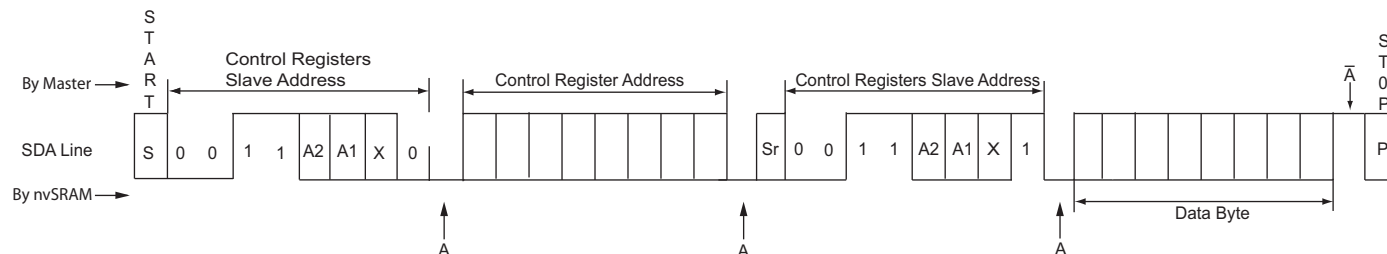

**Figure 34. Random Control Registers Multi-Byte Read**

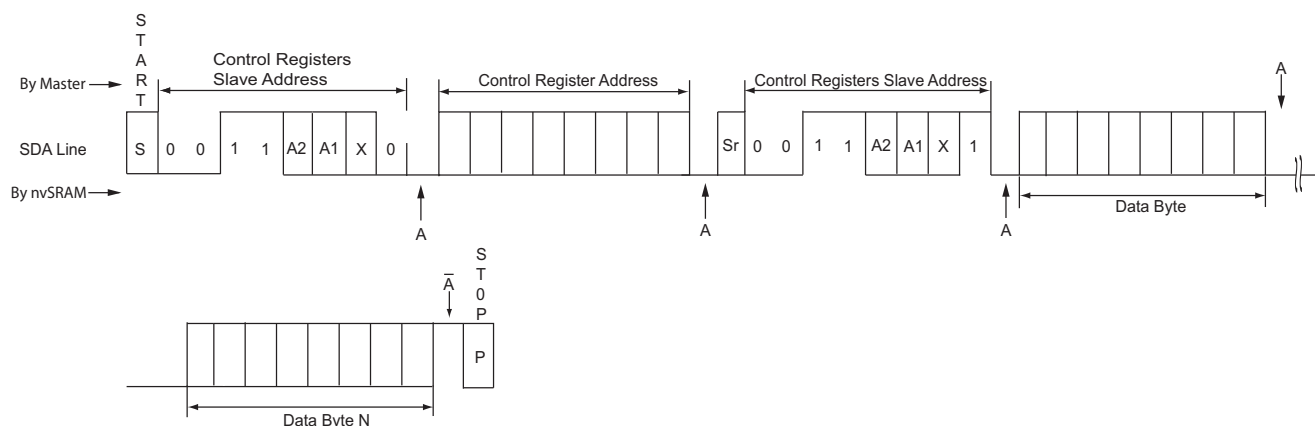

## Serial Number

Serial number is an 8-byte memory space provided to the user to uniquely identify this device. It typically consists of a two-byte customer ID, followed by five bytes of unique serial number and one byte of CRC check. However, nvSRAM does not calculate the CRC and it is up to the user to use the eight-byte memory space in the desired format. The default values for the eight-byte locations are set to '0x00'.

## Serial Number Write

The serial number can be accessed through the Control Registers Slave Device. To write the serial number, master transmits the Control Registers Slave address after the START condition and writes to the address location from 0x01 to 0x08. The content of Serial Number registers is secured to nonvolatile memory on the next STORE operation. If AutoStore is enabled, nvSRAM automatically stores the serial number in the nonvolatile memory on power-down. However, if AutoStore is disabled, user must perform a STORE operation to secure the contents of Serial Number registers.

**Note** If the serial number lock (SNL) bit is not set, the serial number registers can be re-written regardless of whether or not a STORE has happened. Once the serial number lock bit is set, no writes to the serial number registers are allowed. If the master tries to perform a write operation to the serial number registers when the lock bit is set, a NACK is returned and write is not performed.

## Serial Number Lock

After writes to serial number registers is complete, the master is responsible for locking the serial number by setting the serial number lock bit to '1' in the Memory Control Register (0x00). The content of Memory Control Register and serial number are secured on the next STORE operation (STORE or AutoStore). If AutoStore is not enabled, user must perform the STORE operation to secure the lock bit status.

If a STORE was not performed, the serial number lock bit will not survive the power cycle. The serial number lock bit and 8 - byte serial number is defaults to '0' at power-up.

## Serial Number Read

Serial number can be read back by a read operation of the intended address of the Control Registers Slave. The Control Registers Device loops back from the last address (excluding the Command Register) to 0x00 address location while performing burst read operation. The serial number resides in the locations from 0x01 to 0x08. Even if the serial number is not locked, a serial number read operation will return the current values written to the serial number registers. The master may perform a serial number read operation to confirm if the correct serial number is written to the registers before setting the lock bit.

## Device ID

Device ID is a 4-byte code consisting of JEDEC assigned manufacturer ID, product ID, density ID, and die revision. These registers are set in the factory and are read only registers for the user.

**Table 6. Device ID**

| Device    | Device ID<br>(4 bytes) | Device ID Description |                   |                 |                 |
|-----------|------------------------|-----------------------|-------------------|-----------------|-----------------|
|           |                        | 31–21<br>(11 bits)    | 20–7<br>(14 bits) | 6–3<br>(4 bits) | 2–0<br>(3 bits) |
|           |                        | Manufacturer ID       | Product ID        | Density ID      | Die Rev         |
| CY14C101I | 0x0681E2A0             | 00000110100           | 00001111000101    | 0100            | 000             |
| CY14B101I | 0x0681EAA0             | 00000110100           | 00001111010101    | 0100            | 000             |
| CY14E101I | 0x0681F2A0             | 00000110100           | 00001111100101    | 0100            | 000             |

The device ID is divided into four parts as shown in Table 6:

### 1. Manufacturer ID (11 bits)

This is the JEDEC assigned manufacturer ID for Cypress. JEDEC assigns the manufacturer ID in different banks. The first three bits of the manufacturer ID represent the bank in which ID is assigned. The next eight bits represent the manufacturer ID.

Cypress manufacturer ID is 0x34 in bank 0. Therefore the manufacturer ID for all Cypress nvSRAM products is as given below:

Cypress ID - 000\_0011\_0100

### 2. Product ID (14 bits)

The product ID for device is shown in the Table 6.

### 3. Density ID (4 bits)

The 4-bit density ID is used as shown in Table 6 for indicating the 1 Mb density of the product.


### 4. Die Rev (3 bits)

This is used to represent any major change in the design of the product. The initial setting of this is always 0x0.

## Executing Commands Using Command Register

The Control Registers Slave allows different commands to be executed by writing the specific command byte in the Command Register (0xAA). The command byte codes for each command are specified in Table 5. During the execution of these commands the device is not accessible and returns a NACK if any of the three slave devices is selected. If an invalid command is sent by the master, the nvSRAM responds with an ACK indicating that the command has been acknowledged with NOP (No Operation). The address rolls over to the 0x00 location.

**Figure 35. Command Execution using Command Register**

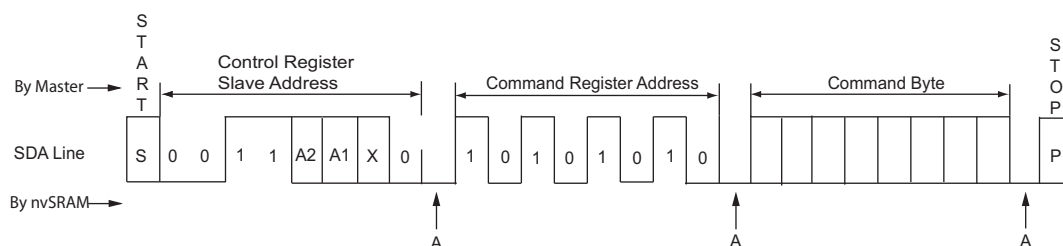

## Real Time Clock Operation

### nvTIME Operation

The CY14X101I offers internal registers that contain clock, alarm, watchdog, interrupt, and control functions. The RTC registers occupy a separate address space from nvSRAM and are accessible through the Read RTC register and Write RTC register sequence on register addresses 0x00 to 0x0F. Internal double buffering of the clock and the timer information registers prevents accessing transitional internal clock data during a read or write operation. Double buffering also circumvents disrupting normal timing counts or the clock accuracy of the internal clock when accessing clock data. Clock and alarm registers store data in BCD format.

### Clock Operations

The clock registers maintain time up to 9,999 years in one-second increments. The time can be set to any calendar time and the clock automatically keeps track of days of the week and month, leap years, and century transitions. There are eight registers dedicated to the clock functions, which are used to set time with a write cycle and to read time with a read cycle. These registers contain the time of day in BCD format. Bits defined as '0' are currently not used and are reserved for future use by Cypress.

### Reading the Clock

The double-buffered RTC register structure reduces the chance of reading incorrect data from the clock. Internal updates to the CY14X101I time keeping registers are stopped when the read bit 'R' (in the flags register at 0x00) is set to '1' before reading clock data to prevent reading of data in transition. Stopping the register updates does not affect clock accuracy.

When a read sequence of RTC device is initiated, the update of the user timekeeping registers stops and does not restart until a STOP or a Repeated START condition is generated. The RTC registers are read while the internal clock continues to run. After the end of read sequence, all the RTC registers are simultaneously updated within 20 ms.

### Setting the Clock

A write access to the RTC device stops updates to the time keeping registers and enables the time to be set when the write bit 'W' (in the flags register at 0x00) is set to '1'. The correct day, date, and time is then written into the registers and must be in 24 hour BCD format. The time written is referred to as the "Base Time". This value is stored in nonvolatile registers and used in the calculation of the current time. When the write bit 'W' is cleared by writing '0' to it and a STOP or Repeated START condition is encountered, the values of timekeeping registers are transferred to the actual clock counters after which the clock resumes normal operation. If a valid STOP or Repeated START condition is not generated by the master, the time written to the RTC registers is never transferred to the actual clock counters.

If the time written to the timekeeping registers is not in the correct BCD format, each invalid nibble of the RTC registers continue counting to 0xF before rolling over to 0x0 after which RTC resumes normal operation.

**Note** After 'W' bit is set to '0', values written into the timekeeping, alarm, calibration, and interrupt registers are transferred to the

RTC time keeping counters in  $t_{RTCp}$  time. These counter values must be saved to nonvolatile memory either by initiating a Software/Hardware STORE or AutoStore operation. While working in AutoStore disabled mode, perform a STORE operation after  $t_{RTCp}$  time while writing into the RTC registers for the modifications to be correctly recorded.

### Backup Power

The RTC in the CY14X101I is intended for permanently powered operation. The  $V_{RTCcap}$  or  $V_{RTCbat}$  pin is connected depending on whether a capacitor or battery is chosen for the application. When the primary power,  $V_{CC}$ , fails and drops below  $V_{SWITCH}$  the device switches to the backup power supply.

The clock oscillator uses very little current, which maximizes the backup time available from the backup source. Regardless of the clock operation with the primary source removed, the data stored in the nvSRAM is secure, having been stored in the nonvolatile elements when power was lost.

During backup operation, the CY14X101I consumes a 0.45  $\mu A$  (Typ) at room temperature. The user must choose capacitor or battery values according to the application.

**Note:** If a battery is applied to  $V_{RTCbat}$  pin prior to  $V_{CC}$ , the chip will draw high  $I_{BAK}$  current. This occurs even if the oscillator is disabled. In order to maximize battery life,  $V_{CC}$  must be applied before a battery is applied to  $V_{RTCbat}$  pin.

Backup time values based on maximum current specifications are shown in the following table. Nominal backup times are approximately two times longer.

**Table 7. RTC Backup Time**

| Capacitor Value | Backup Time (CY14B101I) |
|-----------------|-------------------------|
| 0.1F            | 60 hours                |
| 0.47F           | 12 days                 |
| 1.0F            | 25 days                 |

Using a capacitor has the obvious advantage of recharging the backup source each time the system is powered up. If a battery backup is used, a 3-V lithium battery is recommended and the CY14X101I sources current only from the battery when the primary power is removed. However, the battery is not recharged at any time by the CY14X101I. The battery capacity must be chosen for total anticipated cumulative down time required over the life of the system.

### Stopping and Starting the Oscillator

The OSCEN bit in the calibration register at 0x08 controls the enable and disable of the oscillator. This bit is nonvolatile and is shipped to customers in the "enabled" (set to '0') state. To preserve the battery life when the system is in storage, OSCEN must be set to '1'. This turns off the oscillator circuit, extending the battery life. If the OSCEN bit goes from disabled to enabled, it takes approximately one second (two seconds maximum) for the oscillator to start.

While system power is off, if the voltage on the backup supply ( $V_{RTCcap}$  or  $V_{RTCbat}$ ) falls below their respective minimum level, the oscillator may fail. The CY14X101I has the ability to detect oscillator failure when system power is restored. This is recorded in the Oscillator Fail Flag (OSCF) of the flags register at the address 0x00. When the device is powered on ( $V_{CC}$  goes above



$V_{SWITCH}$ ) the OSCEN bit is checked for the 'enabled' status. If the OSCEN bit is enabled and the oscillator is not active within the first 5 ms, the OSCF bit is set to '1'. The system must check for this condition and then write '0' to clear the flag.

Note that in addition to setting the OSCF flag bit, the time registers are reset to the 'Base Time', which is the value last written to the timekeeping registers. The control or calibration registers and the OSCEN bit are not affected by the 'oscillator failed' condition.

The value of OSCF must be reset to '0' when the time registers are written for the first time. This initializes the state of this bit which may have become set when the system was first powered on.

To reset OSCF, set the write bit 'W' (in the flags register at 0x00) to a '1' to enable writes to the flags register. Write a '0' to the OSCF bit and then reset the write bit to '0' to disable writes.

### Calibrating the Clock

The RTC is driven by a quartz-controlled crystal with a nominal frequency of 32.768 kHz. Clock accuracy depends on the quality of the crystal and calibration. The crystals available in the market typically have an error of  $\pm 20$  ppm to  $\pm 35$  ppm. However, CY14X101I employs a calibration circuit that improves the accuracy to  $\pm 1/-2$  ppm at 25 °C. This implies an error of  $\pm 2.5$  seconds to  $\pm 5$  seconds every month.

The calibration circuit adds or subtracts counts from the oscillator divider circuit to achieve this accuracy. The number of pulses that are suppressed (subtracted, negative calibration) or split (added, positive calibration) depends upon the value loaded into the five calibration bits found in the calibration register at 0x08. The calibration bits occupy the five lower order bits in the calibration register. These bits are set to represent any value between '0' and 31 in binary form. Bit D5 is a sign bit, where a '1' indicates positive calibration and a '0' indicates negative calibration. Adding counts speeds the clock up and subtracting counts slows the clock down. If a binary '1' is loaded into the register, it corresponds to an adjustment of 4.068 or  $-2.034$  ppm offset in oscillator error, depending on the sign.

Calibration occurs within a 64-minute cycle. The first 62 minutes in the cycle may, once every minute, have one second shortened by 128 or lengthened by 256 oscillator cycles. If a binary '1' is loaded into the register, only the first two minutes of the 64-minute cycle are modified. If a binary 6 is loaded, the first 12 are affected, and so on. Therefore, each calibration step has the effect of adding 512 or subtracting 256 oscillator cycles for every 125,829,120 actual oscillator cycles, that is, 4.068 or  $-2.034$  ppm of adjustment per calibration step in the calibration register.

To determine the required calibration, the CAL bit in the flags register (0x00) must be set to '1'. This causes the INT pin to toggle at a nominal frequency of 512 Hz. Any deviation measured from the 512 Hz indicates the degree and direction of the required correction. For example, a reading of 512.01024 Hz indicates a  $\pm 20$  ppm error. Hence, a decimal value of  $-10$  (001010b) must be loaded into the Calibration register to offset this error.

**Note** Setting or changing the calibration register does not affect the test output frequency.

To set or clear CAL, set the write bit 'W' (in the flags register at 0x00) to '1' to enable writes to the flags register. Write a value to CAL, and then reset the write bit to '0' to disable writes.

### Alarm

The alarm function compares user programmed values of alarm time and date (stored in the registers 0x01-5) with the corresponding time of day and date values. When a match occurs, the alarm internal flag (AF) is set and an interrupt is generated on INT pin if alarm interrupt enable (AIE) bit is set.

There are four alarm match fields - date, hours, minutes, and seconds. Each of these fields has a match bit that is used to determine if the field is used in the alarm match logic. Setting the match bit to '0' indicates that the corresponding field is used in the match process. Depending on the match bits, the alarm occurs as specifically as once a month or as frequently as once every minute. Selecting none of the match bits (all 1s) indicates that no match is required and therefore, alarm is disabled. Selecting all match bits (all 0s) causes an exact time and date match.

There are two ways to detect an alarm event: by reading the AF flag or monitoring the INT pin. The AF flag in the flags register at 0x00 indicates that a date or time match has occurred. The AF bit is set to '1' when a match occurs. Reading the flags register clears the alarm flag bit (and all others). A hardware interrupt pin may also be used to detect an alarm event.

To set, clear or enable an alarm, set the 'W' bit (in flags register - 0x00) to '1' to enable writes to alarm registers. After writing the alarm value, clear the 'W' bit back to '0' for the changes to take effect.

**Note** CY14X101I requires the alarm match bit for seconds (bit 'D7' in Alarm-Seconds register 0x02) to be set to '0' for proper operation of Alarm Flag and Interrupt.

### Watchdog Timer

The watchdog timer is a free running down counter that uses the 32 Hz clock (31.25 ms) derived from the crystal oscillator. The oscillator must be running for the watchdog to function. It begins counting down from the value loaded in the watchdog timer register.

The timer consists of a loadable register and a free running counter. On power-up, the watchdog time out value in register 0x07 is loaded into the Counter Load register. Counting begins on power-up and restarts from the loadable value any time the Watchdog Strobe (WDS) bit is set to '1'. The counter is compared to the terminal value of '0'. If the counter reaches this value, it causes an internal flag and an optional interrupt output. You can prevent the time out interrupt by setting WDS bit to '1' prior to the counter reaching '0'. This causes the counter to reload with the watchdog time out value and to be restarted. As long as the user sets the WDS bit prior to the counter reaching the terminal value, the interrupt and WDT flag never occur.


New time out values are written by setting the watchdog write bit to '0'. When the WDW is '0', new writes to the watchdog time out value bits D5-D0 are enabled to modify the time out value. When WDW is '1', writes to bits D5-D0 are ignored. The WDW function enables a user to set the WDS bit without concern that the watchdog timer value is modified. A logical diagram of the watchdog timer is shown in [Figure 36 on page 22](#). Note that



setting the watchdog time out value to '0' disables the watchdog function.

The output of the watchdog timer is the flag bit WDF that is set if the watchdog is allowed to time out. If the watchdog interrupt enable (WIE) bit in the Interrupt register is set, a hardware interrupt on INT pin is also generated on watchdog timeout. The flag and the hardware interrupt are both cleared when user reads the flag registers.

**Figure 36. Watchdog Timer Block Diagram**

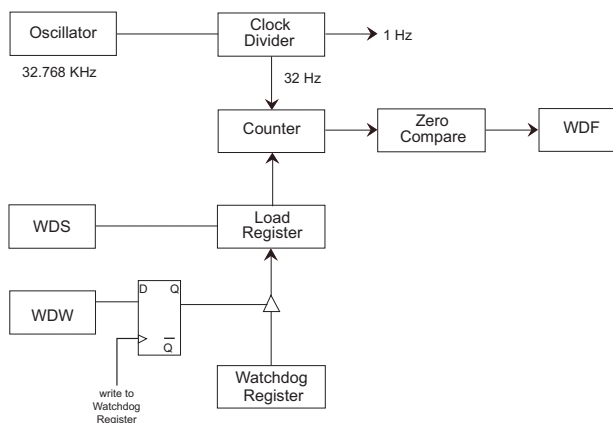

### Programmable Square Wave Generator

The square wave generator block uses the crystal output to generate a desired frequency on the INT pin of the device. The output frequency can be programmed to be one of the following:

1. 1 Hz
2. 512 Hz
3. 4096 Hz
4. 32768 Hz

The square wave output is not generated while the device is running on backup power.

### Power Monitor

The CY14X101I provides a power management scheme with power fail interrupt capability. It also controls the internal switch to back up power for the clock and protects the memory from low  $V_{CC}$  access. The power monitor is based on an internal band gap reference circuit that compares the  $V_{CC}$  voltage to  $V_{SWITCH}$  threshold.

When  $V_{SWITCH}$  is reached, as  $V_{CC}$  decays from power loss, a data store operation is initiated from SRAM to the nonvolatile elements, securing the last SRAM data state. Power is also switched from  $V_{CC}$  to the backup supply (battery or capacitor) to operate the RTC oscillator.

When operating from the backup source, read and write operations to nvSRAM are inhibited and the RTC functions are not available to the user. The RTC clock continues to operate in the background. The updated RTC time keeping registers are available to the user after  $V_{CC}$  is restored to the device (see [nvSRAM Specifications on page 34](#)).

### Backup Power Monitor

The CY14X101I provides a backup power monitoring system that detects the backup power (either battery or capacitor backup) failure. The backup power fail flag (BPF) is issued on the next power-up in case of backup power failure. The BPF flag is set in the event of backup voltage falling lower than  $V_{BAKFAIL}$ . The backup power is monitored even while the RTC is running in backup mode. Low voltage detected during backup mode is flagged through the BPF flag. BPF can hold the data only until a defined low level of the back up voltage ( $V_{DR}$ ).

### Interrupts

The CY14X101I has a flags register, interrupt register, and interrupt logic that can signal interrupt to the microcontroller. There are three potential sources for interrupt: watchdog timer, power monitor, and alarm timer. Each of these can be individually enabled to drive the INT pin by appropriate setting in the interrupt register (0x06). In addition, each has an associated flag bit in the flags register (0x00) that the host processor uses to determine the cause of the interrupt. The INT pin driver has two bits that specify its behavior when an interrupt occurs.

An interrupt is raised only if both a flag is raised by one of the three sources and the respective interrupt enable bit in interrupts register is enabled (set to '1'). After an interrupt source is active, two programmable bits, H/L and P/L, determine the behavior of the output pin driver on INT pin. These two bits are located in the Interrupt register and can be used to drive level or pulse mode output from the INT pin. In pulse mode, the pulse width is internally fixed at approximately 200 ms. This mode is intended to reset a host microcontroller. In the level mode, the pin goes to its active polarity until the flags register is read by the user. This mode is used as an interrupt to a host microcontroller. The control bits are summarized in the following section.

Interrupts are only generated while working on normal power and are not triggered when system is running in backup power mode.

**Note** CY14X101I generates valid interrupts only after the Powerup RECALL sequence is completed. All events on INT pin must be ignored for  $t_{FA}$  duration after powerup.

### Interrupt Register

**Watchdog Interrupt Enable (WIE):** When set to '1', the watchdog timer drives the INT pin and an internal flag when a watchdog time out occurs. When WIE is set to '0', the watchdog timer only affects the WDF flag in flags register.

**Alarm Interrupt Enable (AIE):** When set to '1', the alarm match drives the INT pin and an internal flag. When AIE is set to '0', the alarm match only affects the AF flag in the flags register.

**Power Fail Interrupt Enable (PFE):** When set to '1', the power fail monitor drives the pin and an internal flag. When PFE is set to '0', the power fail monitor only affects the PF flag in the flags register.

**Square Wave Enable (SQWE):** When set to '1', a square wave of programmable frequency is generated on the INT pin. The frequency is decided by the SQ1 and SQ0 bits of the interrupts register. This bit is nonvolatile and survives power cycle. The SQWE bit overrides all other interrupts. However, CAL bit will take precedence over the square wave generator. This bit defaults to '0' from the factory.

**High/Low (H/L):** When set to a '1', the INT pin is active HIGH and the driver mode is push pull. The INT pin drives HIGH only when  $V_{CC}$  is greater than  $V_{SWITCH}$ . When set to a '0', the INT pin is active LOW and the drive mode is open drain. The INT pin must be pulled up to  $V_{CC}$  by a 10 k resistor while using the interrupt in active LOW mode.

**Pulse/Level (P/L):** When set to a '1' and an interrupt occurs, the INT pin is driven for approximately 200 ms. When P/L is set to a '0', the INT pin is driven HIGH or LOW (determined by H/L) until the flags register is read.

**SQ1 and SQ0.** These bits are used together to fix the frequency of square wave on INT pin output when SQWE bit is set to '1'. These bits are nonvolatile and survive power cycle. The output frequency is decided as illustrated in this table.

**Table 8. SQW Output Selection**

| SQ1 | SQ0 | Frequency | Comment                     |
|-----|-----|-----------|-----------------------------|
| 0   | 0   | 1 Hz      | 1 Hz signal                 |
| 0   | 1   | 512 Hz    | 512 Hz clock output         |
| 1   | 0   | 4096 Hz   | 4 kHz clock output          |
| 1   | 1   | 32768 Hz  | Oscillator output frequency |

When an enabled interrupt source activates the INT pin, an external host reads the flag registers to determine the cause. Remember that all flags are cleared when the register is read. If

the INT pin is programmed for Level mode, then the condition clears and the INT pin returns to its inactive state. If the pin is programmed for Pulse mode, then reading the flag also clears the flag and the pin. The pulse does not complete its specified duration if the flags register is read. If the INT pin is used as a host reset, the flags register is not read during a reset.

Following is a summary table that shows the state of the INT pin,


**Table 9. State of the INT pin**

| CAL | SQWE | WIE/AIE/PFE | INT Pin Output     |
|-----|------|-------------|--------------------|
| 1   | X    | X           | 512 Hz             |
| 0   | 1    | X           | Square wave output |
| 0   | 0    | 1           | Alarm              |
| 0   | 0    | 0           | HI-Z               |

## Flags Register

The flags register has three flag bits: WDF, AF, and PF, which can be used to generate an interrupt. These flags are set by the watchdog timeout, alarm match, or power fail monitor respectively. The processor can either poll this register or enable interrupts to be informed when a flag is set. These flags are automatically reset after the register is read. The flags register is automatically loaded with the value 0x00 on power-up (except for the OSCF bit. See [Stopping and Starting the Oscillator on page 20](#)).

**Figure 37. Interrupt Block Diagram**

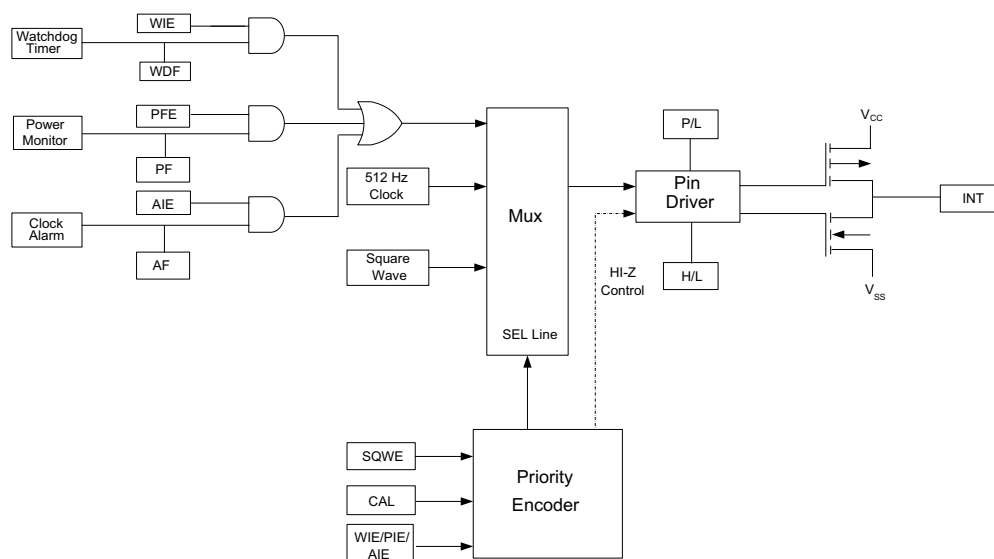


WDF - Watchdog timer flag  
WIE - Watchdog interrupt enable  
PF - Power fail flag  
PFE - Power Fail Enable  
AF - Alarm flag  
AIE - Alarm interrupt enable  
P/L - Pulse level  
H/L - High/Low  
SQWE - Square wave enable

## RTC External Components

The RTC requires connecting an external 32.768 kHz crystal and  $C_1$ ,  $C_2$  load capacitance as shown in the [Figure 38](#). The figure shows the recommended RTC external component values. The

load capacitances  $C_1$  and  $C_2$  are inclusive of parasitic of the printed circuit board (PCB). The PCB parasitic includes the capacitance due to land pattern of crystal pads/pins,  $X_{in}/X_{out}$  pads and copper traces connecting crystal and device pins.

**Figure 38. RTC Recommended Component Configuration** <sup>[4]</sup>

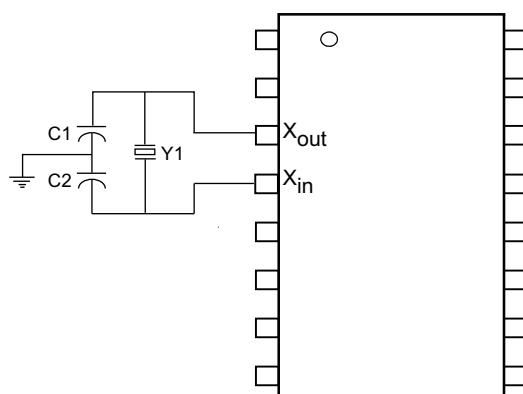

### Recommended Values

Y1 = 32.768 KHz (12.5 pF)

$C_1$  = 12 pF

$C_2$  = 69 pF

**Note:** The recommended values for  $C_1$  and  $C_2$  include board trace capacitance.

### Note

4. For nvSRAM RTC design guidelines and best practices, refer to the application note [AN61546](#).

## PCB Design Considerations for RTC

RTC crystal oscillator is a low current circuit with high impedance nodes on their crystal pins. Due to lower timekeeping current of RTC, the crystal connections are very sensitive to noise on the board. Hence it is necessary to isolate the RTC circuit from other signals on the board.

It is also critical to minimize the stray capacitance on the PCB. Stray capacitances add to the overall crystal load capacitance and therefore cause oscillation frequency errors. Proper bypassing and careful layout are required to achieve the optimum RTC performance.


### Layout requirements

The board layout must adhere to (but not limited to) the following guidelines during routing RTC circuitry. Following these guidelines help you achieve optimum performance from the RTC design.

- It is important to place the crystal as close as possible to the  $X_{in}$  and  $X_{out}$  pins. Keep the trace lengths between the crystal and RTC equal in length and as short as possible to reduce the probability of noise coupling by reducing the length of the antenna.

- Keep  $X_{in}$  and  $X_{out}$  trace width lesser than 8 mils. Wider trace width leads to larger trace capacitance. The larger these bond pads and traces are, the more likely it is that noise can couple from adjacent signals.
- Shield the  $X_{in}$  and  $X_{out}$  signals by providing a guard ring around the crystal circuitry. This guard ring prevents noise coupling from neighboring signals.
- Take care while routing any other high speed signal in the vicinity of RTC traces. The more the crystal is isolated from other signals on the board, the less likely it is that noise is coupled into the crystal. Maintain a minimum of 200 mil separation between the  $X_{in}$ ,  $X_{out}$  traces and any other high speed signal on the board.
- No signals should run underneath crystal components on the same PCB layer.
- Create an isolated solid copper plane on adjacent PCB layer and underneath the crystal circuitry to prevent unwanted noise coupled from traces routed on the other signal layers of the PCB. The local plane should be separated by at least 40 mils from the neighboring plane on the same PCB layer. The solid plane should be in the vicinity of RTC components only and its perimeter should be kept equal to the guard ring perimeter. [Figure 39](#) shows the recommended layout for RTC circuit.

Figure 39. Recommended Layout for RTC

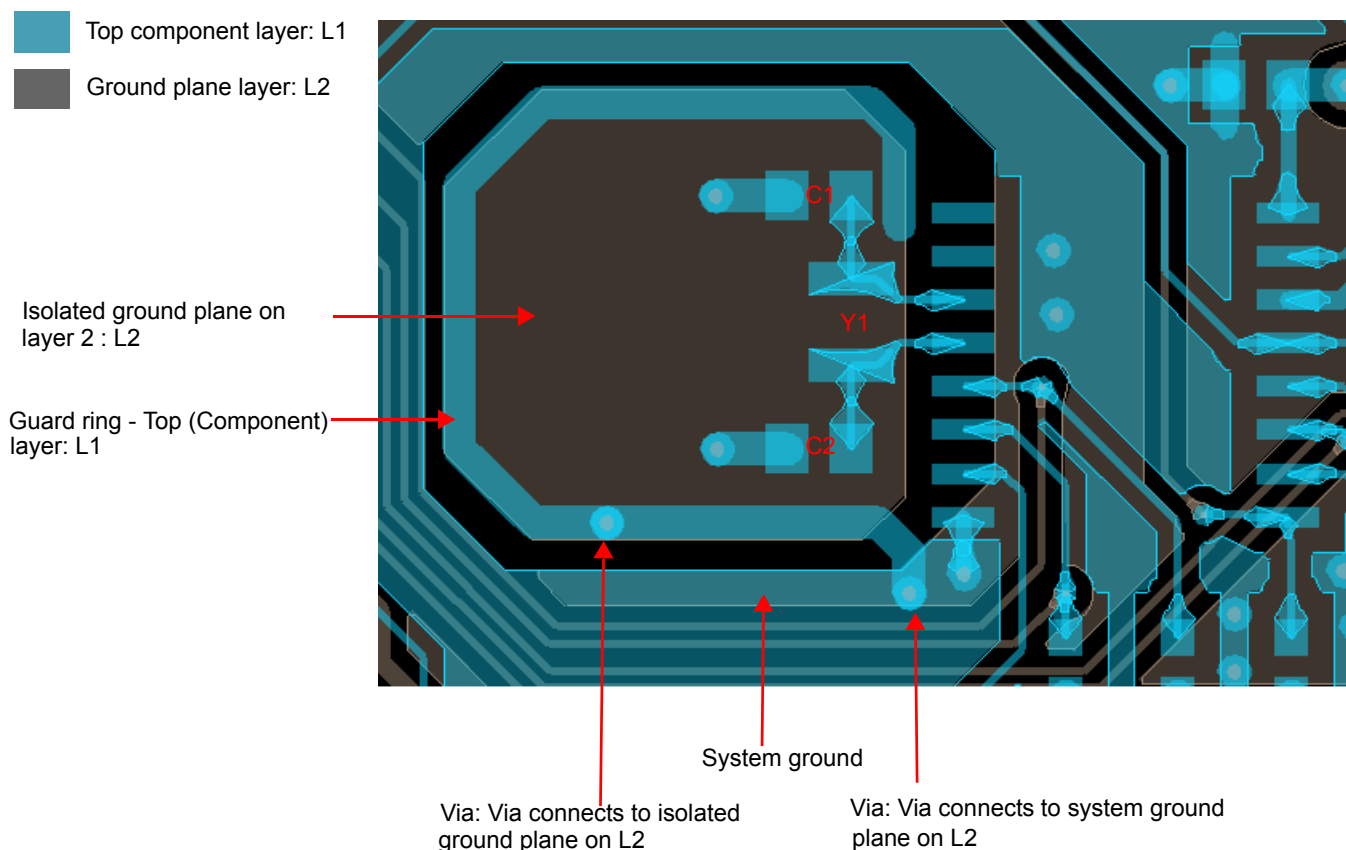

**Table 10. RTC Register Map** <sup>[5, 6]</sup>

| Register | BCD Format Data |                   |                  |                     |                    |             |         |         | Function/Range                    |
|----------|-----------------|-------------------|------------------|---------------------|--------------------|-------------|---------|---------|-----------------------------------|
|          | D7              | D6                | D5               | D4                  | D3                 | D2          | D1      | D0      |                                   |
| 0x0F     | 10s years       |                   |                  |                     | Years              |             |         |         | Years: 00–99                      |
| 0x0E     | 0               | 0                 | 0                | 10s months          | Months             |             |         |         | Months: 01–12                     |
| 0x0D     | 0               | 0                 | 10s day of month |                     | Day of month       |             |         |         | Day of month: 01–31               |
| 0x0C     | 0               | 0                 | 0                | 0                   | 0                  | Day of week |         |         | Day of week: 01–07                |
| 0x0B     | 0               | 0                 | 10s hours        |                     | Hours              |             |         |         | Hours: 00–23                      |
| 0x0A     | 0               | 10s minutes       |                  |                     | Minutes            |             |         |         | Minutes: 00–59                    |
| 0x09     | 0               | 10s seconds       |                  |                     | Seconds            |             |         |         | Seconds: 00–59                    |
| 0x08     | OSCEN (0)       | 0                 | Cal Sign (0)     | Calibration (00000) |                    |             |         |         | Calibration Values <sup>[7]</sup> |
| 0x07     | WDS (0)         | WDW (0)           | WDT (000000)     |                     |                    |             |         |         | Watchdog <sup>[7]</sup>           |
| 0x06     | WIE (0)         | AIE (0)           | PFE (0)          | SQWE (0)            | H/L (1)            | P/L (0)     | SQ1 (0) | SQ0 (0) | Interrupts <sup>[7]</sup>         |
| 0x05     | M (1)           | 0                 | 10s alarm date   |                     | Alarm day          |             |         |         | Alarm, day of month: 01–31        |
| 0x04     | M (1)           | 0                 | 10s alarm hours  |                     | Alarm hours        |             |         |         | Alarm, hours: 00–23               |
| 0x03     | M (1)           | 10s alarm minutes |                  |                     | Alarm minutes      |             |         |         | Alarm, minutes: 00–59             |
| 0x02     | M (1)           | 10s alarm seconds |                  |                     | Alarm seconds      |             |         |         | Alarm, seconds: 00–59             |
| 0x01     | 10s centuries   |                   |                  |                     | Centuries          |             |         |         | Centuries: 00–99                  |
| 0x00     | WDF             | AF                | PF               | OSCF <sup>[8]</sup> | BPF <sup>[8]</sup> | CAL (0)     | W (0)   | R (0)   | Flags <sup>[7]</sup>              |

**Notes**

5. ( ) designates values shipped from the factory.
6. The unused bits of RTC registers are reserved for future use and should be set to '0'.
7. This is a binary value, not a BCD value.
8. When user resets OSCF and BPF flag bits, the flags register will be updated after  $t_{RTCp}$  time.

**Table 11. Register Map Detail**

| Register         | Description                                                                                                                                                                                                                                                                            |             |                  |             |              |             |    |    |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|------------------|-------------|--------------|-------------|----|----|
| 0x0F             | Time Keeping - Years                                                                                                                                                                                                                                                                   |             |                  |             |              |             |    |    |
|                  | D7                                                                                                                                                                                                                                                                                     | D6          | D5               | D4          | D3           | D2          | D1 | D0 |
|                  | 10s years                                                                                                                                                                                                                                                                              |             |                  |             | Years        |             |    |    |
|                  | Contains the lower two BCD digits of the year. Lower nibble (four bits) contains the value for years; upper nibble (four bits) contains the value for 10s of years. Each nibble operates from 0 to 9. The range for the register is 0–99.                                              |             |                  |             |              |             |    |    |
| 0x0E             | Time Keeping - Months                                                                                                                                                                                                                                                                  |             |                  |             |              |             |    |    |
|                  | D7                                                                                                                                                                                                                                                                                     | D6          | D5               | D4          | D3           | D2          | D1 | D0 |
|                  | 0                                                                                                                                                                                                                                                                                      | 0           | 0                | 10s month   | Months       |             |    |    |
|                  | Contains the BCD digits of the month. Lower nibble (four bits) contains the lower digit and operates from 0 to 9; upper nibble (one bit) contains the upper digit and operates from 0 to 1. The range for the register is 1–12.                                                        |             |                  |             |              |             |    |    |
| 0x0D             | Time Keeping - Date                                                                                                                                                                                                                                                                    |             |                  |             |              |             |    |    |
|                  | D7                                                                                                                                                                                                                                                                                     | D6          | D5               | D4          | D3           | D2          | D1 | D0 |
|                  | 0                                                                                                                                                                                                                                                                                      | 0           | 10s day of month |             | Day of month |             |    |    |
|                  | Contains the BCD digits for the date of the month. Lower nibble (four bits) contains the lower digit and operates from 0 to 9; upper nibble (two bits) contains the 10s digit and operates from 0 to 3. The range for the register is 1–31. Leap years are automatically adjusted for. |             |                  |             |              |             |    |    |
| 0x0C             | Time Keeping - Day                                                                                                                                                                                                                                                                     |             |                  |             |              |             |    |    |
|                  | D7                                                                                                                                                                                                                                                                                     | D6          | D5               | D4          | D3           | D2          | D1 | D0 |
|                  | 0                                                                                                                                                                                                                                                                                      | 0           | 0                | 0           | 0            | Day of week |    |    |
|                  | Lower nibble (three bits) contains a value that correlates to day of the week. Day of the week is a ring counter that counts from 1 to 7 then returns to 1. The user must assign meaning to the day value, because the day is not integrated with the date.                            |             |                  |             |              |             |    |    |
| 0x0B             | Time Keeping - Hours                                                                                                                                                                                                                                                                   |             |                  |             |              |             |    |    |
|                  | D7                                                                                                                                                                                                                                                                                     | D6          | D5               | D4          | D3           | D2          | D1 | D0 |
|                  | 0                                                                                                                                                                                                                                                                                      | 0           | 10s hours        |             | Hours        |             |    |    |
|                  | Contains the BCD value of hours in 24 hour format. Lower nibble (four bits) contains the lower digit and operates from 0 to 9; upper nibble (two bits) contains the upper digit and operates from 0 to 2. The range for the register is 0–23.                                          |             |                  |             |              |             |    |    |
| 0x0A             | Time Keeping - Minutes                                                                                                                                                                                                                                                                 |             |                  |             |              |             |    |    |
|                  | D7                                                                                                                                                                                                                                                                                     | D6          | D5               | D4          | D3           | D2          | D1 | D0 |
|                  | 0                                                                                                                                                                                                                                                                                      | 10s minutes |                  |             | Minutes      |             |    |    |
|                  | Contains the BCD value of minutes. Lower nibble (four bits) contains the lower digit and operates from 0 to 9; upper nibble (three bits) contains the upper minutes digit and operates from 0 to 5. The range for the register is 0–59.                                                |             |                  |             |              |             |    |    |
| 0x09             | Time Keeping - Seconds                                                                                                                                                                                                                                                                 |             |                  |             |              |             |    |    |
|                  | D7                                                                                                                                                                                                                                                                                     | D6          | D5               | D4          | D3           | D2          | D1 | D0 |
|                  | 0                                                                                                                                                                                                                                                                                      | 10s seconds |                  |             | Seconds      |             |    |    |
|                  | Contains the BCD value of seconds. Lower nibble (four bits) contains the lower digit and operates from 0 to 9; upper nibble (three bits) contains the upper digit and operates from 0 to 5. The range for the register is 0–59.                                                        |             |                  |             |              |             |    |    |
| 0X08             | Calibration/Control                                                                                                                                                                                                                                                                    |             |                  |             |              |             |    |    |
|                  | D7                                                                                                                                                                                                                                                                                     | D6          | D5               | D4          | D3           | D2          | D1 | D0 |
|                  | OSCEN                                                                                                                                                                                                                                                                                  | 0           | Calibration sign | Calibration |              |             |    |    |
| OSCEN            | Oscillator Enable. When set to '1', the oscillator is stopped. When set to '0', the oscillator runs. Disabling the oscillator saves battery or capacitor power during storage.                                                                                                         |             |                  |             |              |             |    |    |
| Calibration Sign | Determines if the calibration adjustment is applied as an addition (1) to or as a subtraction (0) from the time-base.                                                                                                                                                                  |             |                  |             |              |             |    |    |



**Table 11. Register Map Detail** (continued)

| Register    | Description                                                                                                                                                                                                                                                                                                                                                                                                          |     |                 |      |     |             |     |     |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----------------|------|-----|-------------|-----|-----|
| Calibration | These five bits control the calibration of the clock.                                                                                                                                                                                                                                                                                                                                                                |     |                 |      |     |             |     |     |
| 0x07        | Watchdog Timer                                                                                                                                                                                                                                                                                                                                                                                                       |     |                 |      |     |             |     |     |
|             | D7                                                                                                                                                                                                                                                                                                                                                                                                                   | D6  | D5              | D4   | D3  | D2          | D1  | D0  |
|             | WDS                                                                                                                                                                                                                                                                                                                                                                                                                  | WDW | WDT             |      |     |             |     |     |
| WDS         | Watchdog Strobe. Setting this bit to '1' reloads and restarts the watchdog timer. Setting the bit to '0' has no effect. The bit is cleared automatically after the watchdog timer is reset. The WDS bit is write only. Reading it always returns a 0.                                                                                                                                                                |     |                 |      |     |             |     |     |
| WDW         | Watchdog Write Enable. Setting this bit to '1' disables any WRITE to the watchdog timeout value (D5–D0). This enables the user to set the watchdog strobe bit without disturbing the timeout value. Setting this bit to '0' allows bits D5–D0 to be written to the watchdog register when the next write cycle is complete. This function is explained in more detail in <a href="#">Watchdog Timer on page 21</a> . |     |                 |      |     |             |     |     |
| WDT         | Watchdog timeout selection. The watchdog timer interval is selected by the 6-bit value in this register. It represents a multiplier of the 32 Hz count (31.25 ms). The range of timeout value is 31.25 ms (a setting of 1) to 2 seconds (setting of 3 Fh). Setting the watchdog timer register to '0' disables the timer. These bits can be written only if the WDW bit was set to 0 on a previous cycle.            |     |                 |      |     |             |     |     |
| 0x06        | Interrupt Status/Control                                                                                                                                                                                                                                                                                                                                                                                             |     |                 |      |     |             |     |     |
|             | D7                                                                                                                                                                                                                                                                                                                                                                                                                   | D6  | D5              | D4   | D3  | D2          | D1  | D0  |
|             | WIE                                                                                                                                                                                                                                                                                                                                                                                                                  | AIE | PFE             | SQWE | H/L | P/L         | SQ1 | SQ0 |
| WIE         | Watchdog Interrupt Enable. When set to '1' and a watchdog timeout occurs, the watchdog timer drives the INT pin and the WDF flag. When set to '0', the watchdog timeout affects only the WDF flag.                                                                                                                                                                                                                   |     |                 |      |     |             |     |     |
| AIE         | Alarm Interrupt Enable. When set to '1', the alarm match drives the INT pin and the AF flag. When set to '0', the alarm match only affects the AF flag.                                                                                                                                                                                                                                                              |     |                 |      |     |             |     |     |
| PFE         | Power Fail Enable. When set to '1', the alarm match drives the INT pin and the PF flag. When set to '0', the power fail monitor affects only the PF flag.                                                                                                                                                                                                                                                            |     |                 |      |     |             |     |     |
| SQWE        | Square Wave Enable. When set to '1', a square wave is driven on the INT pin with frequency programmed using SQ1 and SQ0 bits. The square wave output takes precedence over interrupt logic. If the SQWE bit is set to '1', when an enabled interrupt source becomes active, only the corresponding flag is raised and the INT pin continues to drive the square wave.                                                |     |                 |      |     |             |     |     |
| H/L         | High/Low. When set to '1', the INT pin is driven active HIGH. When set to '0', the INT pin is open drain, active LOW.                                                                                                                                                                                                                                                                                                |     |                 |      |     |             |     |     |
| P/L         | Pulse/Level. When set to '1', the INT pin is driven active (determined by H/L) by an interrupt source for approximately 200 ms. When set to '0', the INT pin is driven to an active level (as set by H/L) until the flags register is read.                                                                                                                                                                          |     |                 |      |     |             |     |     |
| SQ1, SQ0    | SQ1, SQ0. These bits are used to decide the frequency of the Square wave on the INT pin output when SQWE bit is set to '1'. The following is the frequency output for each combination of (SQ1, SQ0):<br>(0, 0) - 1 Hz<br>(0, 1) - 512 Hz<br>(1, 0) - 4096 Hz<br>(1, 1) - 32768 Hz                                                                                                                                   |     |                 |      |     |             |     |     |
| 0x05        | Alarm - Day                                                                                                                                                                                                                                                                                                                                                                                                          |     |                 |      |     |             |     |     |
|             | D7                                                                                                                                                                                                                                                                                                                                                                                                                   | D6  | D5              | D4   | D3  | D2          | D1  | D0  |
|             | M                                                                                                                                                                                                                                                                                                                                                                                                                    | 0   | 10s alarm date  |      |     | Alarm date  |     |     |
|             | Contains the alarm value for the date of the month and the mask bit to select or deselect the date value.                                                                                                                                                                                                                                                                                                            |     |                 |      |     |             |     |     |
| M           | Match. When this bit is set to '0', the date value is used in the alarm match. Setting this bit to '1' causes the match circuit to ignore the date value.                                                                                                                                                                                                                                                            |     |                 |      |     |             |     |     |
| 0x04        | Alarm - Hours                                                                                                                                                                                                                                                                                                                                                                                                        |     |                 |      |     |             |     |     |
|             | D7                                                                                                                                                                                                                                                                                                                                                                                                                   | D6  | D5              | D4   | D3  | D2          | D1  | D0  |
|             | M                                                                                                                                                                                                                                                                                                                                                                                                                    | 0   | 10s alarm hours |      |     | Alarm hours |     |     |
|             | Contains the alarm value for the hours and the mask bit to select or deselect the hours value.                                                                                                                                                                                                                                                                                                                       |     |                 |      |     |             |     |     |
| M           | Match. When this bit is set to '0', the hours value is used in the alarm match. Setting this bit to '1' causes the match circuit to ignore the hours value.                                                                                                                                                                                                                                                          |     |                 |      |     |             |     |     |

**Table 11. Register Map Detail** (continued)

| Register | Description                                                                                                                                                                                                                                                                                                                                                                                                                                     |                   |    |      |               |     |    |    |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|----|------|---------------|-----|----|----|
| 0x03     | Alarm - Minutes                                                                                                                                                                                                                                                                                                                                                                                                                                 |                   |    |      |               |     |    |    |
|          | D7                                                                                                                                                                                                                                                                                                                                                                                                                                              | D6                | D5 | D4   | D3            | D2  | D1 | D0 |
|          | M                                                                                                                                                                                                                                                                                                                                                                                                                                               | 10s alarm minutes |    |      | Alarm minutes |     |    |    |
|          | Contains the alarm value for the minutes and the mask bit to select or deselect the minutes value.                                                                                                                                                                                                                                                                                                                                              |                   |    |      |               |     |    |    |
| M        | Match. When this bit is set to '0', the minutes value is used in the alarm match. Setting this bit to '1' causes the match circuit to ignore the minutes value.                                                                                                                                                                                                                                                                                 |                   |    |      |               |     |    |    |
| 0x02     | Alarm - Seconds                                                                                                                                                                                                                                                                                                                                                                                                                                 |                   |    |      |               |     |    |    |
|          | D7                                                                                                                                                                                                                                                                                                                                                                                                                                              | D6                | D5 | D4   | D3            | D2  | D1 | D0 |
|          | M                                                                                                                                                                                                                                                                                                                                                                                                                                               | 10s alarm seconds |    |      | Alarm seconds |     |    |    |
|          | Contains the alarm value for the seconds and the mask bit to select or deselect the seconds' value.                                                                                                                                                                                                                                                                                                                                             |                   |    |      |               |     |    |    |
| M        | Match. When this bit is set to '0', the seconds value is used in the alarm match. Setting this bit to '1' causes the match circuit to ignore the seconds value.                                                                                                                                                                                                                                                                                 |                   |    |      |               |     |    |    |
| 0x01     | Time Keeping - Centuries                                                                                                                                                                                                                                                                                                                                                                                                                        |                   |    |      |               |     |    |    |
|          | D7                                                                                                                                                                                                                                                                                                                                                                                                                                              | D6                | D5 | D4   | D3            | D2  | D1 | D0 |
|          | 10s centuries                                                                                                                                                                                                                                                                                                                                                                                                                                   |                   |    |      | Centuries     |     |    |    |
|          | Contains the BCD value of centuries. Lower nibble contains the lower digit and operates from 0 to 9; upper nibble contains the upper digit and operates from 0 to 9. The range for the register is 0-99 centuries.                                                                                                                                                                                                                              |                   |    |      |               |     |    |    |
| 0x00     | Flags                                                                                                                                                                                                                                                                                                                                                                                                                                           |                   |    |      |               |     |    |    |
|          | D7                                                                                                                                                                                                                                                                                                                                                                                                                                              | D6                | D5 | D4   | D3            | D2  | D1 | D0 |
|          | WDF                                                                                                                                                                                                                                                                                                                                                                                                                                             | AF                | PF | OSCF | BPF           | CAL | W  | R  |
| WDF      | Watchdog Timer Flag. This read only bit is set to '1' when the watchdog timer is allowed to reach '0' without being reset by the user. It is cleared to '0' when the flags register is read or on power-up                                                                                                                                                                                                                                      |                   |    |      |               |     |    |    |
| AF       | Alarm Flag. This read only bit is set to '1' when the time and date match the values stored in the alarm registers with the match bits = '0'. It is cleared when the flags register is read or on power-up.                                                                                                                                                                                                                                     |                   |    |      |               |     |    |    |
| PF       | Power Fail Flag. This read only bit is set to '1' when power falls below the power fail threshold $V_{SWITCH}$ . It is cleared when the flags register is read.                                                                                                                                                                                                                                                                                 |                   |    |      |               |     |    |    |
| OSCF     | Oscillator Fail Flag. Set to '1' on power-up if the oscillator is enabled and not running in the first 5 ms of operation. This indicates that RTC backup power failed and clock value is no longer valid. This bit survives power cycle and is never cleared internally by the chip. The user must check for this condition and write '0' to clear this flag. When user resets OSCF flag bit, the bit will be updated after $t_{RTCp}$ time.    |                   |    |      |               |     |    |    |
| BPF      | Backup Power Fail Flag. Set to '1' on power-up if the backup power (battery or capacitor) failed. The backup power fail condition is determined by the voltage falling below their respective minimum specified voltage. BPF can hold the data only until a defined low level of the back up voltage ( $V_{DR}$ ). User must reset this bit to clear this flag. When user resets BPF flag bit, the bit will be updated after $t_{RTCp}$ time.   |                   |    |      |               |     |    |    |
| CAL      | Calibration Mode. When set to '1', a 512 Hz square wave is output on the INT pin. When set to '0', the INT pin resumes normal operation. This bit takes priority than SQ0/SQ1 and other functions. This bit defaults to '0' (disabled) on power-up.                                                                                                                                                                                             |                   |    |      |               |     |    |    |
| W        | Write Enable: Setting the 'W' bit to '1' freezes updates of the RTC registers. The user can then write to RTC registers, alarm registers, calibration register, interrupt register and flags register. Setting the 'W' bit to '0' causes the contents of the RTC registers to be transferred to the time keeping counters if the time has changed. This transfer process takes $t_{RTCp}$ time to complete. This bit defaults to 0 on power-up. |                   |    |      |               |     |    |    |
| R        | Read Enable: Setting 'R' bit to '1', stops clock updates to user RTC registers so that clock updates are not seen during the reading process. Set 'R' bit to '0' to resume clock updates to the holding register. Setting this bit does not require 'W' bit to be set to '1'. This bit defaults to '0' on power-up.                                                                                                                             |                   |    |      |               |     |    |    |

## Maximum Ratings

Exceeding maximum ratings may shorten the useful life of the device. These user guidelines are not tested.

Storage temperature ..... -65 °C to +150 °C

Maximum accumulated storage time

At 150 °C ambient temperature ..... 1000 h

At 85 °C ambient temperature ..... 20 Years

Maximum junction temperature ..... 150 °C

Supply voltage on  $V_{CC}$  relative to  $V_{SS}$

CY14C101I: ..... -0.5 V to +3.1 V

CY14B101I: ..... -0.5 V to +4.1 V

CY14E101I: ..... -0.5 V to +7.0 V

DC voltage applied to outputs

in High Z state ..... -0.5 V to  $V_{CC} + 0.5 V$

Input voltage ..... -0.5 V to  $V_{CC} + 0.5 V$

Transient voltage (<20 ns) on

any pin to ground potential ..... -2.0 V to  $V_{CC} + 2.0 V$

Package power dissipation

capability ( $T_A = 25\text{ °C}$ ) ..... 1.0 W

Surface mount lead soldering

temperature (3 seconds) ..... +260 °C

DC output current (1 output at a time, 1s duration) ..... 15 mA

Static discharge voltage

(per MIL-STD-883, Method 3015) ..... > 2001 V

Latch up current ..... > 140 mA

## Operating Range

| Product   | Range      | Ambient Temperature | $V_{CC}$       |
|-----------|------------|---------------------|----------------|
| CY14C101I | Industrial | -40 °C to +85 °C    | 2.4 V to 2.6 V |
| CY14B101I |            |                     | 2.7 V to 3.6 V |
| CY14E101I |            |                     | 4.5 V to 5.5 V |

## DC Electrical Characteristics

Over the [Operating Range](#)

| Parameter                | Description                                      | Test Conditions                                                                                                                                                                                                                           | Min  | Typ <sup>[9]</sup> | Max | Unit |
|--------------------------|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|--------------------|-----|------|
| $V_{CC}$                 | Power supply                                     | CY14C101I                                                                                                                                                                                                                                 | 2.4  | 2.5                | 2.6 | V    |
|                          |                                                  | CY14B101I                                                                                                                                                                                                                                 | 2.7  | 3.0                | 3.6 | V    |
|                          |                                                  | CY14E101I                                                                                                                                                                                                                                 | 4.5  | 5.0                | 5.5 | V    |
| $I_{CC1}$                | Average $V_{CC}$ current                         | $f_{SCL} = 3.4\text{ MHz}$ ;<br>Values obtained without output loads ( $I_{OUT} = 0\text{ mA}$ )                                                                                                                                          | —    | —                  | 1   | mA   |
|                          |                                                  | $f_{SCL} = 1\text{ MHz}$ ;<br>Values obtained without output loads ( $I_{OUT} = 0\text{ mA}$ )                                                                                                                                            | —    | —                  | 400 | μA   |
|                          |                                                  | CY14E101I                                                                                                                                                                                                                                 | —    | —                  | 450 | μA   |
| $I_{CC2}$                | Average $V_{CC}$ current during STORE            | All inputs don't care, $V_{CC} = \text{max}$<br>Average current for duration $t_{STORE}$                                                                                                                                                  | —    | —                  | 3   | mA   |
| $I_{CC4}$                | Average $V_{CAP}$ current during AutoStore cycle | All inputs don't care. Average current for duration $t_{STORE}$                                                                                                                                                                           | —    | —                  | 3   | mA   |
| $I_{SB}$                 | $V_{CC}$ standby current                         | $SCL \geq (V_{CC} - 0.2\text{ V})$ .<br>$V_{IN} \leq 0.2\text{ V}$ or $\geq (V_{CC} - 0.2\text{ V})$ .<br>'W' bit set to '0'. Standby current level after nonvolatile cycle is complete. Inputs are static.<br>$f_{SCL} = 0\text{ MHz}$ . | —    | —                  | 250 | μA   |
| $I_{ZZ}$                 | Sleep mode current                               | $t_{SLEEP}$ time after SLEEP Instruction is registered. All inputs are static and configured at CMOS logic level.                                                                                                                         | —    | —                  | 8   | μA   |
| $I_{IX}$ <sup>[10]</sup> | Input current in each I/O pin (except HSB)       | $0.1 V_{CC} < V_i < 0.9 V_{CCmax}$                                                                                                                                                                                                        | -1   | —                  | +1  | μA   |
|                          | Input current in each I/O pin (for HSB)          |                                                                                                                                                                                                                                           | -100 | —                  | +1  | μA   |
| $I_{OZ}$                 | Output leakage current                           |                                                                                                                                                                                                                                           | -1   | —                  | +1  | μA   |
| $C_i$                    | Capacitance for each I/O pin                     | Capacitance measured across all input and output signal pin and $V_{SS}$ .                                                                                                                                                                | —    | —                  | 7   | pF   |

### Notes

9. Typical values are at 25 °C,  $V_{CC} = V_{CC(Typ)}$ . Not 100% tested.

10. Not applicable to WP, A2 and A1 pins.

## DC Electrical Characteristics (continued)

Over the [Operating Range](#)

| Over the Operating Range              |                                                              |                                                  |                        |                      |                    |                       |      |
|---------------------------------------|--------------------------------------------------------------|--------------------------------------------------|------------------------|----------------------|--------------------|-----------------------|------|
| Parameter                             | Description                                                  | Test Conditions                                  |                        | Min                  | Typ <sup>[9]</sup> | Max                   | Unit |
| V <sub>IH</sub>                       | Input HIGH voltage                                           |                                                  |                        | 0.7 V <sub>CC</sub>  | –                  | V <sub>CC</sub> + 0.5 | V    |
| V <sub>IL</sub>                       | Input LOW voltage                                            |                                                  |                        | – 0.5                | –                  | 0.3 V <sub>CC</sub>   | V    |
| V <sub>OL</sub>                       | Output LOW voltage                                           | I <sub>OL</sub> = 3 mA                           |                        | 0                    | –                  | 0.4                   | V    |
|                                       |                                                              | I <sub>OL</sub> = 6 mA                           |                        | 0                    | –                  | 0.6                   | V    |
| R <sub>in</sub> <sup>[11]</sup>       | Input resistance (WP, A2, A1)                                | For V <sub>IN</sub> = V <sub>IL</sub> (Max)      |                        | 50                   | –                  | –                     | KΩ   |
|                                       |                                                              | For V <sub>IN</sub> = V <sub>IH</sub> (Min)      |                        | 1                    | –                  | –                     | MΩ   |
| V <sub>hys</sub>                      | Hysteresis of Schmitt trigger inputs                         |                                                  |                        | 0.05 V <sub>CC</sub> | –                  | –                     | V    |
| V <sub>CAP</sub> <sup>[12]</sup>      | Storage capacitor                                            | Between V <sub>CAP</sub> pin and V <sub>SS</sub> | CY14C101I              | 170                  | 220                | 270                   | μF   |
|                                       |                                                              |                                                  | CY14B101I<br>CY14E101I | 42                   | 47                 | 180                   | μF   |
| V <sub>VCAP</sub> <sup>[13, 14]</sup> | Maximum voltage driven on V <sub>CAP</sub> pin by the device | V <sub>CC</sub> = Max                            | CY14C101I<br>CY14B101I | –                    | –                  | V <sub>CC</sub>       | V    |
|                                       |                                                              |                                                  | CY14E101I              | –                    | –                  | V <sub>CC</sub> – 0.5 | V    |

## Data Retention and Endurance

Over the [Operating Range](#)

| Parameter         | Description                  | Min   | Unit  |
|-------------------|------------------------------|-------|-------|
| DATA <sub>R</sub> | Data retention               | 20    | Years |
| NV <sub>C</sub>   | Nonvolatile STORE operations | 1,000 | K     |

## Thermal Resistance

| Parameter <sup>[14]</sup> | Description                              | Test Conditions                                                                                                         | 16-pin SOIC | Unit |
|---------------------------|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|-------------|------|
| Θ <sub>JA</sub>           | Thermal resistance (junction to ambient) | Test conditions follow standard test methods and procedures for measuring thermal impedance, according to EIA / JESD51. | 56.68       | °C/W |
| Θ <sub>JC</sub>           | Thermal resistance (junction to case)    |                                                                                                                         | 32.11       | °C/W |

### Notes

11. The input pull-down circuit is stronger (50 KΩ) when the input voltage is below V<sub>IL</sub> and weak (1 MΩ) when the input voltage is above V<sub>IH</sub>.
12. Min V<sub>CAP</sub> value guarantees that there is a sufficient charge available to complete a successful AutoStore operation. Max V<sub>CAP</sub> value guarantees that the capacitor on V<sub>CAP</sub> is charged to a minimum voltage during a Power-Up RECALL cycle so that an immediate power-down cycle can complete a successful AutoStore. Therefore it is always recommended to use a capacitor within the specified min and max limits. Refer application note [AN43593](#) for more details on V<sub>CAP</sub> options.
13. Maximum voltage on V<sub>CAP</sub> pin (V<sub>VCAP</sub>) is provided for guidance when choosing the V<sub>CAP</sub> capacitor. The voltage rating of the V<sub>CAP</sub> capacitor across the operating temperature range should be higher than the V<sub>VCAP</sub> voltage.
14. These parameters are guaranteed by design and are not tested.


## AC Test Loads and Waveforms

Figure 40. AC Test Loads and Waveforms

For 2.5 V (CY14C101I)

For 3.0 V (CY14B101I)

For 5.0 V (CY14E101I)

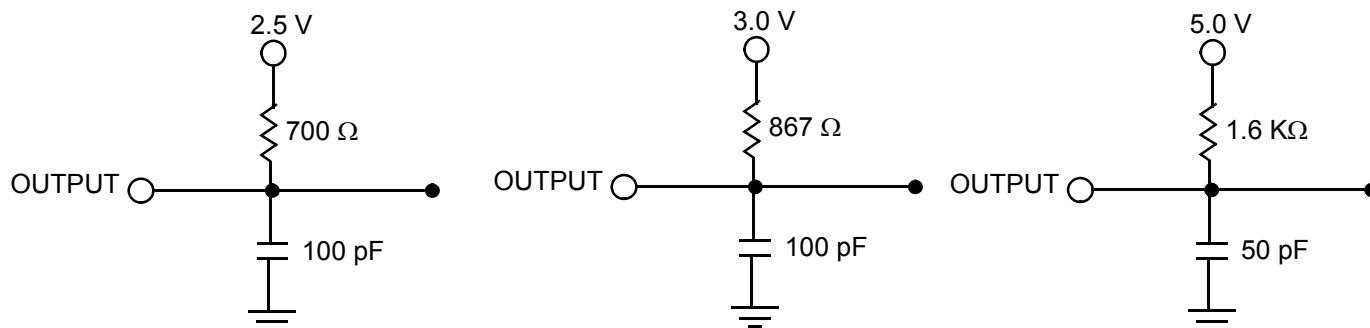

## AC Test Conditions

| Description                              | CY14C101I    | CY14B101I  | CY14E101I  |
|------------------------------------------|--------------|------------|------------|
| Input pulse levels                       | 0 V to 2.5 V | 0 V to 3 V | 0 V to 5 V |
| Input rise and fall times (10%–90%)      | 10 ns        | 10 ns      | 10 ns      |
| Input and output timing reference levels | 1.25 V       | 1.5 V      | 2.5 V      |

## RTC Characteristics

Over the [Operating Range](#)

| Parameter           | Description                                                                                             | Min         | Typ | Max  | Units        |
|---------------------|---------------------------------------------------------------------------------------------------------|-------------|-----|------|--------------|
| $V_{RTCbat}$        | RTC battery pin voltage                                                                                 | 1.8         | –   | 3.6  | V            |
| $I_{BAK}^{[15]}$    | RTC backup current<br>(Refer <a href="#">Figure 38</a> for the recommended external components for RTC) | $T_A$ (Min) | –   | –    | 0.45 $\mu$ A |
|                     |                                                                                                         | 25 °C       | –   | 0.45 | $\mu$ A      |
|                     |                                                                                                         | $T_A$ (Max) | –   | –    | 0.60 $\mu$ A |
| $V_{RTCcap}^{[16]}$ | RTC capacitor pin voltage                                                                               | $T_A$ (Min) | 1.6 | –    | 3.6 V        |
|                     |                                                                                                         | 25 °C       | 1.5 | 3.0  | 3.6 V        |
|                     |                                                                                                         | $T_A$ (Max) | 1.4 | –    | 3.6 V        |
| $V_{BAKFAIL}$       | Backup failure threshold                                                                                | 1.8         | –   | 2.2  | V            |
| $V_{DR}$            | BPF flag retention voltage                                                                              | 1.6         | –   | –    | V            |
| $t_{OCS}$           | RTC oscillator time to start                                                                            | –           | 1   | 2    | sec          |
| $t_{RTCP}$          | RTC processing time from end of 'W' bit set to '0'                                                      | –           | –   | 1    | ms           |
| $R_{BKCHG}$         | RTC backup capacitor charge current-limiting resistor                                                   | 350         | –   | 850  | $\Omega$     |

### Notes

15. Current drawn from either  $V_{RTCcap}$  or  $V_{RTCbat}$  when  $V_{CC} < V_{SWITCH}$ .

16. If  $V_{RTCcap} > 0.5$  V or if no capacitor is connected to  $V_{RTCcap}$  pin, the oscillator will start in  $t_{OCS}$  time. If a backup capacitor is connected and  $V_{RTCcap} < 0.5$  V, the capacitor must be allowed to charge to 0.5 V for oscillator to start.


## AC Switching Characteristics

Over the [Operating Range](#)<sup>[17]</sup>

| Parameter       | Description                                                   | 3.4 MHz <sup>[18]</sup> |      | 1 MHz <sup>[18]</sup> |      | 400 kHz <sup>[18]</sup> |     | Unit |
|-----------------|---------------------------------------------------------------|-------------------------|------|-----------------------|------|-------------------------|-----|------|
|                 |                                                               | Min                     | Max  | Min                   | Max  | Min                     | Max |      |
| $f_{SCL}$       | Clock frequency, SCL                                          | –                       | 3400 | –                     | 1000 | –                       | 400 | kHz  |
| $t_{SU;STA}$    | Setup time for Repeated START condition                       | 160                     | –    | 250                   | –    | 600                     | –   | ns   |
| $t_{HD;STA}$    | Hold time for START condition                                 | 160                     | –    | 250                   | –    | 600                     | –   | ns   |
| $t_{LOW}$       | LOW period of the SCL                                         | 160                     | –    | 500                   | –    | 1300                    | –   | ns   |
| $t_{HIGH}$      | HIGH period of the SCL                                        | 60                      | –    | 260                   | –    | 600                     | –   | ns   |
| $t_{SU;DATA}$   | Data in setup time                                            | 10                      | –    | 100                   | –    | 100                     | –   | ns   |
| $t_{HD;DATA}$   | Data hold time (In/Out)                                       | 0                       | –    | 0                     | –    | 0                       | –   | ns   |
| $t_{DH}$        | Data out hold time                                            | 0                       | –    | 0                     | –    | 0                       | –   | ns   |
| $t_r^{[19]}$    | Rise time of SDA and SCL                                      | –                       | 80   | –                     | 120  | –                       | 300 | ns   |
| $t_f^{[19]}$    | Fall time of SDA and SCL                                      | –                       | 80   | –                     | 120  | –                       | 300 | ns   |
| $t_{SU;STO}$    | Setup time for STOP condition                                 | 160                     | –    | 250                   | –    | 600                     | –   | ns   |
| $t_{VD;DATA}$   | Data output valid time                                        | –                       | 130  | –                     | 400  | –                       | 900 | ns   |
| $t_{VD;ACK}$    | ACK output valid time                                         | –                       | 130  | –                     | 400  | –                       | 900 | ns   |
| $t_{OF}^{[19]}$ | Output fall time from $V_{IH\ min}$ to $V_{IL\ max}$          | –                       | 80   | –                     | 120  | –                       | 250 | ns   |
| $t_{BUF}$       | Bus free time between STOP and next START condition           | 0.3                     | –    | 0.5                   | –    | 1.3                     | –   | us   |
| $t_{SP}$        | Pulse width of spikes that must be suppressed by input filter | –                       | 10   | –                     | 50   | –                       | 50  | ns   |

## Switching Waveforms

Figure 41. Timing Diagram

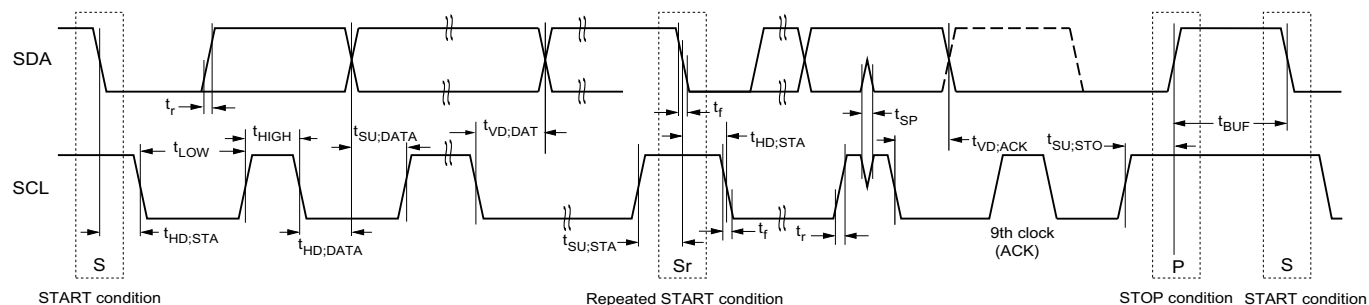

### Notes

17. Test conditions assume signal transition time of 10 ns or less, timing reference levels of  $V_{CC}/2$ , input pulse levels of 0 to  $V_{CC}$  (typ), and output loading of the specified  $I_{OL}$  and load capacitance shown in [Figure 40](#).
18. Bus Load ( $C_b$ ) considerations;  $C_b < 500$  pF for I<sup>2</sup>C clock frequency (SCL) 100/400 KHz;  $C_b < 550$  pF for SCL at 1000 kHz;  $C_b < 100$  pF for SCL at 3.4 MHz.
19. These parameters are guaranteed by design and are not tested.




## nvSRAM Specifications

Over the [Operating Range](#)

| Parameter             | Description                                                  |           | Min | Max  | Unit    |
|-----------------------|--------------------------------------------------------------|-----------|-----|------|---------|
| $t_{FA}^{[20]}$       | Power-up RECALL duration                                     | CY14C101I | –   | 40   | ms      |
|                       |                                                              | CY14B101I | –   | 20   | ms      |
|                       |                                                              | CY14E101I | –   | 20   | ms      |
| $t_{STORE}^{[21]}$    | STORE cycle duration                                         |           | –   | 8    | ms      |
| $t_{DELAY}^{[22]}$    | Time allowed to complete SRAM write cycle                    |           | –   | 25   | ns      |
| $t_{VCCRRISE}^{[23]}$ | $V_{CC}$ rise time                                           |           | 150 | –    | $\mu$ s |
| $V_{SWITCH}$          | Low voltage trigger level                                    | CY14C101I | –   | 2.35 | V       |
|                       |                                                              | CY14B101I | –   | 2.65 | V       |
|                       |                                                              | CY14E101I | –   | 4.40 | V       |
| $t_{LZHSB}^{[23]}$    | HSB high to nvSRAM active time                               |           | –   | 5    | $\mu$ s |
| $V_{HDIS}^{[23]}$     | HSB output disable voltage                                   |           | –   | 1.9  | V       |
| $t_{HHHD}^{[23]}$     | HSB HIGH active time                                         |           | –   | 500  | ns      |
| $t_{WAKE}$            | Time for nvSRAM to wake up from SLEEP mode                   | CY14C101I | –   | 40   | ms      |
|                       |                                                              | CY14B101I | –   | 20   | ms      |
|                       |                                                              | CY14E101I | –   | 20   | ms      |
| $t_{SLEEP}$           | Time to enter low power mode after issuing SLEEP instruction |           | –   | 8    | ms      |
| $t_{SB}^{[23]}$       | Time to enter into standby mode after issuing STOP condition |           | –   | 100  | $\mu$ s |

## Switching Waveforms

Figure 42. AutoStore or Power-Up RECALL <sup>[24]</sup>

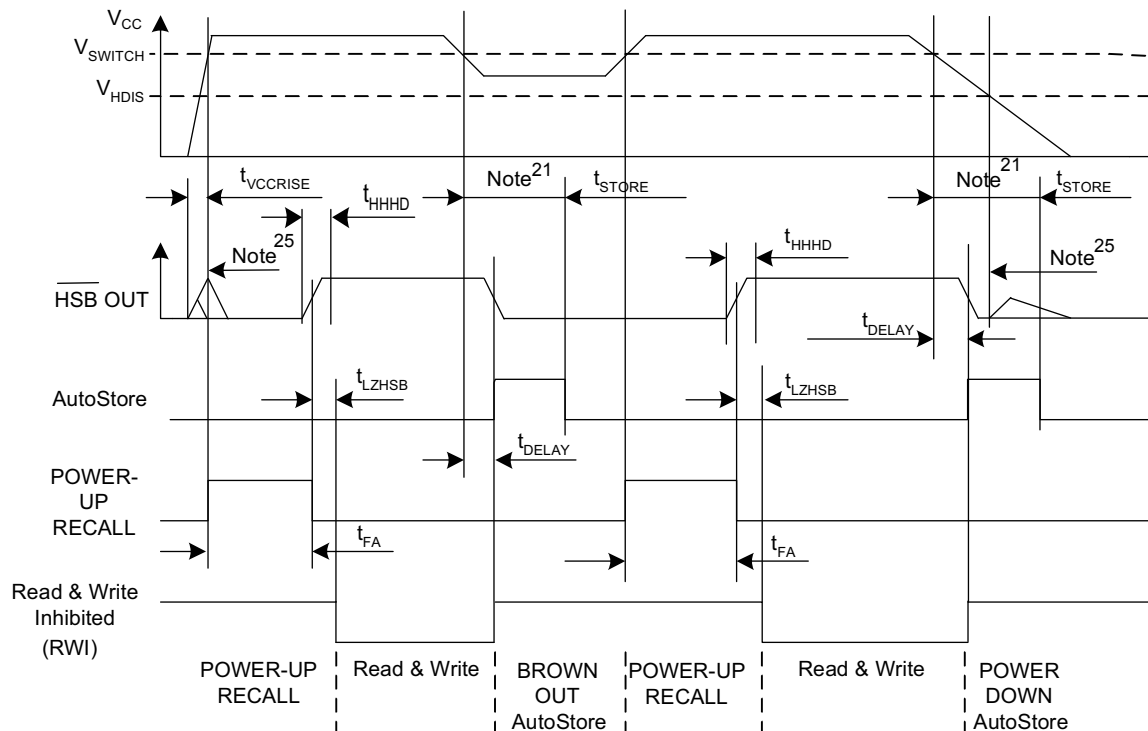

### Notes

20.  $t_{FA}$  starts from the time  $V_{CC}$  rises above  $V_{SWITCH}$ .
21. If an SRAM write has not taken place since the last nonvolatile cycle, no AutoStore or Hardware STORE takes place.
22. On a Hardware STORE and AutoStore initiation, SRAM write operation continues to be enabled for time  $t_{DELAY}$ .
23. These parameters are guaranteed by design and are not tested.
24. Read and Write cycles are ignored during STORE, RECALL, and while  $V_{CC}$  is below  $V_{SWITCH}$ .
25. During power-up and power-down, HSB glitches when HSB pin is pulled up through an external resistor.


## Software Controlled STORE/RECALL Cycles

Over the [Operating Range](#)


| Parameter                  | Description                       | CY14X101I |     | Unit          |
|----------------------------|-----------------------------------|-----------|-----|---------------|
|                            |                                   | Min       | Max |               |
| $t_{\text{RECALL}}$        | RECALL duration                   | —         | 600 | $\mu\text{s}$ |
| $t_{\text{SS}}^{[26, 27]}$ | Software sequence processing time | —         | 500 | $\mu\text{s}$ |

## Switching Waveforms

**Figure 43. Software STORE/RECALL Cycle**

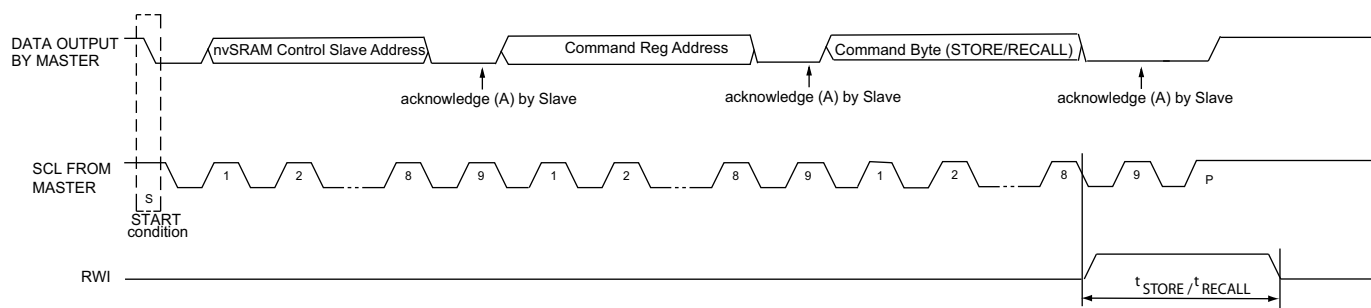

**Figure 44. AutoStore Enable/Disable Cycle**

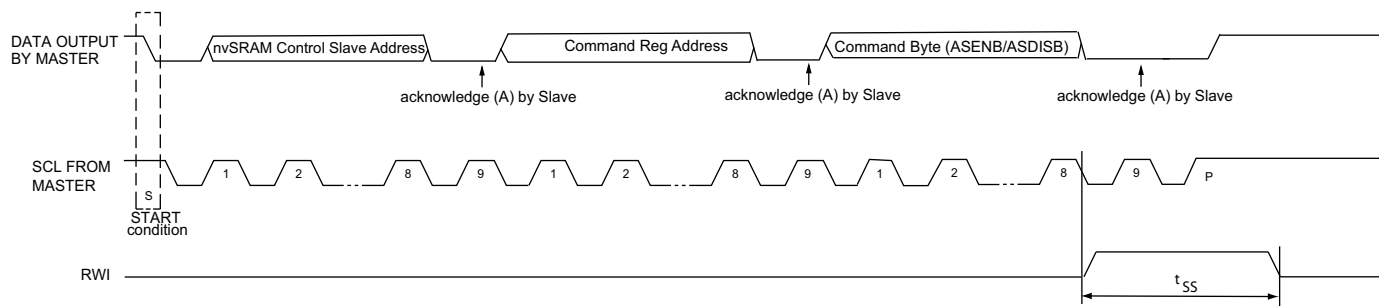

### Notes

26. This is the amount of time it takes to take action on a soft sequence command.  $V_{\text{CC}}$  power must remain HIGH to effectively register command.  
27. Commands such as STORE and RECALL lock out I/O until operation is complete which further increases this time. See the specific command.

## Hardware STORE Cycle


Over the [Operating Range](#)

| Parameter  | Description                | CY14X101I |     | Unit |
|------------|----------------------------|-----------|-----|------|
|            |                            | Min       | Max |      |
| $t_{PHSB}$ | Hardware STORE pulse width | 15        | –   | ns   |


## Switching Waveforms

Figure 45. Hardware STORE Cycle <sup>[28]</sup>

### Write Latch set

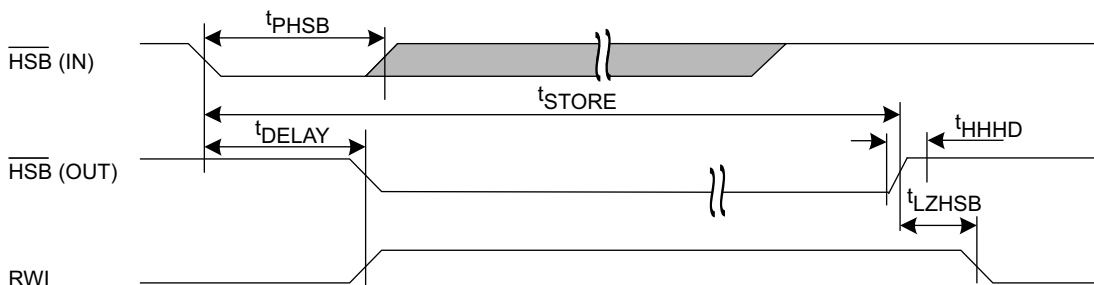

### Write Latch not set

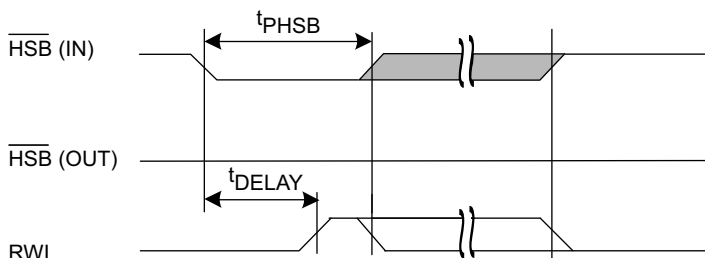

HSB pin is driven HIGH to  $V_{CC}$  only by Internal 100 K $\Omega$  resistor, HSB driver is disabled  
SRAM is disabled as long as HSB (IN) is driven LOW.

#### Note

28. If an SRAM write has not taken place since the last nonvolatile cycle, no AutoStore or Hardware STORE takes place.


## Ordering Information

| Ordering Code   | Package Diagram | Package Type | Operating Range |
|-----------------|-----------------|--------------|-----------------|
| CY14B101I-SFXI  | 51-85022        | 16-pin SOIC  | Industrial      |
| CY14B101I-SFXIT |                 |              |                 |

These parts are Pb-free.


## Ordering Code Definitions

### CY 14 B 101 I - S F X I T

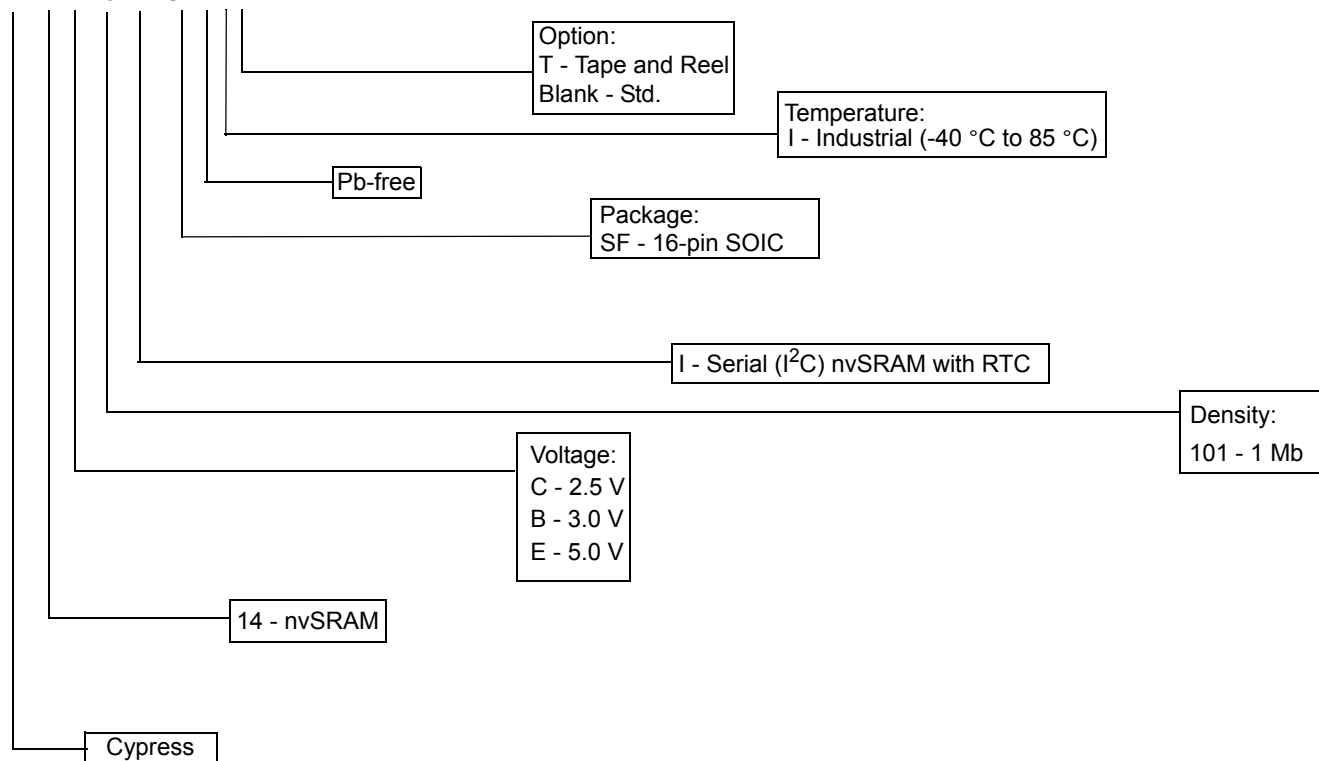

## Package Diagram

Figure 46. 16-pin SOIC (0.413 × 0.299 × 0.0932 Inches) Package Outline, 51-85022

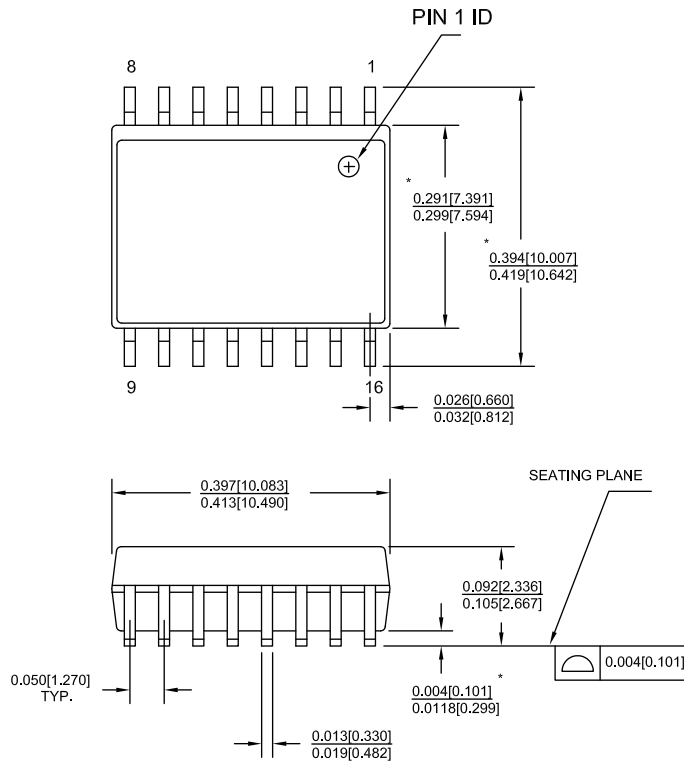


DIMENSIONS IN INCHES[MM]

MIN.  
MAX.

REFERENCE JEDEC MO-119

| PART # |                |
|--------|----------------|
| S16.3  | STANDARD PKG.  |
| SZ16.3 | LEAD FREE PKG. |

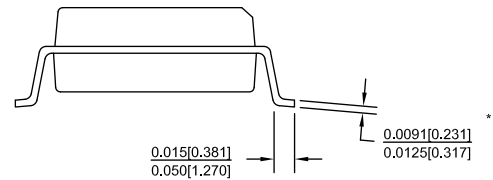

51-85022 \*E

## Acronyms

| Acronym          | Description                                |
|------------------|--------------------------------------------|
| ACK              | Acknowledge                                |
| BCD              | Binary Coded Decimal                       |
| CMOS             | Complementary Metal Oxide Semiconductor    |
| CRC              | Cyclic Redundancy Check                    |
| EIA              | Electronic Industries Alliance             |
| I <sup>2</sup> C | Inter-Integrated Circuit                   |
| I/O              | Input/Output                               |
| JEDEC            | Joint Electron Devices Engineering Council |
| LSB              | Least Significant Bit                      |
| MSB              | Most Significant Bit                       |
| nvSRAM           | non-volatile Static Random Access Memory   |
| NACK             | No Acknowledge                             |
| OSCF             | Oscillator Fail Flag                       |
| PCB              | Printed circuit board                      |
| RoHS             | Restriction of Hazardous Substances        |
| RTC              | Real Time Clock                            |
| R/W              | Read/Write                                 |
| RWI              | Read and Write Inhibit                     |
| SCL              | Serial Clock Line                          |
| SDA              | Serial Data Access                         |
| SNL              | Serial Number Lock                         |
| SOIC             | Small Outline Integrated Circuit           |
| SRAM             | Static Random Access Memory                |
| WP               | Write Protect                              |

## Document Conventions

### Units of Measure

| Symbol | Unit of Measure |
|--------|-----------------|
| °C     | degree Celsius  |
| F      | farad           |
| Hz     | hertz           |
| kHz    | kilohertz       |
| kΩ     | kilohm          |
| Mbit   | megabit         |
| MHz    | megahertz       |
| MΩ     | megaohm         |
| μA     | microampere     |
| μF     | microfarad      |
| μs     | microsecond     |
| mA     | milliampere     |
| ms     | millisecond     |
| ns     | nanosecond      |
| Ω      | ohm             |
| %      | percent         |
| pF     | picofarad       |
| Sec    | second          |
| V      | volt            |
| W      | watt            |

## Document History Page

| Document Title: CY14C101I, CY14B101I, CY14E101I, 1-Mbit (128 K × 8) Serial (I <sup>2</sup> C) nvSRAM with Real Time Clock<br>Document Number: 001-54391 |         |                 |                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-----------------|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rev.                                                                                                                                                    | ECN No. | Submission Date | Orig. of Change | Description of Change                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| **                                                                                                                                                      | 2754627 | 08/21/09        | GVCH            | New data sheet.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| *A                                                                                                                                                      | 2860397 | 01/20/2010      | GVCH            | Changed V <sub>CC</sub> range for CY14C101I from 2.3 - 2.7 V to 2.4-2.6 V<br>Removed 16-SOIC 150 mil package option<br>Added 16-SOIC 300 mil package option<br>Added 3.4 MHz bus frequency related information<br>Changed I <sub>OL</sub> min value from 20 mA to 3mA<br>Changed t <sub>LOW</sub> min value from 400ns to 500ns for 1MHz<br>Changed t <sub>LOW</sub> min value from 600ns to 1300ns for 400 KHz<br>Changed t <sub>HIGH</sub> min value from 400ns to 260ns<br>Changed t <sub>DH</sub> min value from 50ns to 0ns<br>Updated t <sub>r</sub> max value.<br>Removed t <sub>SP</sub> min value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| *B                                                                                                                                                      | 2902491 | 03/31/2010      | GVCH            | Changed status from Advance to Preliminary.<br>Updated logic block diagram<br>Updated <a href="#">Pinout</a><br>Updated <a href="#">Pin Definitions</a><br>Complete content write<br>Changed I <sub>CC4</sub> value from 2 mA to 3 mA<br>Added I <sub>OZ</sub> and C <sub>i</sub> parameter in <a href="#">DC Electrical Characteristics</a><br>Removed I <sub>OL</sub> parameter in <a href="#">DC Electrical Characteristics</a><br>Changed V <sub>CAP</sub> value from for V <sub>CC</sub> =2.4 V-2.6 V in <a href="#">DC Electrical Characteristics</a><br>Changed min value from 100 μF to 170 μF<br>Changed typ value from 150 μF to 220 μF<br>Changed max value from 330 μF to 270 μF<br>Changed V <sub>CAP</sub> value from for V <sub>CC</sub> =2.7 V-3.6 V and V <sub>CC</sub> =4.5-5.5 V in <a href="#">DC Electrical Characteristics</a><br>Changed min value from 40 uF to 42 uF<br>Added <a href="#">Data Retention and Endurance</a> Table<br>Added <a href="#">Thermal Resistance</a> Table<br>Added <a href="#">AC Test Conditions</a> Table<br>Added V <sub>DR</sub> and R <sub>BKCHG</sub> in <a href="#">RTC Characteristics</a><br>Added Figures<br>Added <a href="#">Software Controlled STORE/RECALL Cycles</a> Table<br>Added <a href="#">Hardware STORE Cycle</a> Table<br>Added t <sub>FA</sub> for V <sub>CC</sub> =2.4 V-2.6 V<br>Added t <sub>WAKE</sub> for V <sub>CC</sub> =2.4 V-2.6 V<br>Added t <sub>SB</sub> parameter<br>Changed V <sub>SWITCH</sub> from 4.45 V to 4.40 V for V <sub>CC</sub> = 4.5 V to 5.5 V<br>Updated t <sub>RECALL</sub> value from 200 μs to 300 μs<br>Changed t <sub>SS</sub> value from 100 to 200 μs<br>Added t <sub>PHSB</sub> parameter<br>Updated <a href="#">Ordering Information</a> .<br>Updated <a href="#">Package Diagram</a> .<br>Added <a href="#">Acronyms</a> . |



## Document History Page (continued)

| Document Title: CY14C101I, CY14B101I, CY14E101I, 1-Mbit (128 K × 8) Serial (I <sup>2</sup> C) nvSRAM with Real Time Clock<br>Document Number: 001-54391 |         |                 |                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-----------------|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rev.                                                                                                                                                    | ECN No. | Submission Date | Orig. of Change | Description of Change                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| *C                                                                                                                                                      | 3150044 | 01/21/2011      | GVCH            | <p><b>Hardware STORE and HSB pin Operation:</b> Added more clarity on HSB pin operation</p> <p>Updated <math>t_{SP}</math> max value from 10 ns to 5 ns for 3.4 MHz</p> <p>Updated <b>Setting the Clock</b> description</p> <p>Updated 'W' bit description in <b>Register Map Detail</b> table</p> <p>Updated best practices</p> <p>Added <math>t_{RTCP}</math> parameter to <b>RTC Characteristics</b> table</p> <p>Updated <math>t_{LZHSB}</math> parameter description</p> <p>Figure 41: Typo error fixed</p> <p>Updated <math>t_{SS}</math> value from 200 <math>\mu</math>s to 500 <math>\mu</math>s</p> <p>Updated <math>t_{RECALL}</math> value from 300 <math>\mu</math>s to 600 <math>\mu</math>s</p> <p>Added <b>Units of Measure</b> table</p> |
| *D                                                                                                                                                      | 3191637 | 03/21/2011      | GVCH            | <p>Updated <b>AutoStore Operation</b> (description).</p> <p>Updated <b>Table 6</b> (Product ID column).</p> <p>Updated <b>Figure</b> (changed C1, C2 values to 12 pF, 69 pF from 10 pF, 67 pF respectively).</p> <p>Updated <b>DC Electrical Characteristics</b> (Added note 10).</p> <p>Updated in new template.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| *E                                                                                                                                                      | 3328621 | 07/26/2011      | GVCH            | <p><b>Pin Definitions:</b> Updated SDA pin description</p> <p>Updated SLEEP description on page 9</p> <p><b>Table 6:</b> Added device ID (4 bytes) column</p> <p>Updated <b>Executing Commands Using Command Register</b> description</p> <p>Added <math>I_{CC1}</math> spec value of 400 <math>\mu</math>A for 1 MHz frequency</p> <p>Changed <math>I_{CC2}</math> spec value from 2 mA to 3 mA</p> <p>Removed <math>I_{CC3}</math> parameter spec</p> <p>Added footnote <b>12</b> and <b>17</b></p> <p>Updated <math>t_{SP}</math> max value from 5 ns to 10 ns for 3.4 MHz</p> <p>Updated <b>Figure 43</b> and <b>Figure 44</b></p> <p>Updated <b>Package Diagram</b>.</p>                                                                             |
| *F                                                                                                                                                      | 3453606 | 12/09/2011      | GVCH            | <p>Added footnote <b>3</b> and <b>4</b></p> <p>Updated <b>DC Electrical Characteristics:</b> Added <math>I_{CC1}</math> parameter value of 450 <math>\mu</math>A for CY14E101I.</p> <p>Updated <b>RTC Characteristics</b> table</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| *G                                                                                                                                                      | 3668269 | 07/24/2012      | GVCH            | <p>Updated <b>Real Time Clock Operation</b> (Added more clarity).</p> <p>Updated <b>DC Electrical Characteristics</b> (Added <math>V_{VAP}</math> parameter and its details, added Note <b>13</b> and referred the same note in <math>V_{VAP}</math> parameter, also referred Note <b>14</b> in <math>V_{VAP}</math> parameter).</p>                                                                                                                                                                                                                                                                                                                                                                                                                      |
| *H                                                                                                                                                      | 3753257 | 09/26/2012      | GVCH            | Updated "Ambient temperature with power applied" to "Maximum junction temperature"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| *I                                                                                                                                                      | 3910192 | 02/28/2013      | GVCH            | <p>Changed datasheet status from "Preliminary to Final"</p> <p>Added Note <b>1</b></p> <p><b>Ordering Information:</b> Removed CY14C101I-SFXI, CY14C101I-SFXIT and CY14E101I-SFXI, CY14E101I-SFXIT parts</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

**Document History Page** (continued)

| Document Title: CY14C101I, CY14B101I, CY14E101I, 1-Mbit (128 K × 8) Serial (I <sup>2</sup> C) nvSRAM with Real Time Clock<br>Document Number: 001-54391 |         |                 |                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-----------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rev.                                                                                                                                                    | ECN No. | Submission Date | Orig. of Change | Description of Change                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| *J                                                                                                                                                      | 3983048 | 04/29/2013      | GVCH            | Updated <a href="#">Features</a> :<br>Updated Note 1.<br><br>Updated <a href="#">DC Electrical Characteristics</a> :<br>Added one more condition "I <sub>OL</sub> = 6 mA" for V <sub>OL</sub> parameter and added respective values.<br><br>Updated <a href="#">RTC Characteristics</a> :<br>Changed maximum value V <sub>BAKFALL</sub> parameter from 2 V to 2.2 V.<br><br>Updated <a href="#">AC Switching Characteristics</a> :<br>Updated Note 18.<br>Changed value of t <sub>OF</sub> parameter from 300 ns to 250 ns for 400 kHz frequency.<br><br>Updated <a href="#">Package Diagram</a> :<br>spec 51-85022 – Changed revision from *D to *E. |
| *K                                                                                                                                                      | 3988696 | 05/02/2013      | GVCH            | No technical updates.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| *L                                                                                                                                                      | 4038054 | 06/24/2013      | GVCH            | Updated <a href="#">Real Time Clock Operation</a> :<br>Updated <a href="#">Backup Power</a> (Added Note).<br>Added <a href="#">RTC External Components</a> .<br>Moved <a href="#">Figure 38</a> from <a href="#">Flags Register</a> section to <a href="#">RTC External Components</a> section.<br>Added <a href="#">PCB Design Considerations for RTC</a> .                                                                                                                                                                                                                                                                                          |
| *M                                                                                                                                                      | 4557366 | 11/05/2014      | GVCH            | Added related documentation hyperlink in page 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

## Sales, Solutions, and Legal Information

### Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

#### Products

|                          |                                                                                                                                      |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Automotive               | <a href="http://cypress.com/go/automotive">cypress.com/go/automotive</a>                                                             |
| Clocks & Buffers         | <a href="http://cypress.com/go/clocks">cypress.com/go/clocks</a>                                                                     |
| Interface                | <a href="http://cypress.com/go/interface">cypress.com/go/interface</a>                                                               |
| Lighting & Power Control | <a href="http://cypress.com/go/powerpsoc">cypress.com/go/powerpsoc</a><br><a href="http://cypress.com/go/plc">cypress.com/go/plc</a> |
| Memory                   | <a href="http://cypress.com/go/memory">cypress.com/go/memory</a>                                                                     |
| Optical & Image Sensing  | <a href="http://cypress.com/go/image">cypress.com/go/image</a>                                                                       |
| PSoC                     | <a href="http://cypress.com/go/psoc">cypress.com/go/psoc</a>                                                                         |
| Touch Sensing            | <a href="http://cypress.com/go/touch">cypress.com/go/touch</a>                                                                       |
| USB Controllers          | <a href="http://cypress.com/go/USB">cypress.com/go/USB</a>                                                                           |
| Wireless/RF              | <a href="http://cypress.com/go/wireless">cypress.com/go/wireless</a>                                                                 |

#### PSoC Solutions

[psoc.cypress.com/solutions](http://psoc.cypress.com/solutions)  
PSoC 1 | PSoC 3 | PSoC 5

© Cypress Semiconductor Corporation, 2009-2014. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress product. Nor does it convey or imply any license under patent or other rights. Cypress products are not warranted nor intended to be used for medical, life support, life saving, critical control or safety applications, unless pursuant to an express written agreement with Cypress. Furthermore, Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Any Source Code (software and/or firmware) is owned by Cypress Semiconductor Corporation (Cypress) and is protected by and subject to worldwide patent protection (United States and foreign), United States copyright laws and international treaty provisions. Cypress hereby grants to licensee a personal, non-exclusive, non-transferable license to copy, use, modify, create derivative works of, and compile the Cypress Source Code and derivative works for the sole purpose of creating custom software and or firmware in support of licensee product to be used only in conjunction with a Cypress integrated circuit as specified in the applicable agreement. Any reproduction, modification, translation, compilation, or representation of this Source Code except as specified above is prohibited without the express written permission of Cypress.

Disclaimer: CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Cypress reserves the right to make changes without further notice to the materials described herein. Cypress does not assume any liability arising out of the application or use of any product or circuit described herein. Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress' product in a life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Use may be limited by and subject to the applicable Cypress software license agreement.