
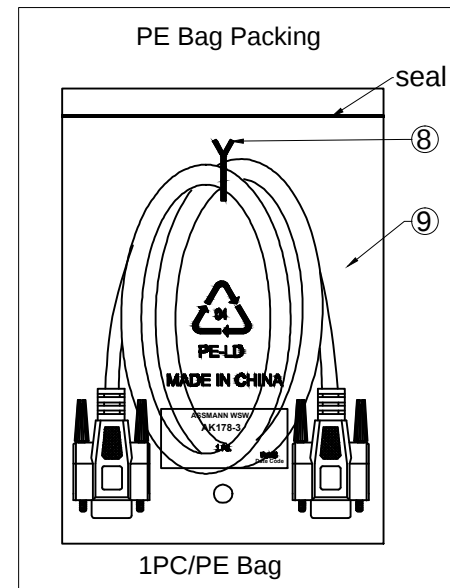


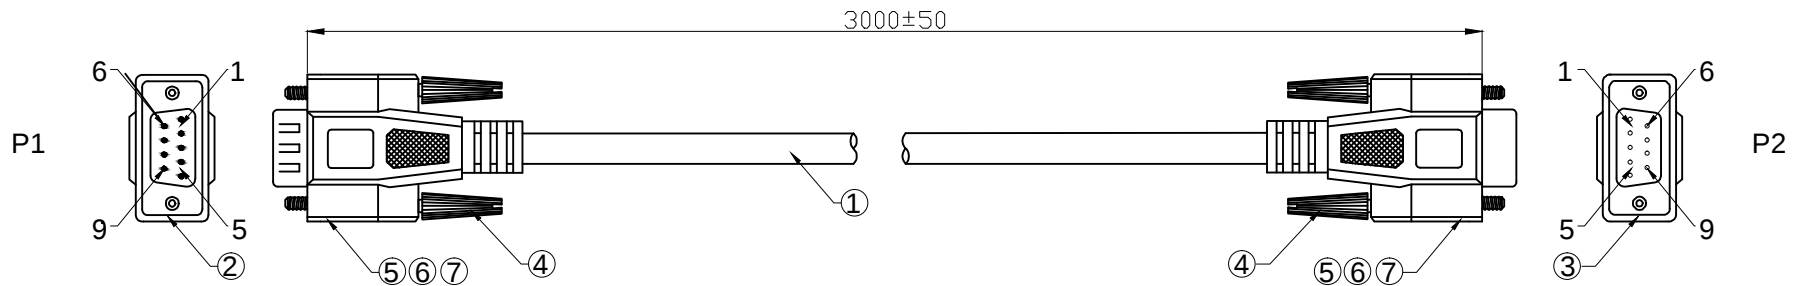

① PIN ASSIGNMENT			
P1		P2	
1	_____	1	
2	_____	2	
3	_____	3	
4	_____	4	
5	_____	5	
6	_____	6	
7	_____	7	
8	_____	8	
9	_____	9	
Shell	_____	Shell	

Electrical test:
1. 100% short, open, miss wire test
2. Conduct resistance: 2 Ohm max.
3. Insulator resistance: 5Mohm min.
4. Hi-Pot: 300V DC/10ms

⑨	PE Bag	1pcs	Clear Print black "MADE IN CHINA"+ "1PC"
⑧	Tie	1pcs	White tie
⑦	Outermold	NA	PVC 45P Beige(BG002)
⑥	Innrmold	NA	LD-PE
⑤	Tube	2pcs	Heat shrink tube black OD:Ø1.5*L15mm
④	Screw	4pcs	Screw #4-40UNC D-E L=32.5mm Nickel plated Insulator color:Beige(BG002)
③	CONN	1pcs	DB 9Pin Female,Pin:G/F Shell-Nickel Insulator color:Blue solder type
②	CONN	1pcs	DB 9Pin male,Pin:G/F Shell-Nickel Insulator color:Blue solder type
①	Cable	1pcs	No UL 28AWG(7/0.12TC)*9C+D+AL/Mylar Jacket PVC,Beige(BG002) OD:5.0mm
NO.	NAME.	Q'TY	SPECIFICATION

RoHS compliant
Unit:mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE					Drawn	05.04.2016	Amy	
					Approved	05.04.2016	Amy	ASSMANN WSW-No. AK178-3
DIM	TOL	①	Update pin assignment	20.12.2018	Xavier		Drawing-No.	
		②	Drawn	05.04.2016	Amy		ASS 7601 CA	rev01
Angle	TOL	Id.	Modification	Date	Name		Replace	Sheet