



REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
A		PROPOSAL DRAWING	JULY 20/05	L.CHAN

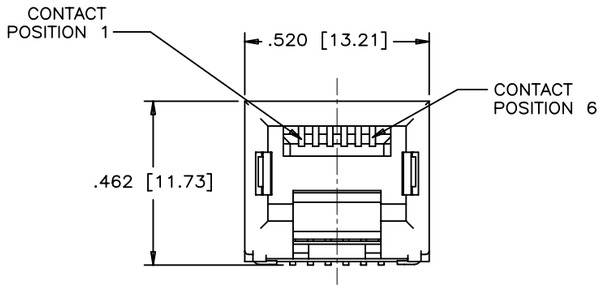

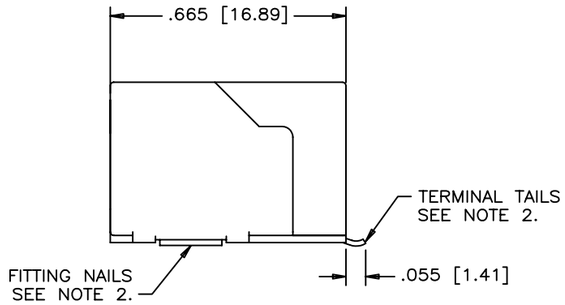

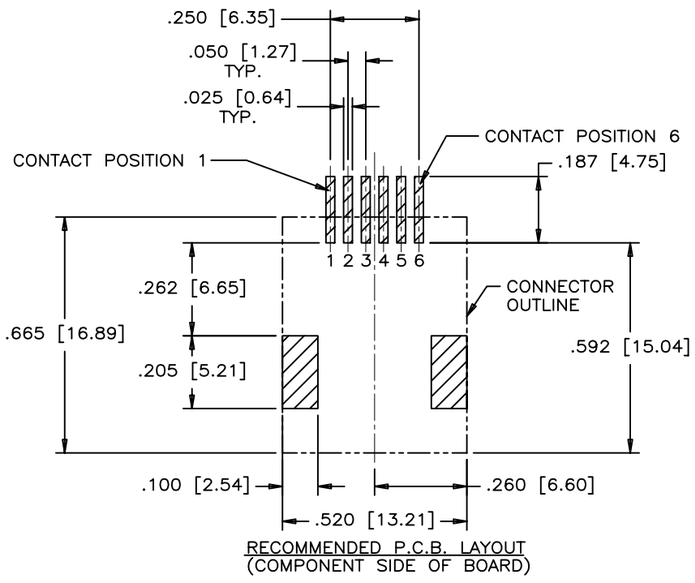

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

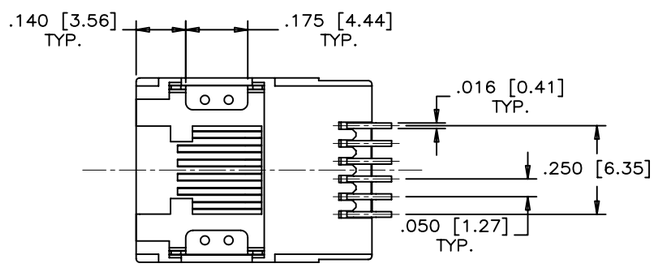

AMPHENOL PART NO.: R J L S E – 6 X 0 X X – 0 1 X

GOLD PLATING
0 = GOLD FLASH
1 = 15 MICRO" GOLD PLATING
2 = 30 MICRO" GOLD PLATING
3 = 50 MICRO" GOLD PLATING

NUMBER OF CONTACTS
2 = 2 CONTACTS 3 & 4
4 = 4 CONTACTS 2 TO 5
6 = 6 CONTACTS 1 TO 6

HOUSING OPTION
1 = BLACK HOUSING
2 = YELLOW HOUSING
3 = RED HOUSING

PACKAGING
BLANK = TRAY
T = TAPE AND REEL

NOTES:

1. MATERIALS:

HOUSING: HIGH TEMPERATURE RESISTANT NYLON.
FLAMMABILITY RATING UL 94V–0
COLOUR: SEE AMPHENOL PART NUMBER SYSTEM FOR HOUSING OPTIONS

CONTACTS: PHOSPHOR BRONZE
PLATING: GOLD PLATING: SEE AMPHENOL PART NUMBER SYSTEM FOR PLATING OPTIONS.
50 MICRO" [1.27 MICRONS] MIN. NICKEL UNDERPLATE.
100 MICRO" [2.54 MICRONS] MIN. MATTE TIN ON CONTACT TAILS.

2. COPLANARITY SPECIFICATION:
WITH THE MODULAR JACK SITTING ON A LEVEL SURFACE, THE MAXIMUM GAP BETWEEN THE LEVEL SURFACE AND ALL TERMINAL TAILS AND BOTH FITTING NAILS IS .004 [0.10].

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

DRAWN PWANG	DATE JULY.20/05	Amphenol Canada Corp.
DESIGNED		
CHECKED TERRY	JULY.20/05	TITLE SURFACE MOUNT MODULAR JACK 6 POSITION, CONTACT OPTIONS, WITHOUT SHIELD, WITH GOLD PLATING AND PACKAGING OPTIONS – RoHS COMPLIANT
I. E. APPRD.		
Q. A. APPRD.		DWG DRAWING NO. P–RJLSE–6X0XX–01X REV. A
DWG. APPRD.		
ENG. REL. NO.		SCALE WT. ——— SURF. ——— SHEET 1 OF 1
REF. EAR # 12798		
DIMENSIONS ARE IN INCHES [mm]	CODE ID. NO. 03554	

Downloaded from Arrow.com.