

To our customers,

Old Company Name in Catalogs and Other Documents

On April 1st, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: <http://www.renesas.com>

April 1st, 2010
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (<http://www.renesas.com>)

Send any inquiries to <http://www.renesas.com/inquiry>.



Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: "Standard", "High Quality", and "Specific". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as "Specific" without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as "Specific" or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is "Standard" unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
 - "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
 - "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
 - "Specific": Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

BIPOLAR DIGITAL INTEGRATED CIRCUITS

μ PB1506GV, μ PB1507GV

3GHz INPUT DIVIDE BY 256, 128, 64 PRESCALER IC FOR ANALOG DBS TUNERS

The μ PB1506GV and μ PB1507GV are 3.0 GHz input, high division silicon prescaler ICs for analog DBS tuner applications. These ICs divide-by-256, 128 and 64 contribute to produce analog DBS tuners with kit-use of 17 K series DTS controller or standard CMOS PLL synthesizer IC. The μ PB1506GV/ μ PB1507GV are shrink package versions of the μ PB586G/588G or μ PB1505GR so that these smaller packages contribute to reduce the mounting space replacing from conventional ICs.

The μ PB1506GV and μ PB1507GV are manufactured using NEC's high fr NESAT™IV silicon bipolar process. This process uses silicon nitride passivation film and gold electrodes. These materials can protect chip surface from external pollution and prevent corrosion/migration. Thus, these ICs have excellent performance, uniformity and reliability.

FEATURES

- High toggle frequency : $f_{in} = 0.5 \text{ GHz to } 3.0 \text{ GHz}$
- High-density surface mounting : 8-pin plastic SSOP (175 mil)
- Low current consumption : 5 V, 19 mA
- Selectable high division : $\div 256, \div 128, \div 64$
- Pin connection variation : μ PB1506GV and μ PB1507GV

APPLICATION

These ICs can use as a prescaler between local oscillator and PLL frequency synthesizer included modulus prescaler. For example, following application can be chosen;

- Analog DBS tuner's synthesizer
- Analog CATV converter synthesizer


ORDERING INFORMATION

PART NUMBER	PACKAGE	MARKING	SUPPLYING FORM
μ PB1506GV-E1	8-pin plastic	1506	Embossed tape 8 mm wide. Pin 1 is in tape pull-out direction. 1 000 p/reel.
μ PB1507GV-E1	SSOP (175 mil)	1507	

Remarks To order evaluation samples, please contact your local NEC sales office.
(Part number for sample order: μ PB1506GV, μ PB1507GV)

Caution: Electro-static sensitive devices

PIN CONNECTION (Top View)

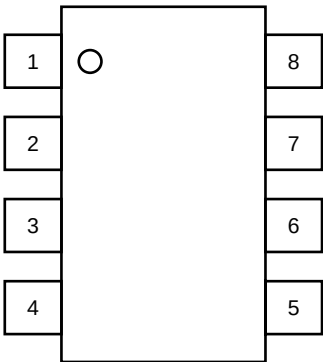

Pin NO.	μPB1506GV	μPB1507GV
1	SW1	IN
2	IN	V _{CC}
3	$\overline{\text{IN}}$	SW1
4	GND	OUT
5	NC	GND
6	SW2	SW2
7	OUT	NC
8	V _{CC}	$\overline{\text{IN}}$


PRODUCT LINE-UP

Features (division, Freq.)	Part No.	I _{CC} (mA)	f _{in} (GHz)	V _{CC} (V)	Package	Pin connection
÷512, ÷256, 2.5 GHz	μPB586G	28	0.5 to 2.5	4.5 to 5.5	8 pin SOP 225 mil	NEC original
÷128, ÷64, 2.5 GHz	μPB588G	26	0.5 to 2.5	4.5 to 5.5		
÷256, ÷128, ÷64	μPB1505GR	14	0.5 to 3.0	4.5 to 5.5		Standard
3.0 GHz	μPB1506GV	19	0.5 to 3.0	4.5 to 5.5	8 pin SSOP 175 mil	NEC original
	μPB1507GV	19	0.5 to 3.0	4.5 to 5.5		Standard

Remarks . This table shows the TYP values of main parameters. Please refer to ELECTRICAL CHARACTERISTICS.


- μPB586G and μPB588G are discontinued.

INTERNAL BLOCK DIAGRAM

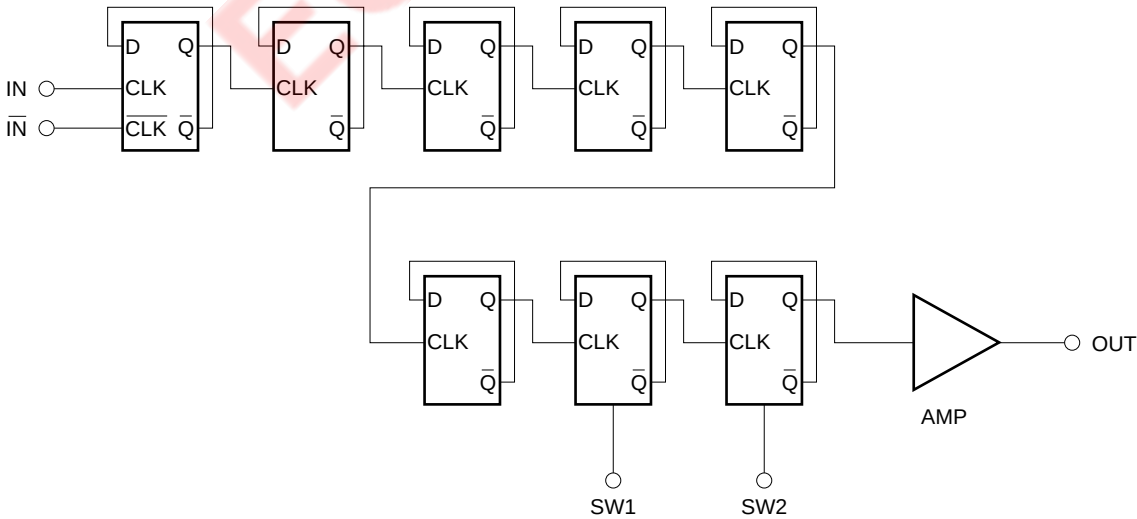


SYSTEM APPLICATION EXAMPLE

RF unit block of Analog DBS tuners

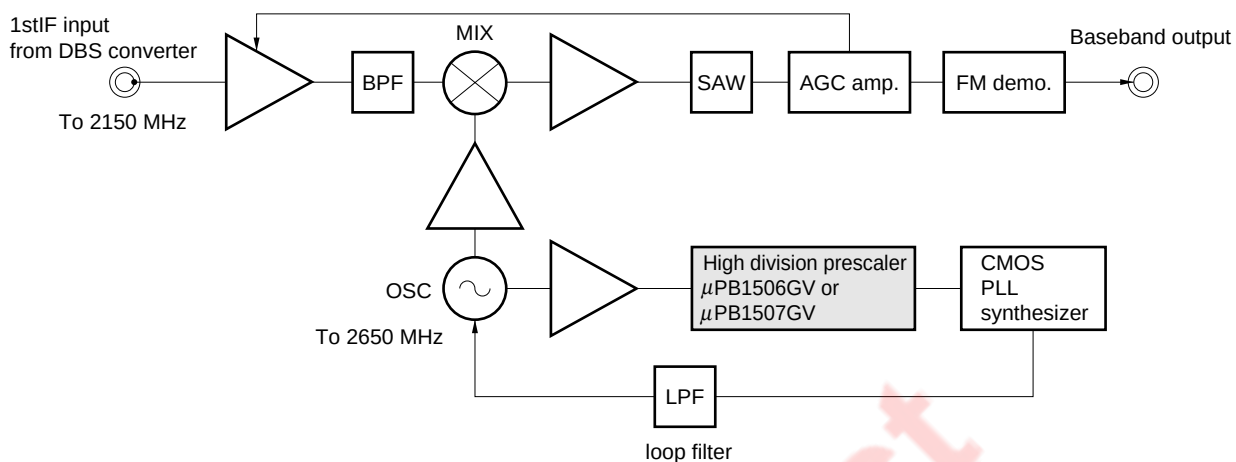

RF unit block of Analog CATV converter

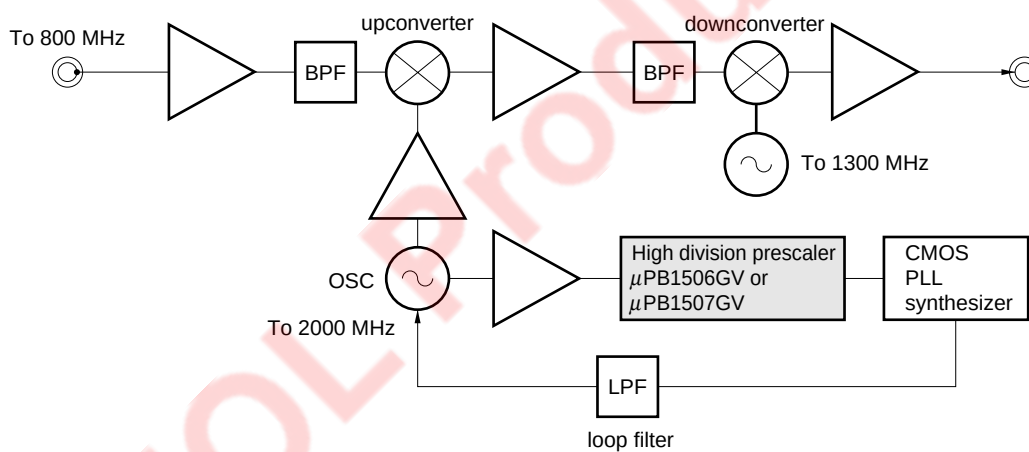

PIN EXPLANATION

Pin name	Applied voltage V	Pin voltage V	Functions and explanation	Pin no.														
				μPB1506GV	μPB1507GV													
IN	—	2.9	Signal input pin. This pin should be coupled to signal source with capacitor (e.g. 1 000 pF) for DC cut.	2	1													
$\overline{\text{IN}}$	—	2.9	Signal input bypass pin. This pin must be equipped with bypass capacitor (e.g. 1 000 pF) to minimize ground impedance.	3	8													
GND	0	—	Ground pin. Ground pattern on the board should be formed as wide as possible to minimize ground impedance.	4	5													
SW1	H/L	—	Divide ratio input pin. The ratio can be determined by following applied level to these pins. <table border="1"><tr><td colspan="2" rowspan="2"></td><th colspan="2">SW2</th></tr><tr><th>H</th><th>L</th></tr><tr><th rowspan="2">SW1</th><th>H</th><td>÷64</td><td>÷128</td></tr><tr><th>L</th><td>÷128</td><td>÷256</td></tr></table>			SW2		H	L	SW1	H	÷64	÷128	L	÷128	÷256	1	3
						SW2												
		H	L															
SW1	H	÷64	÷128															
	L	÷128	÷256															
SW2			These pins should be equipped with bypass capacitor (e.g. 1 000 pF) to minimize ground impedance.	6	6													
V _{cc}	4.5 to 5.5	—	Power supply pin. This pin must be equipped with bypass capacitor (e.g. 10 000 pF) to minimize ground impedance.	8	2													
OUT	—	2.6 to 4.7	Divided frequency output pin. This pin is designed as emitter follower output. This pin can be connected to CMOS input due to 1.2 V _{P-P} MIN output.	7	4													
NC	—	—	Non connection pin. This pin must be opened.	5	7													

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	CONDITION	RATINGS	UNIT
Supply voltage	V _{CC}	T _A = +25 °C	−0.5 to +6.0	V
Input voltage	V _{in}	T _A = +25 °C	−0.5 to V _{CC} + 0.5	V
Total power dissipation	P _D	Mounted on double sided copper clad 50 × 50 × 1.6 mm epoxy glass PWB (T _A = +85 °C)	250	mW
Operating ambient temperature	T _A		−40 to +85	°C
Storage temperature	T _{stg}		−55 to +150	°C


RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	NOTICE
Supply voltage	V _{CC}	4.5	5.0	5.5	V	
Operating ambient temperature	T _A	−40	+25	+85	°C	





ELECTRICAL CHARACTERISTICS (T_A = −40 to +85 °C, V_{CC} = 4.5 to 5.5 V, Z_s = 50 Ω)


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Circuit current	I _{CC}	No signals	12.5	19	26.5	mA
Upper limit operating frequency	f _{in(u)}	P _{in} = −15 to +6 dBm	3.0	—	—	GHz
Lower limit operating frequency 1	f _{in(L)1}	P _{in} = −10 to +6 dBm	—	—	0.5	GHz
Lower limit operating frequency 2	f _{in(L)2}	P _{in} = −15 to +6 dBm	—	—	1.0	GHz
Input power 1	P _{in1}	f _{in} = 1.0 to 3.0 GHz	−15	—	+6	dBm
Input power 2	P _{in2}	f _{in} = 0.5 to 1.0 GHz	−10	—	+6	dBm
Output Voltage	V _{out}	C _L = 8 pF	1.2	1.6	—	V _{P-P}
Divide ratio control input high	V _{IH1}	Connection in the test circuit	V _{CC}	V _{CC}	V _{CC}	
Divide ratio control input low	V _{IL1}	Connection in the test circuit	OPEN or GND	OPEN or GND	OPEN or GND	
Divide ratio control input high	V _{IH2}	Connection in the test circuit	V _{CC}	V _{CC}	V _{CC}	
Divide ratio control input low	V _{IL2}	Connection in the test circuit	OPEN or GND	OPEN or GND	OPEN or GND	

TYPICAL CHARACTERISTICS (Unless otherwise specified $T_A = +25^\circ\text{C}$)




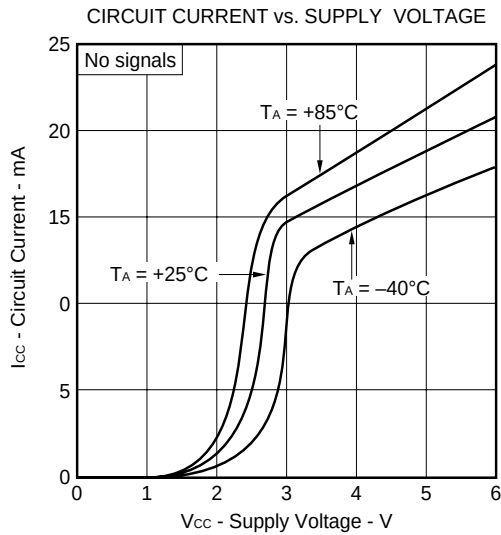


Divide by 64 mode

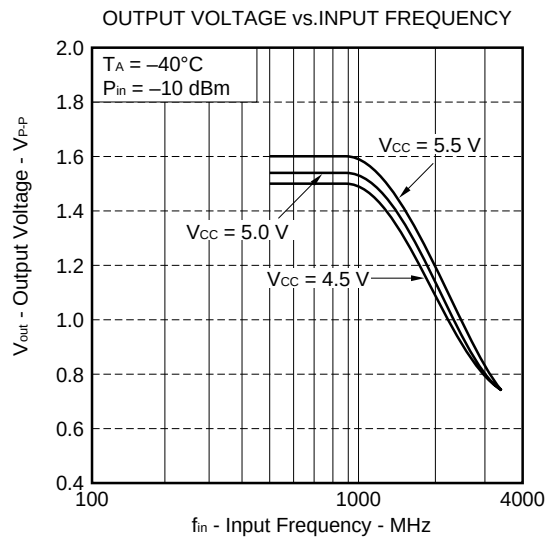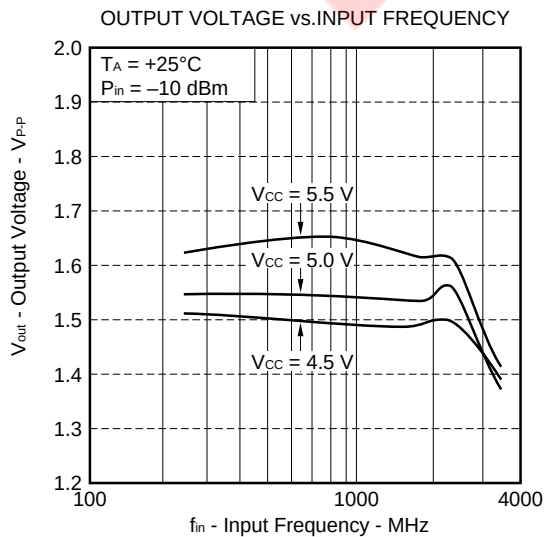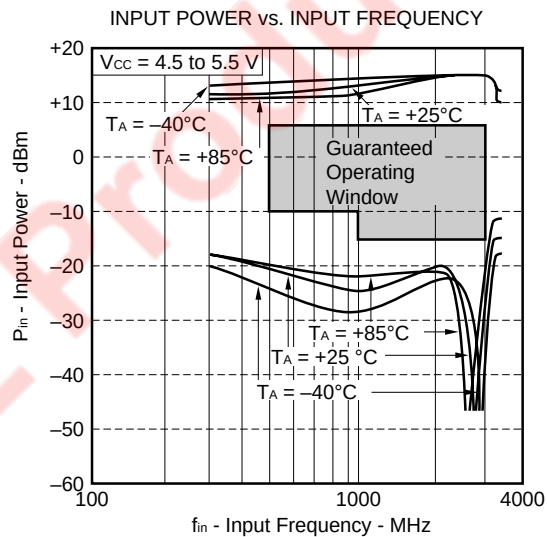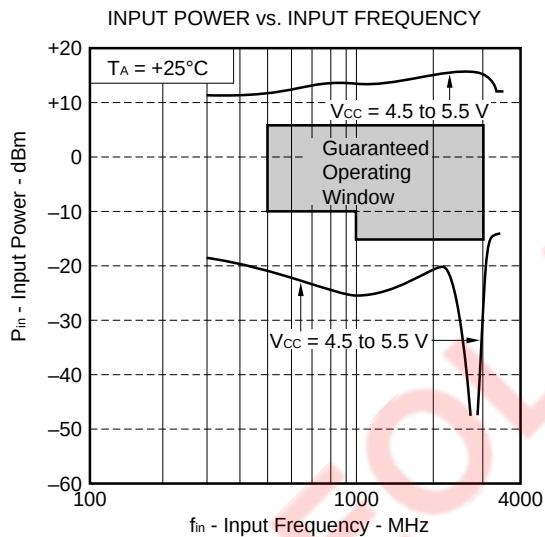


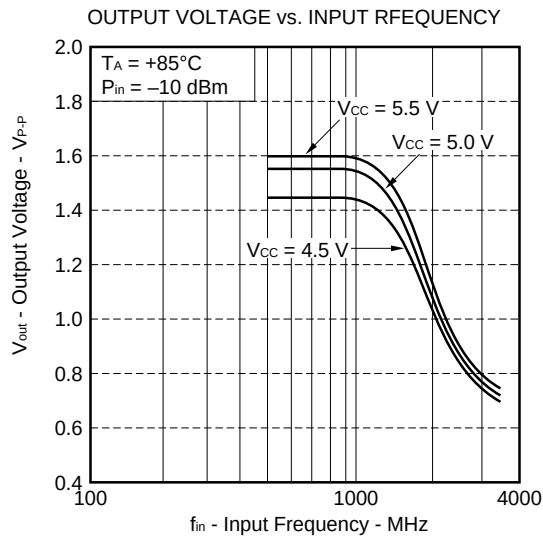

Divide by 128 mode

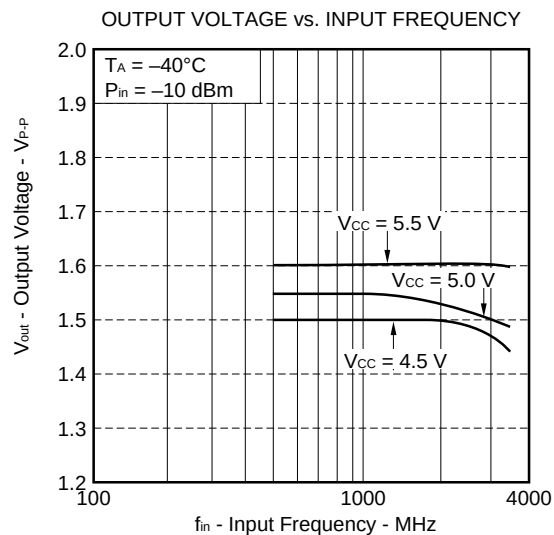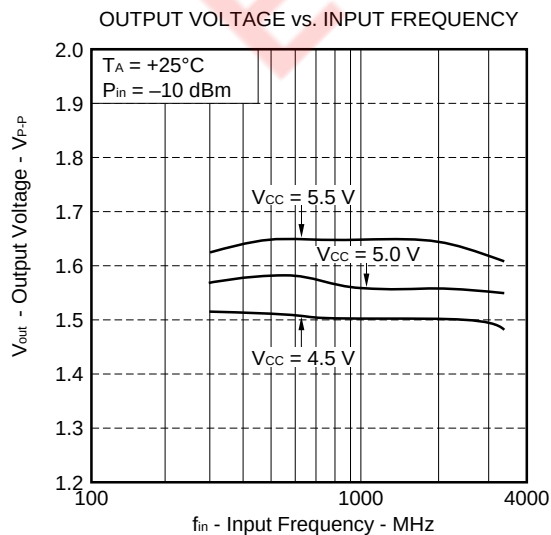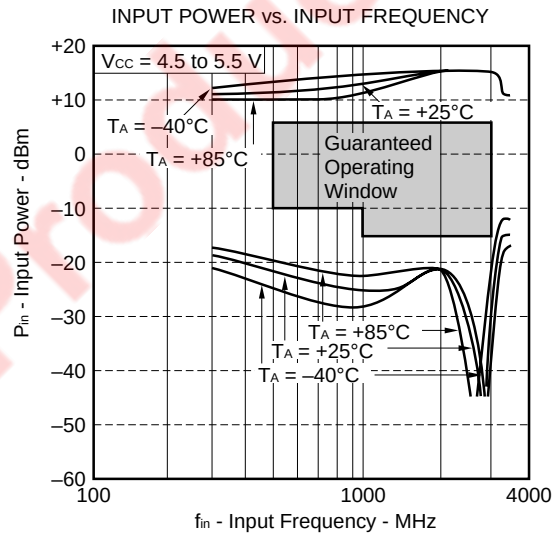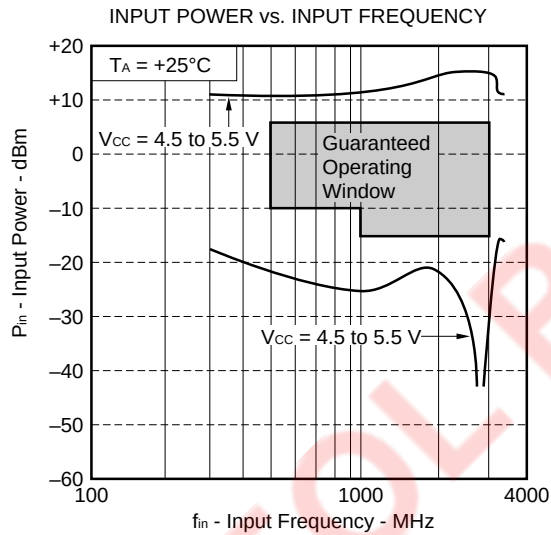


OUTPUT VOLTAGE vs. INPUT FREQUENCY

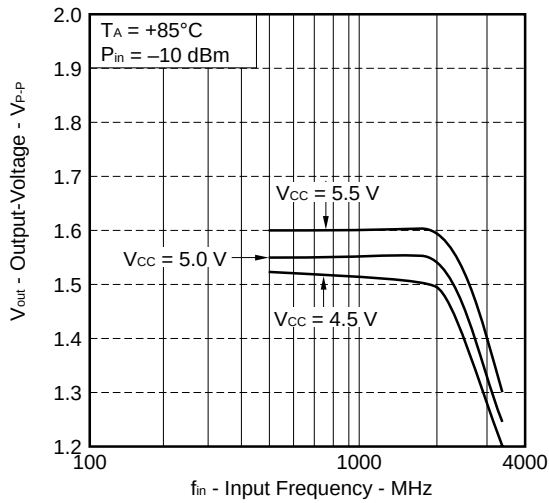


Divide by 256 mode


INPUT POWER vs. INPUT FREQUENCY

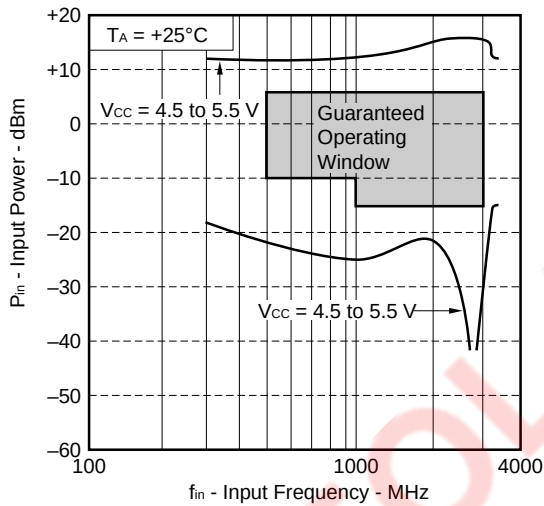


INPUT POWER vs. INPUT FREQUENCY

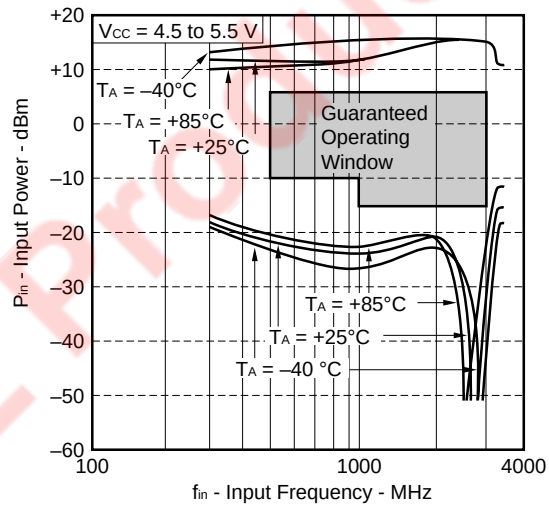


OUTPUT VOLTAGE vs. INPUT FREQUENCY

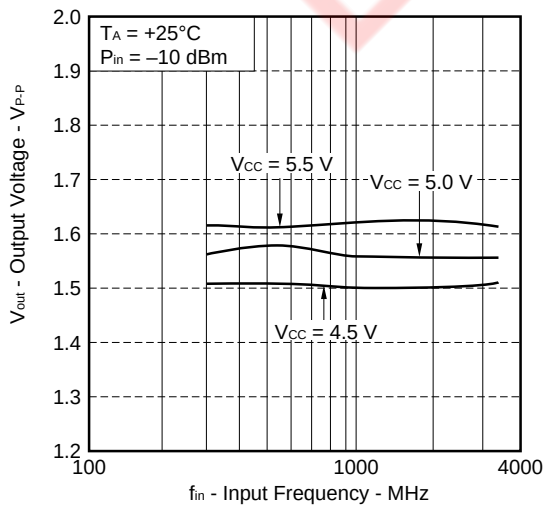

OUTPUT VOLTAGE vs. INPUT FREQUENCY

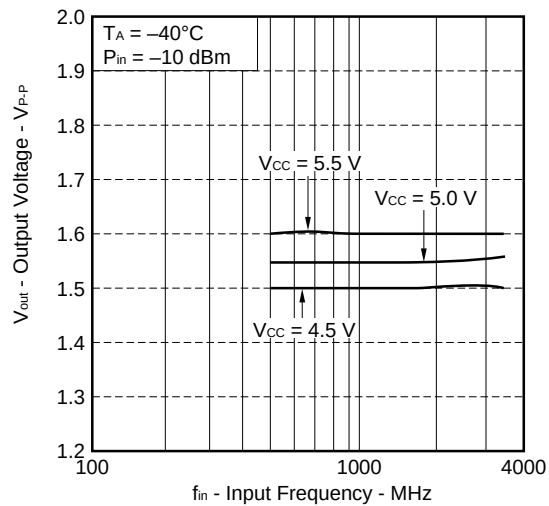


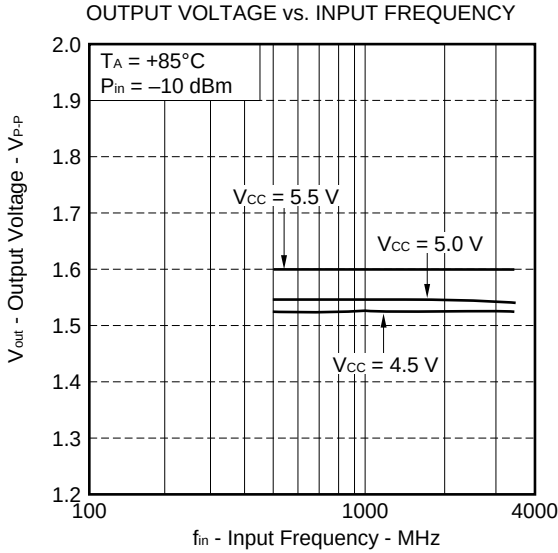

μPB1506GV

S11 vs. INPUT FREQUENCY

$V_{CC} = 5.0\text{ V}$

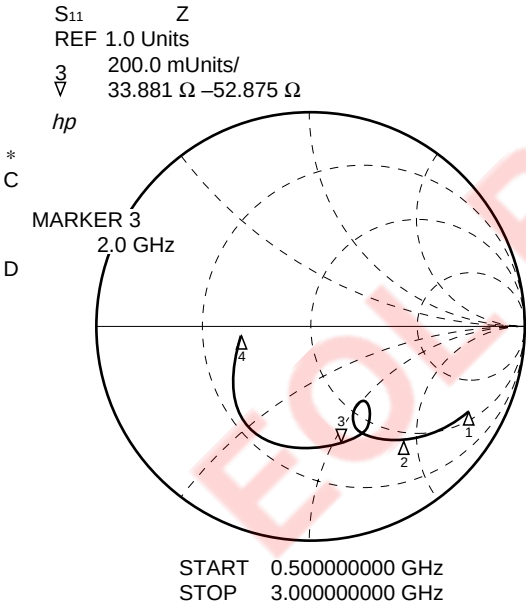


FREQUENCY MHz	S11	
	MAG	ANG
500.0000	.868	-26.6
600.0000	.828	-32.6
700.0000	.794	-37.4
800.0000	.761	-41.9
900.0000	.721	-46.5
1000.0000	.706	-49.3
1100.0000	.662	-54.0
1200.0000	.629	-57.2
1300.0000	.595	-60.2
1400.0000	.554	-62.9
1500.0000	.516	-64.8
1600.0000	.440	-61.9
1700.0000	.428	-51.0
1800.0000	.543	-61.5
1900.0000	.555	-68.4
2000.0000	.560	-74.7
2100.0000	.558	-79.5
2200.0000	.564	-84.9
2300.0000	.570	-90.9
2400.0000	.574	-98.3
2500.0000	.574	-107.9
2600.0000	.564	-118.3
2700.0000	.530	-131.4
2800.0000	.476	-144.6
2900.0000	.411	-159.1
3000.0000	.331	-175.8

μPB1506GV

S₂₂ vs. OUTPUT FREQUENCY

Divide by 64 mode, V_{CC} = 5.0 V

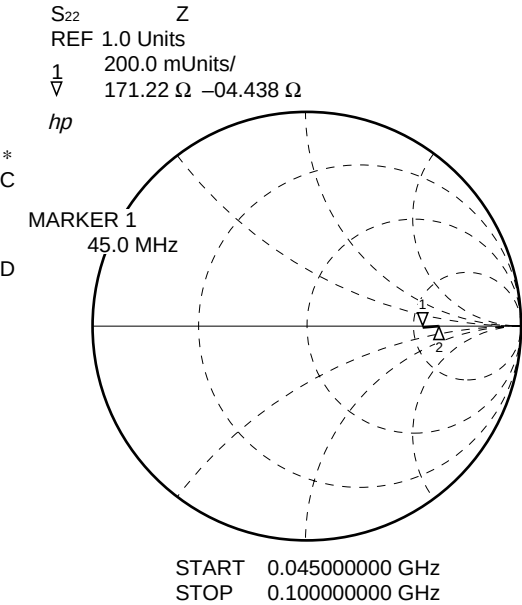


FREQUENCY MHz	S ₂₂	
	MAG	ANG
45.000	.542	-1.4
50.000	.602	-.3
55.000	.616	0.0
60.000	.605	1.1
65.000	.609	.7
70.000	.616	.3
75.000	.620	.1
80.000	.622	0.0
85.000	.619	.6
90.000	.610	.9
95.000	.626	-.7
100.000	.623	-1.7

μPB1506GV

S₂₂ vs. OUTPUT FREQUENCY

Divide by 128 mode, V_{CC} = 5.0 V

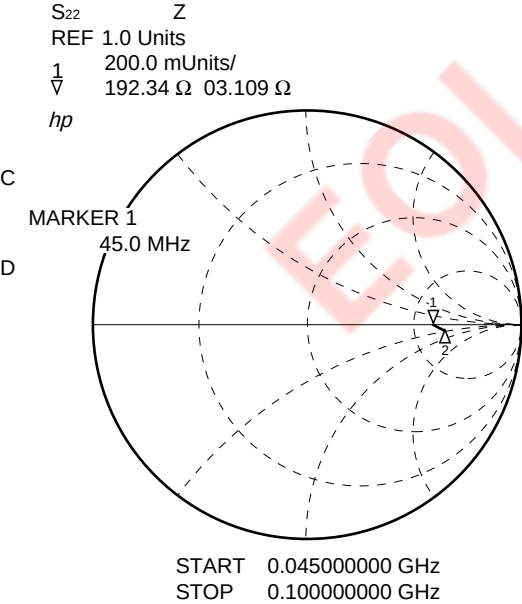


FREQUENCY MHz	S ₂₂	
	MAG	ANG
45.000	.590	.4
50.000	.604	-1.0
55.000	.610	-1.1
60.000	.607	-8
65.000	.548	-5.9
70.000	.630	-0.0
75.000	.615	-1.0
80.000	.618	-1.4
85.000	.617	-1.2
90.000	.616	-2.2
95.000	.623	-2.4
100.000	.624	-2.3

μPB1506GV

S₂₂ vs. OUTPUT FREQUENCY

Divide by 256 mode, V_{CC} = 5.0 V

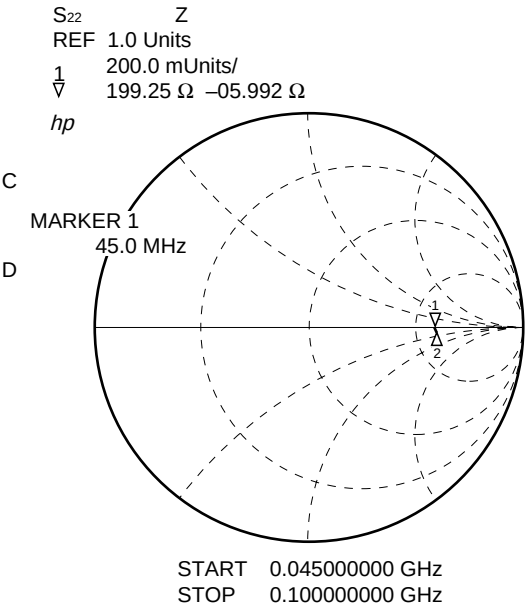


FREQUENCY MHz	S ₂₂	
	MAG	ANG
45.000	.601	-.9
50.000	.609	-1.6
55.000	.611	-1.5
60.000	.620	-1.4
65.000	.607	-2.1
70.000	.615	-1.9
75.000	.613	-3.2
80.000	.611	-2.8
85.000	.607	-2.5
90.000	.605	-2.4
95.000	.610	-3.0
100.000	.608	-2.8

μPB1507GV

S₁₁ vs. INPUT FREQUENCY

V_{CC} = 5.0 V

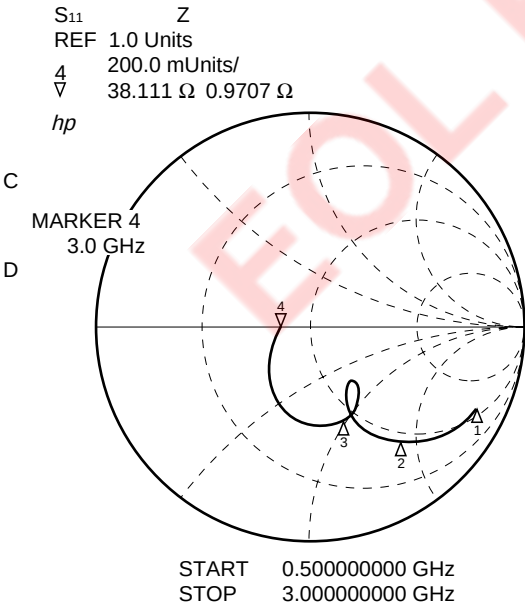


FREQUENCY MHz	S ₁₁	
	MAG	ANG
500.0000	.857	-27.5
600.0000	.849	-32.0
700.0000	.800	-38.9
800.0000	.764	-43.8
900.0000	.725	-49.0
1000.0000	.665	-50.9
1100.0000	.619	-55.3
1200.0000	.573	-59.3
1300.0000	.531	-61.3
1400.0000	.484	-62.8
1500.0000	.439	-63.0
1600.0000	.377	-59.1
1700.0000	.340	-54.1
1800.0000	.377	-54.7
1900.0000	.441	-59.5
2000.0000	.464	-67.2
2100.0000	.443	-67.4
2200.0000	.466	-74.5
2300.0000	.465	-81.3
2400.0000	.454	-89.4
2500.0000	.433	-99.2
2600.0000	.383	-109.6
2700.0000	.350	-114.0
2800.0000	.332	-124.2
2900.0000	.271	-141.2
3000.0000	.185	-163.6

μPB1507GV

S₂₂ vs. OUTPUT FREQUENCY


Divide by 64 mode, V_{CC} = 5.0 V

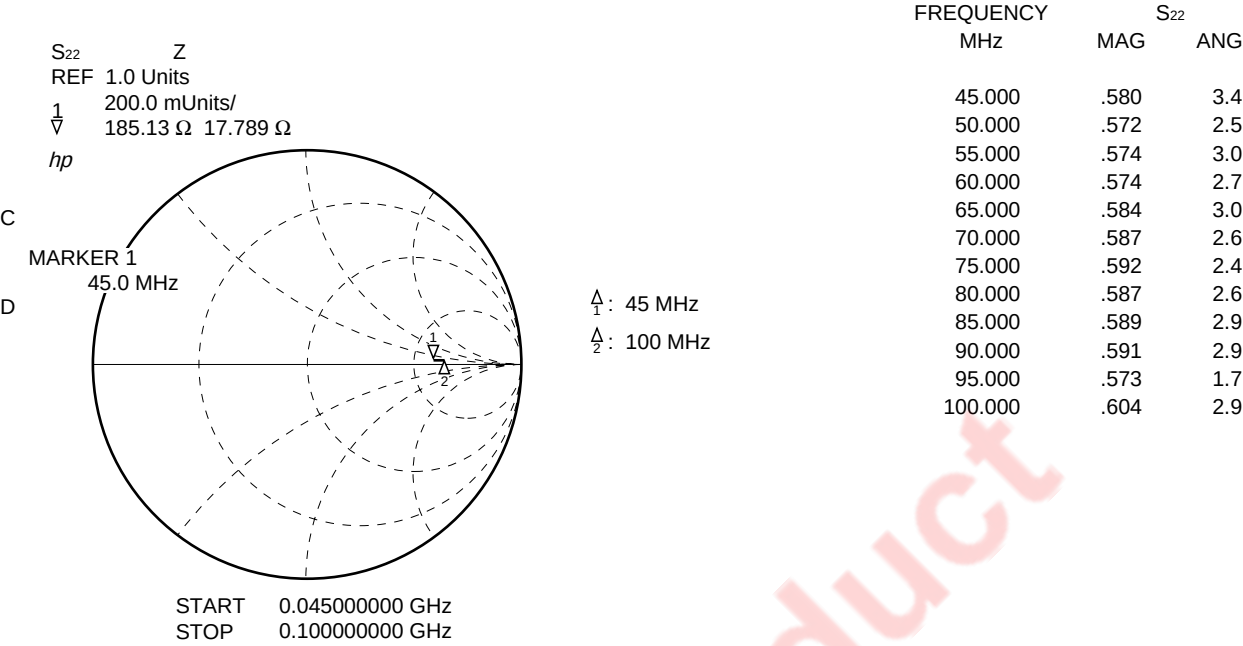

μPB1507GV

S₂₂ vs. OUTPUT FREQUENCY


Divide by 128 mode, V_{CC} = 5.0 V

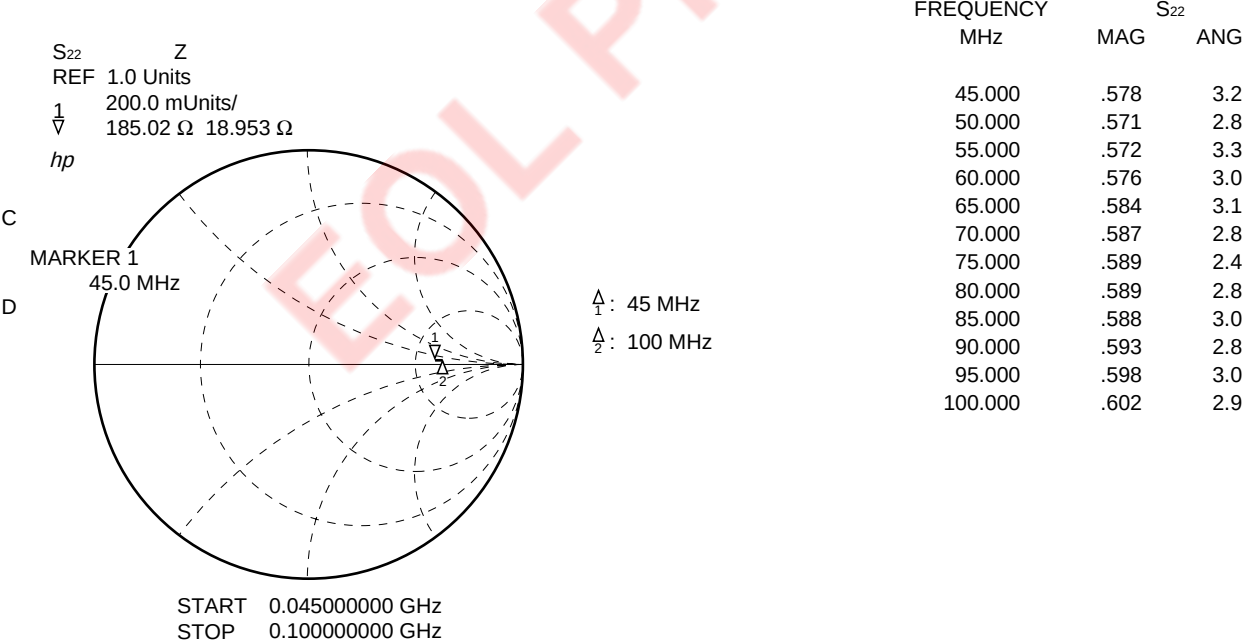

μPB1507GV

S₂₂ vs. OUTPUT FREQUENCY


Divide by 256 mode, V_{CC} = 5.0 V

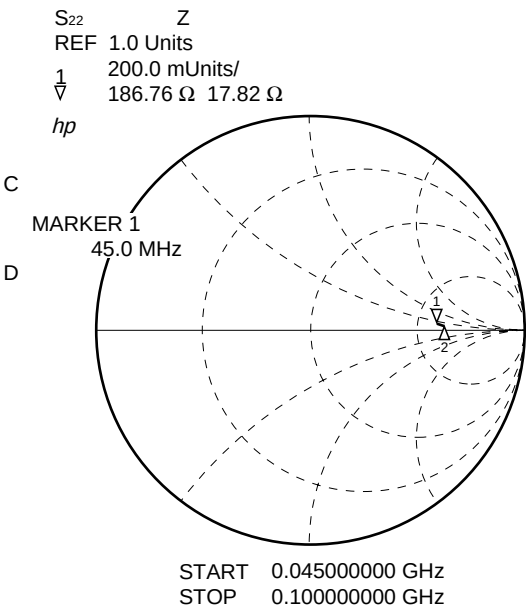

Δ₁: 45 MHz
Δ₂: 100 MHz

FREQUENCY MHz	S ₂₂	
	MAG	ANG
45.000	.580	3.0
50.000	.572	2.8
55.000	.571	2.9
60.000	.576	2.9
65.000	.585	3.2
70.000	.590	2.8
75.000	.589	2.5
80.000	.590	2.6
85.000	.588	2.9
90.000	.597	2.9
95.000	.600	3.1
100.000	.601	3.1

μPB1506GV

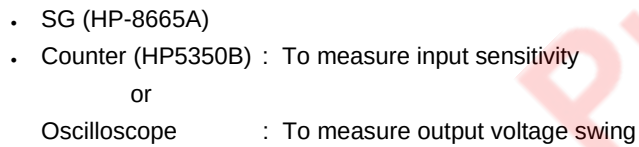

	μ PB1506GV	μ PB1507GV
C1 to C5	1 000 pF	1 000 pF
C6	10 000 pF	10 000 pF
Stray cap.	Aprox 4 pF	Aprox 5 pF
C7	3.5 pF*	2.5 pF*


Divide ratio setting

		SW2	
		H	L
SW1	H	1/64	1/128
	L	1/128	1/256

H: Connect to V_{CC}

L: Connect to GND or OPEN

μPB1507GV

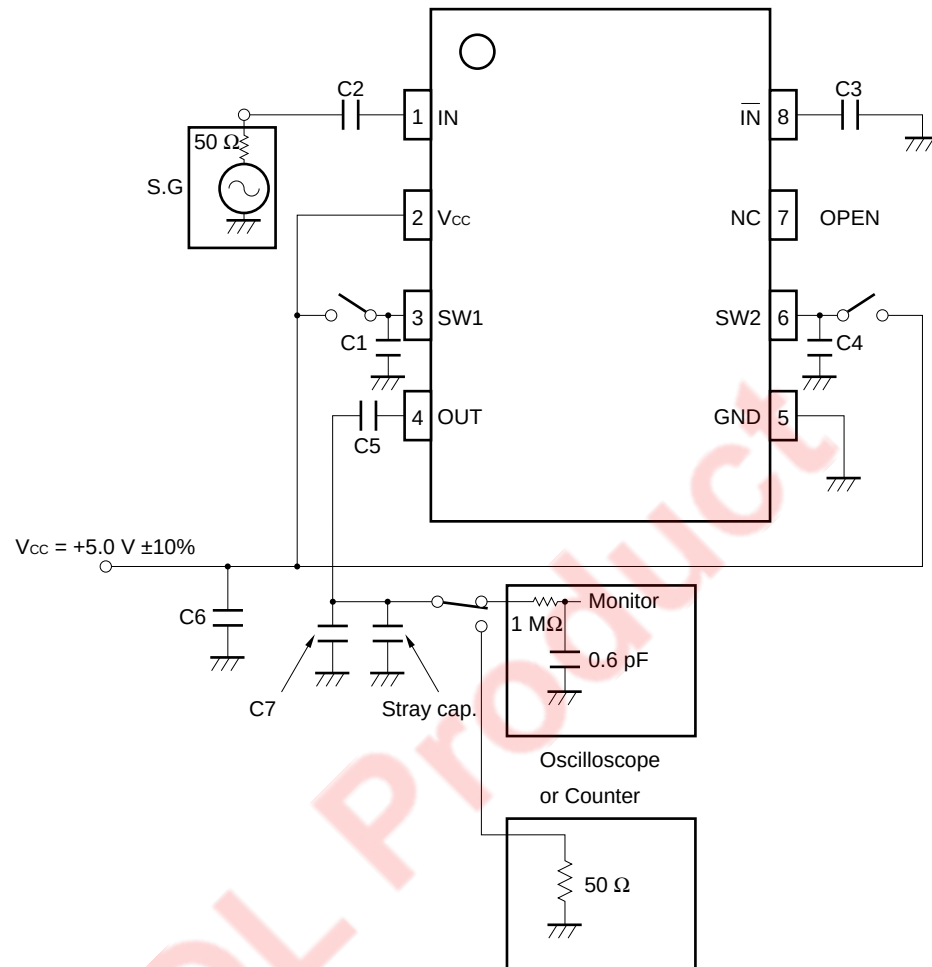


- ### Divide ratio setting

		SW2	
		H	L
SW1	H	1/64	1/128
	L	1/128	1/256


L: Connect to GND or OPEN

ILLUSTRATION OF THE TEST CIRCUIT ASSEMBLED ON EVALUATION BOARD

μ PB1506GV

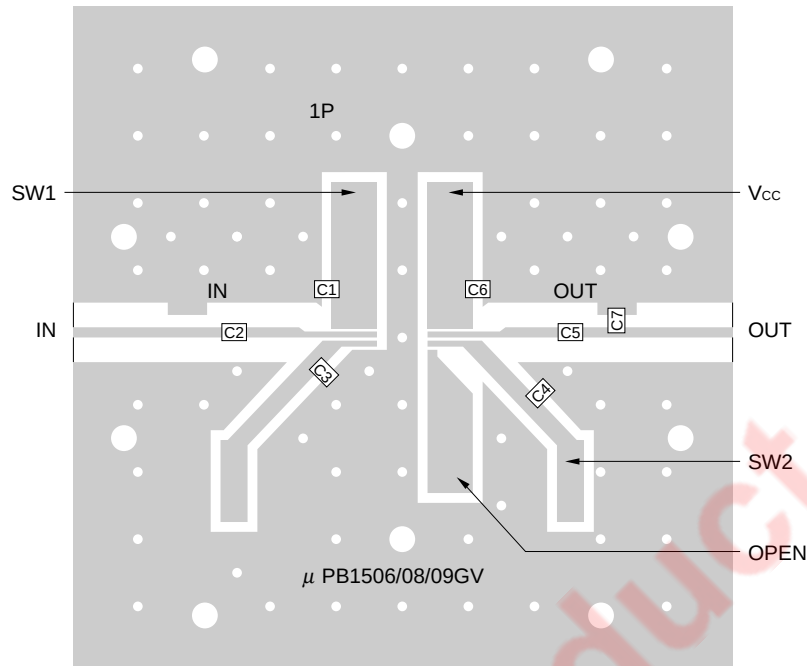


μ PB1507GV

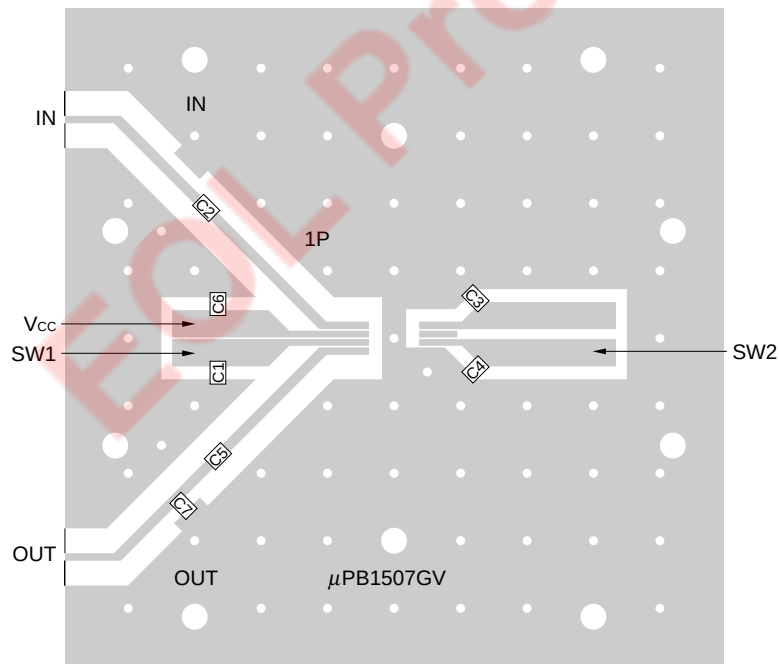

EVALUATION BOARD CHARACTERS

- (1) 35 μ m thick double-sided copper clad 50 × 50 × 0.4 mm polyimide board
- (2) Back side: GND pattern
- (3) Solder plated patterns
- (4) ○ : Through holes

8 PIN PLASTIC SSOP (UNIT: mm) (175 mil)

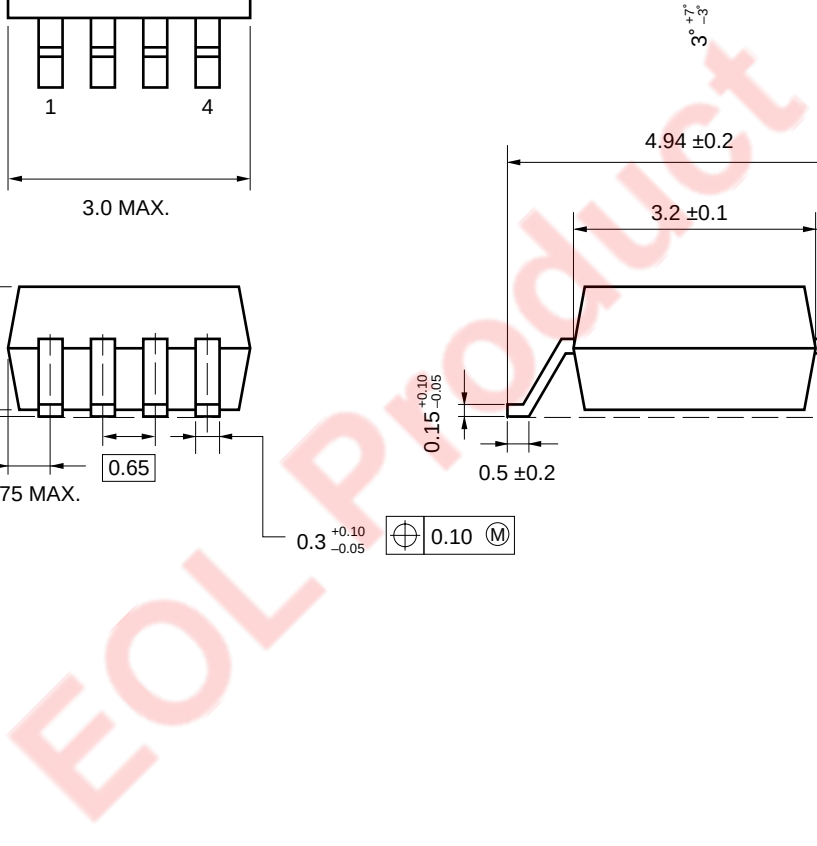

NOTE CORRECT USE

- (1) Observe precautions for handling because of electro-static sensitive devices.
- (2) Form a ground pattern as wide as possible to minimize ground impedance (to prevent undesired operation).
- (3) Keep the wiring length of the ground pins as short as possible.
- (4) Connect a bypass capacitor (e.g. 10 000 pF) to the Vcc pin.

RECOMMENDED SOLDERING CONDITIONS

This product should be soldered in the following recommended conditions. Other soldering methods and conditions than the recommended conditions are to be consulted with our sales representatives.

μPB1506GV, μPB1507GV

Soldering method	Soldering conditions	Recommended condition symbol
Infrared ray reflow	Package peak temperature: 235 °C, Hour: within 30 s. (more than 210 °C), Time: 3 times, Limited days: no.*	IR35-00-3
VPS	Package peak temperature: 215 °C, Hour: within 40 s. (more than 200 °C), Time: 3 times, Limited days: no.*	VP15-00-3
Wave soldering	Soldering tub temperature: less than 260 °C, Hour: within 10 s., Time: 1 time, Limited days: no.	WS60-00-1
Pin part heating	Pin area temperature: less than 300 °C, Hour: within 3 s./pin, Limited days: no.*	


* It is the storage days after opening a dry pack, the storage conditions are 25 °C, less than 65 % RH.

Caution The combined use of soldering method is to be avoided (However, except the pin area heating method).

For details of recommended soldering conditions for surface mounting, refer to information document SEMICONDUCTOR DEVICE MOUNTING TECHNOLOGY MANUAL (C10535E).

[MEMO]

EOL Product



ATTENTION

OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
SENSITIVE
DEVICES

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

NEC devices are classified into the following three quality grades:

"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices is "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact an NEC sales representative in advance.

Anti-radioactive design is not implemented in this product.