bridgelux®



Bridgelux® Gen 7 V10 Thrive™ Array

Product Data Sheet DS320


FIVE YEAR Warranty™

BXRE-27S | 30S | 35S | 40S | 50S | 57S | 65S

Downloaded from Arrow.com.

Introduction

V10 Thrive

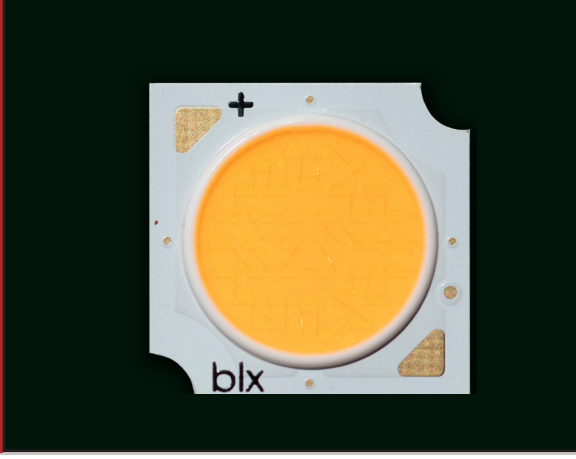

Bridgelux Thrive™ combines unique chip, phosphor and packaging technology to closely match the spectra of natural light over the visible wavelength range. Thrive can be used in constant color point luminaires to bring full spectrum natural light indoors or in tunable white luminaires to incorporate circadian elements that may impact human well-being. The high fidelity spectral output of Thrive creates stunning environments with excellent color rendering and outstanding TM30 metrics. Thrive is available in both SMD components and LED arrays to enable a broad range of lighting applications including retail, hospitality, office, education, architectural, museums, healthcare and residential lighting.

Features

- Engineered spectrum to closely match natural light
- CRI >95, R1-R15 >90, high Rf and Rg values
- High efficacy full spectrum solution
- No violet chip augmentation
- Hot color targeted
- Form factor consistent with existing Bridgelux COB arrays
- Broad product platform availability (SMDs and COBs)

Benefits

- Full consistent spectrum with fewer spectral spikes
- Natural and vivid color rendering
- Greater energy savings, lower utility costs
- Economical, high efficiency solution
- Uniform and consistent white light at application conditions
- Ease of design and rapid go-to-market
- Enables greater design flexibility and platform color consistency

Downloaded from Arrow.com.


Contents

Product Feature Map	2
Product Nomenclature	2
Product Selection Guide	3
Spectrum Characteristics	6
Electrical Characteristics	9
Absolute Maximum Ratings	10
Eye Safety	11
Product Bin Definitions	12
Performance Curves	13
Typical Radiation Pattern	15
Mechanical Dimensions	16
Packaging and Labeling	17
Design Resources	19
Precautions	19
Disclaimers	19
About Bridgelux	20

Downloaded from Arrow.com.

Product Feature Map

Bridgelux arrays are fully engineered devices that provide consistent thermal and optical performance on an engineered mechanical platform. The V Series arrays are the most compact chip-on-board devices across all of Bridgelux's LED Array products. The arrays incorporate several features to simplify design integration and assembly. Please visit www.bridgelux.com for more information on the V Series family of products.

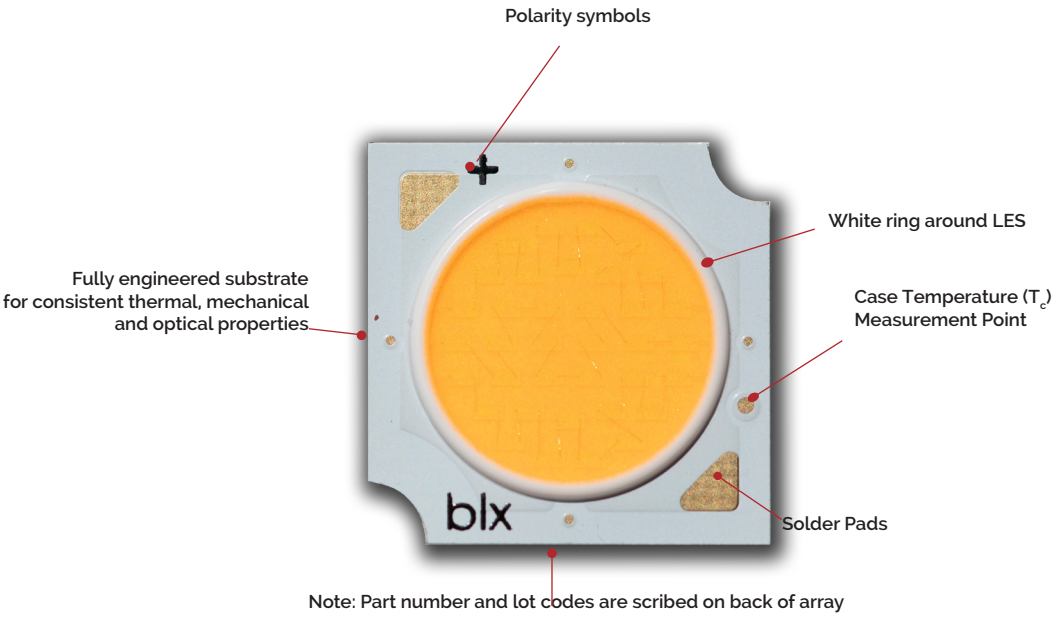

Product Nomenclature

The part number designation for Bridgelux COB arrays is explained as follows:

1 2 3 4 – 5 6 7 8 9 10 11 – 12 – 13 14

BXRE – 30 S 1001 – C – 7 3

Product Family

Nominal CCT
27 = 2,700K
30 = 3,000K
35 = 3,500K
40 = 4,000K
50 = 5,000K
57 = 5,700K
65 = 6,500K

Minimum CRI
S = Thrive

Flux Indicator
1001 = 1000 lm

Array Configuration

Gen 7

CCT Bin Options
2 = 2 SDCM
3 = 3 SDCM
4 = 4 SDCM

Downloaded from Arrow.com.

Product Selection Guide

The following product configurations are available:

Table 1: Selection Guide, Pulsed Measurement Data (T_c = 25°C)

Part Number[1,6]	Nominal CCT[1] (K)	CRI[2]	Nominal Drive Current[3] (mA)	Typical V_f (V)	Typical Pulsed Flux[4,5,6,7] T_c = 25°C (lm)	Minimum Pulsed Flux[6,7,8] T_c = 25°C (lm)	Typical Power (W)	Typical Efficacy (lm/W)	Typical Photosynthetic Photon Flux (PPF)	Typical Photon Efficiency (µmol/J)
BXRE-27S1001-B-7x	2700	95	270	34.4	1003	883	9.3	108	17.50	1.90
BXRE-27S1001-C-7x	2700	95	360	34.4	1337	1177	12.4	108	23.33	1.90
BXRE-30S1001-B-7x	3000	95	270	34.4	1077	948	9.3	116	18.40	1.99
BXRE-30S1001-C-7x	3000	95	360	34.4	1437	1264	12.4	116	24.55	1.99
BXRE-35S1001-B-7x	3500	95	270	34.4	1124	989	9.3	121	18.60	1.99
BXRE-35S1001-C-7x	3500	95	360	34.4	1498	1319	12.4	121	24.79	1.99
BXRE-40S1001-B-7x	4000	95	270	34.4	1142	1005	9.3	123	18.59	1.97
BXRE-40S1001-C-7x	4000	95	360	34.4	1523	1340	12.4	123	24.79	1.97
BXRE-50S1001-B-74	5000	95	270	34.4	1198	1054	9.3	129	19.64	2.06
BXRE-50S1001-C-74	5000	95	360	34.4	1598	1406	12.4	129	26.19	2.06
BXRE-57S1001-B-74	5700	95	270	34.4	1226	1079	9.3	132	20.16	2.10
BXRE-57S1001-C-74	5700	95	360	34.4	1635	1439	12.4	132	26.88	2.10
BXRE-65S1001-B-74	6500	95	270	34.4	1207	1063	9.3	130	19.85	2.07
BXRE-65S1001-C-74	6500	95	360	34.4	1610	1417	12.4	130	26.47	2.07

Table 2: Selection Guide, Stabilized DC Test Performance (T_c = 85°C)[4,5,6]

Part Number[1,6]	Nominal CCT[1] (K)	CRI[2]	Nominal Drive Current[3] (mA)	Typical V_f (V)	Typical DC Flux[4,5,6,7] T_c = 85°C (lm)	Minimum DC Flux[6,7,8,9] T_c = 85°C (lm)	Typical Power (W)	Typical Efficacy (lm/W)	Typical Photosynthetic Photon Flux (PPF)	Typical Photon Efficiency (µmol/J)
BXRE-27S1001-B-7x	2700	95	270	33.7	903	794	9.1	99	15.76	1.90
BXRE-27S1001-C-7x	2700	95	360	33.7	1204	1059	12.1	99	21.01	1.90
BXRE-30S1001-B-7x	3000	95	270	33.7	970	853	9.1	107	16.57	1.99
BXRE-30S1001-C-7x	3000	95	360	33.7	1293	1138	12.1	107	22.09	1.99
BXRE-35S1001-B-7x	3500	95	270	33.7	1011	890	9.1	111	16.73	1.99
BXRE-35S1001-C-7x	3500	95	360	33.7	1349	1187	12.1	111	22.33	1.99
BXRE-40S1001-B-7x	4000	95	270	33.7	1028	905	9.1	113	16.73	1.97
BXRE-40S1001-C-7x	4000	95	360	33.7	1371	1206	12.1	113	22.31	1.97
BXRE-50S1001-B-74	5000	95	270	33.7	1078	949	9.1	119	17.67	2.06
BXRE-50S1001-C-74	5000	95	360	33.7	1438	1265	12.1	119	23.57	2.06
BXRE-57S1001-B-74	5700	95	270	33.7	1103	971	9.1	121	18.14	2.10
BXRE-57S1001-C-74	5700	95	360	33.7	1471	1295	12.1	121	24.19	2.10
BXRE-65S1001-B-74	6500	95	270	33.7	1087	956	9.1	119	17.87	2.07
BXRE-65S1001-C-74	6500	95	360	33.7	1449	1275	12.1	119	23.82	2.07

Notes for Table 1 & 2:
1. Product CCT is hot targeted at T_c = 85°C. Nominal CCT as defined by ANSI C78.377-2011.
2. All CRI values are measured at T_j = T_c = 25°C. CRI values are minimums. Bridgelux maintains a ± 3 tolerance on CRI values.
3. Drive current is referred to as nominal drive current.
4. Products tested under pulsed condition (10ms pulse width) at nominal test current where T_j (junction temperature) = T_c (case temperature) = 25°C. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.
5. Typical performance values are provided as a reference only and are not a guarantee of performance.
6. Typical performance is estimated based on operation under DC (direct current) with LED array mounted onto a heat sink with thermal interface material and the case temperature maintained at 85°C. Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.
7. Bridgelux maintains a ±7% tolerance on flux measurements.
8. Minimum flux values at the nominal test current are guaranteed by 100% test.
9. Minimum flux values at elevated temperatures are provided for reference only and are not guaranteed by 100% production testing. Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.

Downloaded from Arrow.com.

European Product Registry for Energy Labeling

The European Product Registry for Energy Labeling (EPREL) is defined in the EU Regulation 2017/1369 to provide important energy efficiency information to consumers. Together with Energy Labeling Regulation ELR (EU) 2019/2015 which was amended by regulation (EU) 2021/340 for energy labelling of light sources, manufacturers are required to declare an energy class based on key technical specifications from each of their product and register it in an open data base managed by EPREL It is now a legal requirement for a vendor of light sources to upload information about their products into the EPREL database before placing these products on the market in the EU.

Table 3 below provides a list of part numbers that are in compliance with ELR and are currently listed in the EPREL database.

At Bridgelux, we are fully committed to supplying products that are compliant with pertinent laws, rules, and obligation imposed by relevant government bodies including the European Energy Labeling regulation. Customers can use these products with full confidence for any projects that fall under the ELR.

Table 3: Part numbers registered in European Product Registry for Energy Labeling

PART NUMBER[1]	CCT (K)	CRI	Current[2] (mA)	Vf (V)	Useful flux[3] (Φuse) at 85C (lm)	Power (W)	Efficacy (lm/W)	Energy efficiency class[4]	Registration No	URL to Product Information Sheet in EPREL Database
BXRE-27S1001-B-73	2700	97	380	33.6	1239	12.8	97	F	869391	https://eprel.ec.europa.eu/qr/869391
BXRE-27S1001-C-73	2700	97	400	32.8	1277	13.1	97	F	869393	https://eprel.ec.europa.eu/qr/869393
BXRE-30S1001-B-73	3000	97	450	34.3	1541	15.4	100	F	869845	https://eprel.ec.europa.eu/qr/869845
BXRE-30S1001-C-73	3000	97	500	33.5	1678	16.8	100	F	869847	https://eprel.ec.europa.eu/qr/869847
BXRE-35S1001-B-73	3500	97	500	34.7	1755	17.4	101	F	870070	https://eprel.ec.europa.eu/qr/870070
BXRE-35S1001-C-73	3500	97	560	34.0	1933	19.0	102	F	870072	https://eprel.ec.europa.eu/qr/870072
BXRE-40S1001-B-73	4000	97	520	34.9	1841	18.2	101	F	870400	https://eprel.ec.europa.eu/qr/870400
BXRE-40S1001-C-73	4000	97	590	34.2	2055	20.2	102	F	870402	https://eprel.ec.europa.eu/qr/870402
BXRE-50S1001-B-74	5000	97	540	35.1	1993	19.0	105	F	870638	https://eprel.ec.europa.eu/qr/870638
BXRE-50S1001-C-74	5000	97	660	34.7	2368	22.9	103	F	870640	https://eprel.ec.europa.eu/qr/870640
BXRE-57S1001-B-74	5700	97	540	35.1	2039	19.0	107	F	870804	https://eprel.ec.europa.eu/qr/870804
BXRE-57S1001-C-74	5700	97	700	35.0	2541	24.5	104	F	870806	https://eprel.ec.europa.eu/qr/870806
BXRE-65S1001-B-74	6500	97	540	35.1	2009	19.0	106	F	870933	https://eprel.ec.europa.eu/qr/870933
BXRE-65S1001-C-74	6500	97	680	34.8	2445	23.7	103	F	870935	https://eprel.ec.europa.eu/qr/870935

Notes for Table 3:

1. All device listed here must be disposed as e-waste upon its end of life according to local country guideline in each country.
2. For information on performance values at alternative drive conditions. please refer to the Product Selection Guide, Absolute Maximum Rating Table and Performance Curves in this data sheet.
3. For a definition of useful luminous flux **(Φuse),** please see the ELR regulations at https://tinyurl.com/4b6zvt4m.
4. EPREL requires an arrow symbol containing the letter of the energy efficiency class to be displayed. on technical promotional material. Refer to this energy efficiency class column for specific energy efficiency class on each part number.

Downloaded from Arrow.com.

Performance at Commonly Used Drive Currents

V Series Thrive LED arrays are tested to the specifications shown using the nominal drive currents in Table 1. V Series Thrive LED Arrays may also be driven at other drive currents dependent on specific application design requirements. The performance at any drive current can be derived from the current vs. voltage characteristics shown in Figures 11 & 12 and the flux vs. current characteristics shown in Figures 13 & 14. The performance at commonly used drive currents is summarized in Table 4.

Table 4: Product Performance at Commonly Used Drive Currents

Part Number	CRI	Drive Current[1] (mA)	Typical V_f T_c = 25°C (V)	Typical Power T_c = 25°C (W)	Typical Flux[2] T_c = 25°C (lm)	Typical DC Flux[3] T_c = 85°C (lm)	Typical Efficacy T_c = 25°C (lm/W)
BXRE-27S1001-B-7x	95	135	33.2	4.4	535	480	121
		180	33.6	6.1	701	629	116
		270	**34.4**	**9.3**	**1003**	**903**	**108**
		405	35.6	14.3	1472	1309	103
		540	36.6	19.3	1885	1669	98
BXRE-27S1001-C-7x	95	180	33.2	5.9	711	635	120
		240	33.6	8.1	932	828	115
		360	**34.4**	**12.4**	**1337**	**1204**	**108**
		540	35.6	19.0	1948	1692	102
		720	36.6	25.7	2488	2130	97
BXRE-30S1001-B-7x	95	135	33.2	4.4	574	516	130
		180	33.6	6.1	753	675	124
		270	**34.4**	**9.3**	**1077**	**970**	**116**
		405	35.6	14.3	1581	1406	111
		540	36.6	19.3	2025	1792	105
BXRE-30S1001-C-7x	95	180	33.2	5.9	764	682	129
		240	33.6	8.1	1001	889	124
		360	**34.4**	**12.4**	**1437**	**1293**	**116**
		540	35.6	19.0	2092	1817	110
		720	36.6	25.7	2672	2287	104
BXRE-35S1001-B-7x	95	135	33.2	4.4	599	538	135
		180	33.6	6.1	785	704	130
		270	**34.4**	**9.3**	**1124**	**1011**	**121**
		405	35.6	14.3	1649	1467	116
		540	36.6	19.3	2112	1870	109
BXRE-35S1001-C-7x	95	180	33.2	5.9	797	711	135
		240	33.6	8.1	1044	927	129
		360	**34.4**	**12.4**	**1498**	**1349**	**121**
		540	35.6	19.0	2182	1896	115
		720	36.6	25.7	2787	2386	108
BXRE-40S1001-B-7x	95	135	33.2	4.4	609	547	137
		180	33.6	6.1	798	716	132
		270	**34.4**	**9.3**	**1142**	**1028**	**123**
		405	35.6	14.3	1676	1491	117
		540	36.6	19.3	2147	1900	111
BXRE-40S1001-C-7x	95	180	33.2	5.9	810	723	137
		240	33.6	8.1	1061	943	132
		360	**34.4**	**12.4**	**1523**	**1371**	**123**
		540	35.6	19.0	2218	1927	117
		720	36.6	25.7	2833	2425	110

Notes for Table 4:

1. Alternate drive currents are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

Downloaded from Arrow.com.

Performance at Commonly Used Drive Currents

Table 4: Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current[1] (mA)	Typical V_f T_c = 25°C (V)	Typical Power T_c = 25°C (W)	Typical Flux[2] T_c = 25°C (lm)	Typical DC Flux[3] T_c = 85°C (lm)	Typical Efficacy T_c = 25°C (lm/W)
BXRE-50S1001-B-74	95	135	33.2	4.4	638	574	144
		180	33.6	6.1	837	751	138
		270	**34.4**	**9.3**	**1198**	**1078**	**129**
		405	35.6	14.3	1758	1564	123
		540	36.6	19.3	2252	1993	117
BXRE-50S1001-C-74	95	180	33.2	5.9	849	758	144
		240	33.6	8.1	1113	989	138
		360	**34.4**	**12.4**	**1598**	**1438**	**129**
		540	35.6	19.0	2326	2021	122
		720	36.6	25.7	2972	2544	116
BXRE-57S1001-B-74	95	135	33.2	4.4	653	587	147
		180	33.6	6.1	857	768	142
		270	**34.4**	**9.3**	**1226**	**1103**	**132**
		405	35.6	14.3	1799	1600	126
		540	36.6	19.3	2304	2039	119
BXRE-57S1001-C-74	95	180	33.2	5.9	869	776	147
		240	33.6	8.1	1139	1012	141
		360	**34.4**	**12.4**	**1635**	**1471**	**132**
		540	35.6	19.0	2380	2068	125
		720	36.6	25.7	3041	2603	118
BXRE-65S1001-B-74	95	135	33.2	4.4	643	578	145
		180	33.6	6.1	844	757	139
		270	**34.4**	**9.3**	**1207**	**1087**	**130**
		405	35.6	14.3	1771	1576	124
		540	36.6	19.3	2269	2009	118
BXRE-65S1001-C-74	95	180	33.2	5.9	856	764	145
		240	33.6	8.1	1121	996	139
		360	**34.4**	**12.4**	**1610**	**1449**	**130**
		540	35.6	19.0	2344	2037	123
		720	36.6	25.7	2995	2563	116

Notes for Table 4:

1. Alternate drive currents are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

Downloaded from Arrow.com.

Spectrum Characteristics


Table 5: Typical Color Rendering Index and TM-30 Values at, T_c=85˚C

Nominal CCT[1]	R_f	R_g	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
2700K	95	103	97	99	94	94	97	98	97	98	99	97	91	98	98	95	98
3000K	95	104	98	99	93	94	97	98	96	96	97	96	92	95	98	95	97
3500K	95	98	98	98	97	98	98	98	98	97	93	97	97	95	98	97	98
4000K	97	100	99	99	97	99	99	99	99	98	94	97	99	96	99	98	98
5000K	97	100	98	99	98	98	98	98	99	98	95	98	98	98	98	98	97
5700K	94	98	98	98	97	95	98	97	96	95	92	97	96	96	98	98	97
6500K	95	98	98	98	97	96	98	98	96	96	93	97	96	97	98	98	97

Note for Table 5:

1. Bridgelux maintains a tolerance of ± 3 on Color Rendering Index R1-R15 measurements and TM-30 measurements.
2. The data shown in the table above is for reference only. Specific values from R1 to R15 will vary for each production run.

Figure 1: 2700K Thrive TM-30 Graphs

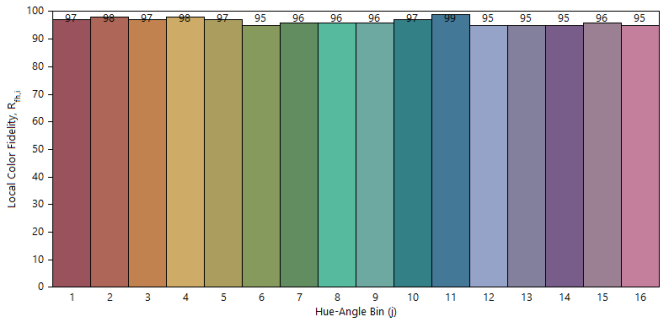


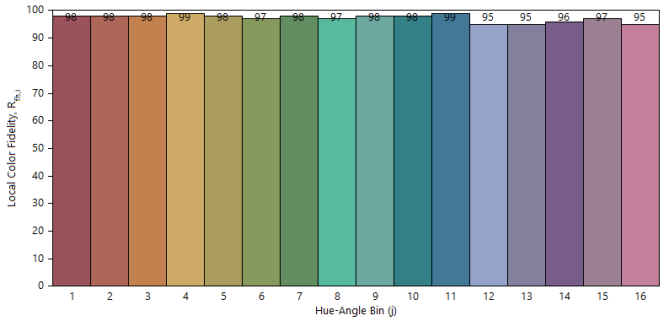


Figure 2: 3000K Thrive TM-30 Graphs








Figure 3: 3500K Thrive TM-30 Graphs

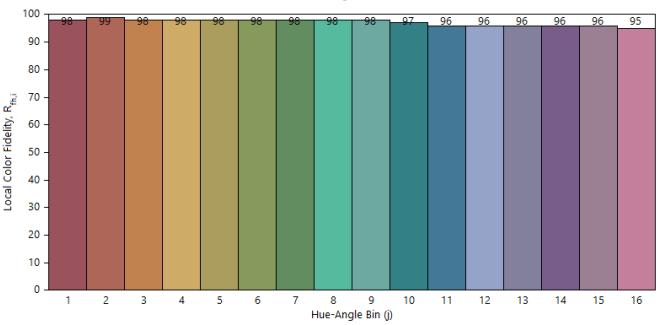




Downloaded from Arrow.com.

Spectrum Characteristics

Figure 4: 4000K Thrive TM-30 Graphs

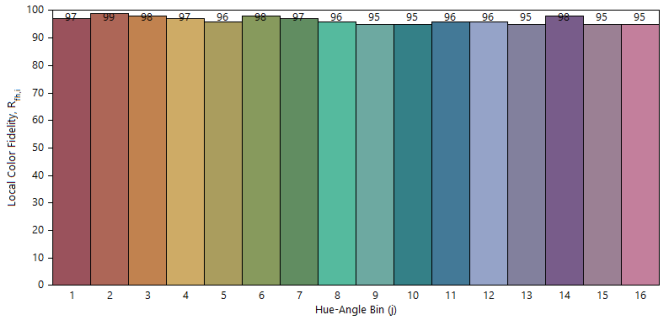


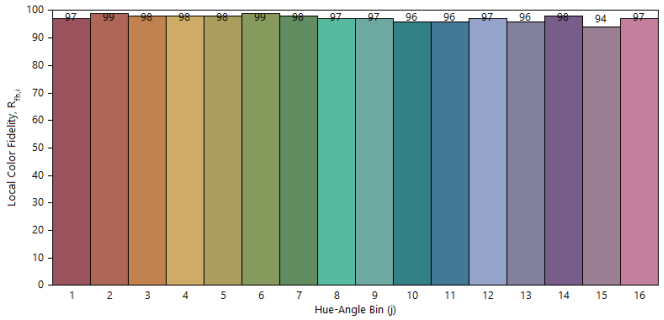


Figure 5: 5000K Thrive TM-30 Graphs




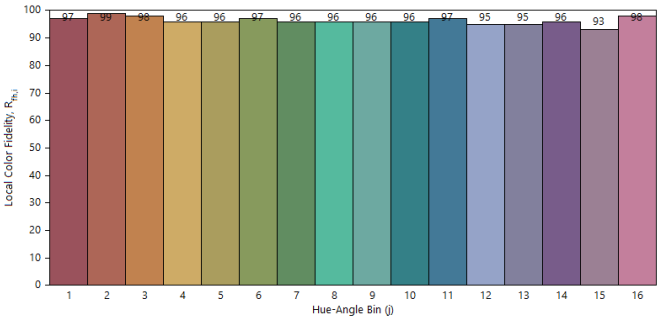


Figure 6: 5700K Thrive TM30 Graphs








Figure 7: 6500K Thrive TM-30 Graphs

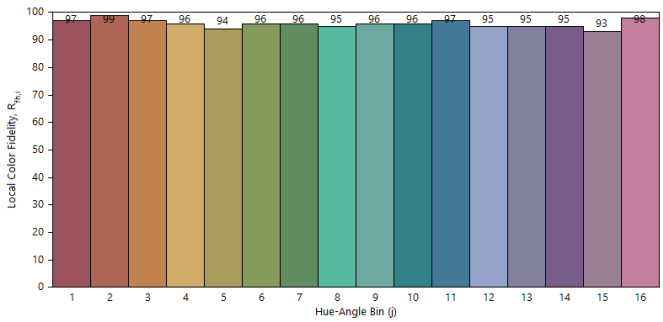




Downloaded from Arrow.com.

Spectrum Characteristics

Figure 8: Typical Color Spectrum

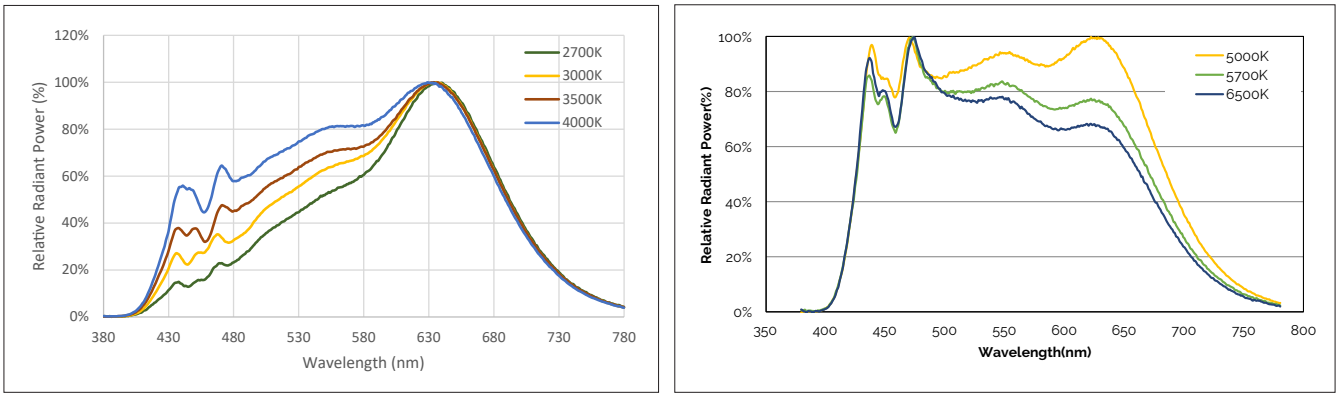


Note for Figure 8:

1. Color spectra measured at nominal current for T_j = 85°C.

Table 6: Typical ASD Values at T_c = 85°C.

Nominal CCT[1]	ASD
2700K	10%
3000K	9%
3500K	8%
4000K	8%
5000K	9%
5700K	9%
6500K	8%

Figure 9: SPD Comparison

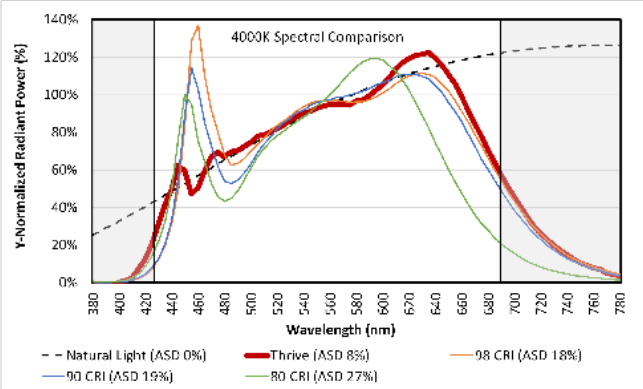

Spectral Matching to Natural Light

The lighting market is in the early stages of adoption of human-centric lighting (HCL). HCL encompasses the effects of lighting on the physical and emotional health and well-being of people. Throughout evolution, the human visual system has evolved under the natural light of sun and fire. These light sources have standardized industry spectral power definitions that describe the state of natural light. However, conventional metrics such as CCT, CRI, and TM-30 fail to adequately quantify the naturalness, or closeness of these light sources to the standardized natural spectra. Due to a lack of an industry standard metric to quantitatively measure the naturalness of a light source, Bridgelux has pioneered a new metric that takes the guesswork out of comparing LED light sources to natural light.

Average Spectral Difference, or ASD, is calculated by measuring the absolute difference between two spectra at discrete wavelengths. These values are averaged across a wavelength range derived from the photopic response curve, or V(); a luminous efficiency function describing the average spectral sensitivity of human perception of brightness. The range of 425nm to 690nm was selected to remove the tails of the V() gaussian distribution below 1% of the peak value at 555nm, covering 99.9% of the area under the photopic response curve. Natural light is defined following the approach of IES TM-30; black body curves for light sources of ≤4000K and the CIE standard illuminant D for light sources of ≥ 5000K.

Natural light has an ASD of 0%; lower ASD values indicate a closer match to natural light. Thrive is engineered to provide the closest match to natural light available using proprietary chip, phosphor and packaging technology, resulting in an ASD between 8% to 10% for all CCTs. By comparison, standard 80, 90, and 98 CRI light sources have ASD values that are 100% to 300% larger than Thrive. To learn more about the ASD metric, please contact your Bridgelux sales representative.

Downloaded from Arrow.com.

Electrical Characteristics

Table 7: Electrical Characteristics

Part Number	Drive Current (mA)	Forward Voltage Pulsed, T_c = 25°C (V) [1, 2, 3, 8]			Typical Coefficient of Forward Voltage[4] $\Delta V_f/\Delta T_c$ (mV/°C)	Typical Thermal Resistance Junction to Case[5,6] R_{j-c} (°C/W)	Driver Selection Voltages[7] (V)	
		Minimum	Typical	Maximum			V_f Min. Hot T_c = 105°C (V)	V_f Max. Cold T_c = -40°C (V)
BXRE-xxx1001-B-7x	270	32.2	34.4	37.4	-16.1	0.49	30.9	38.5
	540	34.2	36.6	39.8	-16.1	0.56	32.1	39.9
BXRE-xxx1001-C-7x	360	32.2	34.4	37.4	-16.1	0.37	30.9	38.5
	720	34.2	36.6	39.8	-16.1	0.45	32.1	39.9

Notes for Table 7:

1. Parts are tested in pulsed conditions, T_c = 25°C. Pulse width is 10ms.
2. Voltage minimum and maximum are provided for reference only and are not a guarantee of performance.
3. Bridgelux maintains a tester tolerance of ± 0.10V on forward voltage measurements.
4. Typical coefficient of forward voltage tolerance is ± 0.1mV for nominal current.
5. Thermal resistance values are based from test data of a 3000K 80 CRI product.
6. Thermal resistance value was calculated using total electrical input power; optical power was not subtracted from input power. The thermal interface material used during testing is not included in the thermal resistance value.
7. V_f min hot and max cold values are provided as reference only and are not guaranteed by test. These values are provided to aid in driver design and selection over the operating range of the product.
8. This product has been designed and manufactured per IEC 62031:2018. This product has passed dielectric withstand voltage testing at 1160 V. The working voltage designated for the insulation is 80V d.c. The maximum allowable voltage across the array must be determined in the end product application.

Downloaded from Arrow.com.

Absolute Maximum Ratings

Table 8: Maximum Ratings

Parameter	Maximum Rating	
LED Junction Temperature (T_j)	150˚C	
Storage Temperature	-40˚C to +105˚C	
Operating Case Temperature[1] (T_c)	105˚C	
Soldering Temperature[2]	300˚C or lower for a maximum of 6 seconds	
	BXRE-xxx1001-B-7x	BXRE-xxx1001-C-7x
Maximum Drive Current[3]	540mA	720mA
Maximum Peak Pulsed Drive Current[4]	770mA	1030mA
Maximum Reverse Voltage[5]	-60V	-60V

Notes for Table 8:

1. For IEC 62717 requirement, please consult your Bridgelux sales representative.
2. Refer to Bridgelux Application Note AN101: Handling and Assembly of Bridgelux V Series LED Arrays.
3. Arrays may be driven at higher currents however lumen maintenance may be reduced.
4. Bridgelux recommends a maximum duty cycle of 10% and pulse width of 20 ms when operating LED Arrays at maximum peak pulsed current specified. Maximum peak pulsed currents indicate values where LED Arrays can be driven without catastrophic failures.
5. Light emitting diodes are not designed to be driven in reverse voltage and will not produce light under this condition. Maximum rating provided for reference only.

Downloaded from Arrow.com.

Eye Safety

Table 9: Eye Safety Risk Group (RG) Classifications

Part Number	Drive Current [5] (mA)	CCT[1,5]			
		2700K/3000K	4000K[2]	5000K[3]	6500K[4]
BXRE-xxx100x-B-7x	270	RG1	RG1	RG1	RG1
	405	RG1	RG1	RG1	RG2
	540	RG1	RG1	RG2	RG2
BXRE-xxx100x-C-7x	360	RG1	RG1	RG1	RG2
	540	RG1	RG1	RG2	RG2
	720	RG1	RG2	RG2	RG2

Notes for Table 9:

1. Eye safety classification for the use of Bridgelux V Series LED arrays is in accordance with specification IEC/TR 62778: Application of IEC 62471 for the assessment of blue light hazard to light sources and luminaires.
2. For products classified as RG2 at 4000K, E_{thr}= 1847.5 lx.
3. For products classified as RG2 at 5000K E_{thr}= 1315.8 lx.
4. For products classified as RG2 at 6500K, E_{thr}= 1124.5 lx.
5. Please contact your Bridgelux sales representative for E_{thr} values at specific drive currents and CCTs not listed.

Downloaded from Arrow.com.

Product Bin Definitions


Table 10: 2-, 3- and 4-step MacAdam Ellipse Color Bin Definitions


CCT	Center Point		Degree	2-step		3-step		4-step	
	x	y	(°)	a	b	a	b	a	b
2700K	0.4578	0.4101	53.700	0.00540	0.00280	0.0081	0.0042	N/A	N/A
3000K	0.4338	0.403	53.217	0.00556	0.00272	0.0083	0.0041	N/A	N/A
4000K	0.3818	0.3797	53.717	0.00626	0.00268	0.0094	0.0040	N/A	N/A
5000K	0.3447	0.3553	59.617	N/A	N/A	0.0082	0.0035	0.0110	0.0047
5700K	0.3287	0.3417	59.060	N/A	N/A	0.0074	0.0032	0.0099	0.0042
6500K	0.3123	0.3282	58.567	N/A	N/A	0.0066	0.0028	0.0090	0.0038

Notes for Table 10:

1. Color binning at T_c=85°C
2. Bridgelux maintains a tolerance of ± 0.007 on x and y color coordinates in the CIE 1931 color space.

Figure 10: C.I.E. 1931 Chromaticity Diagram (Color targeted at T_c=85°C)

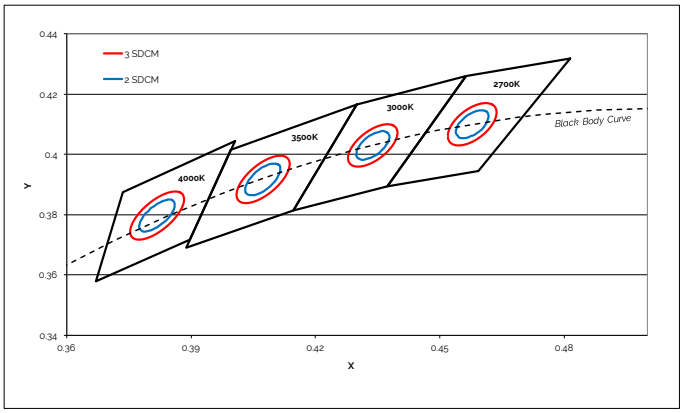

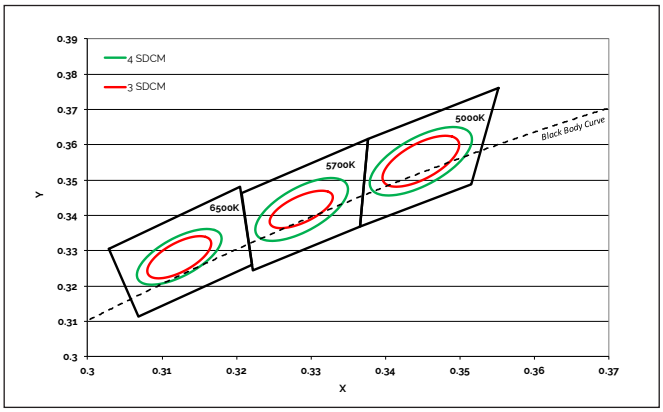

Downloaded from Arrow.com.

Performance Curves

Figure 11: V10B Drive Current vs. Voltage (T_c=25˚C)

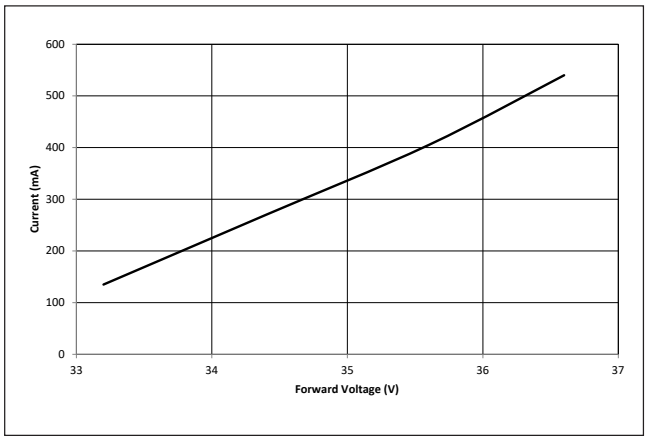


Figure 12: V10C Drive Current vs. Voltage (T_c=25˚C)

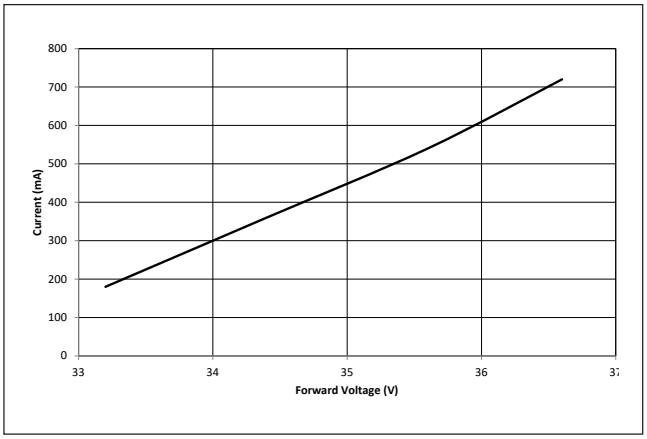


Figure 13: V10B Typical Relative Flux vs. Current (T_c=25˚C)


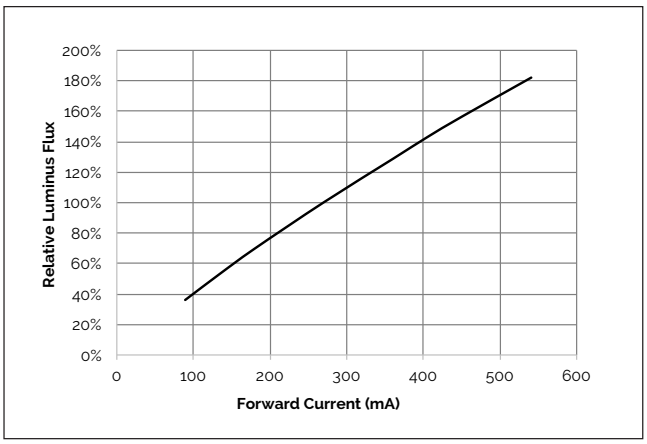


Figure 14: V10C Typical Relative Flux vs. Current (T_c=25˚C)

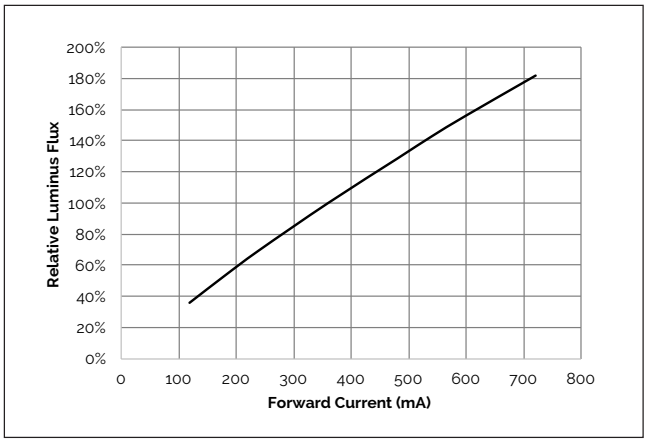

Downloaded from Arrow.com.

Performance Curves

Figure 15: Typical DC Flux vs. Case Temperature

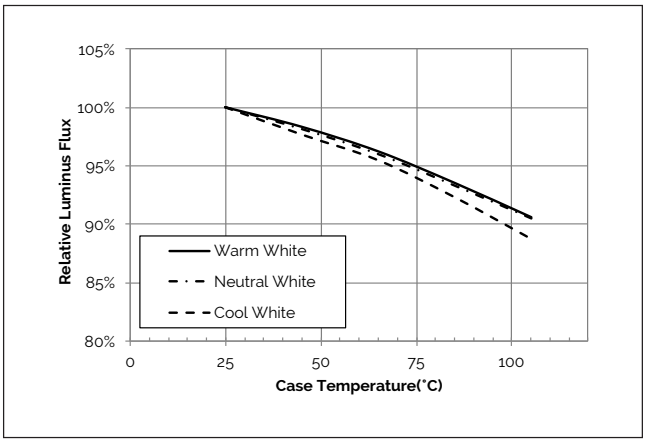


Figure 16: Typical ccx Shift vs. Case Temperature


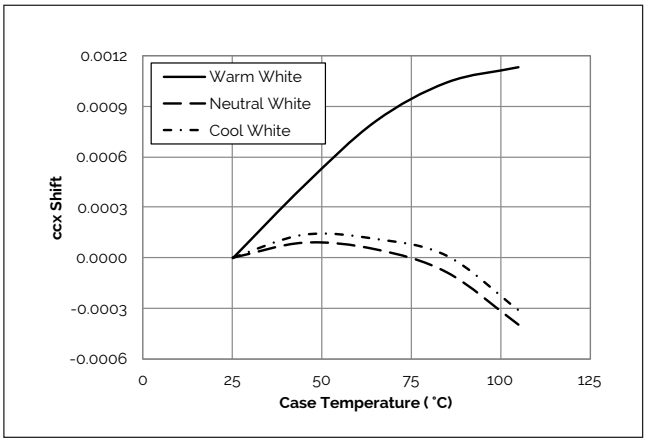


Figure 17: Typical ccy Shift vs. Case Temperature

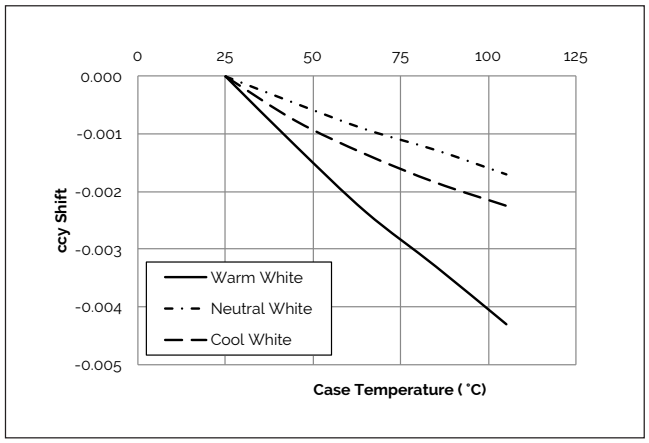


Notes for Figures 15-17:

1. Bridgelux does not recommend driving high power LEDs at low currents. Doing so may produce unpredictable results. Pulse width modulation (PWM) is recommended for dimming effects.
2. Characteristics shown for warm white based on 3000K Thrive
3. Characteristics shown for neutral white based on 4000K Thrive
4. Characteristics shown for cool white based on 5000K Thrive
5. For other color SKUs, the shift in color will vary. Please contact your Bridgelux Sales Representative for more information.

Downloaded from Arrow.com.

Typical Radiation Pattern


Figure 18: Typical Spatial Radiation Pattern

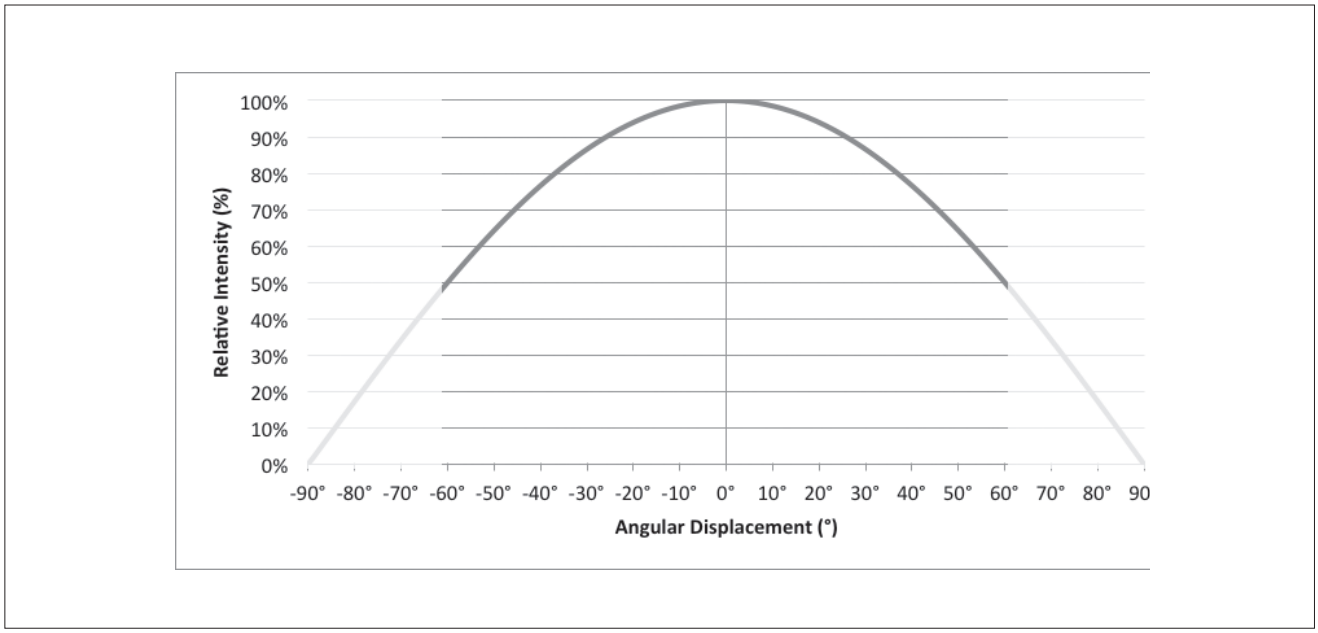

Notes for Figure 18:

1. Typical viewing angle is 120°.
2. The viewing angle is defined as the off axis angle from the centerline where intensity is ½ of the peak value.


Figure 19: Typical Polar Radiation Pattern

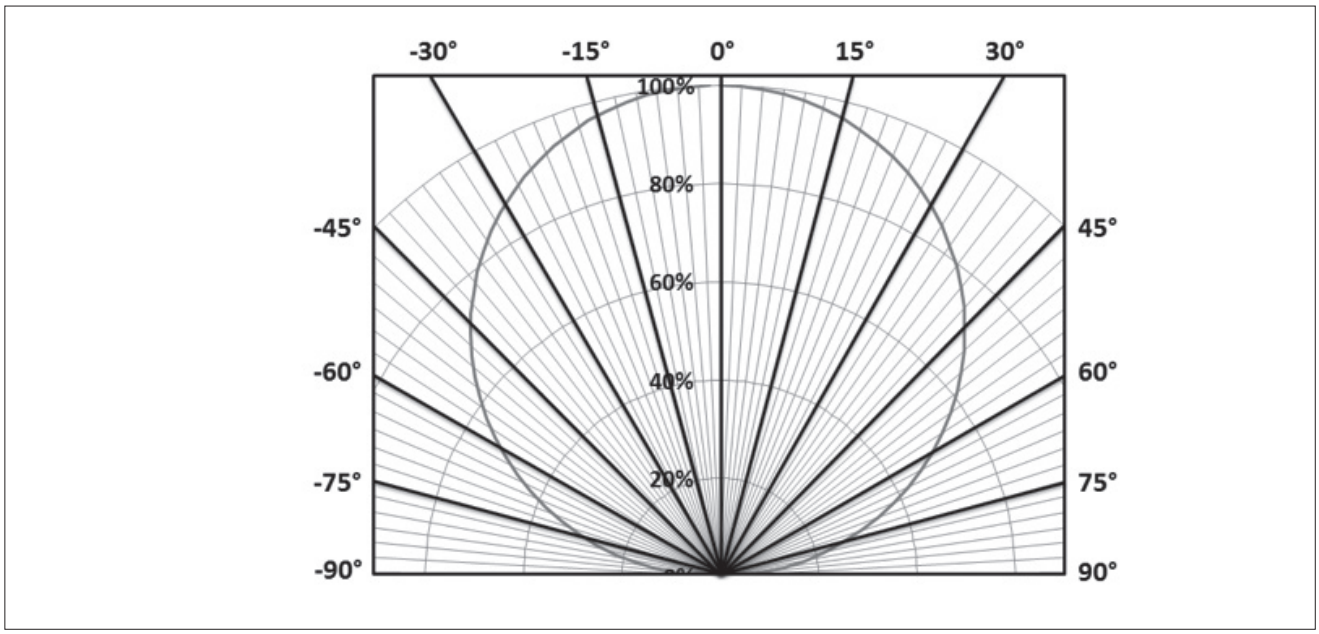

Downloaded from Arrow.com.

Mechanical Dimensions

Figure 20: V10 LED Array

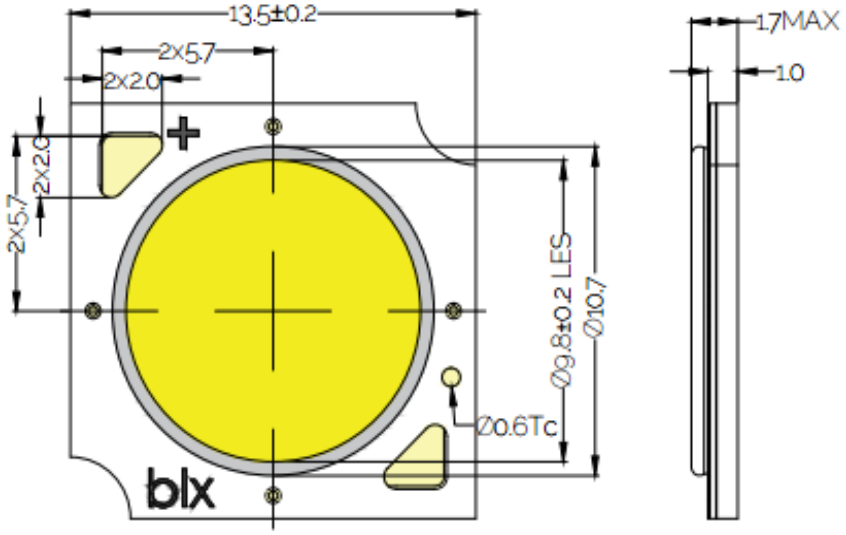

Notes for Figure 20:

1. Drawings are not to scale.
2. Drawing dimensions are in millimeters.
3. Unless otherwise specified, tolerances are ±0.1mm.
4. Mounting locations (2X) are for M2.5 screws.
5. Screws with flat shoulders (pan, dome, button, round, truss, mushroom) provide optimal torque control. Do NOT use flat, countersink, or raised head screws.
6. The optical center of the LED Array is nominally defined by the mechanical center of the array to a tolerance of ± 0.2mm.
7. Bridgelux maintains a flatness of 0.10mm across the mounting surface of the array.

Downloaded from Arrow.com.

Packaging and Labeling

Figure 21: V10 Packaging



Notes for Figure 21:

1. Each tube holds 30 V10 COB arrays.
2. One tube is sealed in an anti-static bag. Four bags are placed in a shipping box. Depending on quantities ordered, a bigger shipping box, containing four boxes may be used to ship products.
3. Each bag and box is to be labeled as shown above.
4. Dimensions for each tube are 8.3 (W) x 15.4 (H) x 430 (L). Dimensions for the anti-static bag are 75 (W) x 615 (L) x 3.1 (T) mm. Dimensions for the shipping box are 58.7 x 13.3 x 7.9 cm

Downloaded from Arrow.com.

Packaging and Labeling

Figure 22: **Gen. 7 Product Labeling**

Bridgelux COB arrays have laser markings on the back side of the substrate to help with product identification. In addition to the product identification markings, Bridgelux COB arrays also contain markings for internal Bridgelux manufacturing use only. The image below shows which markings are for customer use and which ones are for Bridgelux internal use only. The Bridgelux internal manufacturing markings are subject to change without notice, however these will not impact the form, function or performance of the COB array.



Downloaded from Arrow.com.

Design Resources

Application Notes

Bridgelux has developed a comprehensive set of application notes and design resources to assist customers in successfully designing with the V Series product family of LED array products. For all available application notes visit www.bridgelux.com.

Optical Source Models

Optical source models and ray set files are available for all Bridgelux products. For a list of available formats, visit www.bridgelux.com.

3D CAD Models

Three dimensional CAD models depicting the product outline of all Bridgelux V Series LED arrays are available in both IGS and STEP formats. Please contact your Bridgelux sales representative for assistance.

LM80

LM80 testing has been completed and the LM80 report is now available. Please contact your Bridgelux sales representative for LM-80 report.

Precautions

CAUTION: CHEMICAL EXPOSURE HAZARD

Exposure to some chemicals commonly used in luminaire manufacturing and assembly can cause damage to the LED array. Please consult Bridgelux Application Note AN101 for additional information.

CAUTION: RISK OF BURN

Do not touch the V Series LED array during operation. Allow the array to cool for a sufficient period of time before handling. The V Series LED array may reach elevated temperatures such that could burn skin when touched.

CAUTION

CONTACT WITH LIGHT EMITTING SURFACE (LES)

Avoid any contact with the LES. Do not touch the LES of the LED array or apply stress to the LES (yellow phosphor resin area). Contact may cause damage to the LED array.

Optics and reflectors must not be mounted in contact with the LES (yellow phosphor resin area).

Disclaimers

MINOR PRODUCT CHANGE POLICY

The rigorous qualification testing on products offered by Bridgelux provides performance assurance. Slight cosmetic changes that do not affect form, fit, or function may occur as Bridgelux continues product optimization.

STANDARD TEST CONDITIONS

Unless otherwise stated, array testing is performed at the nominal drive current.

Downloaded from Arrow.com.

About Bridgelux: Bridging Light and Life™

At Bridgelux, we help companies, industries and people experience the power and possibility of light. Since 2002, we've designed LED solutions that are high performing, energy efficient, cost effective and easy to integrate. Our focus is on light's impact on human behavior, delivering products that create better environments, experiences and returns—both experiential and financial. And our patented technology drives new platforms for commercial and industrial luminaires.

For more information about the company, please visit
bridgelux.com
twitter.com/Bridgelux
facebook.com/Bridgelux
linkedin.com/company/bridgelux-inc-_2
youtube.com/user/Bridgelux
WeChat ID: BridgeluxInChina

46410 Fremont Boulevard
Fremont, CA 94538 USA
Tel (925) 583-8400
www.bridgelux.com

© 2021 Bridgelux, Inc. Product specifications are subject to change without notice. Bridgelux and the Bridgelux stylized logo design are registered trademarks of Bridgelux, Inc. All other trademarks are the property of their respective owners.

Downloaded from Arrow.com.