

XENSIV™ PAS CO2

Description

Infineon has leveraged its knowledge in sensors and MEMS technologies to develop a disruptive gas sensor for CO₂ sensing. The XENSIV™ PAS CO₂ is a real CO₂ sensor in an exceptionally small form factor based on the photoacoustic spectroscopy (PAS) principle.

Infineon's MEMS microphone, which is optimized for low-frequency operation, detects the pressure change generated by CO₂ molecules within the sensor cavity. CO₂ concentration is then delivered in the form of a direct ppm readout thanks to the integrated microcontroller. Highly accurate CO₂ readings are guaranteed.



Features

- **Operating range:** 0 ppm to 32000 ppm
- **Accuracy:** \pm (30 ppm +3%) of reading between 400 ppm and 5000 ppm
- **Lifetime:** 10 years
- **Operating temperature:** 0-50°C
- **Operating relative humidity:** 0% to 85% (Non-condensing)
- **Interface:** I2C, UART, and PWM
- **Supply voltage:** 12.0 V for the emitter and 3.3 V for other components
- **Average power consumption:** Typically, 30 mW at 1 measurement/minute
- **Package dimension:** 13.8 x 14 x 7.5 mm³

Potential applications

High accuracy, compact size, and SMD capability make the XENSIV™ PAS CO₂ ideal for indoor air quality monitoring solutions in the market with numerous potential applications.

- **Building automation:** Demand Controlled Ventilation, Air Handler Units, Air Exchanger
- **Home appliances:** Air purifiers, Air Conditioner
- **Smart home IoT devices:** Thermostat, Speaker, Baby monitors, Personal assistants, Indoor Air Quality Monitor, Smart lighting.
- **City management/ CO₂ emissions control:** Outdoor lighting, Bus stop stations, Advertising billboards.
- **In-cabin air quality monitoring unit**

Table of contents

Description 1

Features 1

Potential applications 1

Table of contents 2

1 Block diagram..... 3

2 Pin-out diagram 4

3 The typical sensor response to the CO₂ concentration change 5

4 Characteristics and parameters 6

4.1 Specification 6

4.1.1 Operating range 6

4.1.2 Timing characteristics..... 6

4.1.3 Absolute maximum ratings..... 8

4.1.4 The current rating and power consumption 8

4.1.5 CO₂ Transfer Function 9

4.1.6 Peripheral timing 10

4.1.6.1 I2C Timing..... 10

4.1.6.2 UART characteristics 11

4.2 Application Circuit Example..... 11

4.3 Functional description 12

4.3.1 Operating Modes 12

4.3.2 Data post-processing 13

4.3.3 Alarm Threshold 14

4.4 Advanced functionality 14

4.5 Digital interface 15

4.5.1 I2C interface 15

4.5.2 I2C transaction format 15

4.5.3 UART Interface..... 16

4.6 Register map 16

5 Assembly instruction 17

6 Package information 18

7 Footprint and stencil recommendation..... 19

8 Packing for shipment..... 20

9 Revision history 21

1 Block diagram

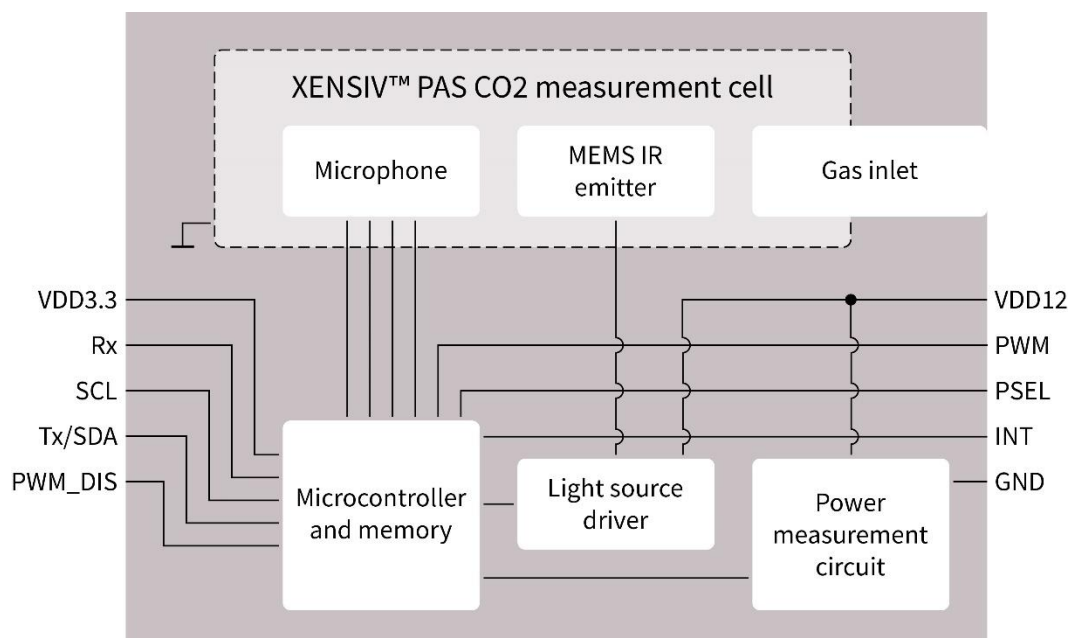


Figure 1 Block diagram of XENSIV™ PAS CO₂

2 Pin-out diagram

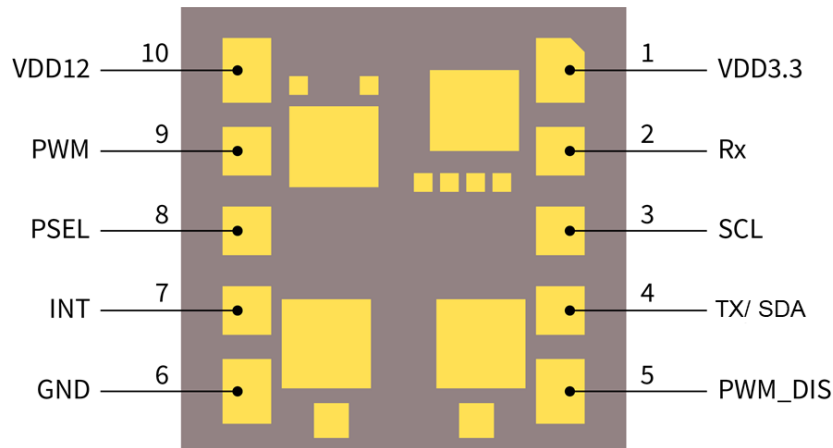


Figure 2 Pin-out diagram (Bottom view)

Table 1

PIN	Symbol	Type	Description
1	VDD3.3	Power supply (3.3V)	3.3V digital power supply
2	Rx	Input/ Output	UART receiver pin (3.3V domain)
3	SCL	Input/ Output	I2C clock pin (3.3V domain)
4	TX/ SDA	Output	UART transmitter pin (3.3V domain) / I2C data pin (3.3V domain)
5	PWM_DIS	Input	PWM disable input pin (3.3V domain)
6	GND	Ground	Ground
7	INT	Output	Interrupt output pin (3.3V domain)
8	PSEL	Input	Communication interface select input pin (3.3V domain)
9	PWM	Output	PWM output pin (3.3V domain)
10	VDD12	Power supply (12V)	12V power supply for the IR emitter

3 The typical sensor response to the CO₂ concentration change

Measurement condition: VDD12 = 12V, VDD3.3=3.3V, T_{amb} = 25°C, P = 1013 hPa and rH = 30%

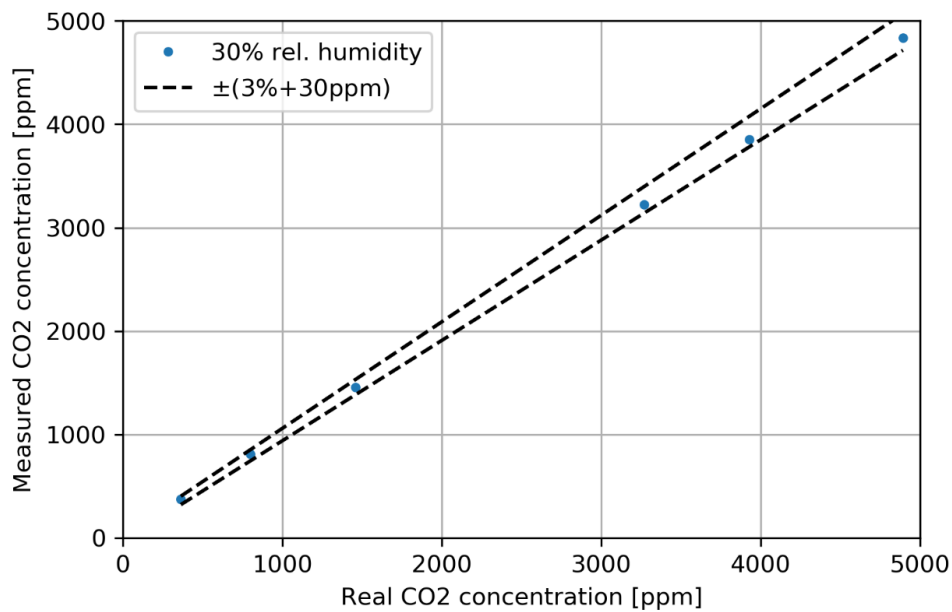


Figure 3 The typical sensor response to the CO₂ concentration change.

4 Characteristics and parameters

4.1 Specification

4.1.1 Operating range

All parameters specified in the following sections refer to these operating conditions unless otherwise specified.

Table 2 Operating range

Parameter	Symbol	Values			Unit	Note or Test Condition
		Min.	Typ.	Max.		
CO ₂ measurement range ¹⁾	C _{CO2}	0		32000	ppm	Functional measurement range
Ambient temperature ¹⁾	T _{amb}	0		50	°C	
Relative humidity ¹⁾	rH	0		85	%	Non-condensing
Pressure ¹⁾	p	750	1013	1150	hPa	
Supply voltage ¹⁾	VDD3.3	3	3.3	3.6	V	
	VDD12	10.8	12	13.2	V	
Lifetime ¹⁾	T _{life}		10		Year	Depends on the mission profile

Note: 1) Not subject to production test. This parameter is verified by design/ characterization.

4.1.2 Timing characteristics

Table 3 Timing characteristics

Parameter	Symbol	Values			Unit	Note or Test Condition
		Min.	Typ.	Max.		
Sampling time ¹⁾	T _{sampling}	5		4095	s	
Time to sensor ready ¹⁾	T _{sensor_rdy}			1	s	
Time to early notification ^{1), 2)}	T _{early_noti}		2		s	
I2C Clock frequency ¹⁾	f _{I2C}		100		kHz	
			400			
PWM frequency ¹⁾	f _{pwm}		80		Hz	
UART baud rate ¹⁾	f _{baud}		9.6		kBps	

Note: 1) Not subject to production test. This parameter is verified by design/ characterization.

2) Relevant for continuous mode of operation.

Typical measurement timing sequence has been illustrated in figure 4.

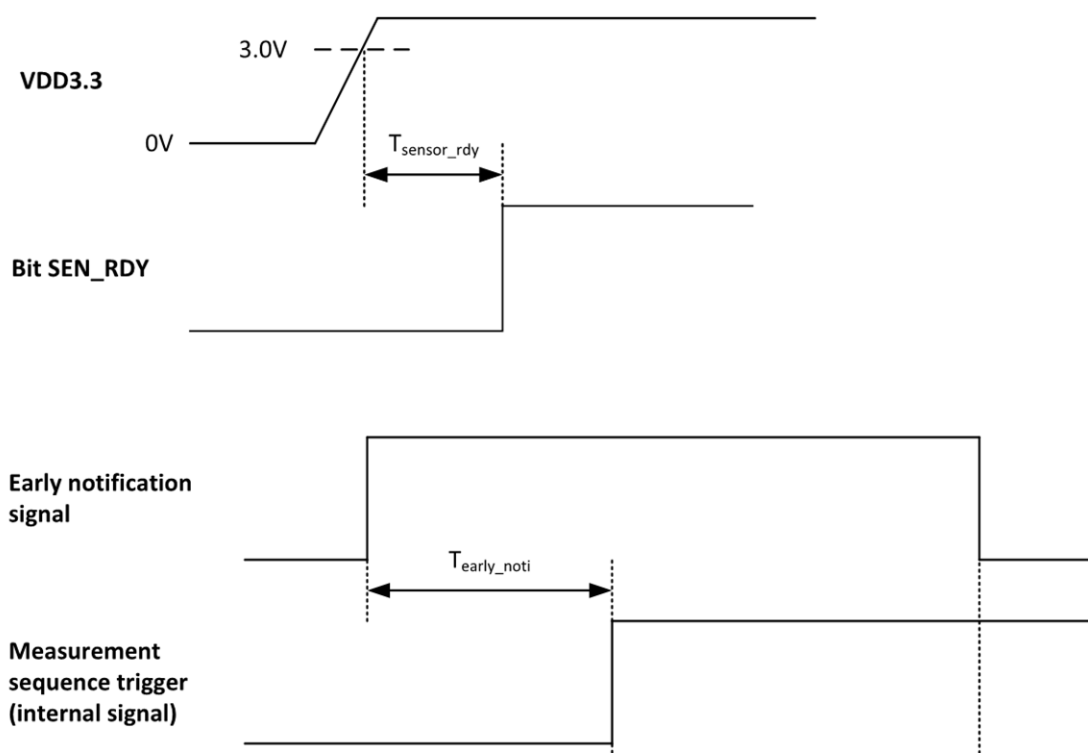


Figure 4 Illustration of the timing characteristic parameters

4.1.3 Absolute maximum ratings

Absolute maximum ratings are verified by design/ characterization, and not tested during production.

Table 4 Absolute Maximum Ratings¹⁾

Parameter	Symbol	Values			Unit	Note or Test Condition
		Min.	Typ.	Max.		
MSL Level	MSL		3			
Maximum ambient temperature	T _{amb_max}	-10		60	°C	
Maximum relative humidity	rH _{max}	0		95	%	
12V Supply voltage	V _{VDD12}	9.6		14.4	V	
3.3V Supply voltage	V _{VDD3.3}	3.0		3.6	V	
Storage temperature	T _s	-30		85	°C	
Reflow temperature	T _r			245	°C	JEDEC J-STD-020E
ESD Human Body Model	V _{ESD_HBM}	-2		2	kV	HBM (JS001)
ESD Charge Discharge Model	V _{ESD_CDM}			500	V	CDM (JS002)

Note: 1) Stresses above the values listed as "Absolute Maximum Ratings" may cause permanent damage to the devices. Exposure to absolute maximum rating conditions for extended period of time may affect device reliability.

4.1.4 The current rating and power consumption

The current rating refers to 1 measurement/ minute as a typical sampling frequency. All parameters specified in table 5 refer to the following operating conditions unless otherwise specified:

VDD3.3 = 3.3V, VDD12 = 12V, T_{amb} = 25°C, % rH = 30 %, p = 1013 hPa.

Table 5 Current rating

Parameter	Symbol	Pin	Values			Unit	Note or Test Condition
			Min.	Typ.	Max.		
Peak current ¹⁾	I _{peak 12}	VDD12		130	150	mA	
Peak current ¹⁾	I _{peak 3.3}	VDD3.3		10		mA	
Average current ¹⁾	I _{avg 12}	VDD12		0.8		mA	
Average current ¹⁾	I _{avg 3.3}	VDD3.3		6.1		mA	
Average power ¹⁾	P _{avg}			30		mW	

Note: 1) Not subject to production test. This parameter is verified by design/ characterization.

Power consumption can be optimized further. For more details please refer to our application note section at the product [web page](#).

4.1.5 CO₂ Transfer Function

All parameters specified in the following sections refer to the operating conditions unless otherwise specified:

VDD3.3 = 3.3V, VDD12 = 12V, T_{amb} = 25°C, % rH = 30 %, p = 1013 hPa.

Table 6 CO₂ Transfer Function

Parameter	Symbol	Values			Unit	Conditions
		Min.	Typ	Max.		
Accuracy	Acc	-30 ppm- 3% of reading		+30 ppm+3% of reading	ppm	C _{CO2} : 400 - 5000 ppm
Response time ¹⁾	T ₆₃		90		s	
Repeatability ¹⁾	R			10	ppm	3σ
Pressure stability ¹⁾	p _{error}		0.1		%/hPa	Without pressure compensation feature enabled
			0			With pressure compensation feature enabled
Drift ¹⁾	d _{error}			1	%/ year	At 1 meas/ min with ABOC enabled in continuous mode.
Acoustic stability ¹⁾	SPL _{error}	3	6	15	ppm	Up to 95 dB for Pink noise from 100 Hz to 10 kHz.

Note: 1) Not subject to production test. This parameter is verified by design/ characterization.

4.1.6 Peripheral timing

4.1.6.1 I2C Timing

Table 7 I2C Standard mode timing

Parameter	Symbol	Values			Unit	Note or Test Condition
		Min.	Typ.	Max.		
Fall time of both SDA and SCL	t ₁			300	ns	
The rise time of both SDA and SCL	t ₂			1000	ns	
Data hold time	t ₃	0			μs	
Data set-up time	t ₄	250			ns	
LOW period of SCL clock	t ₅	4.7			μs	
HIGH period of SCL clock	t ₆	4.0			μs	
Hold time for a (repeated) START condition	t ₇	4.0			μs	
Set-up time for (repeated) START condition	t ₈	4.7			μs	
Set-up time for STOP condition	t ₉	4.0			μs	
Bus free time between a STOP and START condition	t ₁₀	4.7			μs	
Capacitive load for each bus line	C _b			400	pF	

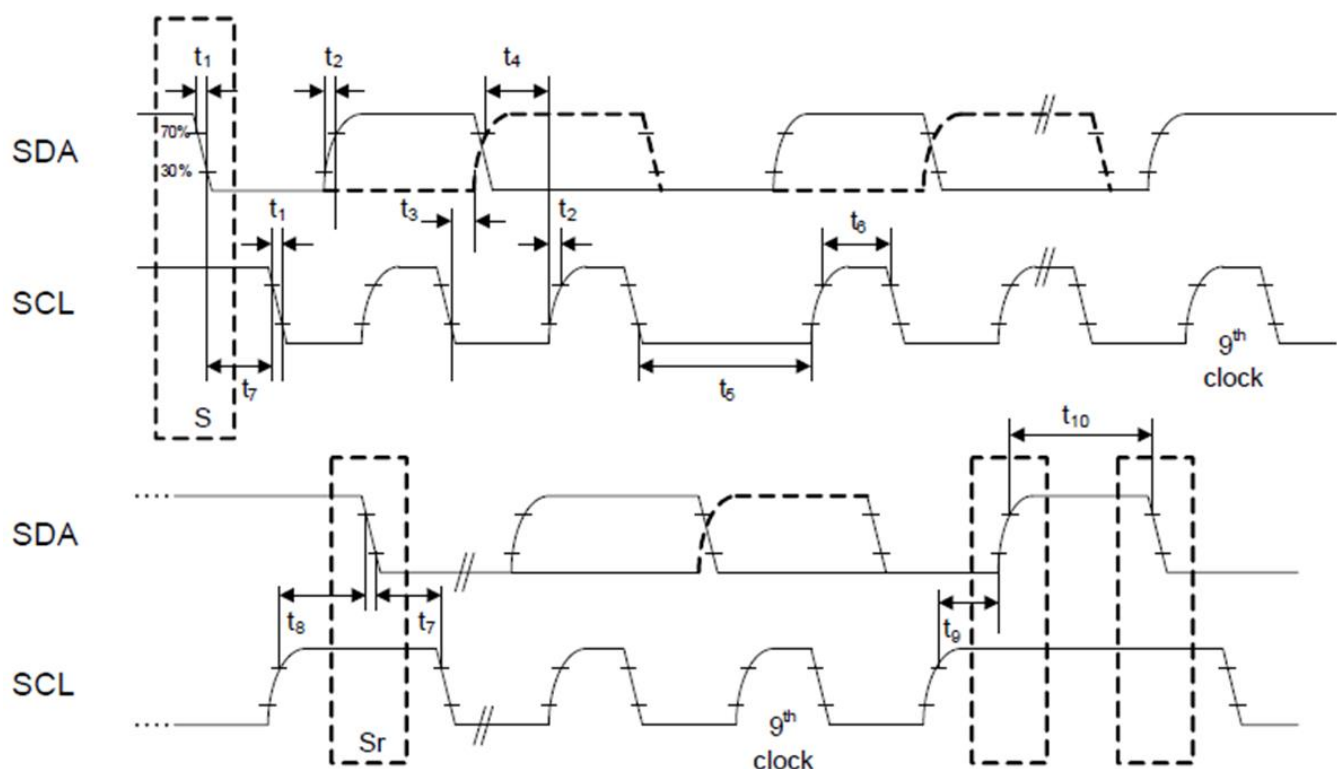


Figure 5 Standard I2C mode timing.

4.1.6.2 UART characteristics

The main characteristics of the UART interface are described below:

- Point to point operation – no bus support.
- Slave operation only.
- $f_{\text{baud}} = 9.6\text{kBps}$
- Format: 1 start bit, 8 Data bits, no parity bit, 1 stop bit.
- Supports direct connection with terminal program.

For further details on UART and I2C communication protocol, please refer to our application note section in the product webpage.

4.2 Application Circuit Example

Typical application circuits for I2C and UART has been presented in the figure 6 and figure 7 respectively.

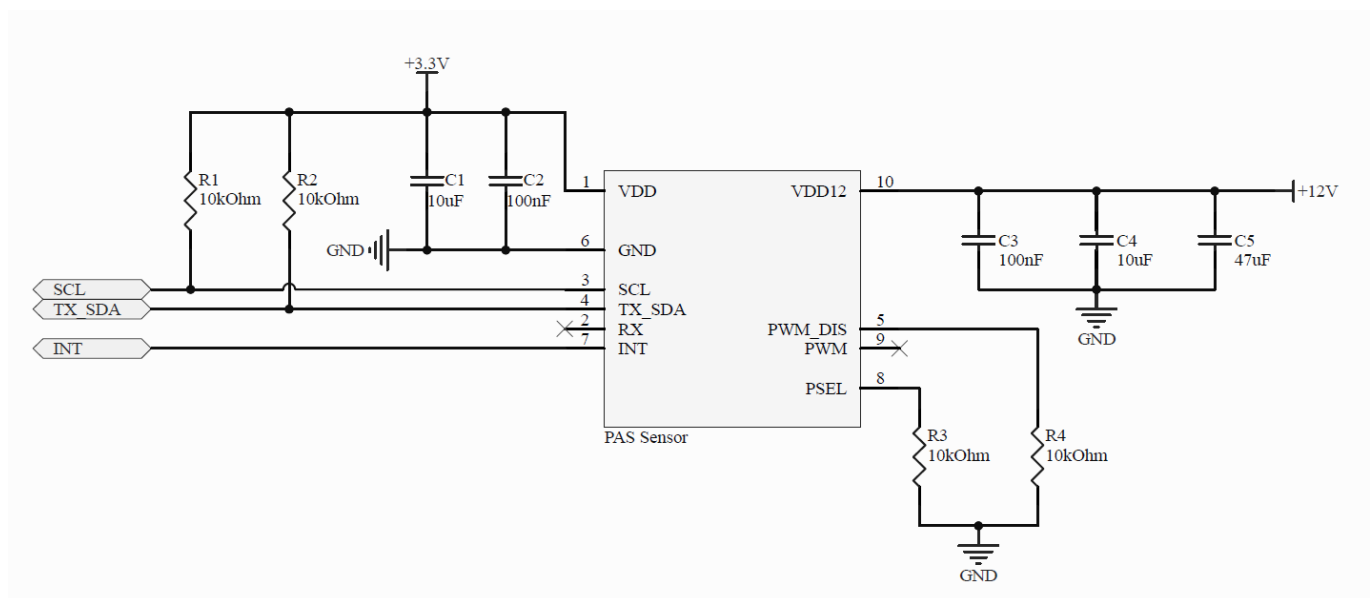


Figure 6 Application circuit example for I2C

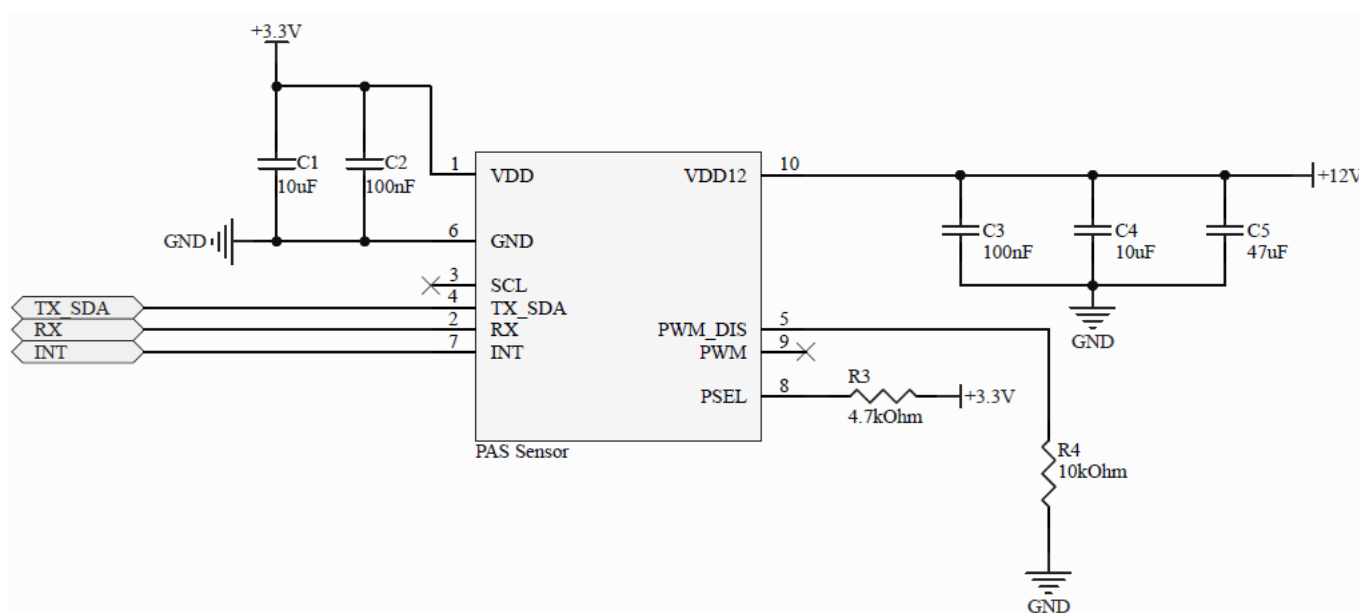


Figure 7 Application circuit example for UART

4.3 Functional description

This section describes the operation of the sensor while measuring CO₂ concentrations. At any moment the device can be in one out of two different states: active and inactive. At active state, the CPU controlling the device is operating and can perform tasks such as: running a measurement sequence, serving an interrupt, etc. When the device has no specific task to perform, it goes to an inactive state. A transition from active to inactive state may occur at the end of a measurement sequence. In an inactive state, the CPU controlling the device is in sleep mode to optimize power consumption. Several events can wake up the device: the reception of a message on the serial communication interface, a falling edge on pin **PWM_DIS**, the internal generation of a measurement request in continuous measurement mode.

4.3.1 Operating Modes

The operating mode can be programmed via the serial communication interface by using the bit field **MEAS_CFG.OP_MODE**.

The sensor module supports three operating modes:

- **Idle mode:** The device does not perform any CO₂ concentration measurement. The device remains inactive until it becomes active shortly to serve interrupts before going back to an inactive state.
- **Continuous mode:** In this mode, the device periodically triggers a CO₂ concentration measurement sequence. Once a measurement sequence is completed, the device goes back to an inactive state and wakes up automatically for the next measurement sequence. The measurement period is programmable from 5 sec to 4095 sec.
- **Single-shot mode:** In this mode, the device triggers a single measurement sequence. At the end of the measurement sequence, the device goes back automatically to idle mode.

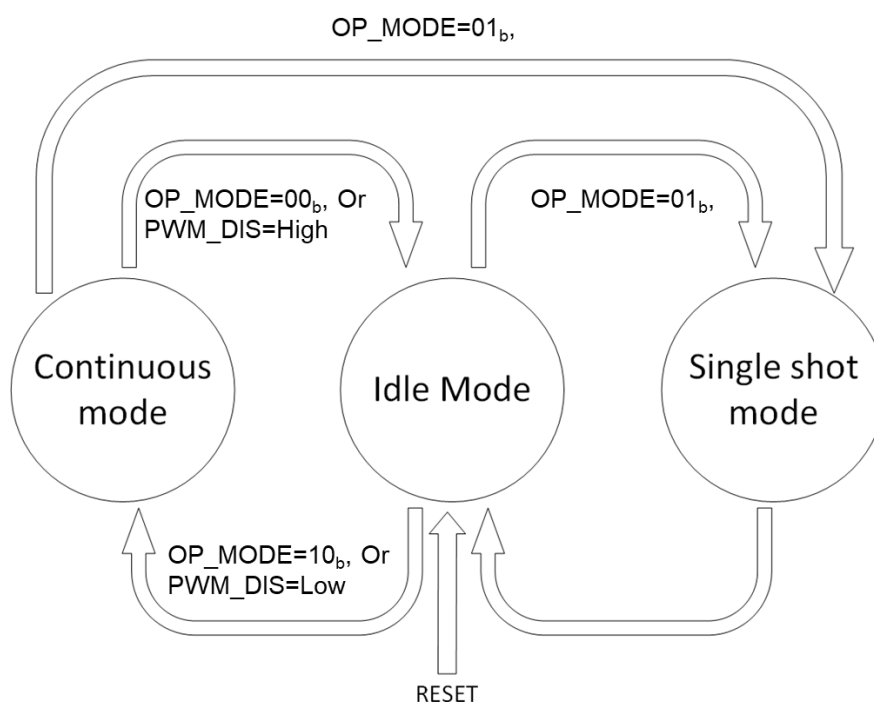


Figure 8 Operating mode transition

4.3.2 Data post-processing

Once the CO₂ concentration data has been acquired, several post-processing schemes can be applied to improve the sensor performance.

- **Pressure compensation**

The CO₂ concentration value acquired by the sensor is dependent on the external atmospheric pressure. To compensate for this effect, the application system can provide the value of the atmospheric pressure by writing into the specific registers, i.e. **PRESSREF_H** and **PRESSREF_L**. At the end of a measurement sequence, the device reads the pressure value and applies for compensation on the CO₂ concentration value before storing it into the result registers.

- **Automatic Baseline Offset Correction**

To correct slow drifts caused by aging during operation, the device supports Automatic Baseline Offset Compensation. Every week of operation, the device computes an offset to correct the baseline of the device. The device must be in contact with the reference concentration (e.g. fresh air at 400 ppm of CO₂ concentration) at least 30 minutes per operating week to make sure proper baseline compensation. The device supports different configurations for compensation. **The ABOC setpoint may only be set between 350 and 1500 ppm.**

- **Forced compensation**

Forced compensation provides a means to speed up the offset compensation process. Before forced compensation is enabled, the device shall be physically exposed to the reference CO₂ concentration. The device will use the 3 next measurements to calculate the compensation offset. The user shall ensure constant exposure to the reference CO₂ concentration during that time. It is recommended to operate at 1 measurement per 10 seconds while implementing the forced compensation scheme. When the 3 measurement sequences are completed, the device automatically reconfigures itself with the newly computed offset applied to the subsequent CO₂ concentration measurement results.

4.3.3 Alarm Threshold

The device can be configured to perform an alarm threshold check each time a new CO₂ concentration data is acquired. At the end of each measurement sequence, the computed CO₂ value (after all applicable offset compensations) is compared to the concatenated value in **ALARM_TH_H** and **ALARM_TH_L**. In case of a threshold violation, the sticky bit **MEAS_STS.ALARM** is set. This also sets pin **INT** to active level if configured as Alarm. Bit **MEAS_STS.ALARM** is cleared by reading register **MEAS_STS.ALARM_CLR**.

4.4 Advanced functionality

Monitoring mechanism

The device supports several mechanisms to monitor the correct operation of the sensor.

Table 7

Mechanism	Description
Sensor Ready status	After each power-on reset, bit SENS_STS.SEN_RDY is set to confirm that the sensor has initialized correctly.
Scratchpad register	<p>To check the integrity of the communication layer of the serial communication interface, register SCRATCH_PAD can be used. This register can use this memory field to write any value and verify that the data received by the device is correct.</p> <p>It can also be used to verify that a soft reset has been executed, using the following sequence:</p> <ol style="list-style-type: none"> 1. The user writes a non-default value to register SCRATCH_PAD. 2. The user reads back register SCRATCH_PAD to verify the writ commend has been correctly executed. 3. The user writes register SENS_RST to trigger a soft reset. 4. The user reads register SCRATCH_PAD to verify that it has been reset to its default value.
VDD12V verification	At power-up and the beginning of each measurement sequence, the device measures automatically the voltage at VDD12 . If the measured voltage exceeds the specified operating range of the device, bit SENS_STS.ORVS is set. The measurement sequence is however completed normally. Bit SENS_STS.ORVS can be cleared by setting bit SENS_STS.ORVS_CLR
Internal temperature verification	At the beginning of each measurement sequence, the device measures automatically its internal temperature. If the measured temperature exceeds the specified operating ranged of the device, sticky bit SENS_STS.ORTMP is set. The measurement sequence is however completed normally. Bit SENS_STS.ORTMP can be cleared by setting bit SENS_STS.ORTMP_CLR .

4.5 Digital interface

The XENSIV™ PAS CO₂ supports I2C, UART, and PWM. The communication protocols have been covered in separate application notes.

4.5.1 I2C interface

The device complies with the I2C protocol. When I2C is selected as a serial communication interface, the device acts as an I2C slave. The main characteristics of the interface are described below:

- Slave mode only.
- I2C Clock frequency: 100 kHz and 400 kHz
- 7-bit slave address: 0x28
- No CRC.
- The device supports clock stretching.
- 8bit addressing mode supported (7bit address + RW)
- Bulk read and write supported (device auto-increments automatically the address).
- Address 0x00 not supported.

Further details of the protocol are covered in the separate application note.

4.5.2 I2C transaction format

The I2C transaction has the following structure: a start condition followed by four bytes followed a stop condition.

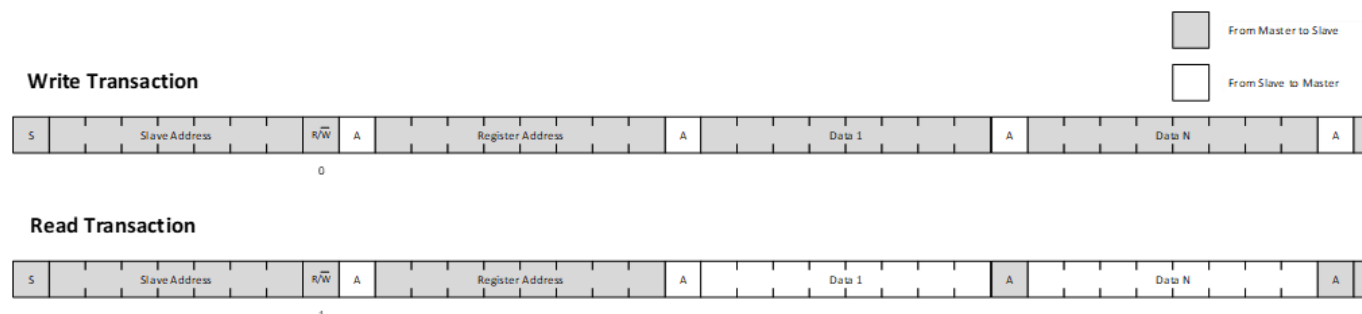


Figure 9 I2C write and read transaction

Table 8

Byte	Description	Value	Comments
	Start condition		
1	Header	(Slave Address << 1) R/W	
2	First data-byte	As per user request/register value	Read: data provided by the slave Write: data provided by the user
N+2	Data byte N	As per user request/register value	Read: data provided by the slave Write: data provided by the user
	End condition		

4.5.3 UART Interface

When UART is selected as a serial communication interface, the device acts as a UART slave. The device operates via UART for point-to-point communication. Bus operation is not supported. As a result, it is recommended that the master uses a time-out mechanism. The basic format of a valid UART frame is 1 start bit, 8 data bits, no parity bit, and 1 stop bit. The master combines several UART frames into a message (read or write). The combination of master request and slave answer defines a transaction. The main characteristics of the interface are described below:

- Point to point operation – no bus support.
- Slave operation only.
- UART clock frequency = 9.6 kHz
- Format: 1 start bit, 8 Data bits, no parity bit, 1 stop bit. Supports direct connection with a terminal program.

For further details on UART communication, please have a look at the application note section on the product website 'www.infineon.com/CO2'.

4.6 Register map


Name	Address	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Reset
PROD_ID	0x00	PROD r			REV r					0x4A
SENS_STS	0x01	SEN_RDY rh	PWM_DIS_ST rh	ORTMP rhs	ORVS rhs	ICCER rhs	ORTMP_CLR w	ORVS_CLR w	ICCER_CLR w	0xC0
MEAS_RATE_H	0x02	VAL rwh								0x00
MEAS_RATE_L	0x03	VAL rwh								0x3C
MEAS_CFG	0x04	0 rw		PWM_OUTEN rw	PWM_MODE rw	BOC_CFG rwh		OP_MODE rwh		0x24
CO2PPM_H	0x05	VAL r								0x00
CO2PPM_L	0x06	VAL r								0x00
MEAS_STS	0x07	0 rw		Res rh	DRDY rhs	INT_STS rhs	ALARM rhs	INT_STS_CLR w	ALARM_CLR w	0x00
INT_CFG	0x08	0 rw			INT_TYP rw	INT_FUNC rw			ALARM_TYP rw	0x11
ALARM_TH_H	0x09	VAL rw								0x00
ALARM_TH_L	0x0A	VAL rw								0x00
PRESS_REF_H	0x0B	VAL rwh								0x03
PRESS_REF_L	0x0C	VAL rwh								0xF7
CALIB_REF_H	0x0D	VAL rwh								0x01
CALIB_REF_L	0x0E	VAL rwh								0x90
SCRATCH_PAD	0x0F	VAL rw								0x00
SENS_RST	0x10	SRTRG w								0x00
Reserved	0x11 ... 0x14	Reserved registers Read & Write access to those registers generate a communication error								
Reserved	0x15 ... 0xFF	Reserved registers Read & Write access to those registers generate a non-acknowledge condition.								

Complete 'Register map description' has been covered in a separate application note in the product webpage.

5 Assembly instruction

XENSIV™ PAS CO2 modules are classified to be Moisture-Sensitivity Level 3 (MSL 3). The maximum reflow temperatures during board assembly must not exceed the classification profile as stated in IPC/JEDEC J-STD-020E with a peak temperature of below 245°C with one possible reflow cycle. Please also refer to the product barcode label that can be found on the packing material.

6 Package information

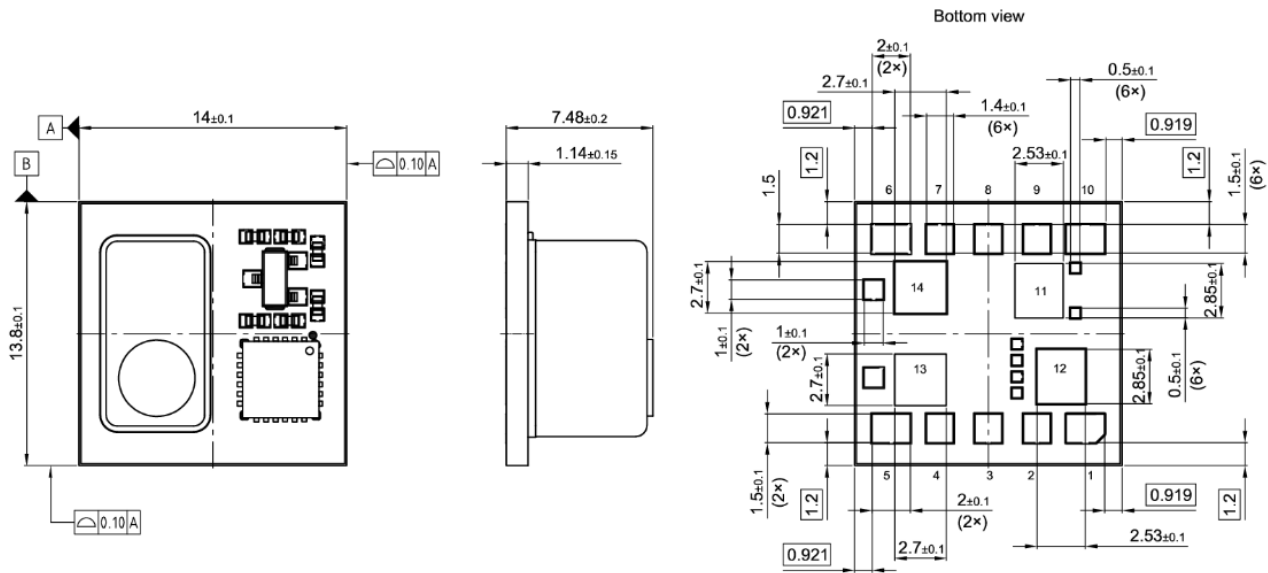

All dimensions are in units mm
The drawing is in compliance with ISO 128-30, Projection Method 1 [⊥] [⊥]
Drawing according to ISO 8015, general tolerances ISO 2768-mK


Figure 10 Package dimensions of XENSIV™ PAS CO₂.

7 Footprint and stencil recommendation

The board pad and stencil aperture recommendations can be found in the package data base that is available on the Infineon package web page (<https://www.infineon.com/packages>). The package type of XENSIV™ PAS CO2 is LG-MLGA-14-1. Please search for the specific package name within the data base, which will then show an example of the footprint layout, stencil recommendation and board assembly recommendation within the download section.

8 Packing for shipment

The device will be shipped in tape and reel. Each tape and reel consist of 300 parts.

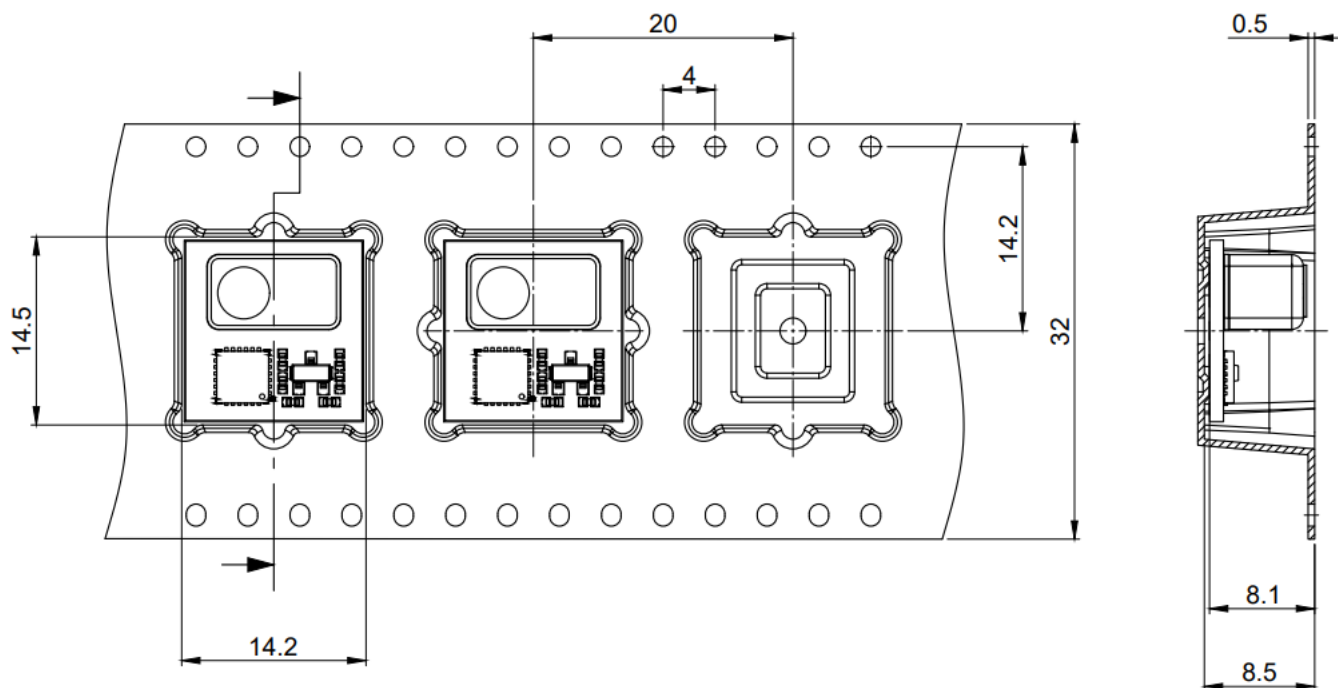

All dimensions are in units mm


The drawing is in compliance with ISO 128-30, Projection Method 1 []

Figure 11 Tape and reel packing of XENSIV™ PAS CO₂

9 Revision history

Table 9 Datasheet versions tracking

Reference	Description	Date
0.1	First copy of the preliminary datasheet	13.10.2020
0.2	Second copy of the preliminary datasheet	25.06.2021
1.0	First release of the datasheet	17.01.2022

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2022-01-17

Published by

**Infineon Technologies AG
81726 München, Germany**

**© 2022 Infineon Technologies AG.
All Rights Reserved.**

Do you have a question about this document?

Email: erratum@infineon.com

Document reference

ifx1

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology delivery terms and conditions and prices please contact your nearest Infineon Technologies office (www.infineon.com).

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.