

## 800-mA / 1000-mA, 3-MHz SYNCHRONOUS STEP-DOWN CONVERTER WITH I<sup>2</sup>C™ COMPATIBLE INTERFACE IN CHIP SCALE PACKAGING

### FEATURES

- 88% Efficiency at 3-MHz Operation
- 800-mA Output Current at  $V_I = 2.7\text{ V}$
- 3-MHz Fixed Frequency Operation
- *Best in Class* Load and Line Transient
- Complete 1-mm Component Profile Solution
- $\pm 2\%$  PWM DC Voltage Accuracy
- 35-ns Minimum On-Time
- Efficiency Optimized Power-Save Mode (Light PFM)
- Transient Optimized Power-Save Mode (Fast PFM)
- 28- $\mu\text{A}$  Typical Quiescent Current
- I<sup>2</sup>C Compatible Interface up to 3.4 Mbps
- Pin-Selectable Output Voltage
- Synchronizable *On the Fly* to External Clock Signal
- Available in a 10-Pin QFN (3 x 3 mm) and 12-Pin NanoFree™ (CSP) Packaging

### APPLICATIONS

- SmartReflex™ Compliant Power Supply
- Split Supply DSPs and  $\mu\text{P}$  Solutions OMAP™, XSCALE™
- Cell Phones, Smart-Phones
- PDAs, Pocket PCs
- Digital Cameras
- Micro DC-DC Converter Modules

### DESCRIPTION


The TPS6235x device is a high-frequency synchronous step-down dc-dc converter optimized for battery-powered portable applications. Intended for low-power applications, the TPS6235x supports up to 800-mA load current and allows the use of small, low cost inductors and capacitors.

The device is ideal for mobile phones and similar portable applications powered by a single-cell Li-Ion battery. With an output voltage range adjustable via I<sup>2</sup>C interface down to 0.6 V, the device supports low-voltage DSPs and processors core power supplies in smart-phones, PDAs, and handheld computers.


The TPS6235x operates at 3-MHz fixed switching frequency and enters the efficiency optimized power-save mode operation at light load currents to maintain high efficiency over the entire load current range. In the shutdown mode, the current consumption is reduced to less than 2  $\mu\text{A}$ .

The serial interface is compatible with Fast/Standard and High-Speed mode I<sup>2</sup>C specification allowing transfers at up to 3.4 Mbps. This communication interface is used for dynamic voltage scaling with voltage steps down to 12.5 mV, for reprogramming the mode of operation (Light PFM, Fast PFM or Forced PWM) or disable/enabling the output voltage.

TYPICAL APPLICATION

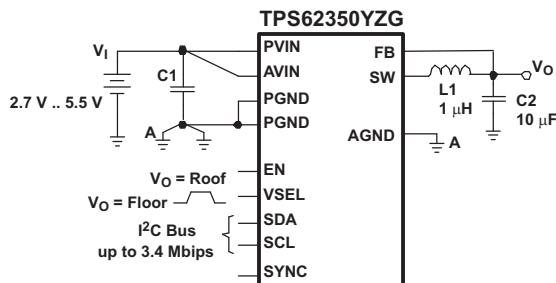

EFFICIENCY vs LOAD CURRENT



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

NanoFree, SmartReflex, OMAP, PowerPAD are trademarks of Texas Instruments.  
XSCALE is a trademark of Intel Corporation.  
I<sup>2</sup>C is a trademark of Philips Corporation.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2006–2008, Texas Instruments Incorporated



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

## ORDERING INFORMATION

| PART<br>NUMBER <sup>(1)</sup> | OUTPUT<br>VOLTAGE<br>RANGE <sup>(2)</sup> | DEFAULT<br>OUTPUT<br>VOLTAGE <sup>(2)</sup> |        | DEFAULT<br>VALUE<br>EN_DCDC<br>BIT <sup>(2)</sup> | SYNC | I <sup>2</sup> C<br>LSB ADDRESS<br>BITS <sup>(2)</sup> |    | PACKAGE | ORDERING <sup>(3)</sup> | PACKAGE<br>MARKING |
|-------------------------------|-------------------------------------------|---------------------------------------------|--------|---------------------------------------------------|------|--------------------------------------------------------|----|---------|-------------------------|--------------------|
|                               |                                           | VSEL0                                       | VSEL1  |                                                   |      | A1                                                     | A0 |         |                         |                    |
| TPS62350 <sup>(4)</sup>       | 0.75 V to 1.5375 V                        | 1.05 V                                      | 1.35 V | 1                                                 | YES  | 0                                                      | 0  | CSP-12  | TPS62350YZG             | TPS62350           |
| TPS62351                      | 0.9 V to 1.6875 V                         | 1.10 V                                      | 1.50 V | 0                                                 | NO   | 1                                                      | 0  | QFN-10  | TPS62351DRC             | BNT                |
|                               |                                           |                                             |        |                                                   | YES  | 1                                                      | 0  | CSP-12  | TPS62351YZG             | TPS62351           |
| TPS62352 <sup>(4)</sup>       | 0.75 V to 1.4375 V                        | 1.05 V                                      | 1.20 V | 1                                                 | YES  | 1                                                      | 0  | CSP-12  | TPS62352YZG             | TPS62352           |
| TPS62353                      | 0.75 V to 1.5375 V                        | 1.00 V                                      | 1.20 V | 1                                                 | YES  | 0                                                      | 0  | CSP-12  | TPS62353YZG             | TPS62353           |
| TPS62354 <sup>(4)</sup>       | 0.75 V to 1.5375 V                        | 1.05 V                                      | 1.30 V | 1                                                 | YES  | 1                                                      | 0  | CSP-12  | TPS62354YZG             | TPS62354           |
| TPS62355 <sup>(4)</sup>       | 0.75 V to 1.5375 V                        | 0.90 V                                      | 1.15 V | 1                                                 | NO   | 1                                                      | 1  | QFN-10  | TPS62355DRC             | CCP                |
| TPS62356                      | 1.5 V to 1.975 V                          | 1.80 V                                      | 1.80 V | 1                                                 | YES  | 0                                                      | 0  | CSP-12  | TPS62356YZG             | TPS62356           |

- All devices are specified for operation in the commercial temperature range, –40°C to 85°C.
- For customized output voltage range, default output voltage and I<sup>2</sup>C address, contact the factory.
- The YZG package is available in tape and reel. Add R suffix (TPS6235xYZGR, TPS6235xDRCR) to order quantities of 3000 parts. Add T suffix (TPS6235xYZGT, TPS6235xDRCT) to order quantities of 250 parts. For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI website at [www.ti.com](http://www.ti.com).
- The following registers bits are set by internal hardware logic and not user programmable through I<sup>2</sup>C:
  - VSEL0[7:6] = 11
  - VSEL1[7:6] = 11
  - CONTROL1[4:2] = 100
  - CONTROL2[7:6] = 10, CONTROL2[4:3] = 00

## ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                           |                                                    | UNITS              |
|---------------------------|----------------------------------------------------|--------------------|
| V <sub>I</sub>            | Voltage at AVIN, PVIN <sup>(2)</sup>               | –0.3 V to 7 V      |
|                           | Voltage at SW <sup>(2)</sup>                       | –0.3 V to 7 V      |
|                           | Voltage at EN, VSEL, SCL, SDA, SYNC <sup>(2)</sup> | –0.3 V to 7 V      |
|                           | Voltage at FB <sup>(2)</sup>                       | –0.3 V to 4.2 V    |
|                           | Power dissipation                                  | Internally limited |
| T <sub>J</sub>            | Maximum operating junction temperature             | 150°C              |
| T <sub>stg</sub>          | Storage temperature range                          | –65°C to 150°C     |
| ESD rating <sup>(3)</sup> | Human body model                                   | 2 kV               |
|                           | Charge device model                                | 1 kV               |
|                           | Machine model                                      | 200 V              |

- Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- All voltage values are with respect to network ground terminal.
- The human body model is a 100-pF capacitor discharged through a 1.5-kΩ resistor into each pin. The machine model is a 200-pF capacitor discharged directly into each pin.

## RECOMMENDED OPERATING CONDITIONS

over operating free-air temperature range (unless otherwise noted)

|       |                                              | MIN | NOM | MAX | UNIT |
|-------|----------------------------------------------|-----|-----|-----|------|
| $V_I$ | Input voltage range                          | 2.7 |     | 5.5 | V    |
| $T_A$ | Operating temperature range <sup>(1)</sup>   | -40 |     | 85  | °C   |
| $T_J$ | Operating virtual junction temperature range | -40 |     | 125 | °C   |

- (1) In applications where high power dissipation and/or poor package thermal resistance is present, the maximum ambient temperature may have to be derated. Maximum ambient temperature ( $T_{A(max)}$ ) is dependent on the maximum operating junction temperature ( $T_{J(max)}$ ), the maximum power dissipation of the device in the application ( $P_{D(max)}$ ), and the junction-to-ambient thermal resistance of the part/package in the application ( $\theta_{JA}$ ), as given by the following equation:  $T_{A(max)} = T_{J(max)} - (\theta_{JA} \times P_{D(max)})$ .

## DISSIPATION RATINGS<sup>(1)</sup>

| PACKAGE | $R_{\theta JA}$ <sup>(2)</sup> | POWER RATING<br>FOR $T_A \leq 25^\circ\text{C}$ | DERATING FACTOR<br>ABOVE $T_A = 25^\circ\text{C}$ |
|---------|--------------------------------|-------------------------------------------------|---------------------------------------------------|
| DRC     | 49°C/W                         | 2050 mW                                         | 21 mW/°C                                          |
| YZG     | 89°C/W                         | 1100 mW                                         | 12 mW/°C                                          |

- (1) Maximum power dissipation is a function of  $T_{J(max)}$ ,  $\theta_{JA}$  and  $T_A$ . The maximum allowable power dissipation at any allowable ambient temperature is  $P_D = [T_{J(max)} - T_A] / \theta_{JA}$ .  
(2) This thermal data is measured with high-K board (4 layers board according to JESD51-7 JEDEC standard).

## ELECTRICAL CHARACTERISTICS

over operating free-air temperature range, typical values are at  $T_A = 25^\circ\text{C}$ . Unless otherwise noted, specifications apply with  $V_I = 3.6\text{ V}$ ,  $EN = V_I$ ,  $VSEL = V_I$ ,  $SYNC = \text{GND}$ ,  $VSEL0[6]\text{ bit} = 1$ .

| PARAMETER                    |                                            | TEST CONDITIONS                       | MIN                                                                   | TYP  | MAX  | UNIT |
|------------------------------|--------------------------------------------|---------------------------------------|-----------------------------------------------------------------------|------|------|------|
| SUPPLY CURRENT               |                                            |                                       |                                                                       |      |      |      |
| I <sub>Q</sub>               | Operating quiescent current                | TPS62350/1/2/3/4/5                    | I <sub>O</sub> = 0 mA, Fast PFM mode enabled<br>Device not switching  | 110  | 150  | μA   |
|                              |                                            | TPS62356                              |                                                                       | 117  | 160  |      |
|                              |                                            | TPS62350/1/2/3/4/5                    | I <sub>O</sub> = 0 mA, Light PFM mode enabled<br>Device not switching | 28   | 45   | μA   |
|                              |                                            | TPS62356                              |                                                                       | 35   | 52   |      |
|                              |                                            | TPS62350/1/2/3/4/5/6                  | I <sub>O</sub> = 0 mA, 3-MHz PWM mode operation                       | 4.8  |      | mA   |
| I <sub>(SD)</sub>            | Shutdown current                           | EN = GND, EN_DCDC bit = X             | 0.1                                                                   | 2    | μA   |      |
|                              |                                            | EN = V <sub>I</sub> , EN_DCDC bit = 0 | 6.5                                                                   |      | μA   |      |
| V <sub>(UVLO)</sub>          | Undervoltage lockout threshold             |                                       | 2.20                                                                  | 2.3  | V    |      |
| ENABLE, VSEL, SDA, SCL, SYNC |                                            |                                       |                                                                       |      |      |      |
| V <sub>IH</sub>              | High-level input voltage                   |                                       | 1.2                                                                   |      |      | V    |
| V <sub>IL</sub>              | Low-level input voltage                    |                                       |                                                                       |      | 0.4  | V    |
| I <sub>lkg</sub>             | Input leakage current                      | Input tied to GND or V <sub>I</sub>   | 0.01                                                                  | 1    |      | μA   |
| POWER SWITCH                 |                                            |                                       |                                                                       |      |      |      |
| r <sub>DS(on)</sub>          | P-channel MOSFET on resistance             | TPS62350/1/2/3/4/5                    | V <sub>I</sub> = V <sub>(GS)</sub> = 3.6 V, YZG package               | 250  | 500  | mΩ   |
|                              |                                            |                                       | V <sub>I</sub> = V <sub>(GS)</sub> = 3.6 V, DRC package               | 275  | 500  |      |
|                              |                                            |                                       | V <sub>I</sub> = V <sub>(GS)</sub> = 2.7 V, DRC package               | 350  | 750  |      |
|                              |                                            | TPS62356                              | V <sub>I</sub> = V <sub>(GS)</sub> = 3.2 V, YZG package               | 320  | 500  |      |
| I <sub>lkg</sub>             | P-channel leakage current                  | V <sub>(DS)</sub> = 6 V               |                                                                       |      | 1    | μA   |
| r <sub>DS(on)</sub>          | N-channel MOSFET on resistance             | TPS62350/1/2/3/4/5/6                  | V <sub>I</sub> = V <sub>(GS)</sub> = 3.6 V, YZG package               | 150  | 350  | mΩ   |
|                              |                                            |                                       | V <sub>I</sub> = V <sub>(GS)</sub> = 3.6 V, DRC package               | 165  | 350  |      |
|                              |                                            |                                       | V <sub>I</sub> = V <sub>(GS)</sub> = 2.7 V, YZG / DRC package         | 210  | 500  |      |
| I <sub>lkg</sub>             | N-channel leakage current                  | V <sub>(DS)</sub> = 6 V               |                                                                       |      | 1    | μA   |
| R <sub>(DIS)</sub>           | Discharge resistor for power-down sequence |                                       | 15                                                                    | 50   |      | Ω    |
| P-MOS current limit          | TPS62350/1/2/3/4/5                         | 2.7 V ≤ V <sub>I</sub> ≤ 5.5 V        | 1150                                                                  | 1350 | 1600 | mA   |
|                              | TPS62356                                   |                                       | 1300                                                                  | 1550 | 1800 | mA   |

## ELECTRICAL CHARACTERISTICS (continued)

over operating free-air temperature range, typical values are at  $T_A = 25^\circ\text{C}$ . Unless otherwise noted, specifications apply with  $V_I = 3.6\text{ V}$ ,  $\text{EN} = V_I$ ,  $\text{VSEL} = V_I$ ,  $\text{SYNC} = \text{GND}$ ,  $\text{VSEL0}[6]\text{ bit} = 1$ .

| PARAMETER                                          |                                    |                    | TEST CONDITIONS                                                                                                                          | MIN   | TYP    | MAX  | UNIT |
|----------------------------------------------------|------------------------------------|--------------------|------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|------|------|
|                                                    | N-MOS current limit (sourcing)     | TPS62350/1/2/3/4/5 | 2.7 V ≤ V <sub>I</sub> ≤ 5.5 V                                                                                                           | 900   | 1100   | 1300 | mA   |
|                                                    |                                    | TPS62356           |                                                                                                                                          | 1200  | 1400   | 1700 | mA   |
|                                                    | N-MOS current limit (sinking)      | TPS62350/1/2/3/4/5 | 2.7 V ≤ V <sub>I</sub> ≤ 5.5 V                                                                                                           | -500  | -700   | -900 | mA   |
|                                                    |                                    | TPS62356           |                                                                                                                                          | -500  | -700   | -900 | mA   |
| Input current limit under short-circuit conditions |                                    | TPS62350/1/2/3/4/5 | V <sub>O</sub> = 0 V                                                                                                                     | 675   |        |      | mA   |
|                                                    |                                    | TPS62356           |                                                                                                                                          | 775   |        |      | mA   |
| Thermal shutdown                                   |                                    |                    |                                                                                                                                          | 150   |        |      | °C   |
| Thermal shutdown hysteresis                        |                                    |                    |                                                                                                                                          | 20    |        |      | °C   |
| OSCILLATOR                                         |                                    |                    |                                                                                                                                          |       |        |      |      |
| f <sub>SW</sub>                                    | Oscillator frequency               |                    | CONTROL2[4:3] = 00                                                                                                                       | 2.65  | 3      | 3.35 | MHz  |
| f <sub>(SYNC)</sub>                                | Synchronization range              |                    |                                                                                                                                          | 2.65  |        | 3.35 | MHz  |
| Duty cycle of external clock signal                |                                    |                    |                                                                                                                                          | 20%   |        | 80%  |      |
| OUTPUT                                             |                                    |                    |                                                                                                                                          |       |        |      |      |
| V <sub>O</sub>                                     | Output voltage range               | TPS62350           |                                                                                                                                          | 0.75  | 1.5375 |      | V    |
|                                                    |                                    | TPS62351           |                                                                                                                                          | 0.90  | 1.6875 |      | V    |
|                                                    |                                    | TPS62352           |                                                                                                                                          | 0.75  | 1.4375 |      | V    |
|                                                    |                                    | TPS62353           |                                                                                                                                          | 0.75  | 1.5375 |      | V    |
|                                                    |                                    | TPS62354           |                                                                                                                                          | 0.75  | 1.5375 |      | V    |
|                                                    |                                    | TPS62355           |                                                                                                                                          | 0.75  | 1.5375 |      | V    |
|                                                    |                                    | TPS62356           |                                                                                                                                          | 1.50  | 1.975  |      | V    |
| t <sub>on(MIN)</sub>                               | Minimum on-time (P-channel MOSFET) |                    |                                                                                                                                          | 35    |        |      | ns   |
| Resistance into FB sense pin                       |                                    |                    |                                                                                                                                          | 700   | 1000   |      | kΩ   |
| V <sub>O</sub>                                     | Output voltage DC accuracy         | TPS62350           | V <sub>I</sub> = 3.6 V, V <sub>O</sub> = 1.35 V, I <sub>O(DC)</sub> = 0 mA<br>PWM operation                                              | -1.5% | 1.5%   |      |      |
|                                                    |                                    |                    | 2.7 V ≤ V <sub>I</sub> ≤ 5.5 V, 0 mA ≤ I <sub>O(DC)</sub> ≤ 800 mA<br>V <sub>O</sub> = 0.75 V, 1.05 V, 1.35 V, 1.5375 V<br>PWM operation | -2%   | 2%     |      |      |
|                                                    |                                    |                    | 2.7 V ≤ V <sub>I</sub> ≤ 5.5 V, I <sub>O(DC)</sub> = 0 mA<br>V <sub>O</sub> = 1.05 V, L = 1 μH, Light PFM                                | -1%   | 4.5%   |      |      |
|                                                    |                                    |                    | 2.7 V ≤ V <sub>I</sub> ≤ 5.5 V, 0 mA ≤ I <sub>O(DC)</sub> ≤ 800 mA<br>V <sub>O</sub> = 1.35 V, L = 1 μH, Fast PFM/PWM                    | -2%   | 3%     |      |      |
|                                                    |                                    |                    | 2.7 V ≤ V <sub>I</sub> ≤ 5.5 V, 0 mA ≤ I <sub>O(DC)</sub> ≤ 800 mA<br>V <sub>O</sub> = 1.05 V, L = 1 μH, Light or Fast PFM/PWM           | -2%   | 4.5%   |      |      |
| V <sub>O</sub>                                     | Output voltage DC accuracy         | TPS62351           | V <sub>I</sub> = 3.6 V, V <sub>O</sub> = 1.50 V, I <sub>O(DC)</sub> = 0 mA<br>PWM operation                                              | -1.5% | 1.5%   |      |      |
|                                                    |                                    |                    | 2.7 V ≤ V <sub>I</sub> ≤ 5.5 V, 0 mA ≤ I <sub>O(DC)</sub> ≤ 800 mA<br>V <sub>O</sub> = 0.90 V, 1.10 V, 1.50 V, 1.6875 V<br>PWM operation | -2%   | 2%     |      |      |
|                                                    |                                    |                    | 2.7 V ≤ V <sub>I</sub> ≤ 5.5 V, I <sub>O(DC)</sub> = 0 mA<br>V <sub>O</sub> = 1.10 V, L = 1 μH, Light PFM                                | -1%   | 4.5%   |      |      |
|                                                    |                                    |                    | 2.7 V ≤ V <sub>I</sub> ≤ 5.5 V, 0 mA ≤ I <sub>O(DC)</sub> ≤ 800 mA<br>V <sub>O</sub> = 1.10 V, L = 1 μH, Light or Fast PFM/PWM           | -2%   | 4.5%   |      |      |
|                                                    |                                    |                    | 2.7 V ≤ V <sub>I</sub> ≤ 5.5 V, 0 mA ≤ I <sub>O(DC)</sub> ≤ 800 mA<br>V <sub>O</sub> = 1.50 V, L = 1 μH, Light or Fast PFM/PWM           | -2%   | 4.0%   |      |      |
| V <sub>O</sub>                                     | Output voltage DC accuracy         | TPS62352           | V <sub>I</sub> = 3.6 V, V <sub>O</sub> = 1.20 V, I <sub>O(DC)</sub> = 0 mA<br>PWM operation                                              | -1.5% | 1.5%   |      |      |
|                                                    |                                    |                    | 2.7 V ≤ V <sub>I</sub> ≤ 5.5 V, 0 mA ≤ I <sub>O(DC)</sub> ≤ 800 mA<br>V <sub>O</sub> = 0.75 V, 1.05 V, 1.20 V, 1.4375 V<br>PWM operation | -2%   | 2%     |      |      |
|                                                    |                                    |                    | 2.7 V ≤ V <sub>I</sub> ≤ 5.5 V, I <sub>O(DC)</sub> = 0 mA<br>V <sub>O</sub> = 1.05 V, L = 1 μH, Light PFM                                | -1%   | 4.5%   |      |      |
|                                                    |                                    |                    | 2.7 V ≤ V <sub>I</sub> ≤ 5.5 V, 0 mA ≤ I <sub>O(DC)</sub> ≤ 800 mA<br>V <sub>O</sub> = 1.20 V, L = 1 μH, Fast PFM/PWM                    | -2%   | 3%     |      |      |
|                                                    |                                    |                    | 2.7 V ≤ V <sub>I</sub> ≤ 5.5 V, 0 mA ≤ I <sub>O(DC)</sub> ≤ 800 mA<br>V <sub>O</sub> = 1.05 V, L = 1 μH, Light or Fast PFM/PWM           | -2%   | 4.5%   |      |      |

## ELECTRICAL CHARACTERISTICS (continued)

over operating free-air temperature range, typical values are at  $T_A = 25^\circ\text{C}$ . Unless otherwise noted, specifications apply with  $V_I = 3.6\text{ V}$ ,  $\text{EN} = V_I$ ,  $\text{VSEL} = V_I$ ,  $\text{SYNC} = \text{GND}$ ,  $\text{VSEL0}[6]\text{ bit} = 1$ .

| PARAMETER                      |                                   | TEST CONDITIONS                                                                                                                                  | MIN                                                                                                                                                                                                                                                                                           | TYP         | MAX              | UNIT |
|--------------------------------|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|------------------|------|
| $V_O$                          | Output voltage<br>DC accuracy     | TPS62353                                                                                                                                         | $V_I = 3.6\text{ V}$ , $V_O = 1.20\text{ V}$ , $I_{O(\text{DC})} = 0\text{ mA}$<br>PWM operation                                                                                                                                                                                              |             | –1.5%            | 1.5% |
|                                |                                   |                                                                                                                                                  | $2.7\text{ V} \leq V_I \leq 5.5\text{ V}$ , $0\text{ mA} \leq I_{O(\text{DC})} \leq 800\text{ mA}$<br>$V_O = 0.75\text{ V}$ , $1.00\text{ V}$ , $1.20\text{ V}$ , $1.5375\text{ V}$<br>PWM operation                                                                                          |             | –2%              | 2%   |
|                                |                                   |                                                                                                                                                  | $2.7\text{ V} \leq V_I \leq 5.5\text{ V}$ , $I_{O(\text{DC})} = 0\text{ mA}$ ,<br>$V_O = 1.00\text{ V}$ , $L = 1\text{ }\mu\text{H}$ , Light PFM                                                                                                                                              |             | –1%              | 4.5% |
|                                |                                   |                                                                                                                                                  | $2.7\text{ V} \leq V_I \leq 5.5\text{ V}$ , $0\text{ mA} \leq I_{O(\text{DC})} \leq 800\text{ mA}$<br>$V_O = 1.20\text{ V}$ , $L = 1\text{ }\mu\text{H}$ , Fast PFM/PWM                                                                                                                       |             | –2%              | 3%   |
|                                |                                   |                                                                                                                                                  | $2.7\text{ V} \leq V_I \leq 5.5\text{ V}$ , $0\text{ mA} \leq I_{O(\text{DC})} \leq 800\text{ mA}$<br>$V_O = 1.00\text{ V}$ , $L = 1\text{ }\mu\text{H}$ , Light or Fast PFM/PWM                                                                                                              |             | –2%              | 4.5% |
| $V_O$                          | Output voltage<br>DC accuracy     | TPS62354                                                                                                                                         | $V_I = 3.6\text{ V}$ , $V_O = 1.30\text{ V}$ , $I_{O(\text{DC})} = 0\text{ mA}$ ,<br>PWM operation                                                                                                                                                                                            |             | –1.5%            | 1.5% |
|                                |                                   |                                                                                                                                                  | $2.7\text{ V} \leq V_I \leq 5.5\text{ V}$ , $0\text{ mA} \leq I_{O(\text{DC})} \leq 800\text{ mA}$<br>$V_O = 0.75\text{ V}$ , $1.05\text{ V}$ , $1.30\text{ V}$ , $1.5375\text{ V}$<br>PWM operation                                                                                          |             | –2%              | 2%   |
|                                |                                   |                                                                                                                                                  | $2.7\text{ V} \leq V_I \leq 5.5\text{ V}$ , $I_{O(\text{DC})} = 0\text{ mA}$ ,<br>$V_O = 1.05\text{ V}$ , $L = 1\text{ }\mu\text{H}$ , Light PFM                                                                                                                                              |             | –1%              | 4.5% |
|                                |                                   |                                                                                                                                                  | $2.7\text{ V} \leq V_I \leq 5.5\text{ V}$ , $0\text{ mA} \leq I_{O(\text{DC})} \leq 800\text{ mA}$<br>$V_O = 1.30\text{ V}$ , $L = 1\text{ }\mu\text{H}$ , Fast PFM/PWM                                                                                                                       |             | –2%              | 3%   |
|                                |                                   |                                                                                                                                                  | $2.7\text{ V} \leq V_I \leq 5.5\text{ V}$ , $0\text{ mA} \leq I_{O(\text{DC})} \leq 800\text{ mA}$<br>$V_O = 1.05\text{ V}$ , $L = 1\text{ }\mu\text{H}$ , Light or Fast PFM/PWM                                                                                                              |             | –2%              | 4.5% |
| $V_O$                          | Output voltage<br>DC accuracy     | TPS62355                                                                                                                                         | $V_I = 3.6\text{ V}$ , $V_O = 1.15\text{ V}$ , $I_{O(\text{DC})} = 0\text{ mA}$ ,<br>PWM operation                                                                                                                                                                                            |             | –1.5%            | 1.5% |
|                                |                                   |                                                                                                                                                  | $2.7\text{ V} \leq V_I \leq 5.5\text{ V}$ , $0\text{ mA} \leq I_{O(\text{DC})} \leq 800\text{ mA}$<br>$V_O = 0.75\text{ V}$ , $0.9\text{ V}$ , $1.15\text{ V}$ , $1.5375\text{ V}$<br>PWM operation                                                                                           |             | –2%              | 2%   |
|                                |                                   |                                                                                                                                                  | $2.7\text{ V} \leq V_I \leq 5.5\text{ V}$ , $I_{O(\text{DC})} = 0\text{ mA}$<br>$V_O = 0.9\text{ V}$ , $L = 1\text{ }\mu\text{H}$ , Light PFM                                                                                                                                                 |             | –1%              | 4.5% |
|                                |                                   |                                                                                                                                                  | $2.7\text{ V} \leq V_I \leq 5.5\text{ V}$ , $0\text{ mA} \leq I_{O(\text{DC})} \leq 800\text{ mA}$<br>$V_O = 1.15\text{ V}$ , $L = 1\text{ }\mu\text{H}$ , Fast PFM/PWM                                                                                                                       |             | –2%              | 3%   |
|                                |                                   |                                                                                                                                                  | $2.7\text{ V} \leq V_I \leq 5.5\text{ V}$ , $0\text{ mA} \leq I_{O(\text{DC})} \leq 800\text{ mA}$<br>$V_O = 0.9\text{ V}$ , $L = 1\text{ }\mu\text{H}$ , Light or Fast PFM/PWM                                                                                                               |             | –2%              | 4.5% |
| $V_O$                          | Output voltage<br>DC accuracy     | TPS62356                                                                                                                                         | $2.7\text{ V} \leq V_I \leq 3.2\text{ V}$ , $0\text{ mA} \leq I_{O(\text{DC})} \leq 800\text{ mA}$<br>$3.2\text{ V} \leq V_I \leq 5.5\text{ V}$ , $0\text{ mA} \leq I_{O(\text{DC})} \leq 1000\text{ mA}^{(1)}$<br>$V_O = 1.80\text{ V}$<br>PWM operation                                     |             | –2%              | 2%   |
|                                |                                   |                                                                                                                                                  | $2.7\text{ V} \leq V_I \leq 5.5\text{ V}$ , $I_{O(\text{DC})} = 0\text{ mA}$<br>$V_O = 1.80\text{ V}$ , $L = 1\text{ }\mu\text{H}$ , Light PFM                                                                                                                                                |             | –1%              | 4.5% |
|                                |                                   |                                                                                                                                                  | $2.7\text{ V} \leq V_I \leq 3.2\text{ V}$ , $0\text{ mA} \leq I_{O(\text{DC})} \leq 800\text{ mA}$<br>$3.2\text{ V} \leq V_I \leq 5.5\text{ V}$ , $0\text{ mA} \leq I_{O(\text{DC})} \leq 1000\text{ mA}^{(1)}$<br>$V_O = 1.80\text{ V}$ , $L = 1\text{ }\mu\text{H}$ , Fast PFM/PWM          |             | –2%              | 3%   |
|                                |                                   |                                                                                                                                                  | $2.7\text{ V} \leq V_I \leq 3.2\text{ V}$ , $0\text{ mA} \leq I_{O(\text{DC})} \leq 800\text{ mA}$<br>$3.2\text{ V} \leq V_I \leq 5.5\text{ V}$ , $0\text{ mA} \leq I_{O(\text{DC})} \leq 1000\text{ mA}^{(1)}$<br>$V_O = 1.80\text{ V}$ , $L = 1\text{ }\mu\text{H}$ , Light or Fast PFM/PWM |             | –2%              | 4.5% |
| $\Delta V_O$                   | DC output voltage load regulation | $I_{O(\text{DC})} = 0\text{ mA}$ to $800\text{ mA}$ , PWM operation                                                                              |                                                                                                                                                                                                                                                                                               | –0.0003     |                  | %/mA |
|                                | DC output voltage line regulation | $V_I = V_O + 0.5\text{ V}$ (min $2.7\text{ V}$ ) to $5.5\text{ V}$ ,<br>$I_{O(\text{DC})} = 300\text{ mA}$                                       |                                                                                                                                                                                                                                                                                               | 0           |                  | %/V  |
| Power-save mode ripple voltage |                                   | $V_O = 0.9\text{ V}$ , $I_{O(\text{DC})} = 0\text{ mA}$ , $L = 1\text{ }\mu\text{H}$ ,<br>Light PFM operation                                    |                                                                                                                                                                                                                                                                                               | 33          | mV <sub>PP</sub> |      |
|                                |                                   | $V_O = 1.05\text{ V}$ , $I_{O(\text{DC})} = 1\text{ mA}$ , $L = 1\text{ }\mu\text{H}$ ,<br>Light PFM operation                                   |                                                                                                                                                                                                                                                                                               | 30          | mV <sub>PP</sub> |      |
|                                |                                   | $V_O = 1.10\text{ V}$ , $I_{O(\text{DC})} = 1\text{ mA}$ ,<br>$L = 1\text{ }\mu\text{H}$ , Light PFM operation, $\text{VSEL0}[6]\text{ bit} = 0$ |                                                                                                                                                                                                                                                                                               | 12          | mV <sub>PP</sub> |      |
|                                |                                   | $V_O = 1.35\text{ V}$ , $I_{O(\text{DC})} = 1\text{ mA}$ ,<br>$L = 1\text{ }\mu\text{H}$ , Fast PFM operation                                    |                                                                                                                                                                                                                                                                                               | 0.025 $V_O$ | $V_{PP}$         |      |

- (1) In applications where high power dissipation and/or poor package thermal resistance is present, the maximum ambient temperature may have to be derated. Maximum ambient temperature ( $T_{A(\text{max})}$ ) is dependent on the maximum operating junction temperature ( $T_{J(\text{max})}$ ), the maximum power dissipation of the device in the application ( $P_{D(\text{max})}$ ), and the junction-to-ambient thermal resistance of the part/package in the application ( $\theta_{JA}$ ), as given by the following equation:  $T_{A(\text{max})} = T_{J(\text{max})} - (\theta_{JA} \times P_{D(\text{max})})$ .

## ELECTRICAL CHARACTERISTICS (continued)

over operating free-air temperature range, typical values are at  $T_A = 25^\circ\text{C}$ . Unless otherwise noted, specifications apply with  $V_I = 3.6\text{ V}$ ,  $\text{EN} = V_I$ ,  $\text{VSEL} = V_I$ ,  $\text{SYNC} = \text{GND}$ ,  $\text{VSEL0}[6]\text{ bit} = 1$ .

| PARAMETER                                                         |                                                                                  | TEST CONDITIONS                                                                                                  | MIN | TYP  | MAX  | UNIT |
|-------------------------------------------------------------------|----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|-----|------|------|------|
| I <sub>lkg</sub>                                                  | Leakage current into SW pin                                                      | V <sub>I</sub> > V <sub>O</sub> , 0 V ≤ V <sub>(SW)</sub> ≤ V <sub>I</sub> , EN = GND                            |     | 0.01 | 1    | μA   |
|                                                                   | Reverse leakage current into SW pin                                              | V <sub>I</sub> = open, V <sub>(SW)</sub> = 6 V, EN = GND                                                         |     | 0.01 | 1    |      |
| DAC                                                               |                                                                                  |                                                                                                                  |     |      |      |      |
| Resolution                                                        | TPS62350<br>TPS62351<br>TPS62352<br>TPS62353<br>TPS62354<br>TPS62355<br>TPS62356 |                                                                                                                  | 6   |      |      | Bits |
| Differential nonlinearity                                         |                                                                                  | Specified monotonic by design                                                                                    |     |      | ±0.8 | LSB  |
| TIMING                                                            |                                                                                  |                                                                                                                  |     |      |      |      |
| Setup Time Between Rising EN and Start of I <sup>2</sup> C Stream |                                                                                  |                                                                                                                  | 250 |      |      | μs   |
| V <sub>O</sub>                                                    | Output voltage settling time                                                     | TPS62350<br>From min to max output voltage, I <sub>O(DC)</sub> = 500 mA, PWM operation                           |     | 3    |      | μs   |
| Start-up time                                                     | TPS62350                                                                         | Time from active EN to V <sub>O</sub><br>V <sub>O</sub> = 1.35 V, R <sub>L</sub> = 5Ω, PWM operation             |     | 180  |      | μs   |
|                                                                   |                                                                                  | Time from active EN to V <sub>O</sub><br>V <sub>O</sub> = 1.05 V, I <sub>O(DC)</sub> = 0 mA, Light PFM operation |     | 170  |      |      |
|                                                                   | TPS62351                                                                         | Time from active EN_DCDC bit to V <sub>O</sub><br>V <sub>O</sub> = 1.5 V, R <sub>L</sub> = 5Ω, PWM operation     |     | 45   |      |      |
|                                                                   | TPS62352                                                                         | Time from active EN to V <sub>O</sub><br>V <sub>O</sub> = 1.2 V, R <sub>L</sub> = 5Ω, PWM operation              |     | 175  |      |      |
|                                                                   |                                                                                  | Time from active EN to V <sub>O</sub><br>V <sub>O</sub> = 1.05 V, I <sub>O(DC)</sub> = 0 mA, Light PFM operation |     | 170  |      |      |

## $I^2\text{C}$ INTERFACE TIMING CHARACTERISTICS<sup>(1)</sup>

| PARAMETER                          |                                                  | TEST CONDITIONS                                              | MIN | MAX | UNIT          |
|------------------------------------|--------------------------------------------------|--------------------------------------------------------------|-----|-----|---------------|
| $f_{(\text{SCL})}$                 | SCL Clock Frequency                              | Standard mode                                                |     | 100 | kHz           |
|                                    |                                                  | Fast mode                                                    |     | 400 | kHz           |
|                                    |                                                  | High-speed mode (write operation), $C_B - 100\text{ pF}$ max |     | 3.4 | MHz           |
|                                    |                                                  | High-speed mode (read operation), $C_B - 100\text{ pF}$ max  |     | 3.4 | MHz           |
|                                    |                                                  | High-speed mode (write operation), $C_B - 400\text{ pF}$ max |     | 1.7 | MHz           |
|                                    |                                                  | High-speed mode (read operation), $C_B - 400\text{ pF}$ max  |     | 1.7 | MHz           |
| $t_{\text{BUF}}$                   | Bus Free Time Between a STOP and START Condition | Standard mode                                                | 4.7 |     | $\mu\text{s}$ |
|                                    |                                                  | Fast mode                                                    | 1.3 |     | $\mu\text{s}$ |
| $t_{\text{HD}}$ , $t_{\text{STA}}$ | Hold Time (Repeated) START Condition             | Standard mode                                                | 4   |     | $\mu\text{s}$ |
|                                    |                                                  | Fast mode                                                    | 600 |     | ns            |
|                                    |                                                  | High-speed mode                                              | 160 |     | ns            |
| $t_{\text{LOW}}$                   | LOW Period of the SCL Clock                      | Standard mode                                                | 4.7 |     | $\mu\text{s}$ |
|                                    |                                                  | Fast mode                                                    | 1.3 |     | $\mu\text{s}$ |
|                                    |                                                  | High-speed mode, $C_B - 100\text{ pF}$ max                   | 160 |     | ns            |
|                                    |                                                  | High-speed mode, $C_B - 400\text{ pF}$ max                   | 320 |     | ns            |
| $t_{\text{HIGH}}$                  | HIGH Period of the SCL Clock                     | Standard mode                                                | 4   |     | $\mu\text{s}$ |
|                                    |                                                  | Fast mode                                                    | 600 |     | ns            |
|                                    |                                                  | High-speed mode, $C_B - 100\text{ pF}$ max                   | 60  |     | ns            |
|                                    |                                                  | High-speed mode, $C_B - 400\text{ pF}$ max                   | 120 |     | ns            |

(1) Specified by design. Not tested in production.

**I<sup>2</sup>C INTERFACE TIMING CHARACTERISTICS (continued)**

| PARAMETER            |                                                                                       | TEST CONDITIONS                     | MIN            | MAX  | UNIT    |
|----------------------|---------------------------------------------------------------------------------------|-------------------------------------|----------------|------|---------|
| $t_{SU}$ , $t_{STA}$ | Setup Time for a Repeated START Condition                                             | Standard mode                       | 4.7            |      | $\mu$ s |
|                      |                                                                                       | Fast mode                           | 600            |      | ns      |
|                      |                                                                                       | High-speed mode                     | 160            |      | ns      |
| $t_{SU}$ , $t_{DAT}$ | Data Setup Time                                                                       | Standard mode                       | 250            |      | ns      |
|                      |                                                                                       | Fast mode                           | 100            |      | ns      |
|                      |                                                                                       | High-speed mode                     | 10             |      | ns      |
| $t_{HD}$ , $t_{DAT}$ | Data Hold Time                                                                        | Standard mode                       | 0              | 3.45 | $\mu$ s |
|                      |                                                                                       | Fast mode                           | 0              | 0.9  | $\mu$ s |
|                      |                                                                                       | High-speed mode, $C_B$ – 100 pF max | 0              | 70   | ns      |
|                      |                                                                                       | High-speed mode, $C_B$ – 400 pF max | 0              | 150  | ns      |
| $t_{RCL}$            | Rise Time of SCL Signal                                                               | Standard mode                       | $20 + 0.1 C_B$ | 1000 | ns      |
|                      |                                                                                       | Fast mode                           | $20 + 0.1 C_B$ | 300  | ns      |
|                      |                                                                                       | High-speed mode, $C_B$ – 100 pF max | 10             | 40   | ns      |
|                      |                                                                                       | High-speed mode, $C_B$ – 400 pF max | 20             | 80   | ns      |
| $t_{RCL1}$           | Rise Time of SCL Signal After a Repeated START Condition and After an Acknowledge BIT | Standard mode                       | $20 + 0.1 C_B$ | 1000 | ns      |
|                      |                                                                                       | Fast mode                           | $20 + 0.1 C_B$ | 300  | ns      |
|                      |                                                                                       | High-speed mode, $C_B$ – 100 pF max | 10             | 80   | ns      |
|                      |                                                                                       | High-speed mode, $C_B$ – 400 pF max | 20             | 160  | ns      |
| $t_{FCL}$            | Fall Time of SCL Signal                                                               | Standard mode                       | $20 + 0.1 C_B$ | 300  | ns      |
|                      |                                                                                       | Fast mode                           | $20 + 0.1 C_B$ | 300  | ns      |
|                      |                                                                                       | High-speed mode, $C_B$ – 100 pF max | 10             | 40   | ns      |
|                      |                                                                                       | High-speed mode, $C_B$ – 400 pF max | 20             | 80   | ns      |
| $t_{RDA}$            | Rise Time of SDA Signal                                                               | Standard mode                       | $20 + 0.1 C_B$ | 1000 | ns      |
|                      |                                                                                       | Fast mode                           | $20 + 0.1 C_B$ | 300  | ns      |
|                      |                                                                                       | High-speed mode, $C_B$ – 100 pF max | 10             | 80   | ns      |
|                      |                                                                                       | High-speed mode, $C_B$ – 400 pF max | 20             | 160  | ns      |
| $t_{FDA}$            | Fall Time of SDA Signal                                                               | Standard mode                       | $20 + 0.1 C_B$ | 300  | ns      |
|                      |                                                                                       | Fast mode                           | $20 + 0.1 C_B$ | 300  | ns      |
|                      |                                                                                       | High-speed mode, $C_B$ – 100 pF max | 10             | 80   | ns      |
|                      |                                                                                       | High-speed mode, $C_B$ – 400 pF max | 20             | 160  | ns      |
| $t_{SU}$ , $t_{STO}$ | Setup Time for STOP Condition                                                         | Standard mode                       | 4              |      | $\mu$ s |
|                      |                                                                                       | Fast mode                           | 600            |      | ns      |
|                      |                                                                                       | High-speed mode                     | 160            |      | ns      |
| $C_B$                | Capacitive Load for SDA and SCL                                                       |                                     |                | 400  | pF      |

## I<sup>2</sup>C TIMING DIAGRAMS


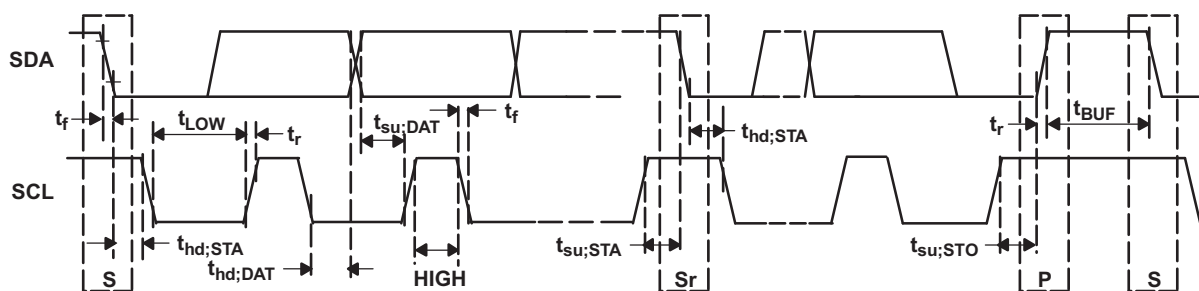



Figure 1. Serial Interface Timing Diagram for F/S-Mode

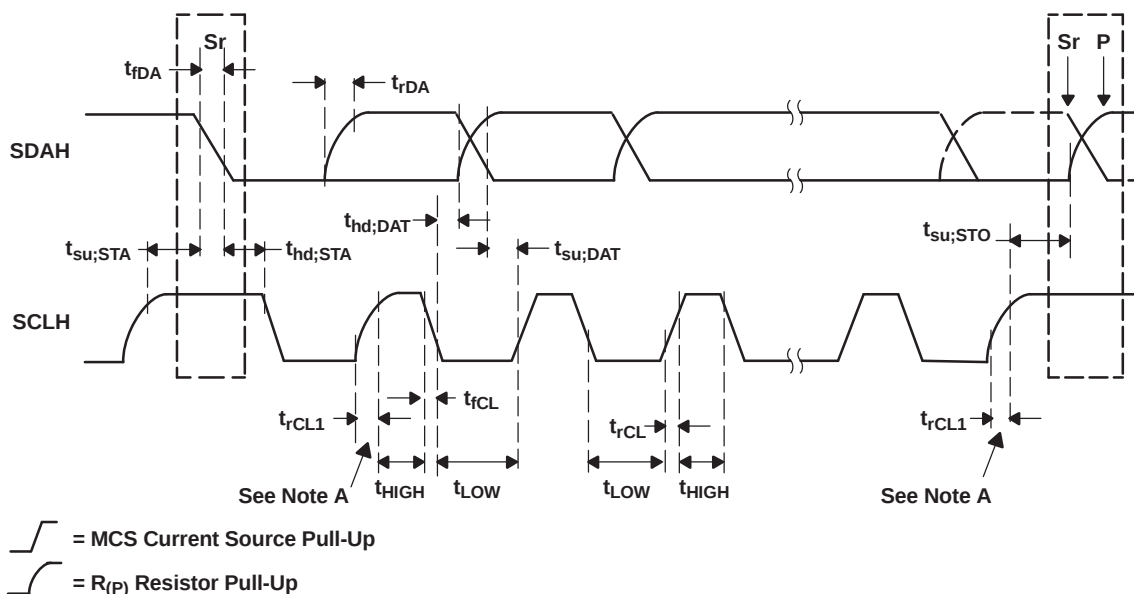

Note A: First rising edge of the SCLH signal after Sr and after each acknowledge bit.

Figure 2. Serial Interface Timing Diagram for HS-Mode


## PIN ASSIGNMENTS

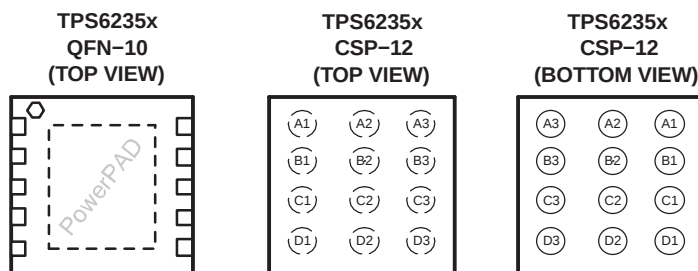


## TERMINAL FUNCTIONS

| TERMINAL  |            |            | I/O | DESCRIPTION                                                                                                                                                                                                                                                                                                  |
|-----------|------------|------------|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME      | NO.<br>QFN | NO.<br>CSP |     |                                                                                                                                                                                                                                                                                                              |
| PVIN      | 1          | A3         |     | Supply voltage for output power stage.                                                                                                                                                                                                                                                                       |
| AVIN      | 2          | B3         |     | This is the input voltage pin of the device. Connect directly to the input bypass capacitor.                                                                                                                                                                                                                 |
| EN        | 7          | C2         | I   | This is the enable pin of the device. Connect this pin to ground forces the device into shutdown mode. Pulling this pin to $V_I$ enables the device. On the rising edge of the enable pin, all the registers are reset with their default values. This pin must not be left floating and must be terminated. |
| VSEL      | 5          | D2         | I   | VSEL signal is primarily used to scale the output voltage and to set the TPS6235x operation between active mode (VSEL=HIGH) and sleep mode (VSEL=LOW). The mode of operation can also be adapted by I <sup>2</sup> C settings. This pin must not be left floating and must be terminated.                    |
| SDA       | 3          | C3         | I/O | Serial interface address/data line                                                                                                                                                                                                                                                                           |
| SCL       | 4          | D3         | I   | Serial interface clock line                                                                                                                                                                                                                                                                                  |
| FB        | 6          | D1         | I   | Output feedback sense input. Connect FB to the converter output.                                                                                                                                                                                                                                             |
| AGND      | 8          | C1         |     | Analog ground                                                                                                                                                                                                                                                                                                |
| SYNC      | N/A        | B2         | I   | Input for synchronization to external clock signal. Synchronizes the converter switching frequency to an external clock signal. This pin must not be left floating and must be terminated. Connecting SYNC to static high or low state has no effect on the converter operation.                             |
| PGND      | 9          | A1 B1      |     | Power ground. Connect to AGND underneath IC.                                                                                                                                                                                                                                                                 |
| SW        | 10         | A2         | I/O | This is the switch pin of the converter and connected to the drain of the internal power MOSFETs.                                                                                                                                                                                                            |
| PowerPAD™ |            |            | N/A | Internally connected to PGND.                                                                                                                                                                                                                                                                                |

## FUNCTIONAL BLOCK DIAGRAM

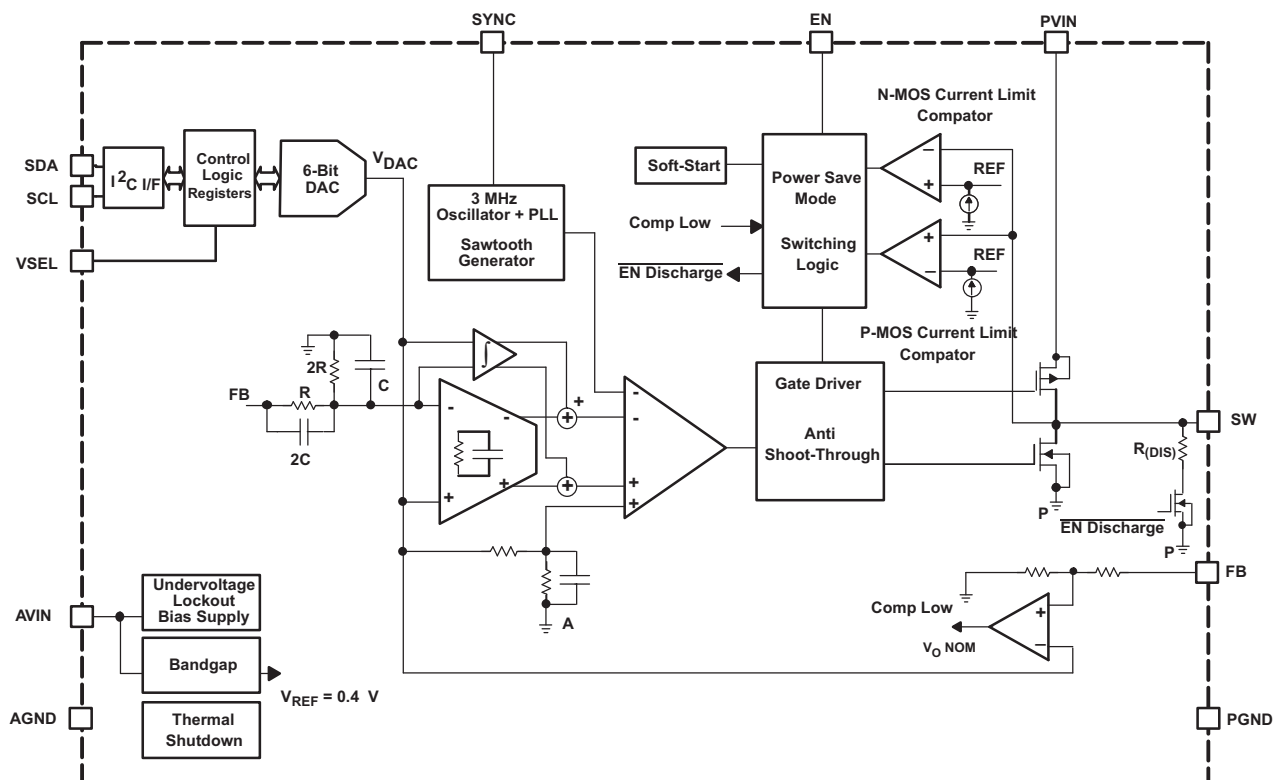

## PARAMETER MEASUREMENT INFORMATION

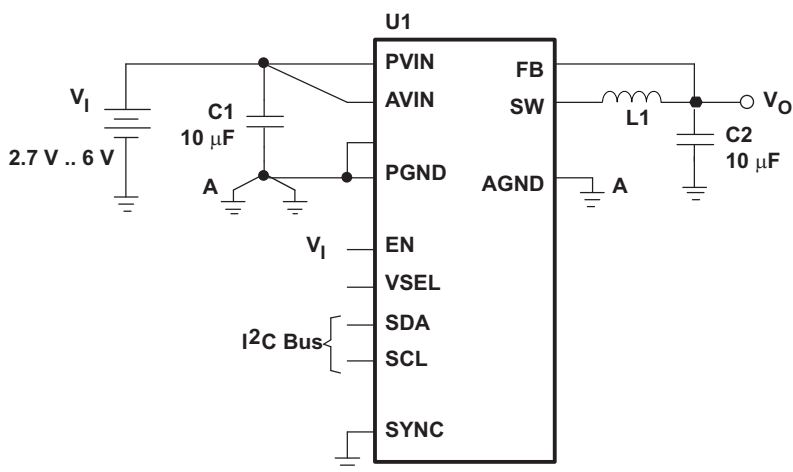



List of Components:  
U1 = TPS6235x  
L1 = FDK MIPS2520 Series  
C1, C2 = TDK C1608X5R0G106MT





Note: The internal registers are set to their default values.

## TYPICAL CHARACTERISTICS

### Table of Graphs

|              |                                           |                              | FIGURE                                           |
|--------------|-------------------------------------------|------------------------------|--------------------------------------------------|
| $\eta$       | Efficiency                                | vs Output current            | 3, 4, 5, 6                                       |
|              |                                           | vs Input voltage             | 7                                                |
| $V_O$        | DC output voltage                         | vs Output current            | 8, 9, 12                                         |
|              |                                           | vs Input voltage             | 10, 11                                           |
|              |                                           | vs Ambient temperature       | 13                                               |
|              | Measured output voltage                   | vs DAC target output voltage | 14                                               |
| $I_Q$        | Quiescent current                         | vs Input voltage             | 15                                               |
| $I_{SD}$     | Shutdown current                          | vs Input voltage             | 16                                               |
| $f_{(OSC)}$  | Oscillator frequency                      | vs Input voltage             | 17                                               |
| $r_{DS(on)}$ | P-channel MOSFET $r_{DS(on)}$             | vs Input voltage             | 18                                               |
|              | N-channel MOSFET $r_{DS(on)}$             | vs Input voltage             | 19                                               |
| $I_P$        | Inductor peak current                     | vs Ambient temperature       | 20                                               |
|              | Load transient response                   |                              | 21, 22, 23, 24, 25, 26<br>27, 28, 29, 30, 31, 32 |
|              | Line transient response                   |                              | 33                                               |
|              | Combined line and load transient response |                              | 34                                               |
|              | PWM operation                             |                              | 35                                               |
|              | Duty cycle jitter                         |                              | 36                                               |
|              | Power-save mode operation                 |                              | 37, 38                                           |
|              | Dynamic voltage management                |                              | 39, 40                                           |
|              | Output voltage ramp control               |                              | 41                                               |
|              | Start-up                                  |                              | 42, 43                                           |

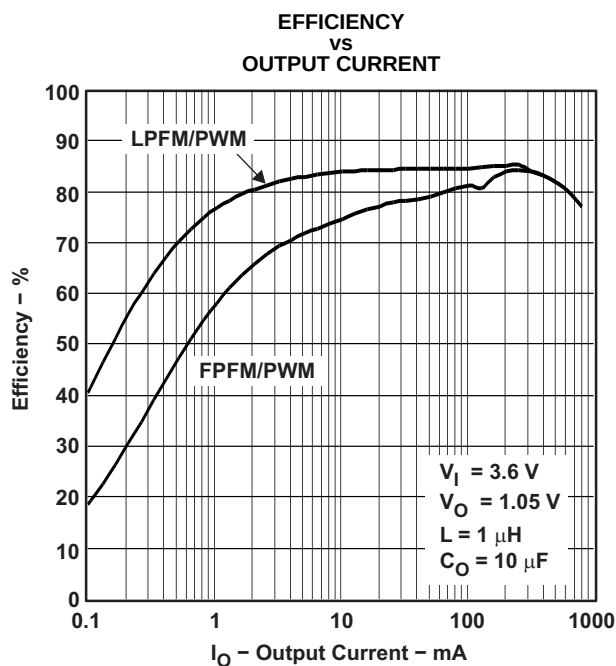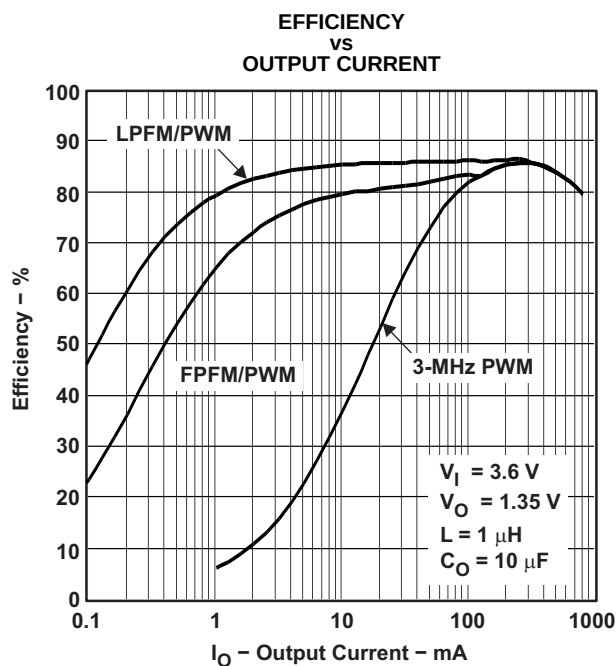

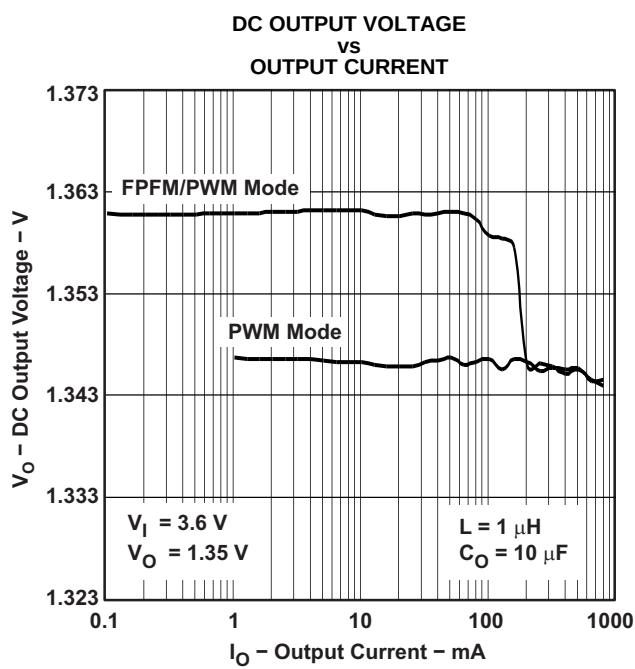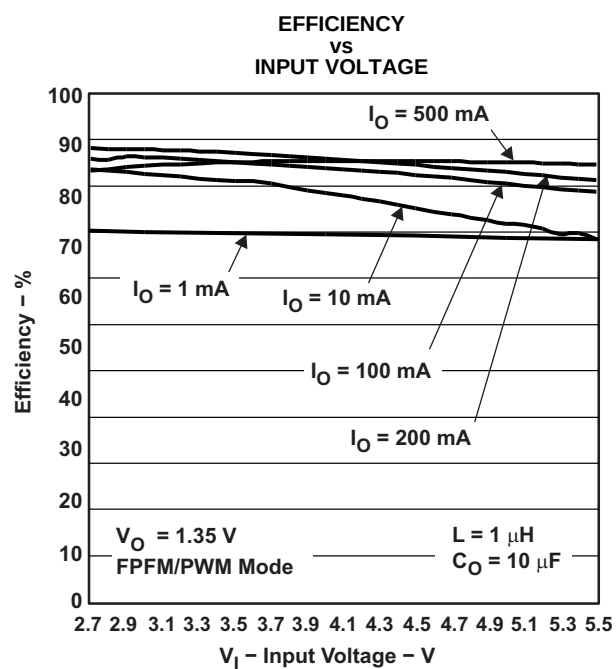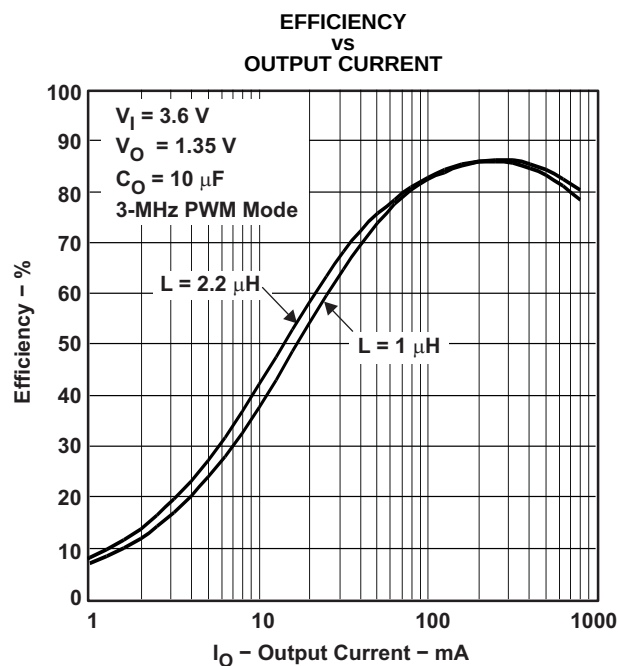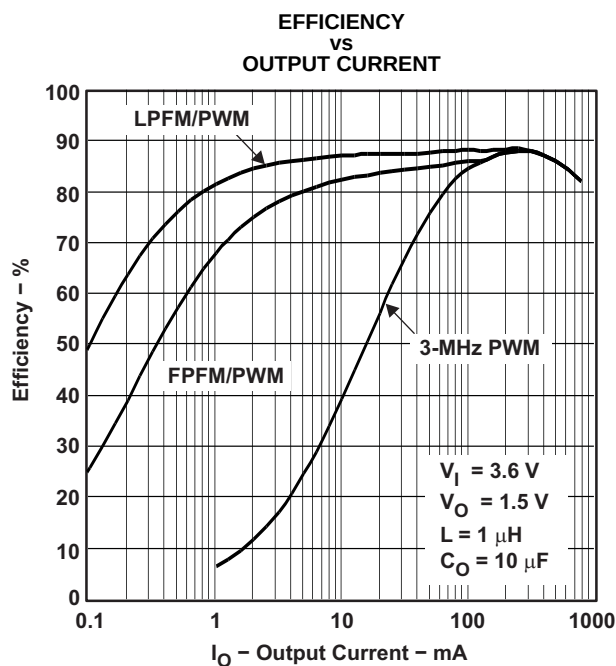

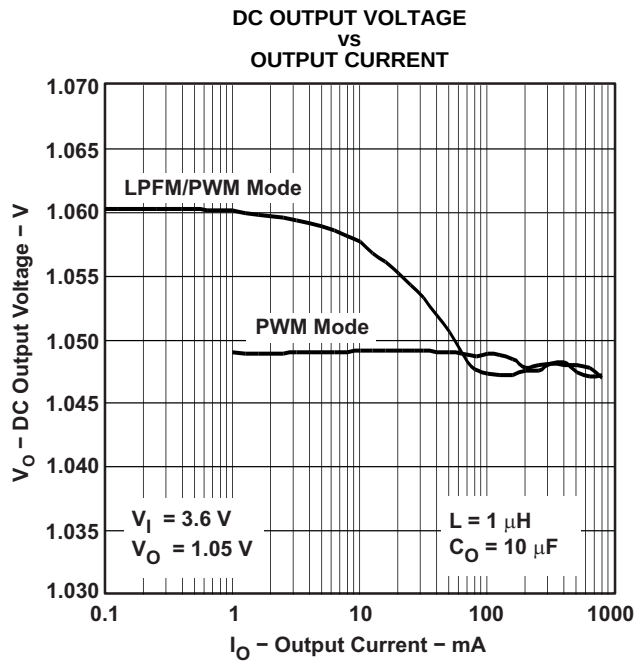


Figure 9.

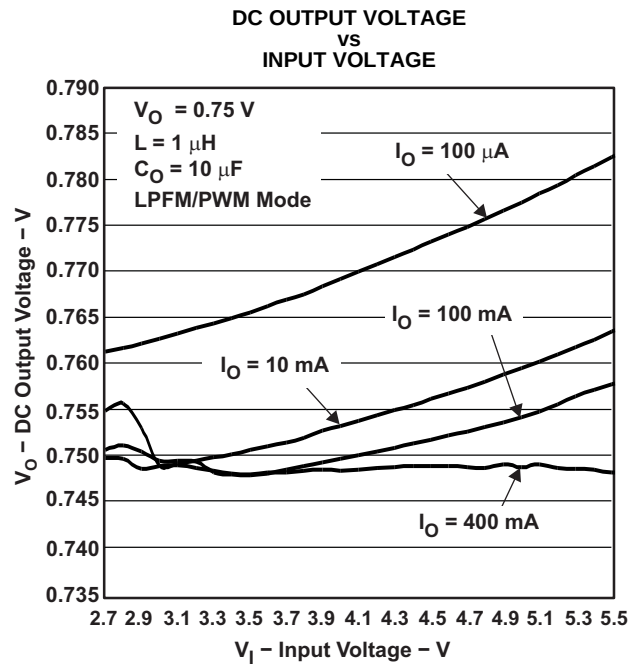


Figure 10.

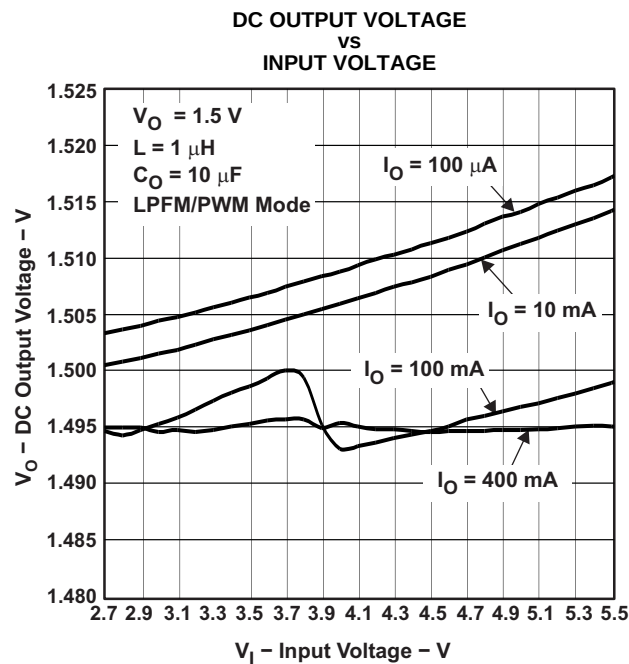


Figure 11.

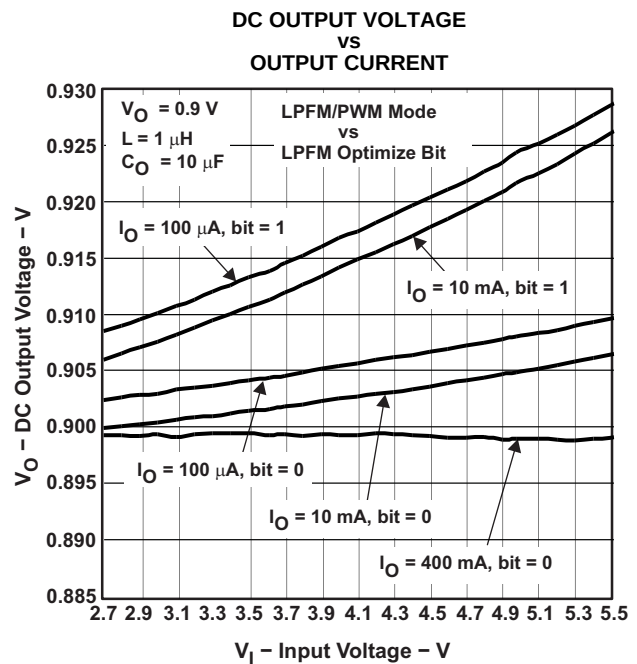


Figure 12.

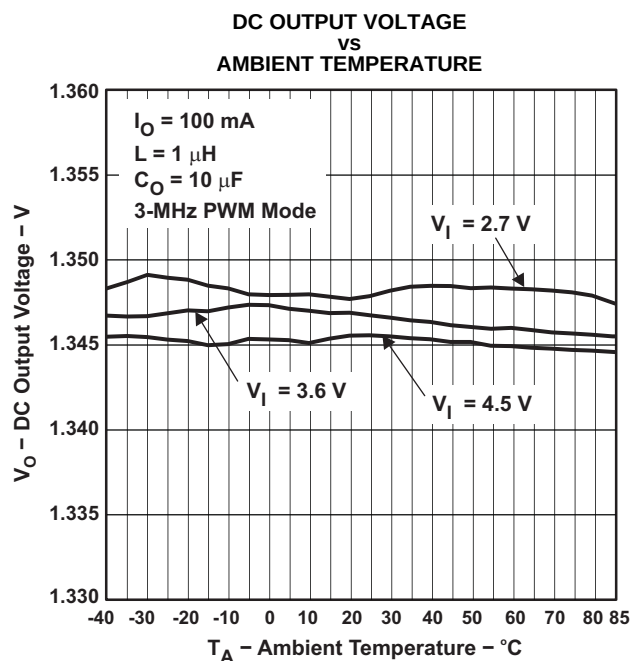


Figure 13.

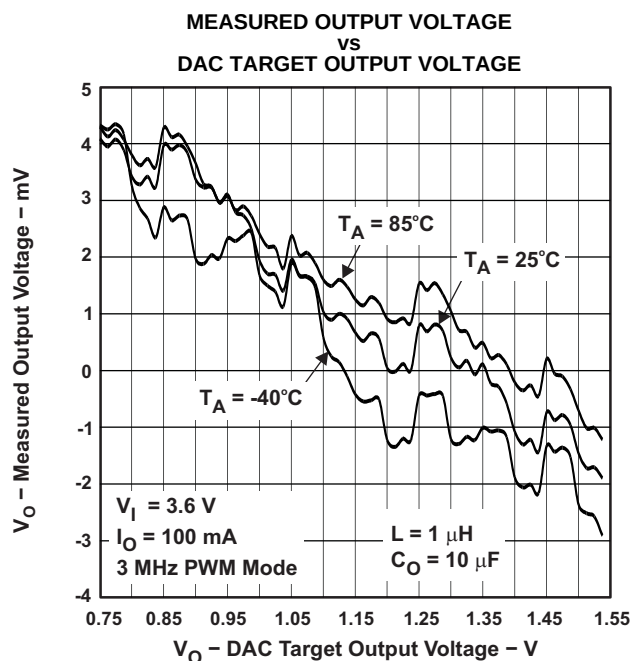


Figure 14.

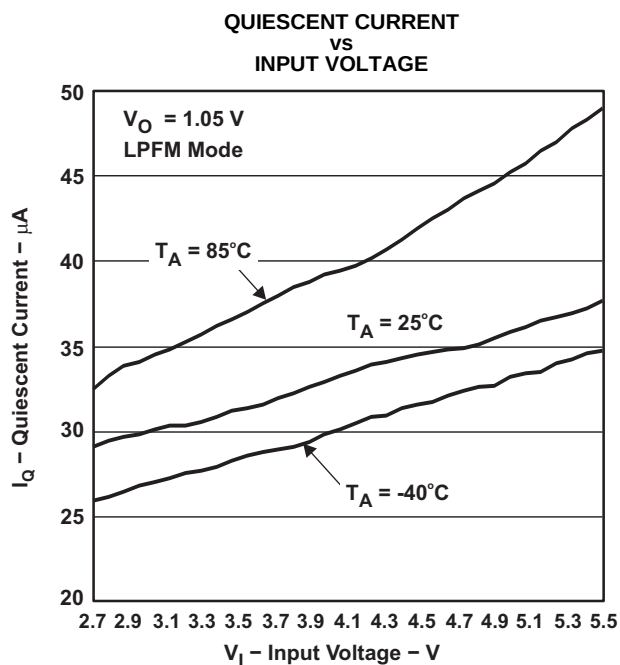


Figure 15.

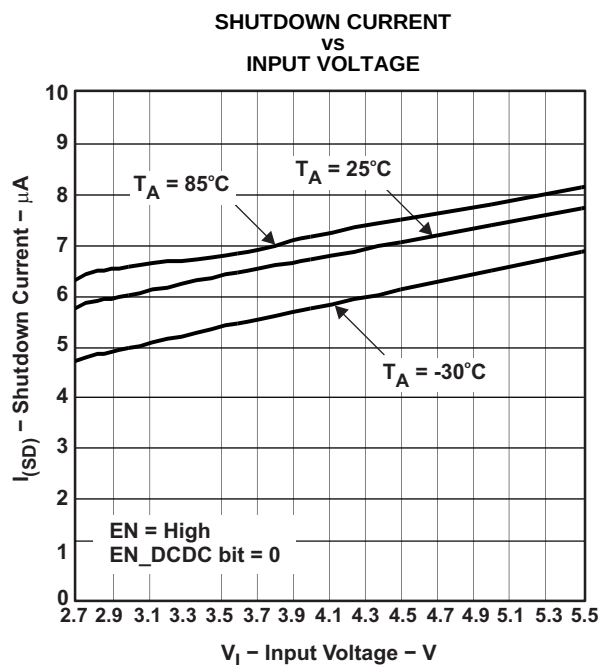


Figure 16.

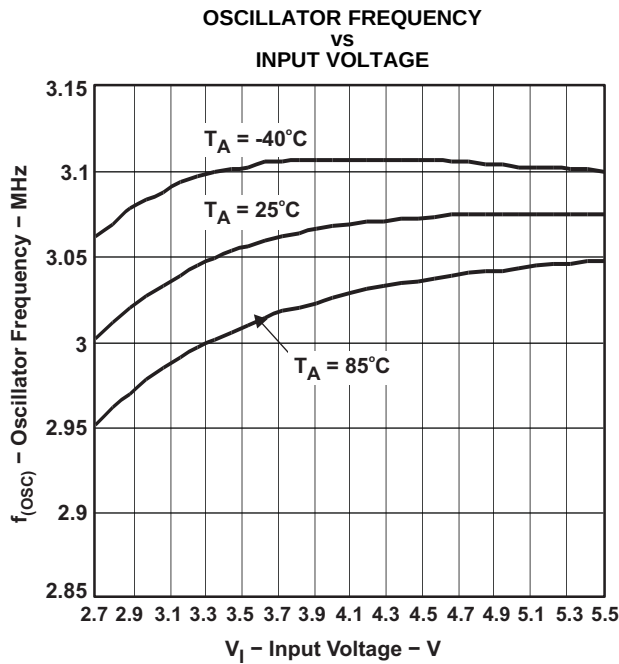


Figure 17.

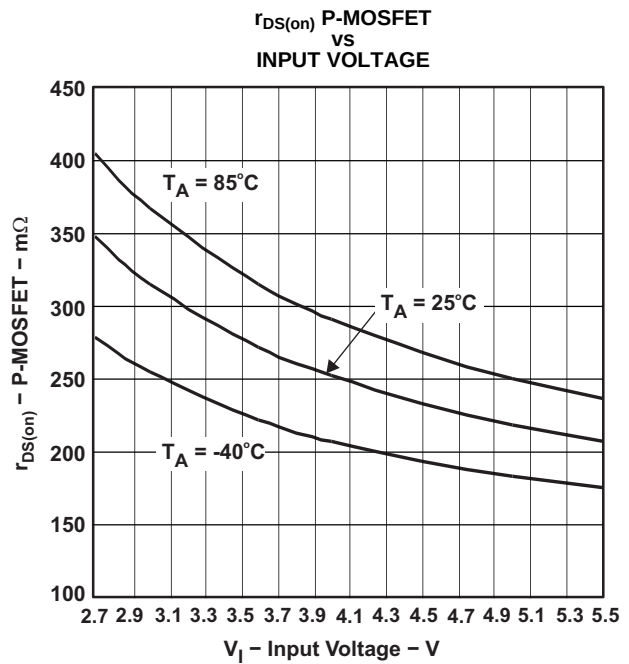


Figure 18.

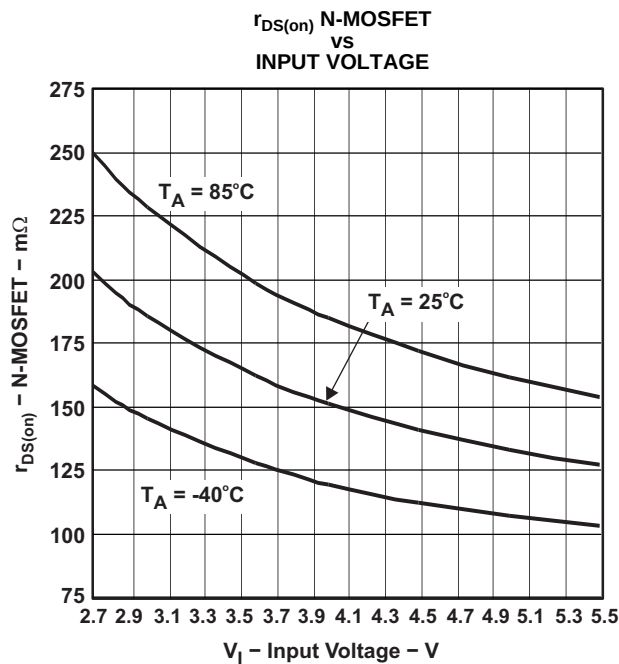


Figure 19.

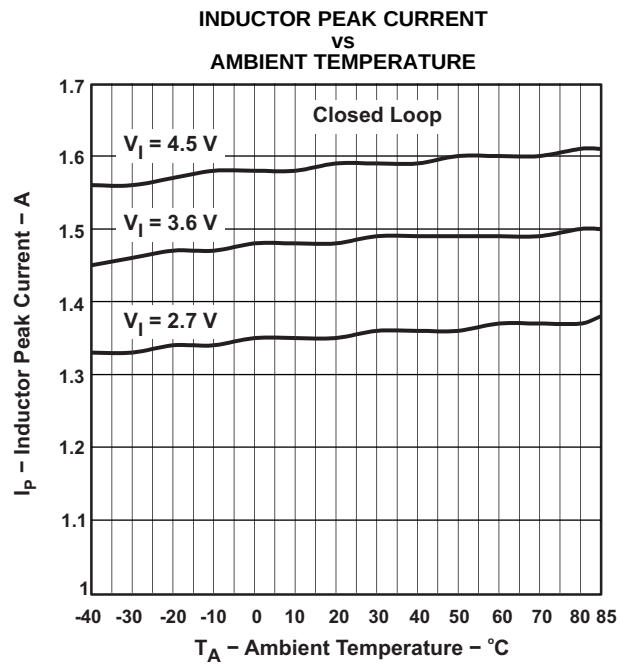


Figure 20.

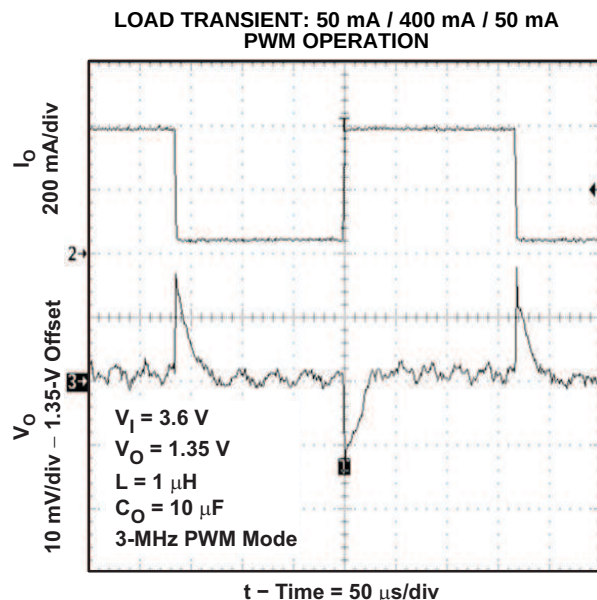


Figure 21.

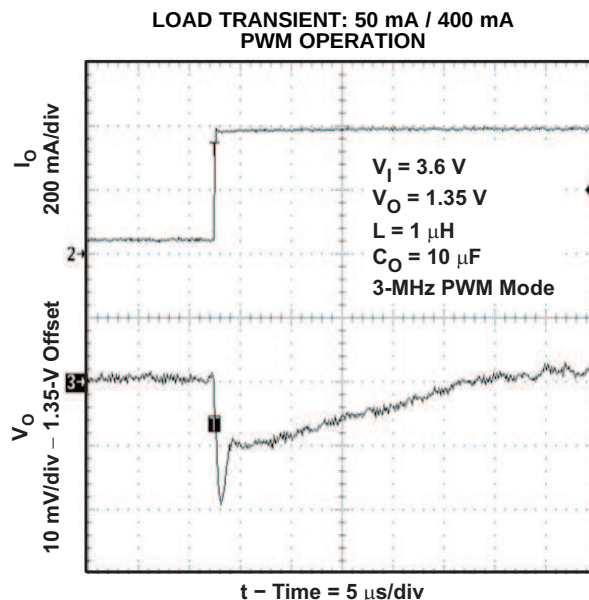


Figure 22.

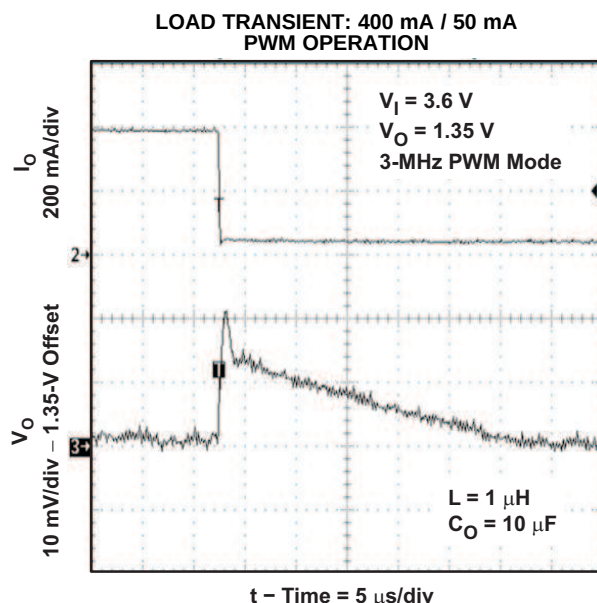


Figure 23.

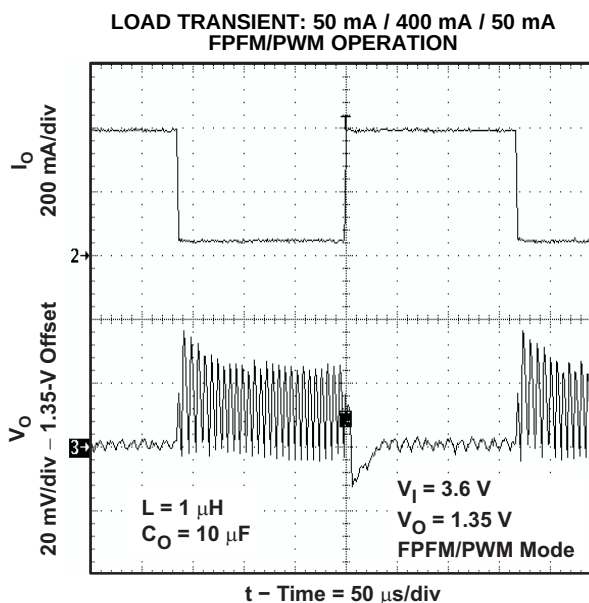


Figure 24.

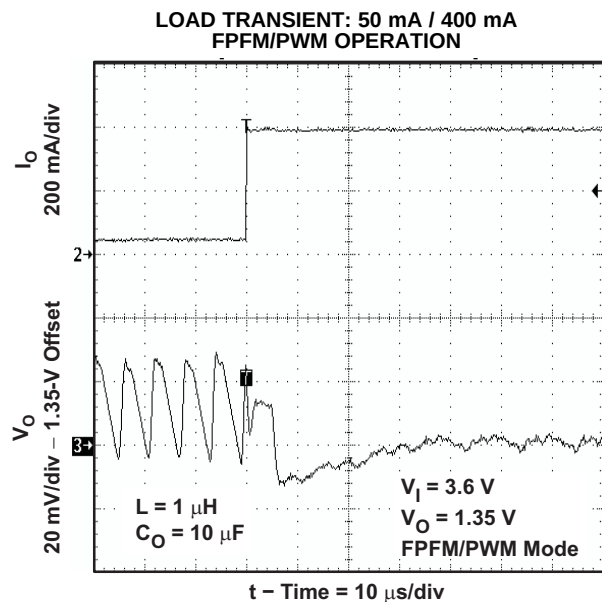


Figure 25.

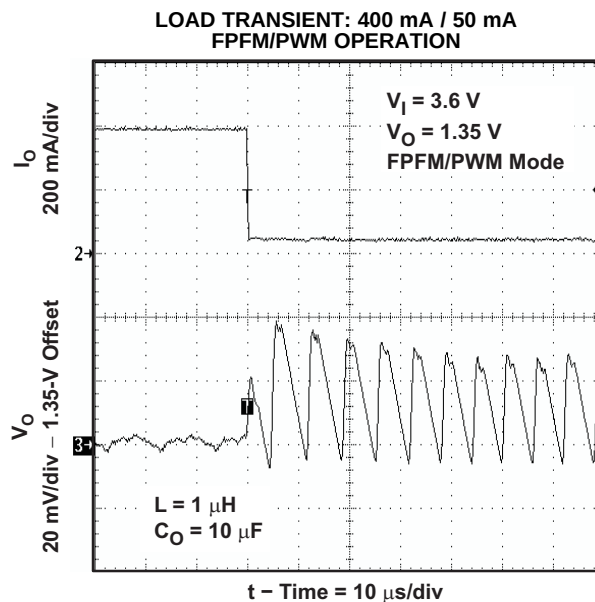


Figure 26.

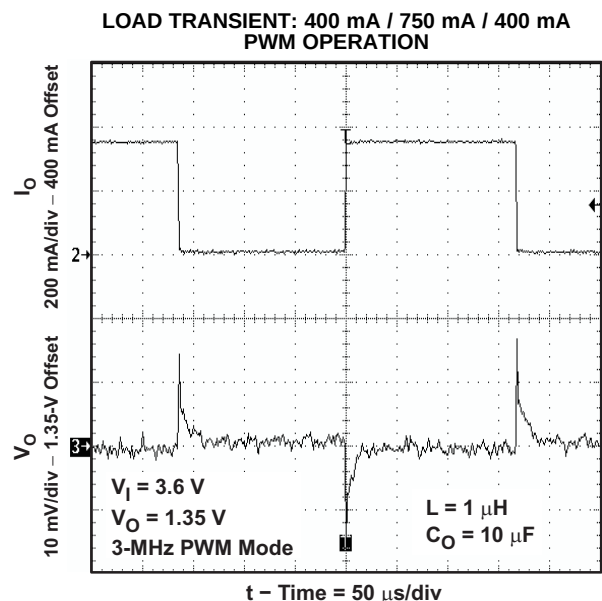


Figure 27.

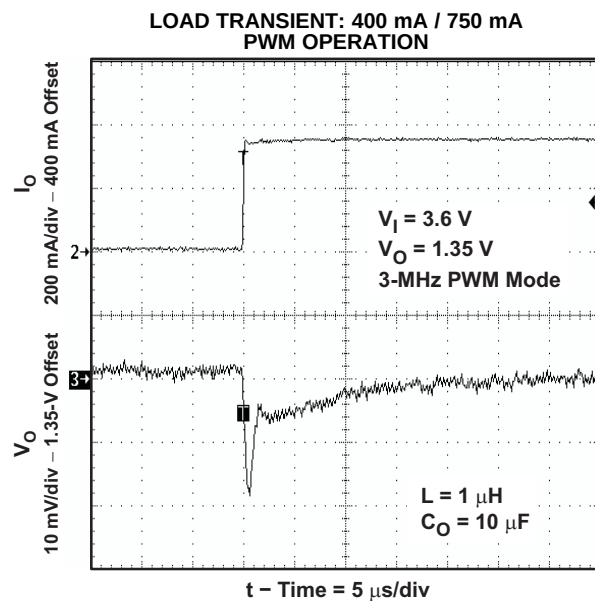


Figure 28.

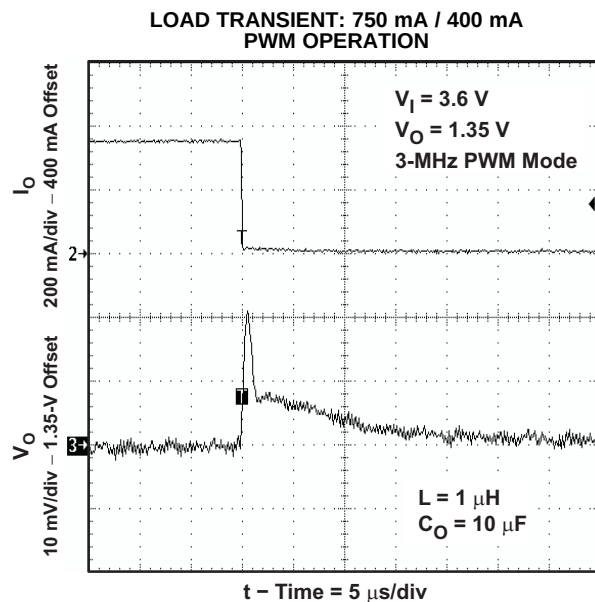


Figure 29.

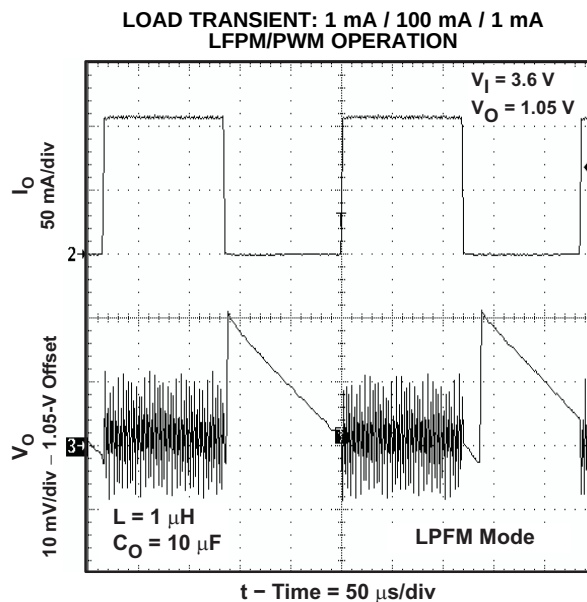


Figure 30.

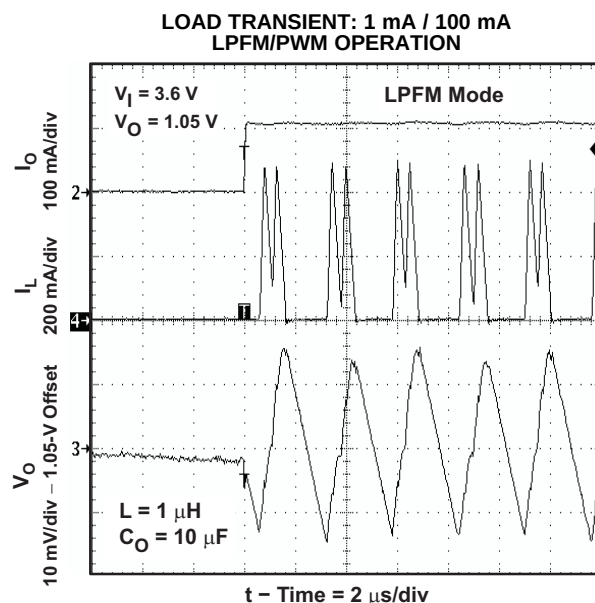


Figure 31.

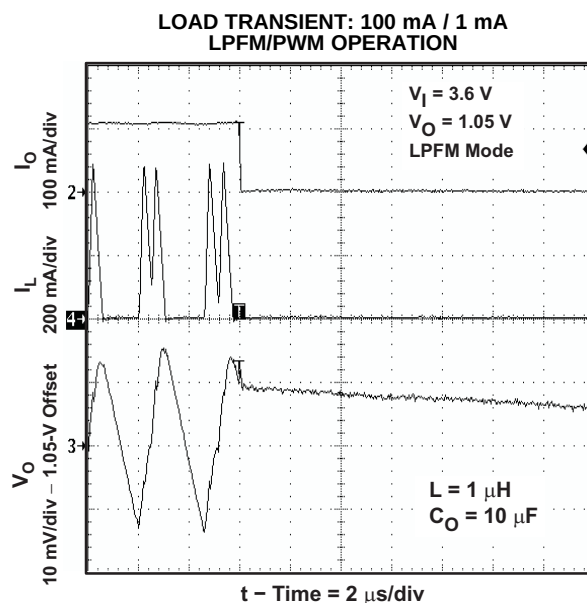


Figure 32.

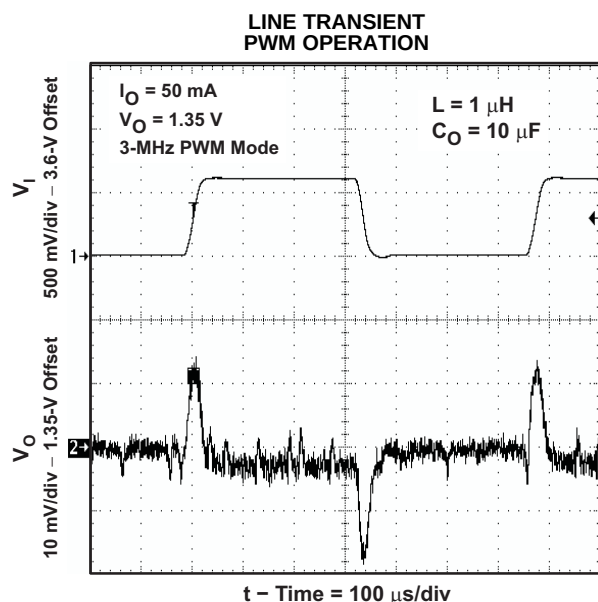


Figure 33.

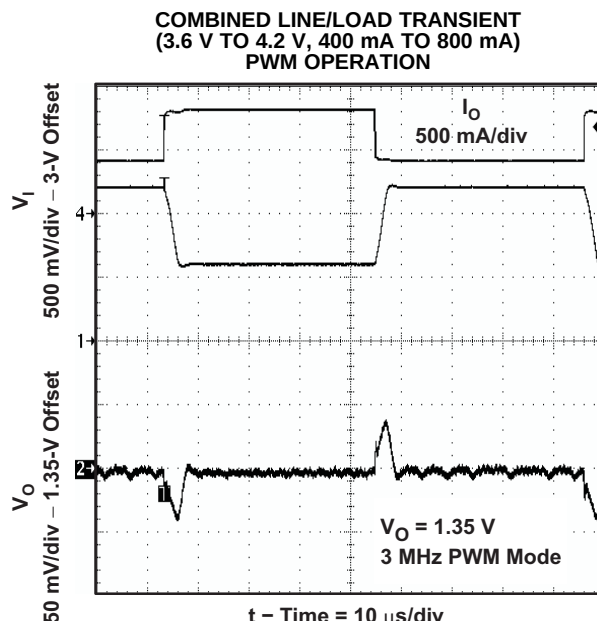


Figure 34.

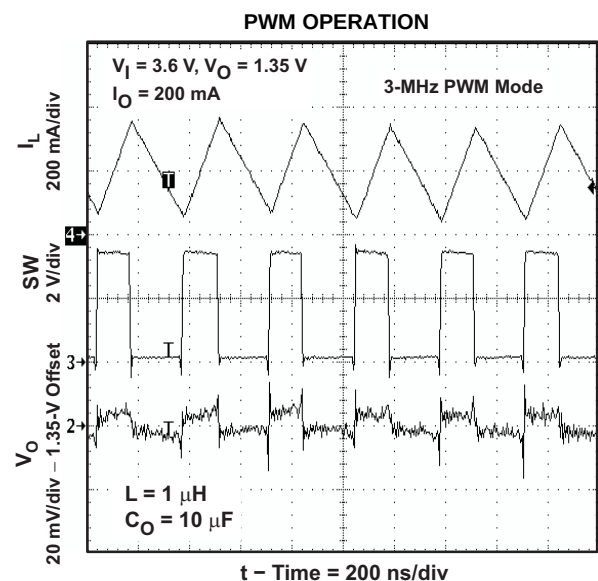


Figure 35.



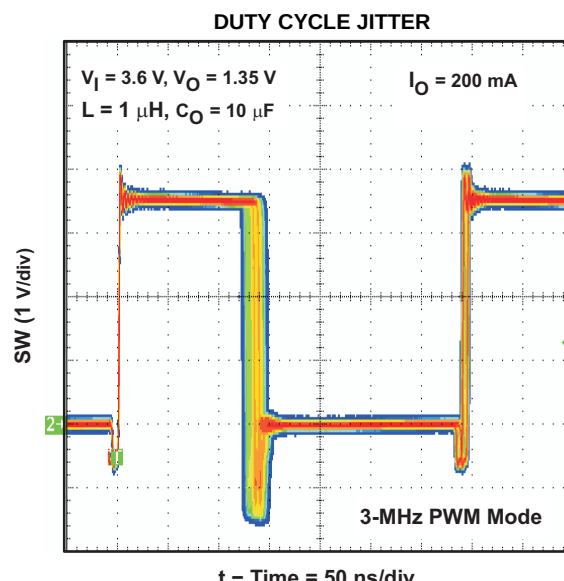


Figure 36.

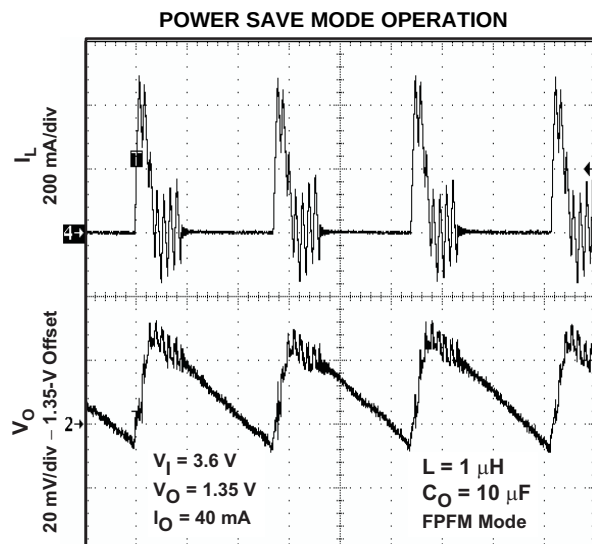


t – Time = 2.5  $\mu\text{s/div}$

Figure 37.

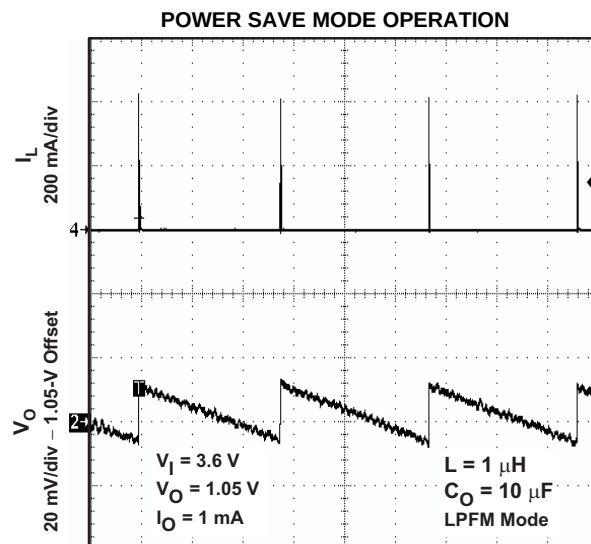


t – Time = 40  $\mu\text{s/div}$

Figure 38.

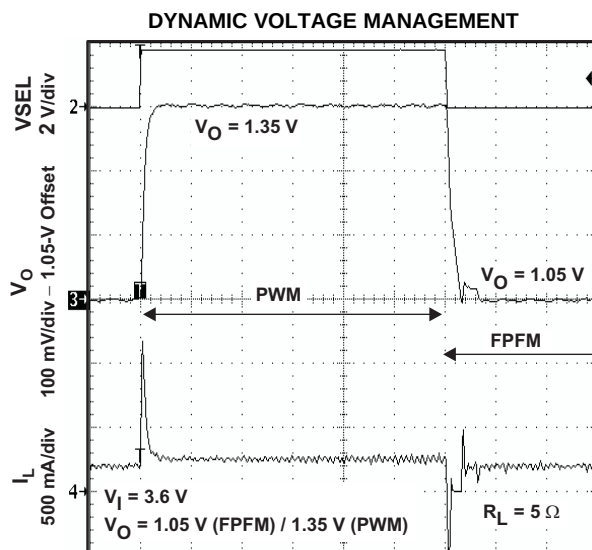

t – Time = 20  $\mu\text{s/div}$

Figure 39.

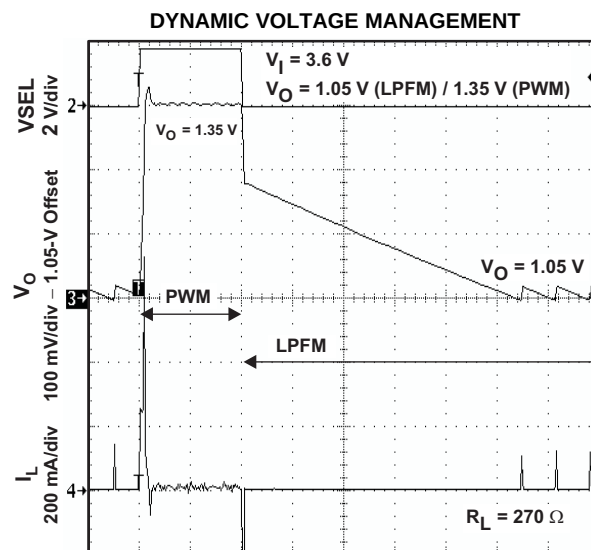

t – Time = 50  $\mu\text{s/div}$

Figure 40.

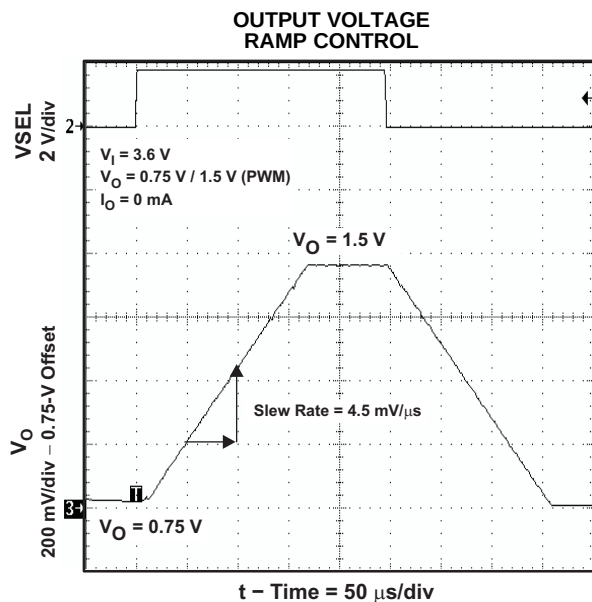


Figure 41.

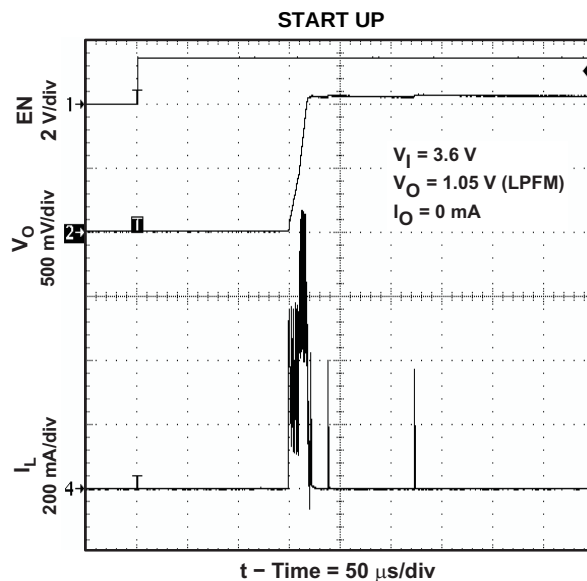


Figure 42.

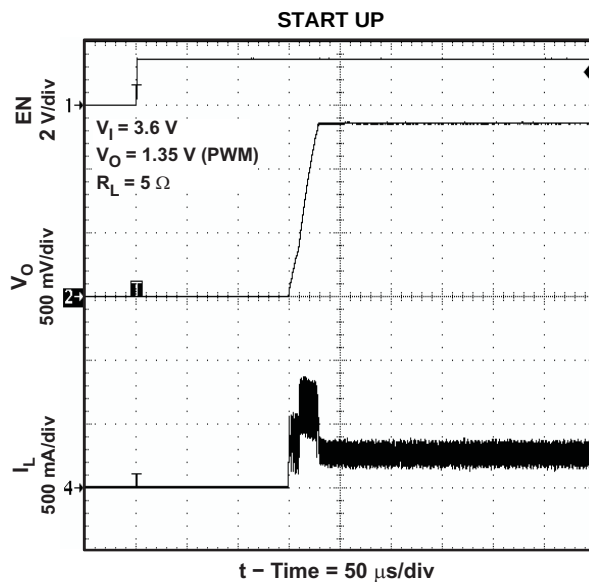


Figure 43.

## DETAILED DESCRIPTION

### Operation

The TPS6235x is a synchronous step-down converter typically operating with a 3-MHz fixed frequency pulse width modulation (PWM) at moderate to heavy load currents. At light load currents, the converter operates in power-save mode with pulse frequency modulation (PFM). The device integrates two power-save modes optimized either for ultra-high efficiency at light load (light PFM) or for transient response when turning in PWM operation (fast PFM). Both power-save modes automatically transition to PWM operation when the load current increases.

The TPS6235x integrates an I<sup>2</sup>C compatible interface allowing transfers up to 3.4 Mbps. This communication interface can be used for dynamic voltage scaling with voltage steps down to 12.5 mV (or to 25 mV steps for TPS62356), for reprogramming the mode of operation (light PFM, fast PFM or forced PWM) or disable/enabling the output voltage for instance. For more details, see the I<sup>2</sup>C interface and register description section.

During PWM operation, the converter uses a unique fast response, voltage mode, control scheme with input voltage feed-forward. This achieves *best-in-class* load and line response and allows the use of tiny inductors and small ceramic input and output capacitors. At the beginning of each switching cycle, the P-channel MOSFET switch is turned on and the inductor current ramps up until the comparator trips and the control logic turns off the switch. The operating frequency is set to 3 MHz and can be synchronized *on-the-fly* to an external oscillator or to a master dc/dc converter (refer to application examples).

The device integrates two current limits, one in the P-channel MOSFET and another one in the N-channel MOSFET. When the current in the P-channel MOSFET reaches its current limit, the P-channel MOSFET is turned off and the N-channel MOSFET is turned on. When the current in the N-channel MOSFET is above the N-MOS current limit threshold, the N-channel MOSFET remains on until the current drops below its current limit. The current limit in the N-channel MOSFET is important for small duty-cycle operation when the current in the inductor does not decrease because of the P-channel MOSFET current limit delay, or because of start-up conditions where the output voltage is low.

### Power-Save Mode : Fast PFM

With decreasing load current, the device automatically switches into pulse skipping operation in which the power stage operates intermittently based on load demand. By running cycles periodically, the switching losses are minimized, and the device runs with a minimum quiescent current and maintains high efficiency.

In fast PFM mode, the converter only operates when the output voltage trips below a set threshold voltage ( $V_O$  nominal). It ramps up the output voltage with several pulses and goes into power-save mode when the inductor current reaches zero. As a consequence in power-save mode the average output voltage is slightly higher than its nominal value in PWM mode. The fast PFM mode is optimized for fast response when transitioning between pulse skipping and PWM operation.

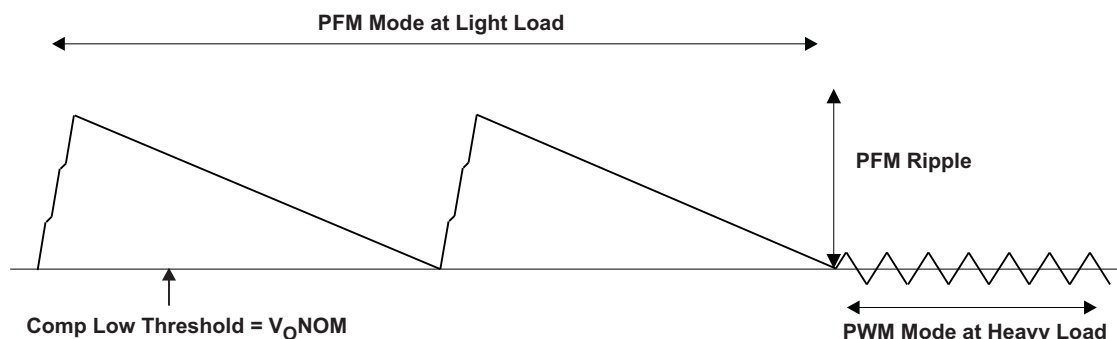


Figure 44. Operation in PFM Mode and Transfer to PWM Mode

## Power-Save Mode : Light PFM

With decreasing load current, the device can also automatically switch into light PFM pulse skipping operation in which the power stage operates intermittently based on load demand. The advantage of the light PFM is much lower  $I_Q$  (28  $\mu$ A) and drastically higher efficiency compared with fast PFM in low output loads.

In light PFM mode, the converter only operates when the output voltage trips below a set threshold voltage ( $V_{O\text{nominal}}$ ). It ramps up the output voltage with one or several pulses and goes back into power-save mode. As a consequence in power-save mode the average output voltage is slightly higher than its nominal value in PWM mode.

In order to get a proper transition between light PFM and PWM operation, the output voltage ripple (in light PFM mode) has been made proportional to the input voltage. It is possible to reduce the output voltage ripple by setting the LIGHTPFM OPTIMIZE (VSEL0[6] or VSEL1[6]) bit low. However, this is only practical in applications operating with a 1- $\mu$ H (typical) inductor, with a load current less than  $V_I / 25 \Omega$  and which do not require the auto-mode transition function.

When operating with a 2.2- $\mu$ H (typical) inductor, the LIGHTPFM OPTIMIZE (VSEL0[6] or VSEL1[6]) bit should always be set to low. In this case, the auto-mode transition is fully functional without any restriction on the load current.

## Mode Selection and Frequency Synchronization

The TPS6235x can be synchronized to an external clock signal by the SYNC pin. Pulling the SYNC pin to a static state high or low state has no effect on the converter's operation.

Depending on the settings of CONTROL1 register the device can be operated in either the fixed frequency PWM mode or in the automatic PWM and power-save mode. In this mode, the converter operates in fixed frequency PWM mode at moderate to heavy loads and in the PFM mode during light loads, which maintains high efficiency over a wide load current range. For more details, see the *CONTROL1* register description.

The fixed frequency PWM mode has the tightest regulation and the best line/load transient performance. Furthermore, this mode of operation allows simple filtering of the switching frequency for noise-sensitive applications. In fixed frequency PWM mode, the efficiency is lower compared to the power-save mode during light loads. It is possible to switch from power-save mode (light or fast PWM) to forced PWM mode during operation either via the VSEL signal or by re-programming the CONTROL1 register. This allows adjustments to the converters operation to match the specific system requirements leading to more efficient and flexible power management.

When the synchronization is enabled (CONTROL2[5]=1), the mode is set to fixed-frequency operation and the P-channel MOSFET turn on is synchronized to the falling edge of the external clock. This creates the ability for multiple converters to be connected together in a master-slave configuration for frequency matching of the converters (see the application section for more details).

When CONTROL1[1:0]=00 and VSEL signal is low, the converter operates according to MODE0 bit and the synchronization is disabled regardless of EN\_SYNC and HW\_nSW bits.

## Soft Start

The TPS6235x has an internal soft-start circuit that limits the inrush current during start-up. This prevents possible input voltage drops when a battery or a high-impedance power source is connected to the input of the converter.

In the TPS62350/1/2/3/4/5 devices, the soft start is implemented as a digital circuit increasing the switch current in steps of typically 350 mA, 675 mA, 1000 mA, and the typical switch current limit of 1350 mA. The current limit transitions to the next step every 256 clocks ( $\approx 88\mu$ s). To be able to switch from 675 mA to 1000 mA current limit step, the output voltage needs to be higher than  $0.5 \times V_{O(NOM)}$  (otherwise the parts keeps operating at 675 mA current limit).

In the TPS62356 device, the soft start is implemented as a digital circuit increasing the switch current in steps of typically 400 mA, 775 mA, 1150 mA, and the typical switch current limit of 1550 mA. The current limit transitions to the next step every 256 clocks ( $\approx 88\mu$ s). To switch from 775 mA to 1150 mA current limit step, the output voltage needs to be higher than  $0.5 \times V_{O(NOM)}$  (otherwise the parts keeps operating at 775 mA current limit).

This mechanism is used to limit the output current under short-circuit conditions. Therefore, the start-up time depends on the output capacitor and load current.

## Enable

The device starts operation when EN pin is set high and starts up with the soft start. This signal is gated by the EN\_DCDC bit defined in register VSEL0 and VSEL1. On rising edge of the EN pin, all the registers are reset with their default values. Enabling the converter's operation via the EN\_DCDC bit does not affect internal register settings. This allows the output voltage to be programmed to other values than the default voltage before starting up the converter. For more details, see the *VSEL0/1* register description.

Pulling the EN pin, VSEL0[6] bit or VSEL1[6] bit low forces the device into shutdown, with a shutdown current as defined in the electrical characteristics table. In this mode, the P and N-channel MOSFETs are turned off, the internal resistor feedback divider is disconnected, and the entire internal-control circuitry is switched off. When an output voltage is present during shutdown mode, which is caused by an external voltage source or super capacitor, the reverse leakage is specified under electrical characteristics. For proper operation, the EN pin must be terminated and must not be left floating.

In addition, depending on the setting of CONTROL2[6] bit, the device can actively discharge the output capacitor when it turns off. The integrated discharge resistor has a typical resistance of 15  $\Omega$ . The required time to discharge the output capacitor at  $V_O$  depends on load current and the output capacitance value.

## Voltage and Mode Selection

The TPS6235x features a pin-selectable output voltage. VSEL is primarily used to scale the output voltage between active (VSEL=HIGH) and sleep mode (VSEL=LOW). For maximum flexibility, it is possible to reprogram the operating mode of the converter (e.g. fixed frequency PWM, fast PFM or light PFM) associated with VSEL signal via the I<sup>2</sup>C interface

VSEL output voltage and mode selection is defined as following:

**VSEL = LOW:** DC/DC output voltage determined by VSEL0 register value. DC/DC mode of operation is determined by MODE0 bit in CONTROL1 register

**VSEL = HIGH:** DC/DC output voltage determined by VSEL1 register value. DC/DC mode of operation is determined by MODE1 bit in CONTROL1 register.

## Undervoltage Lockout

The undervoltage lockout circuit prevents the device from misoperation at low input voltages. It prevents the converter from turning on the switch or rectifier MOSFET under undefined conditions.

## Short-Circuit Protection

As soon as the output voltage falls below 50% of the nominal output voltage, the converter current limit is reduced by 50% of the nominal value. Because the short-circuit protection is enabled during start-up, the device does not deliver more than half of its nominal current limit until the output voltage exceeds 50% of the nominal output voltage. This needs to be considered when a load acting as a current sink is connected to the output of the converter.

## Thermal Shutdown

As soon as the junction temperature,  $T_J$ , exceeds 150°C typical, the device goes into thermal shutdown. In this mode, the P- and N-channel MOSFETs are turned off. The device continues its operation when the junction temperature falls below 130°C typical again.

## THEORY OF OPERATION

### Serial Interface Description

I<sup>2</sup>C is a 2-wire serial interface developed by Philips Semiconductor (see I<sup>2</sup>C-Bus Specification, Version 2.1, January 2000). The bus consists of a data line (SDA) and a clock line (SCL) with pull-up structures. When the bus is idle, both SDA and SCL lines are pulled high. All the I<sup>2</sup>C compatible devices connect to the I<sup>2</sup>C bus through open drain I/O pins, SDA and SCL. A master device, usually a microcontroller or a digital signal processor, controls the bus. The master is responsible for generating the SCL signal and device addresses. The master also generates specific conditions that indicate the START and STOP of data transfer. A slave device receives and/or transmits data on the bus under control of the master device.

The TPS6235x device works as a slave and supports the following data transfer modes, as defined in the I<sup>2</sup>C-Bus Specification: standard mode (100 kbps), fast mode (400 kbps), and high-speed mode (up to 3.4 Mbps in write mode). The interface adds flexibility to the power supply solution, enabling most functions to be programmed to new values depending on the instantaneous application requirements. Register contents remain intact as long as supply voltage remains above 2.2 V (typical).

The data transfer protocol for standard and fast modes is exactly the same, therefore, they are referred to as F/S-mode in this document. The protocol for high-speed mode is different from the F/S-mode, and it is referred to as HS-mode. The TPS6235x device supports 7-bit addressing; 10-bit addressing and general call address are not supported.

The TPS6235x device has a 7-bit address with the 2 LSB bits factory programmable allowing up to four dc/dc converters to be connected to the same bus. The 5 MSBs are 10010.

### F/S-Mode Protocol

The *master* initiates data transfer by generating a start condition. The start condition is when a high-to-low transition occurs on the SDA line while SCL is high, see [Figure 45](#). All I<sup>2</sup>C-compatible devices should recognize a start condition.

The master then generates the SCL pulses, and transmits the 7-bit address and the read/write direction bit R/W on the SDA line. During all transmissions, the master ensures that data is *valid*. A valid data condition requires the SDA line to be stable during the entire high period of the clock pulse, see [Figure 46](#). All devices recognize the address sent by the master and compare it to their internal fixed addresses. Only the slave device with a matching address generates an *acknowledge*, see [Figure 47](#), by pulling the SDA line low during the entire high period of the ninth SCL cycle. Upon detecting this acknowledge, the master knows that the communication link with a slave has been established.

The master generates further SCL cycles to either transmit data to the slave (R/W bit 1) or receive data from the slave (R/W bit 0). In either case, the receiver needs to acknowledge the data sent by the transmitter. An acknowledge signal can either be generated by the master or by the slave, depending on which one is the receiver. 9-bit valid data sequences consisting of 8-bit data and 1-bit acknowledge can continue as long as necessary.

To signal the end of the data transfer, the master generates a stop condition by pulling the SDA line from low to high while the SCL line is high, see [Figure 45](#). This releases the bus and stops the communication link with the addressed slave. All I<sup>2</sup>C compatible devices must recognize the stop condition. Upon the receipt of a stop condition, all devices know that the bus is released, and they wait for a start condition followed by a matching address.

Attempting to read data from register addresses not listed in this section results in FFh being read out.

### HS-Mode Protocol

When the bus is idle, both SDA and SCL lines are pulled high by the pull-up devices.

The master generates a start condition followed by a valid serial byte containing HS master code 00001XXX. This transmission is made in F/S-mode at no more than 400 Kbps. No device is allowed to acknowledge the HS master code, but all devices must recognize it and switch their internal setting to support 3.4-Mbps operation.

The master then generates a repeated start condition (a repeated start condition has the same timing as the start condition). After this repeated start condition, the protocol is the same as F/S-mode, except that transmission speeds up to 3.4 Mbps are allowed. A stop condition ends the HS-mode and switches all the internal settings of the slave devices to support the F/S-mode. Instead of using a stop condition, repeated start conditions are used to secure the bus in HS-mode.

Attempting to read data from register addresses not listed in this section results in FFh being read out.

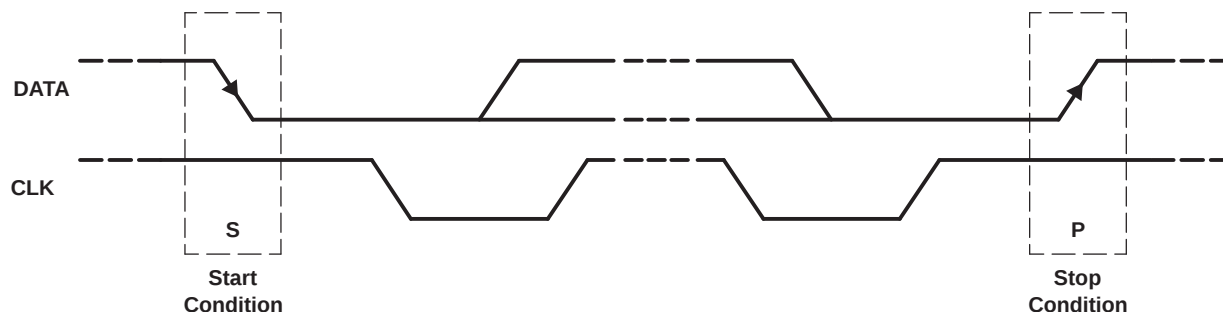


Figure 45. START and STOP Conditions

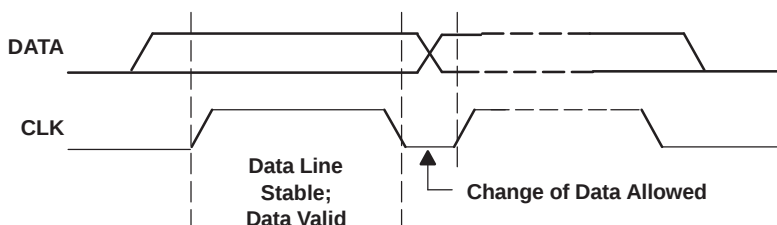


Figure 46. Bit Transfer on the Serial Interface

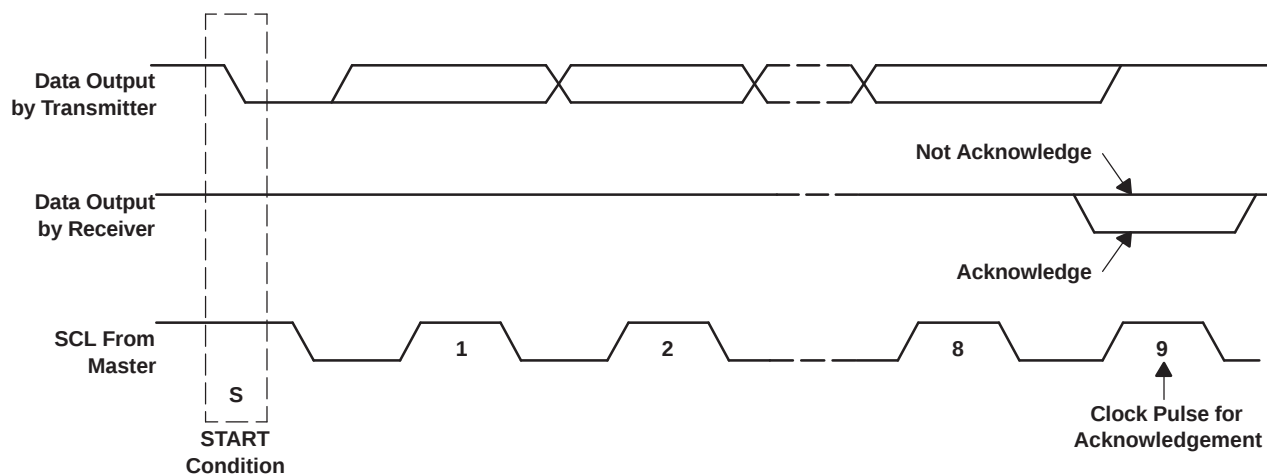


Figure 47. Acknowledge on the I²C Bus



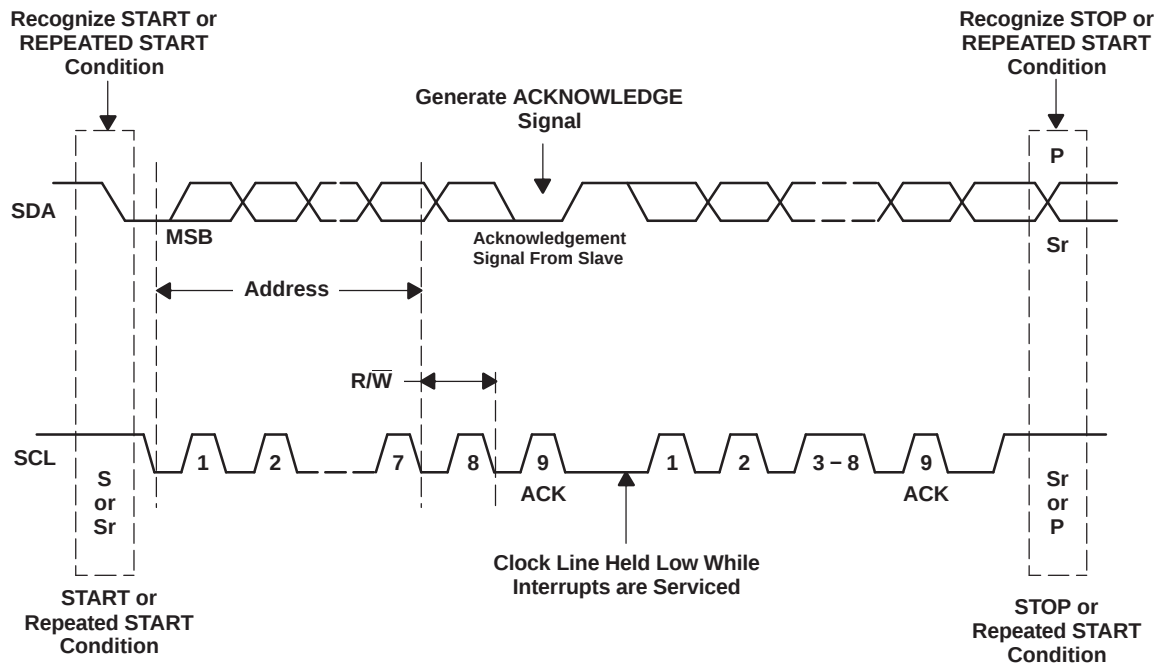


Figure 48. Bus Protocol

### TPS6235x I<sup>2</sup>C Update Sequence

The TPS6235x requires a start condition, a valid I<sup>2</sup>C address, a register address byte, and a data byte for a single update. After the receipt of each byte, TPS6235x device acknowledges by pulling the SDA line low during the high period of a single clock pulse. A valid I<sup>2</sup>C address selects the TPS6235x. TPS6235x performs an update on the falling edge of the LSB byte.

When the TPS6235x is in hardware shutdown (EN pin tied to ground) the device can not be updated via the I<sup>2</sup>C interface. Conversely, the I<sup>2</sup>C interface is fully functional during software shutdown (EN\_DCDC bit=0).

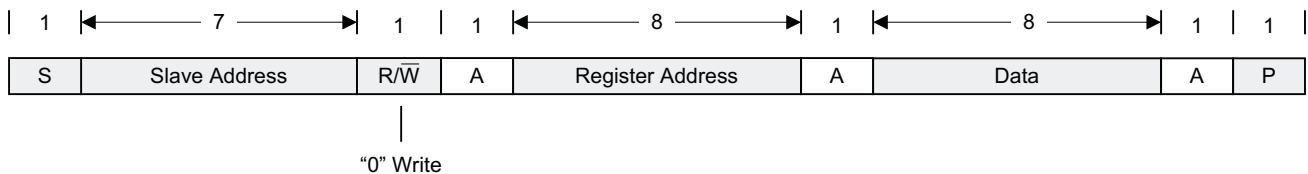

A = Acknowledge  
S = START condition  
P = STOP condition

Figure 49. "Write" Data Transfer Format in F/S-Mode

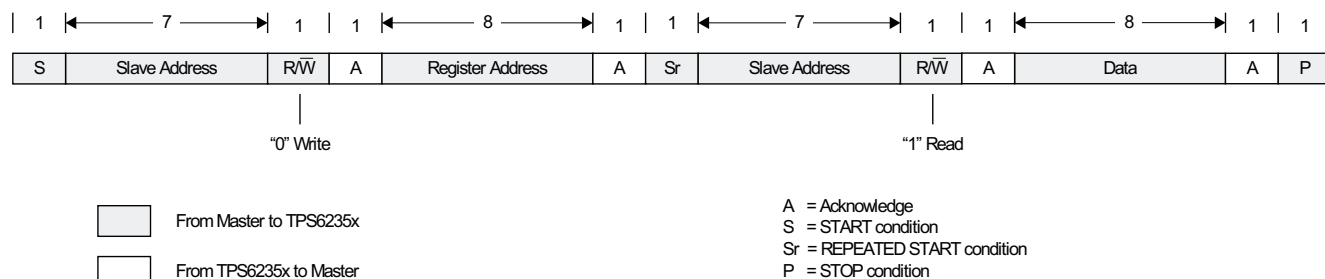


Figure 50. "Read" Data Transfer Format in F/S-Mode

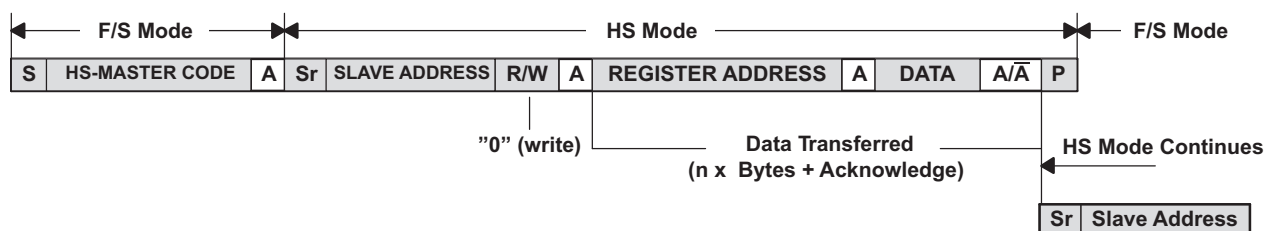


Figure 51. Data Transfer Format in H/S-Mode

### Slave Address Byte

| MSB |   |   |   |   |   |    | LSB |
|-----|---|---|---|---|---|----|-----|
| X   | 1 | 0 | 0 | 1 | 0 | A1 | A0  |

The slave address byte is the first byte received following the START condition from the master device. The first five bits (MSBs) of the address are factory preset to 10010. The next two bits (A1, A0) of the address are device option dependent. For example, TPS62350 is factory preset to 00 and TPS62351 is preset to 10. Up to 4 TPS62350 type of devices can be connected to the same I<sup>2</sup>C-Bus. See the ordering information table for more details.

### Register Address Byte

| MSB |   |   |   |   |   |    | LSB |
|-----|---|---|---|---|---|----|-----|
| 0   | 0 | 0 | 0 | 0 | 0 | D1 | D0  |

Following the successful acknowledgment of the slave address, the bus master sends a byte to the TPS6235x, which contains the address of the register to be accessed. The TPS6235x contains four 8-bit registers accessible via a bidirectional I<sup>2</sup>C-bus interface. All internal registers have read and write access.

Table 1. Register Description

| Name                    | Description |
|-------------------------|-------------|
| VSEL0 (read / write)    | 00          |
| VSEL1 (read / write)    | 01          |
| CONTROL1 (read / write) | 10          |
| CONTROL2 (read / write) | 11          |

## Voltage Scaling Management

In order to reduce the power consumption of the processor core, the TPS6235x can scale its output voltage. There are two different strategies: 1) by software or 2) by hardware. It can be selected by the HW\_nSW bit (more information of the control and value bit mentioned below is shown in the *Register Description* section).


### Synchronized Scaling Hardware Strategy (HW\_nSW = 1)

The application processor programs via I<sup>2</sup>C the output voltages associated with the two states of VSEL signal: floor (VSEL0) and roof (VSEL1) values. The application processor also writes the DEFSLEW value in the CONTROL2 register to control the output voltage ramp rate.

These two registers can be continuously updated via I<sup>2</sup>C to provide the appropriate output voltage according to the VSEL input. The voltage changes with the selected ramp rate immediately after writing to the VSEL0 or VSEL1 register.

In PFM mode, when the output voltage is programmed to a lower value by toggling VSEL signal from high to low, PWROK is defined as low, while the output capacitor is discharged by the load until the converter starts pulsing to maintain the voltage within regulation.

In multiple-step mode, PWROK is defined as low while the output voltage is ramping up or down. Under all other operating conditions, PWROK is defined to be low when the output voltage is below -1.5% of the target value.

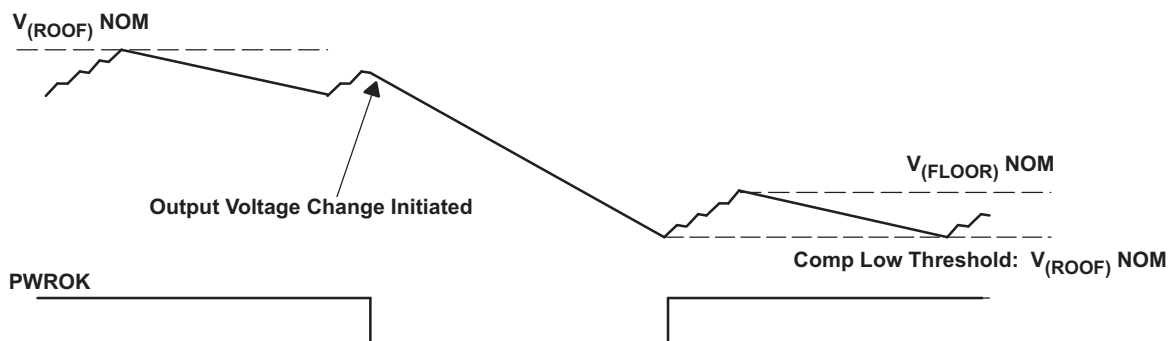

**Figure 52. PWROK Operation (Transition to a Lower Voltage)**

Table 2 shows the output voltage states depending on VSEL0, VSEL1 registers, and VSEL signal.

**Table 2. Synchronized Scaling Hardware Strategy Overview (HW\_nSW = 1)**

| VSEL PIN | VSEL0 REGISTER  | VSEL1 REGISTER  | OUTPUT VOLTAGE                   |
|----------|-----------------|-----------------|----------------------------------|
| Low      | No action       | No action       | Floor                            |
| Low      | Write new value | No action       | Change to new value              |
| Low      | No action       | Write           | No change stays at floor voltage |
| High     | No action       | No action       | Roof                             |
| High     | Write new value | No action       | No change stays at roof voltage  |
| High     | No action       | Write new value | Change to new value              |

### Direct Scaling Software Strategy (HW\_nSW = 0)

The digital processor writes the output voltage needed directly to the register VSEL1 via I<sup>2</sup>C interface. The application processor also writes the DEFSLEW value in the CONTROL2 register to control the output voltage ramp rate.

The voltage changes with the selected ramp rate after setting the GO bit in CONTROL2 register. This bit is reset when the output voltage has reached its target value. In this mode, the output voltage change is independent of VSEL signal and VSEL0 register is not used.

In PFM mode, when the output voltage is programmed to a lower value, PWROK is defined as low while the output capacitor is discharged by the load until the converter starts pulsing to maintain the voltage within regulation.

In multiple-step mode, PWROK is defined as low while the output voltage is ramping up or down. Under all other operating conditions, PWROK is defined to be low when the output voltage is below -1.5% of the target value.

### Voltage Ramp Control

The TPS6235x offers a voltage ramp rate control that can operate in two different modes:

- Multiple-Step Mode
- Single-Step Mode

The mode is selected via DEFSLEW control bits in the CONTROL2 register.

#### Single-Step Voltage Scaling Mode (default), DEFSLEW[2:0] = [111]

In single-step mode, the TPS6235x ramps the output voltage with maximum slew-rate when transitioning between the floor and the roof voltages (switch to a higher voltage).

When switching between the roof and the floor voltages (transition to a lower voltage), the ramp rate control is dependent on the mode selection (see CONTROL1 register) associated with the target register (Forced PWM, Fast, or Light PFM).

Table 3 shows the ramp rate control when transitioning to a lower voltage with DEFSLEW set to immediate transition.

**Table 3. Ramp Rate Control vs. Target Mode**

| Mode Associated with Target Voltage | HW_nSW | Output Voltage Ramp Rate                                         |
|-------------------------------------|--------|------------------------------------------------------------------|
| Forced PWM                          | X      | Immediate                                                        |
| Fast PFM                            | X      | Time to ramp down depends on output capacitance and load current |
| Light PFM                           | X      | Time to ramp down depends on output capacitance and load current |


For instance, when the output is programmed to transition to a lower voltage with Light or Fast PFM operation enabled, the TPS6235x ramps down the output voltage without controlling the ramp rate or having intermediate micro-steps. The required time to ramp down the voltage depends on the capacitance present at the output of the TPS6235x and on the load current. From an overall system perspective, this is the most efficient way to perform dynamic voltage scaling.

#### Multiple-Step Voltage Scaling Mode, DEFSLEW[2:0] = [000] to [110]

In multiple-step mode the TPS6235x controls the output voltage ramp rate regardless of the HW\_nSW bit and of the mode of operation (e.g. Forced PWM, Fast PFM, or Light PFM). The voltage ramp control is done by adjusting the time between the voltage micro-steps.

## REGISTER DESCRIPTION

## VSEL0 REGISTER (READ/WRITE)

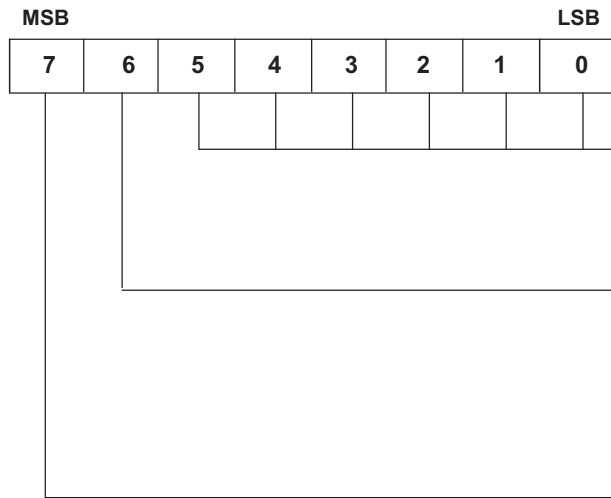

Memory location: 00

Reset state: X1XX XXXX – See the Ordering Information Table

## VOLTAGE STEP MULTIPLIER, VSM0

6-bit unsigned binary linear coding.

Code effective from 0 to 63 decimal

## LIGHTPFM OPTIMIZE

0 : LightPFM optimized for 2.2- $\mu$ H inductor

1 : LightPFM optimized for 1- $\mu$ H inductor (default)

This bit is internally mapped by VSEL1[6]. Writing a value in VSEL0[6] automatically updates VSEL1[6].

**EN\_DCDC**

This bit gates the external EN pin signal


0 : Device in shutdown regardless of EN signal

1 : Device enabled when EN pin tied high (default)

This bit is internally mapped by VSEL1[7]. Writing a value in VSEL0[7] automatically updates VSEL1[7].

- A. TPS62350, 51, 52, 53, 54, 55: Output Voltage = Minimum Output Voltage + (Voltage Step Multiplier 0 x 12.5 mV)  
B. TPS62356: Output Voltage = Minimum Output Voltage + (Voltage Step Multiplier 0 x 25 mV)

### VSEL1 REGISTER (READ/WRITE)

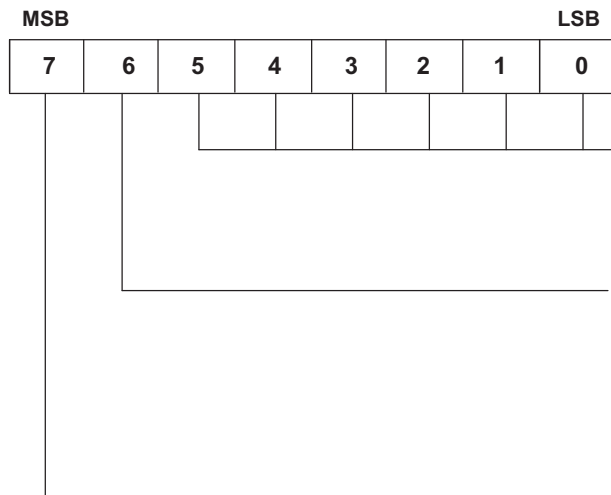

Memory location: 01

Reset state: X1XX XXXX – See the Ordering Information Table

### VOLTAGE STEP MULTIPLIER, VSM1

6-bit unsigned binary linear coding.

Code effective from 0 to 63 decimal

## LIGHTPFM OPTIMIZE

0 : LightPFM optimized for 2.2- $\mu$ H inductor

1 : LightPFM optimized for 1- $\mu$ H inductor (default)

This bit is internally mapped by VSEL0[6]. Writing a value in VSEL1[6] automatically updates VSEL0[6].

**EN DCDC**

This bit gates the external EN pin signal


0 : Device in shutdown regardless of EN signal

1 : Device enabled when EN pin tied high (default)


This bit is internally mapped by VSEL0[7]. Writing a value in VSEL1[7] automatically updates VSEL0[7].

- A. TPS62350, 51, 52, 53, 54, 55: Output Voltage = Minimum Output Voltage + (Voltage Step Multiplier 1 x 12.5 mV)  
B. TPS62356: Output Voltage = Minimum Output Voltage + (Voltage Step Multiplier 1 x 25 mV)

## CONTROL1 REGISTER (READ/WRITE)

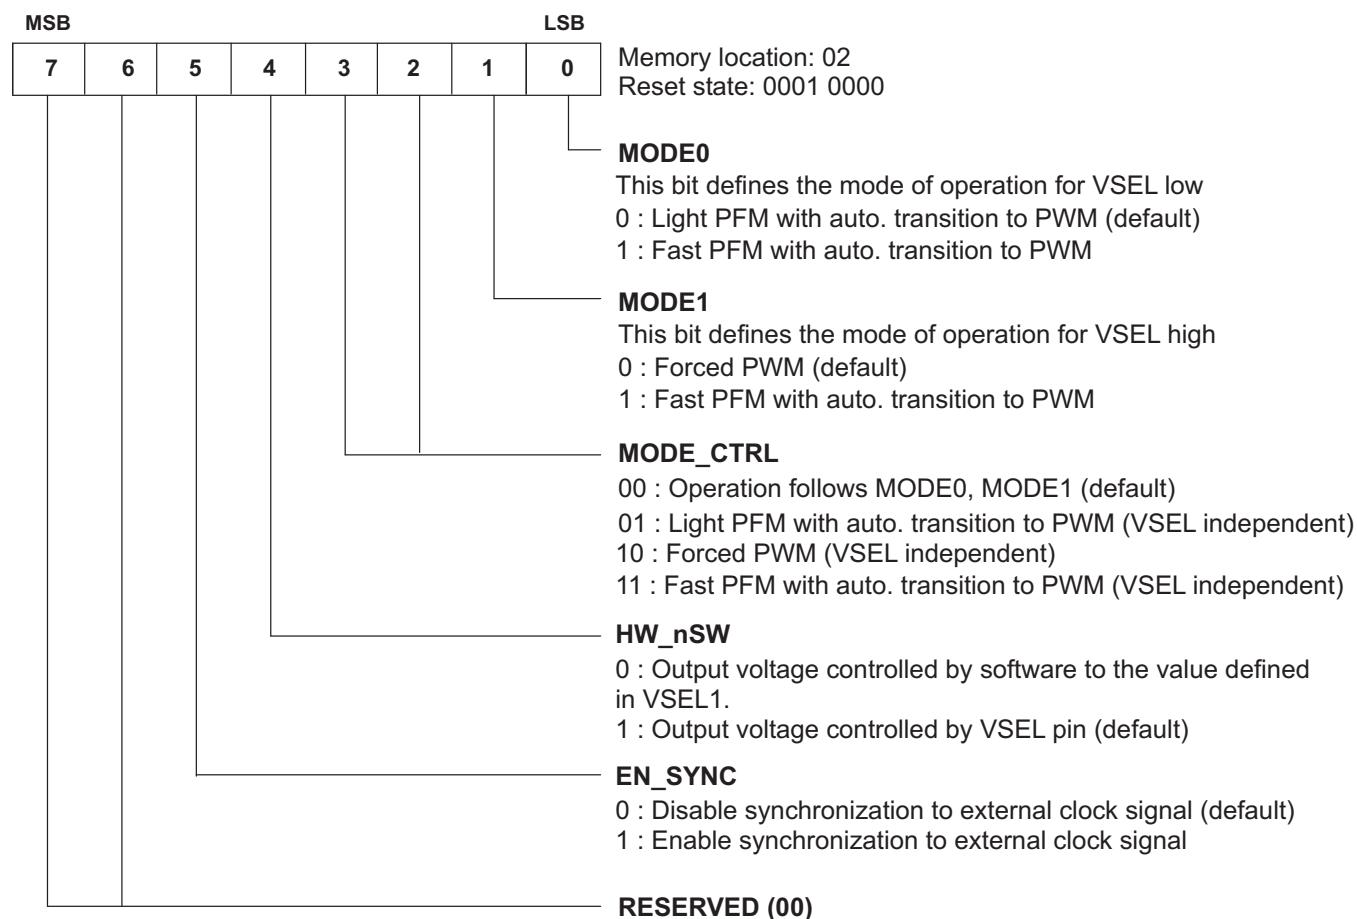

## CONTROL2 REGISTER (READ/WRITE)

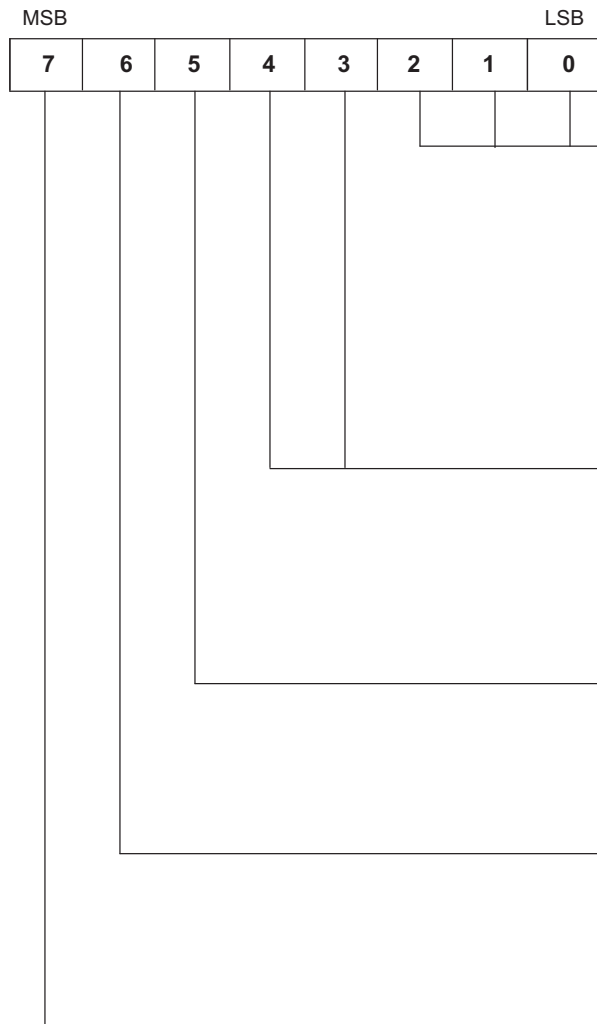

Memory location: 03  
Reset state: 0000 0111

**DEFSLEW**

DEFSLEW defines the output voltage ramp rate

000 : 0.15 mV/ $\mu$ s

001 : 0.3 mV/ $\mu$ s

010 : 0.6 mV/ $\mu$ s

011 : 1.2 mV/ $\mu$ s

100 : 2.4 mV/ $\mu$ s

101 : 4.8 mV/ $\mu$ s

110 : 9.6 mV/ $\mu$ s

111 : Immediate (default)

## PLL\_MULT

PLL\_MULT defines the synchronization clock multiplier ratio

00 :  $x1 - f_{(\text{SYNC})} = 3 \text{ MHz} \pm 12\%$  (default)

$$01 : x2 - f_{(\text{SYNC})}^{(\text{SYNC})} = 1.5 \text{ MHz} \pm 12\%$$
$$10 : x3 - f_{(SYNC)} = 1 \text{ MHz} \pm 12\%$$
$$11 : x4 - f_{(\text{SYNC})} = 750 \text{ kHz} \pm 12\%$$

## PWROK (READ ONLY)

0 : Indicates that the output voltage is below its target regulation voltage. This bit is zero if the converter is disabled.

1 : Indicates that the output voltage is within its nominal range

## OUTPUT\_DISCHARGE

0 : The dc/dc output capacitor is not actively discharged when the converter is disabled (default).

1 : The dc/dc output capacitor is actively discharged when the converter is disabled.

**GO**

This bit is only valid when HW\_nSW = 0

0 : No change in the output voltage (default).

1 : The output voltage is changed with the ramp rate defined in DEFSLEW.

## APPLICATION INFORMATION

### Output Filter Design (Inductor and Output Capacitor)

The TPS6235x step-down converter has an internal loop compensation. Therefore, the external L-C filter must be selected to work with the internal compensation.

The device has been designed to operate with inductance values between a minimum of 0.7  $\mu\text{H}$  and maximum of 6.2  $\mu\text{H}$ . The internal compensation is optimized to operate with an output filter of  $L = 1 \mu\text{H}$  and  $C_O = 10 \mu\text{F}$ . Such an output filter has its corner frequency at:

$$f_c = \frac{1}{2\pi\sqrt{L \times C_O}} = \frac{1}{2\pi\sqrt{1 \mu\text{H} \times 10 \mu\text{F}}} = 50.3 \text{ kHz} \quad (1)$$

Selecting a larger output capacitor value (e.g., 22  $\mu\text{F}$ ) is less critical because the corner frequency moves to lower frequencies with fewer stability problems. The possible output filter combinations are listed in [Table 4](#).

Regardless of the inductance value, operation is recommended with 10- $\mu\text{F}$  output capacitor in applications with high-load transients  $\left(\frac{di}{dt}\right)$  (e.g.,  $\geq 1600 \text{ mA}/\mu\text{s}$ ).

**Table 4. Output Filter Combinations**

| INDUCTANCE (L)    | OUTPUT CAPACITANCE (C <sub>O</sub> )<br>FOR STABLE LOOP OPERATION | OUTPUT CAPACITANCE (C <sub>O</sub> )<br>FOR OPTIMIZED TRANSIENT PERFORMANCE |
|-------------------|-------------------------------------------------------------------|-----------------------------------------------------------------------------|
| 1.0 $\mu\text{H}$ | $\geq 10 \mu\text{F}$ (ceramic capacitor)                         | $\geq 10 \mu\text{F}$ (ceramic capacitor)                                   |
| 2.2 $\mu\text{H}$ | $\geq 4.7 \mu\text{F}$ (ceramic capacitor)                        | $\geq 22 \mu\text{F}$ (ceramic capacitor)                                   |

The inductor value also has an impact on the pulse skipping operation. The transition into power-save mode begins when the valley inductor current drops below a level set internally. Lower inductor values result in higher ripple current which occurs at lower load currents. This results in a dip in efficiency at light load operations.

### Inductor Selection

Even though the inductor does not influence the operating frequency, the inductor value has a direct effect on the ripple current. The selected inductor has to be rated for its dc resistance and saturation current. The inductor ripple current ( $\Delta I_L$ ) decreases with higher inductance and increases with higher  $V_I$  or  $V_O$ .

$$\Delta I_L = \frac{V_O}{V_I} \times \frac{V_I - V_O}{L \times f_{SW}} \quad \Delta I_{L(\text{MAX})} = I_{O(\text{MAX})} + \frac{\Delta I_L}{2} \quad (2)$$

where:

$f_{SW}$  = switching frequency (3 MHz typical)

$L$  = inductor value

$\Delta I_L$  = peak-to-peak inductor ripple current

$I_{L(\text{MAX})}$  = maximum inductor current

Normally, it is advisable to operate with a ripple of less than 30% of the average output current. Accepting larger values of ripple current allows the use of low inductances, but results in higher output voltage ripple, greater core losses, and lower output current capability.

The total losses of the coil consist of both the losses in the dc resistance ( $R_{DC}$ ) and the following frequency-dependent components:

- The losses in the core material (magnetic hysteresis loss, especially at high switching frequencies)
- Additional losses in the conductor from the skin effect (current displacement at high frequencies)
- Magnetic field losses of the neighboring windings (proximity effect)
- Radiation losses

The following inductor series from different suppliers have been used with the TPS62350 converters.

**Table 5. List of Inductors**

| MANUFACTURER | SERIES    | DIMENSIONS                                    |
|--------------|-----------|-----------------------------------------------|
| FDK          | MIPSA2520 | $2.5 \times 2.0 \times 1.2 = 6 \text{ mm}^3$  |
| TDK          | VLF3010AT | $2.8 \times 2.6 \times 1 = 7.28 \text{ mm}^3$ |
| Coilcraft    | LPS3010   | $3 \times 3 \times 1 = 9 \text{ mm}^3$        |
|              | LPS3015   | $3 \times 3 \times 1.5 = 13.5 \text{ mm}^3$   |

## Output Capacitor Selection

The advanced fast-response voltage mode control scheme of the TPS6235x allows the use of tiny ceramic capacitors. Ceramic capacitors with low ESR values have the lowest output voltage ripple and are recommended. The output capacitor requires either an X7R or X5R dielectric. Y5V and Z5U dielectric capacitors, aside from their wide variation in capacitance over temperature, become resistive at high frequencies.

At nominal load current, the device operates in PWM mode and the overall output voltage ripple is the sum of the voltage spike caused by the output capacitor ESR plus the voltage ripple caused by charging and discharging the output capacitor:

$$\Delta V_O = \frac{V_O}{V_I} \times \frac{V_I - V_O}{L \times f_{sw}} \times \left( \frac{1}{8 \times C_O \times f_{sw}} + \text{ESR} \right), \text{ maximum for high } V_I \quad (3)$$

At light loads, the device operates in power-save mode and the output voltage ripple is independent of the output capacitor value. The output voltage ripple is set by the internal comparator thresholds and propagation delays. The typical output voltage ripple is 2% of the nominal output voltage  $V_O$ .

## Input Capacitor Selection

Because of the nature of the buck converter having a pulsating input current, a low ESR input capacitor is required to prevent large voltage transients that can cause misbehavior of the device or interferences with other circuits in the system. For most applications, a 10-μF capacitor is sufficient.

Take care when using only ceramic input capacitors. When a ceramic capacitor is used at the input and the power is being supplied through long wires, such as from a wall adapter, a load step at the output can induce ringing at the VIN pin. This ringing can couple to the output and be mistaken as loop instability or could even damage the part.

## Checking Loop Stability

The first step of circuit and stability evaluation is to look from a steady-state perspective at the following signals:

- Switching node, SW
- Inductor current,  $I_L$
- Output ripple voltage,  $V_{O(AC)}$

These are the basic signals that need to be measured when evaluating a switching converter. When the switching waveform shows large duty cycle jitter or the output voltage or inductor current shows oscillations, the regulation loop may be unstable. This is often a result of board layout and/or L-C combination.

As a next step in the evaluation of the regulation loop, the load transient response is tested. The output capacitor must supply all of the load current during the time between the application of the load transient and the turn on of the P-channel MOSFET.  $V_O$  immediately shifts by an amount equal to  $\Delta I_{(LOAD)} \times \text{ESR}$ , where ESR is the effective series resistance of  $C_O$ .  $\Delta I_{(LOAD)}$  begins to charge or discharge  $C_O$  generating a feedback error signal used by the regulator to return  $V_O$  to its steady-state value.

During this recovery time,  $V_O$  is monitored for settling time, overshoot, or ringing that helps judge the converter stability. Without any ringing, the loop has usually more than 45° of phase margin.

Because the damping factor of the circuitry is directly related to several resistive parameters (e.g., MOSFET  $r_{DS(on)}$ ) that are temperature dependant, the loop stability analysis must be performed over the input voltage range, load current range, and temperature range.

## Layout Considerations

As for all switching power supplies, the layout is an important step in the design. High-speed operation of the TPS6235x device demands careful attention to PCB layout. Care must be taken in board layout to get the specified performance. If the layout is not carefully done, the regulator could show poor line and/or load regulation, stability issues as well as EMI problems. It is critical to provide a low inductance, impedance ground path. Therefore, use wide and short traces for the main current paths as indicated in bold on [Figure 53](#).

The input capacitor should be placed as close as possible to the IC pins as well as the inductor and output capacitor. Use a common ground node for power ground and a different one for control ground (AGND) to minimize the effects of ground noise. Connect these ground nodes together (star point) underneath the IC and make sure that small signal components returning to the AGND pin do not share the high current path of C1 and C2.

The output voltage sense line (FB) should be connected right to the output capacitor and routed away from noisy components and traces (e.g., SW line). Its trace should be minimized and shielded by a guard-ring connected to the reference ground.

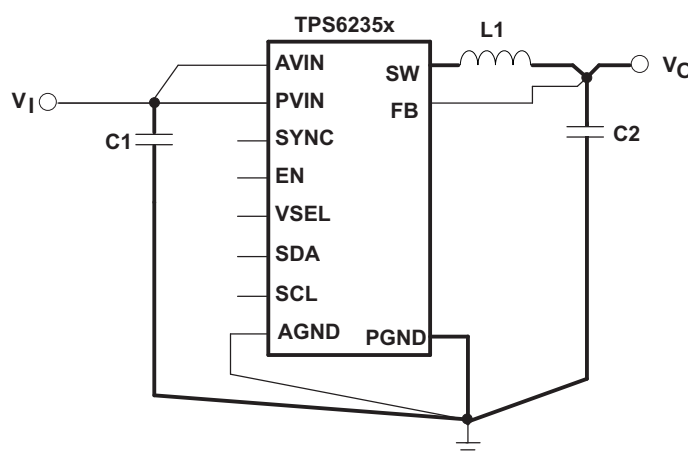


Figure 53. Layout Diagram

## Thermal Information

Implementation of integrated circuits in low-profile and fine-pitch surface-mount packages typically requires special attention to power dissipation. Many system-dependant issues such as thermal coupling, airflow, added heat sinks, and convection surfaces, and the presence of other heat-generating components, affect the power-dissipation limits of a given component.

Three basic approaches for enhancing thermal performance are listed below:


- Improving the power dissipation capability of the PCB design
- Improving the thermal coupling of the component to the PCB
- Introducing airflow in the system

The maximum recommended junction temperature ( $T_J$ ) of the TPS6235x device is 125°C. The thermal resistance of the 12-pin CSP package (YZG) is  $R_{\theta JA} = 89^\circ\text{C/W}$ . Specified regulator operation is assured to a maximum ambient temperature  $T_A$  of 85°C. Therefore, the maximum power dissipation is about 450 mW. More power can be dissipated if the maximum ambient temperature of the application is lower or if the PowerPAD™ package (DRC) is used.


$$P_{D\text{MAX}} = \frac{T_{J\text{MAX}} - T_A}{R_{\theta JA}} = \frac{125^\circ\text{C} - 85^\circ\text{C}}{89^\circ\text{C/W}} = 450 \text{ mW} \quad (4)$$

## PACKAGE SUMMARY

**CHIP SCALE PACKAGE  
(BOTTOM VIEW)**



**CHIP SCALE PACKAGE  
(TOP VIEW)**



Code:

- Y — 2 digit date code
- LLLL - lot trace code
- S - assembly site code

## PACKAGE DIMENSIONS

The dimensions for the YZG package are provided in the mechanical data package drawing at the end of this data sheet.

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|-------------------------|----------------------|--------------|-------------------------|-------------------------|
| TPS62350YZGR     | ACTIVE        | DSBGA        | YZG                | 12   | 3000           | Green (RoHS<br>& no Sb/Br) | SNAGCU                  | Level-1-260C-UNLIM   | -40 to 85    | TPS62350                | <a href="#">Samples</a> |
| TPS62350YZGT     | ACTIVE        | DSBGA        | YZG                | 12   | 250            | Green (RoHS<br>& no Sb/Br) | SNAGCU                  | Level-1-260C-UNLIM   | -40 to 85    | TPS62350                | <a href="#">Samples</a> |
| TPS62351DRCR     | ACTIVE        | VSON         | DRC                | 10   | 3000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  | -40 to 85    | BNT                     | <a href="#">Samples</a> |
| TPS62351DRCRG4   | ACTIVE        | VSON         | DRC                | 10   | 3000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  | -40 to 85    | BNT                     | <a href="#">Samples</a> |
| TPS62352YZGR     | ACTIVE        | DSBGA        | YZG                | 12   | 3000           | Green (RoHS<br>& no Sb/Br) | SNAGCU                  | Level-1-260C-UNLIM   | -40 to 85    | TPS62352                | <a href="#">Samples</a> |
| TPS62352YZGT     | ACTIVE        | DSBGA        | YZG                | 12   | 250            | Green (RoHS<br>& no Sb/Br) | SNAGCU                  | Level-1-260C-UNLIM   | -40 to 85    | TPS62352                | <a href="#">Samples</a> |
| TPS62353YZGR     | ACTIVE        | DSBGA        | YZG                | 12   | 3000           | Green (RoHS<br>& no Sb/Br) | SNAGCU                  | Level-1-260C-UNLIM   | -40 to 85    | TPS62353                | <a href="#">Samples</a> |
| TPS62353YZGT     | ACTIVE        | DSBGA        | YZG                | 12   | 250            | Green (RoHS<br>& no Sb/Br) | SNAGCU                  | Level-1-260C-UNLIM   | -40 to 85    | TPS62353                | <a href="#">Samples</a> |
| TPS62354YZGR     | ACTIVE        | DSBGA        | YZG                | 12   | 3000           | Green (RoHS<br>& no Sb/Br) | SNAGCU                  | Level-1-260C-UNLIM   | -40 to 85    | TPS62354                | <a href="#">Samples</a> |
| TPS62354YZGT     | ACTIVE        | DSBGA        | YZG                | 12   | 250            | Green (RoHS<br>& no Sb/Br) | SNAGCU                  | Level-1-260C-UNLIM   | -40 to 85    | TPS62354                | <a href="#">Samples</a> |
| TPS62355DRCR     | ACTIVE        | VSON         | DRC                | 10   | 3000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  | -40 to 85    | CCP                     | <a href="#">Samples</a> |
| TPS62356YZGR     | ACTIVE        | DSBGA        | YZG                | 12   | 3000           | Green (RoHS<br>& no Sb/Br) | SNAGCU                  | Level-1-260C-UNLIM   | -40 to 85    | TPS62356                | <a href="#">Samples</a> |
| TPS62356YZGT     | ACTIVE        | DSBGA        | YZG                | 12   | 250            | Green (RoHS<br>& no Sb/Br) | SNAGCU                  | Level-1-260C-UNLIM   | -40 to 85    | TPS62356                | <a href="#">Samples</a> |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.


<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

<sup>(6)</sup> Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

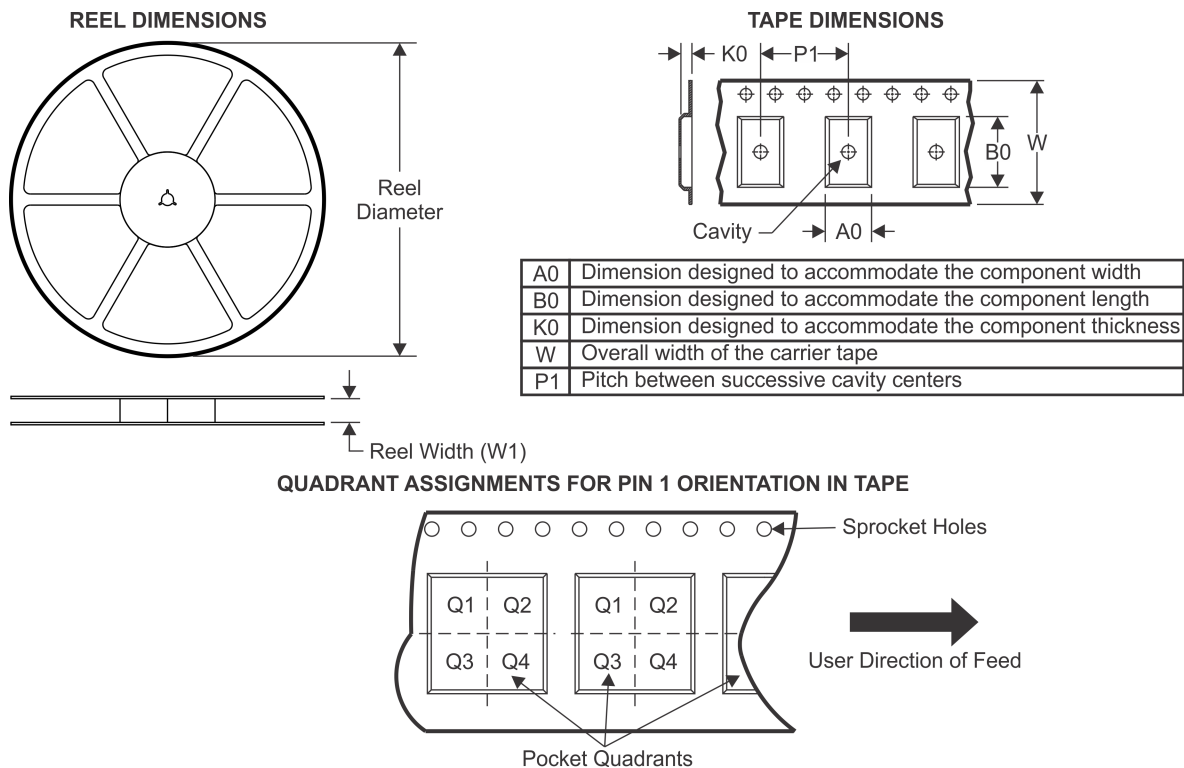**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS62350YZGR | DSBGA        | YZG             | 12   | 3000 | 180.0              | 8.4                | 1.6     | 2.37    | 0.81    | 4.0     | 8.0    | Q1            |
| TPS62350YZGT | DSBGA        | YZG             | 12   | 250  | 180.0              | 8.4                | 1.6     | 2.37    | 0.81    | 4.0     | 8.0    | Q1            |
| TPS62351DRCR | VSON         | DRC             | 10   | 3000 | 330.0              | 12.4               | 3.3     | 3.3     | 1.1     | 8.0     | 12.0   | Q2            |
| TPS62352YZGR | DSBGA        | YZG             | 12   | 3000 | 180.0              | 8.4                | 1.6     | 2.37    | 0.81    | 4.0     | 8.0    | Q1            |
| TPS62352YZGT | DSBGA        | YZG             | 12   | 250  | 180.0              | 8.4                | 1.6     | 2.37    | 0.81    | 4.0     | 8.0    | Q1            |
| TPS62353YZGR | DSBGA        | YZG             | 12   | 3000 | 180.0              | 8.4                | 1.6     | 2.37    | 0.81    | 4.0     | 8.0    | Q1            |
| TPS62353YZGT | DSBGA        | YZG             | 12   | 250  | 180.0              | 8.4                | 1.6     | 2.37    | 0.81    | 4.0     | 8.0    | Q1            |
| TPS62354YZGR | DSBGA        | YZG             | 12   | 3000 | 180.0              | 8.4                | 1.6     | 2.37    | 0.81    | 4.0     | 8.0    | Q1            |
| TPS62354YZGT | DSBGA        | YZG             | 12   | 250  | 180.0              | 8.4                | 1.6     | 2.37    | 0.81    | 4.0     | 8.0    | Q1            |
| TPS62355DRCR | VSON         | DRC             | 10   | 3000 | 330.0              | 12.4               | 3.3     | 3.3     | 1.1     | 8.0     | 12.0   | Q2            |
| TPS62356YZGR | DSBGA        | YZG             | 12   | 3000 | 180.0              | 8.4                | 1.6     | 2.37    | 0.81    | 4.0     | 8.0    | Q1            |
| TPS62356YZGT | DSBGA        | YZG             | 12   | 250  | 180.0              | 8.4                | 1.6     | 2.37    | 0.81    | 4.0     | 8.0    | Q1            |

## TAPE AND REEL BOX DIMENSIONS

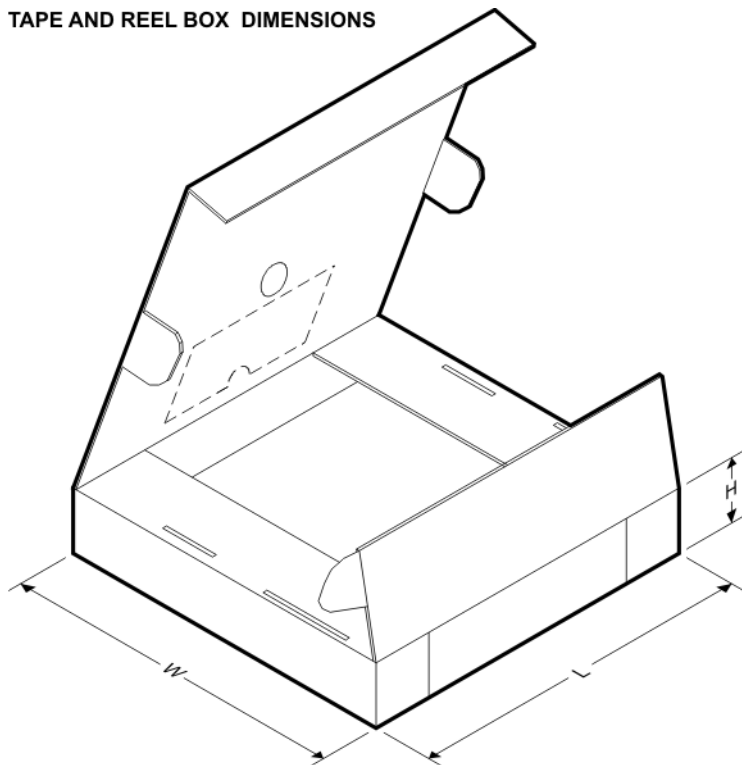


\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS62350YZGR | DSBGA        | YZG             | 12   | 3000 | 182.0       | 182.0      | 20.0        |
| TPS62350YZGT | DSBGA        | YZG             | 12   | 250  | 182.0       | 182.0      | 20.0        |
| TPS62351DRCR | VSON         | DRC             | 10   | 3000 | 367.0       | 367.0      | 35.0        |
| TPS62352YZGR | DSBGA        | YZG             | 12   | 3000 | 182.0       | 182.0      | 20.0        |
| TPS62352YZGT | DSBGA        | YZG             | 12   | 250  | 182.0       | 182.0      | 20.0        |
| TPS62353YZGR | DSBGA        | YZG             | 12   | 3000 | 182.0       | 182.0      | 20.0        |
| TPS62353YZGT | DSBGA        | YZG             | 12   | 250  | 182.0       | 182.0      | 20.0        |
| TPS62354YZGR | DSBGA        | YZG             | 12   | 3000 | 182.0       | 182.0      | 20.0        |
| TPS62354YZGT | DSBGA        | YZG             | 12   | 250  | 182.0       | 182.0      | 20.0        |
| TPS62355DRCR | VSON         | DRC             | 10   | 3000 | 367.0       | 367.0      | 35.0        |
| TPS62356YZGR | DSBGA        | YZG             | 12   | 3000 | 182.0       | 182.0      | 20.0        |
| TPS62356YZGT | DSBGA        | YZG             | 12   | 250  | 182.0       | 182.0      | 20.0        |

YZG (R-XBGA-N12)

DIE-SIZE BALL GRID ARRAY

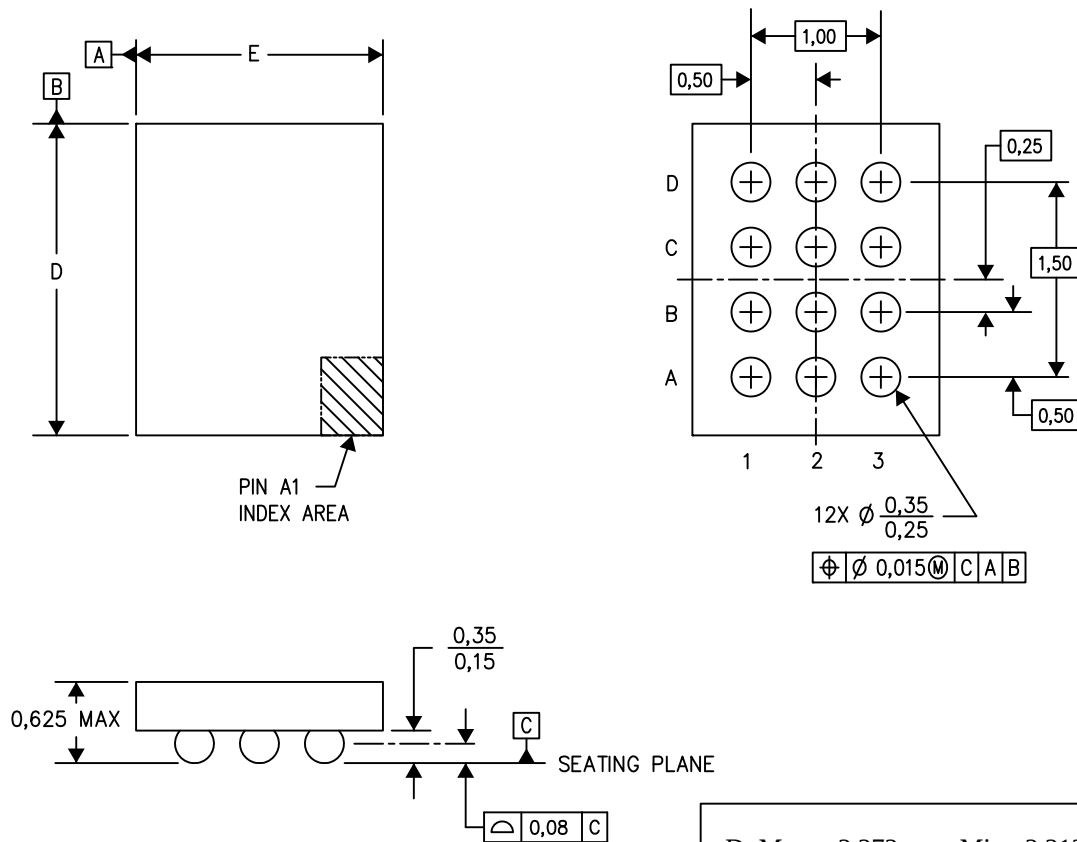

D: Max = 2.272 mm, Min = 2.212 mm

E: Max = 1.504 mm, Min = 1.444 mm

4205059/E 07/13

- NOTES: A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.  
 B. This drawing is subject to change without notice.  
 C. NanoFree™ package configuration.


NanoFree is a trademark of Texas Instruments.

**DRC 10**

**GENERIC PACKAGE VIEW**


**VSON - 1 mm max height**

PLASTIC SMALL OUTLINE - NO LEAD

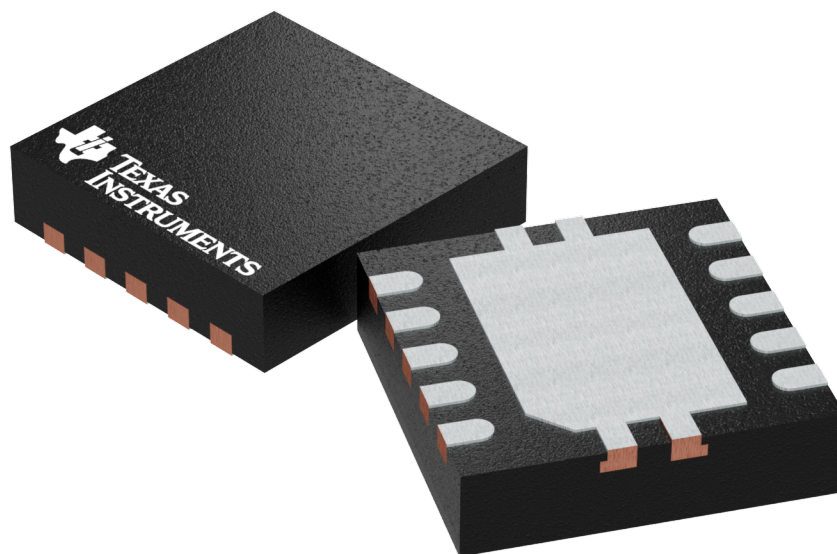

Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

4204102-3/M

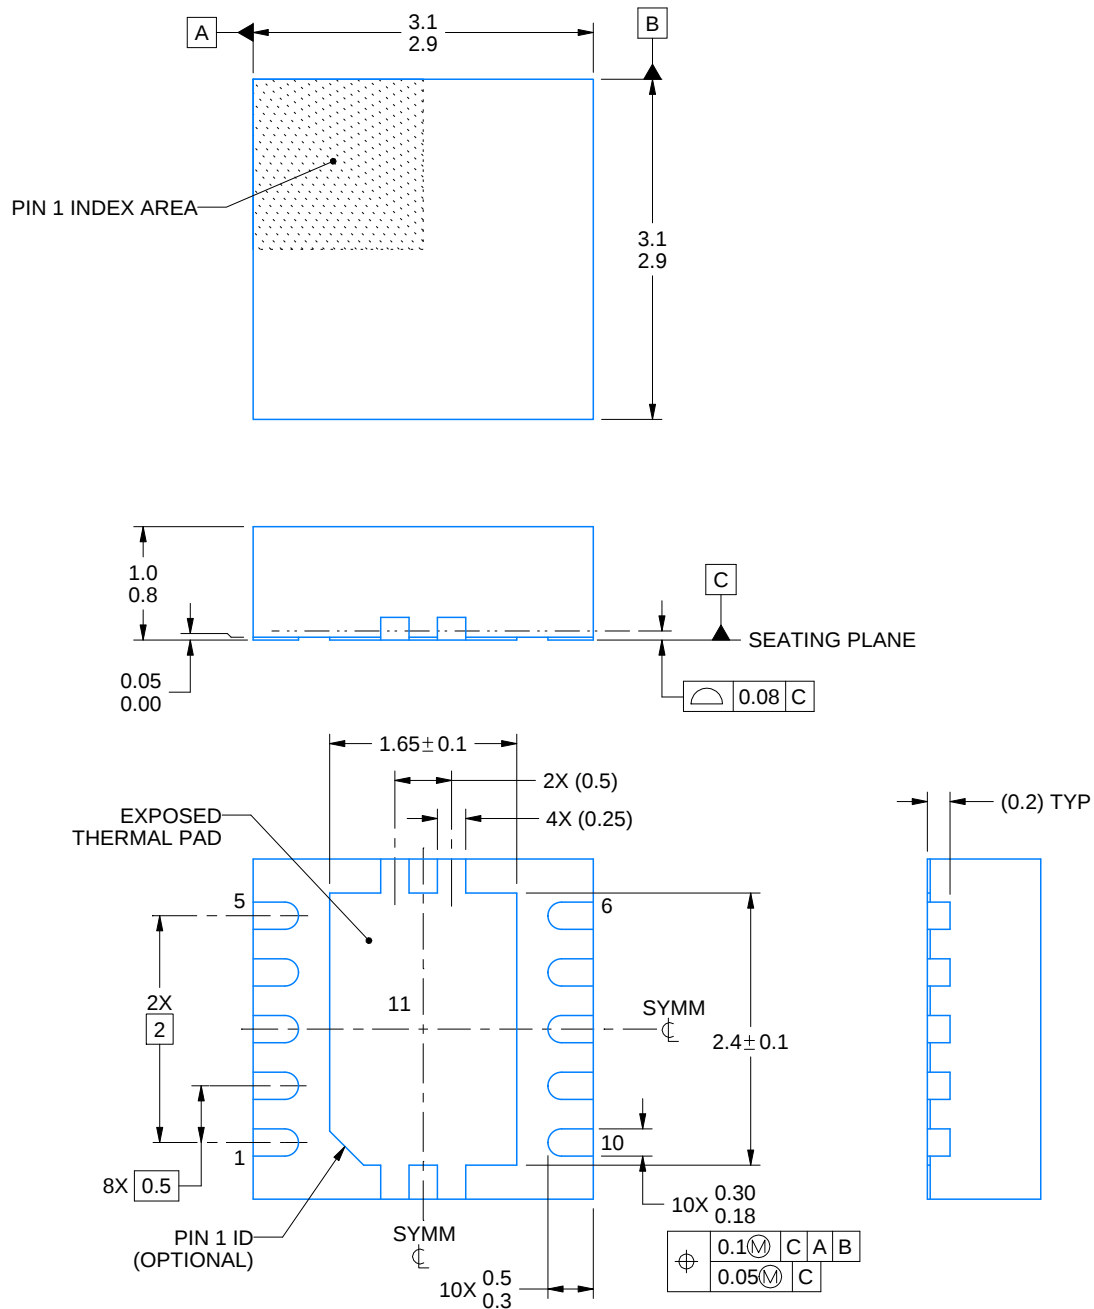

4218878/B 07/2018

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.

# EXAMPLE BOARD LAYOUT



DRC0010J

VSON - 1 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

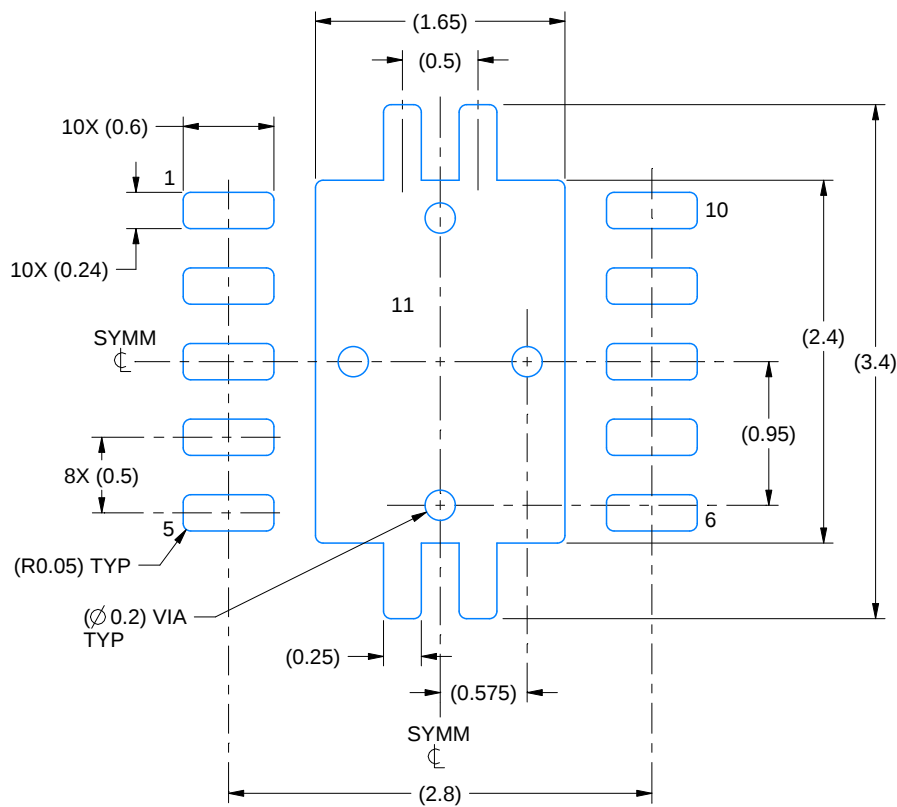

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:20X

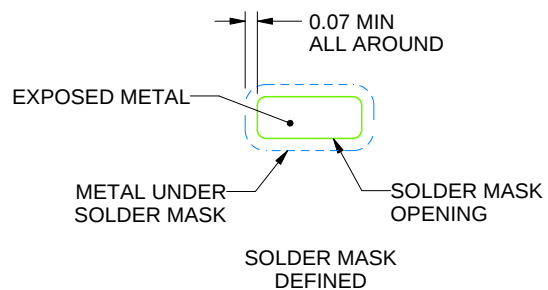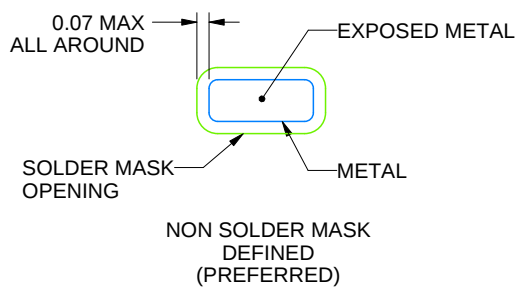

SOLDER MASK DETAILS

4218878/B 07/2018


NOTES: (continued)

4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sluea271](http://www.ti.com/lit/sluea271)).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

**DRC0010J**

**VSON - 1 mm max height**

PLASTIC SMALL OUTLINE - NO LEAD

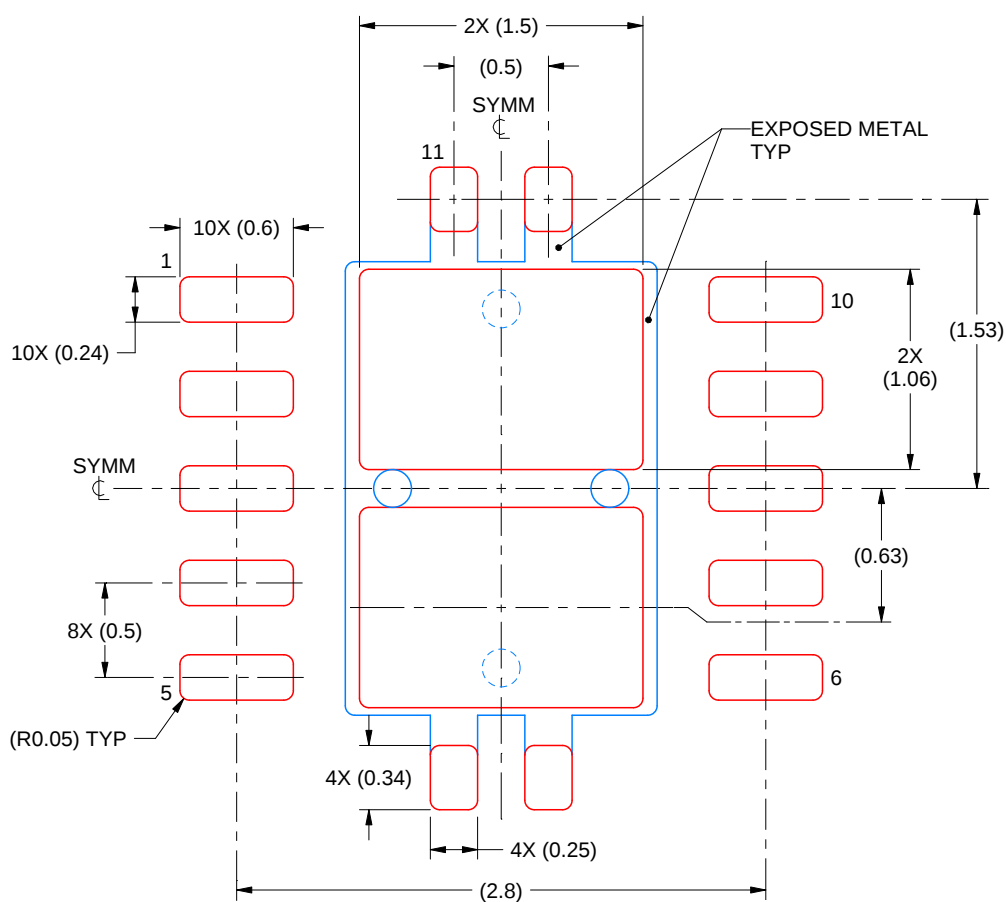

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 11:  
80% PRINTED SOLDER COVERAGE BY AREA  
SCALE:25X

4218878/B 07/2018

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## IMPORTANT NOTICE

Texas Instruments Incorporated (TI) reserves the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

TI's published terms of sale for semiconductor products (<http://www.ti.com/sc/docs/stdterms.htm>) apply to the sale of packaged integrated circuit products that TI has qualified and released to market. Additional terms may apply to the use or sale of other types of TI products and services.

Reproduction of significant portions of TI information in TI data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such reproduced documentation. Information of third parties may be subject to additional restrictions. Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyers and others who are developing systems that incorporate TI products (collectively, "Designers") understand and agree that Designers remain responsible for using their independent analysis, evaluation and judgment in designing their applications and that Designers have full and exclusive responsibility to assure the safety of Designers' applications and compliance of their applications (and of all TI products used in or for Designers' applications) with all applicable regulations, laws and other applicable requirements. Designer represents that, with respect to their applications, Designer has all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. Designer agrees that prior to using or distributing any applications that include TI products, Designer will thoroughly test such applications and the functionality of such TI products as used in such applications.

TI's provision of technical, application or other design advice, quality characterization, reliability data or other services or information, including, but not limited to, reference designs and materials relating to evaluation modules, (collectively, "TI Resources") are intended to assist designers who are developing applications that incorporate TI products; by downloading, accessing or using TI Resources in any way, Designer (individually or, if Designer is acting on behalf of a company, Designer's company) agrees to use any particular TI Resource solely for this purpose and subject to the terms of this Notice.

TI's provision of TI Resources does not expand or otherwise alter TI's applicable published warranties or warranty disclaimers for TI products, and no additional obligations or liabilities arise from TI providing such TI Resources. TI reserves the right to make corrections, enhancements, improvements and other changes to its TI Resources. TI has not conducted any testing other than that specifically described in the published documentation for a particular TI Resource.

Designer is authorized to use, copy and modify any individual TI Resource only in connection with the development of applications that include the TI product(s) identified in such TI Resource. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT OF TI OR ANY THIRD PARTY IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of TI Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI RESOURCES ARE PROVIDED "AS IS" AND WITH ALL FAULTS. TI DISCLAIMS ALL OTHER WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, REGARDING RESOURCES OR USE THEREOF, INCLUDING BUT NOT LIMITED TO ACCURACY OR COMPLETENESS, TITLE, ANY EPIDEMIC FAILURE WARRANTY AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS. TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY DESIGNER AGAINST ANY CLAIM, INCLUDING BUT NOT LIMITED TO ANY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON ANY COMBINATION OF PRODUCTS EVEN IF DESCRIBED IN TI RESOURCES OR OTHERWISE. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, DIRECT, SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF TI RESOURCES OR USE THEREOF, AND REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Unless TI has explicitly designated an individual product as meeting the requirements of a particular industry standard (e.g., ISO/TS 16949 and ISO 26262), TI is not responsible for any failure to meet such industry standard requirements.

Where TI specifically promotes products as facilitating functional safety or as compliant with industry functional safety standards, such products are intended to help enable customers to design and create their own applications that meet applicable functional safety standards and requirements. Using products in an application does not by itself establish any safety features in the application. Designers must ensure compliance with safety-related requirements and standards applicable to their applications. Designer may not use any TI products in life-critical medical equipment unless authorized officers of the parties have executed a special contract specifically governing such use. Life-critical medical equipment is medical equipment where failure of such equipment would cause serious bodily injury or death (e.g., life support, pacemakers, defibrillators, heart pumps, neurostimulators, and implantables). Such equipment includes, without limitation, all medical devices identified by the U.S. Food and Drug Administration as Class III devices and equivalent classifications outside the U.S.

TI may expressly designate certain products as completing a particular qualification (e.g., Q100, Military Grade, or Enhanced Product). Designers agree that it has the necessary expertise to select the product with the appropriate qualification designation for their applications and that proper product selection is at Designers' own risk. Designers are solely responsible for compliance with all legal and regulatory requirements in connection with such selection.

Designer will fully indemnify TI and its representatives against any damages, costs, losses, and/or liabilities arising out of Designer's non-compliance with the terms and provisions of this Notice.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2018, Texas Instruments Incorporated