
DATA SHEET

RELEASE B DATA SHEET



GRF5507W

HIGH LINEARITY POWER AMPLIFIER 700 to 910 MHz

FEATURES

- Excellent OP1dB, OIP3, ACLR and IM3 Performance
- Native Linearity Provides up to +24.5 dBm P_{OUT} with > 45 dBc ACLR – Without the Need for Digital Predistortion Correction
- +24 dBm Linear Output Power Maintained at 105 °C
- Flexible Biasing Provides Latitude for Linearity Optimization
- 195 mA Native Mode Quiescent Current Consumption
- 5 V Supply Voltage
- 50 Ω Single-ended Input and Output Impedances
- Digital Shutdown
- Rugged Design is Extremely Resilient to Mismatched Loads
- -40 to 105 °C Operating Temperature Range
- Compact 3 x 3 mm QFN-16 Package

Tested to AEC-Q100 Grade 2 Qualification

- 100% Device Reflow at Assembly
- 100% Optical Die Inspection

Reference: 5 V / 195 mA I_{CCQ} / 750 MHz

- Gain: 30.5 dB
- OIP3: 47.3 dBm at +23 dBm P_{OUT}/tone
- OP1dB: 33.4 dBm
- Noise Figure: 4.5 dB

APPLICATIONS

- Cellular Boosters/Repeaters
- Automotive Compensators
- Picocells/Femtocells
- Cellular DAS
- Customer Premise Equipment
- Wireless Infrastructure

DESCRIPTION


The GRF5507W is a high gain, two-stage InGaP HBT power amplifier designed to deliver excellent P1dB, ACLR and IM3 performance over the 700 to 800 MHz band. Its exceptional native linearity makes it an ideal choice for transmitter applications that typically do not employ digital predistortion correction schemes.

This device is part of a complete family of externally matched linear amplifiers that cover the following frequency ranges:

GRF5506: 0.66 - 0.72 GHz	GRF5518: 1.8 - 2.0 GHz
GRF5507: 0.7 - 0.91 GHz	GRF5519: 1.92 - 2.2 GHz
GRF5508: 0.777 - 0.96 GHz	GRF5521: 2.11 - 2.17 GHz
GRF5510: 0.88 - 0.96 GHz	GRF5526: 2.2 - 2.7 GHz
GRF5517: 1.6 - 1.92 GHz	GRF5536: 3.3 - 4.2 GHz


Please consult with the GRF applications engineering team for custom tuning/evaluation board data.

BLOCK DIAGRAM

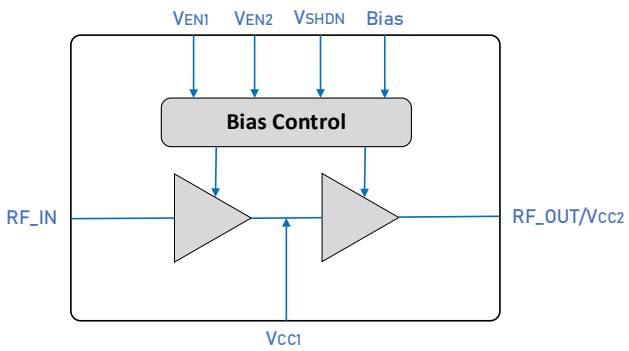

Guerrilla RF Proprietary Information. • ©2026 Guerrilla RF, Inc. • All rights reserved. • February 16, 2026

Downloaded from Arrow.com.

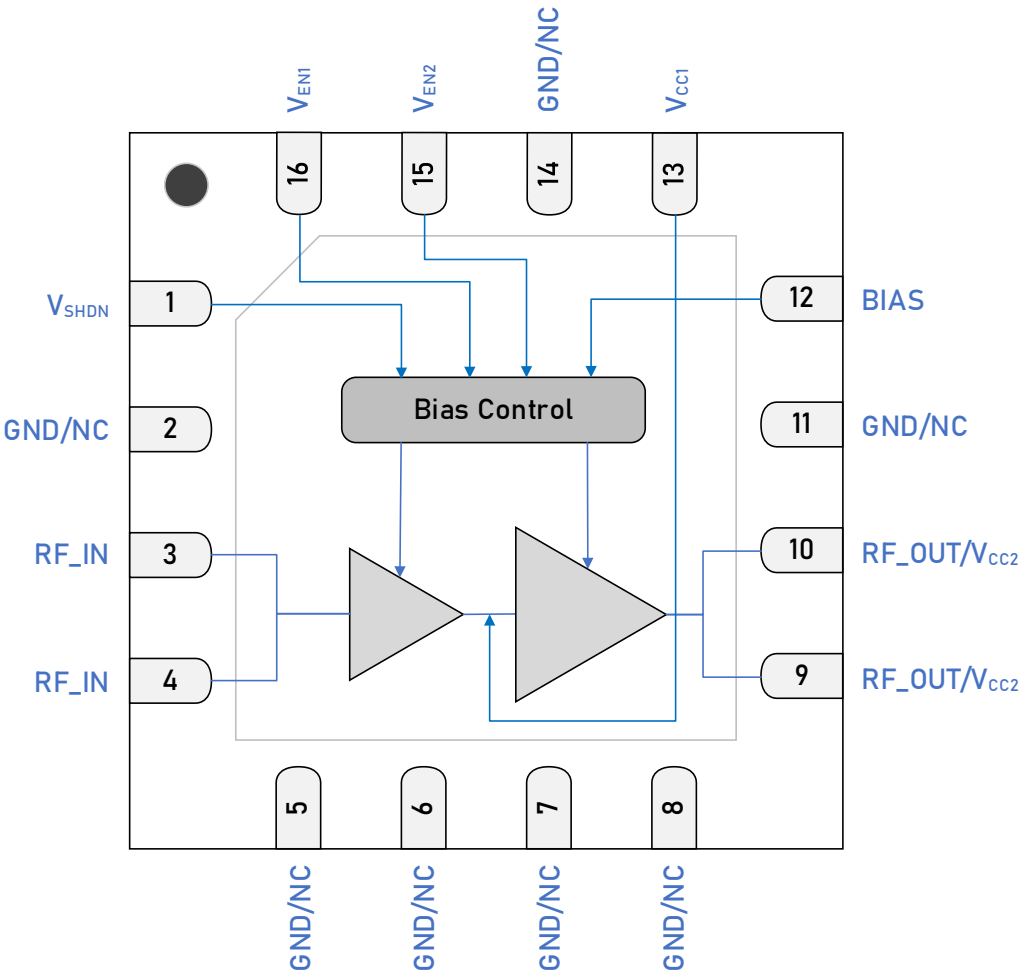

3 x 3 mm QFN-16 Pin Out (Top View)

Guerrilla RF Proprietary Information. • ©2026 Guerrilla RF, Inc. • All rights reserved. • February 16, 2026
www.guerrilla-rf.com • (336) 510-7840 • sales@guerrilla-rf.com • 2000 Pisgah Church Road. Greensboro, NC 27455

Downloaded from Arrow.com.

Pin Assignments

Pin	Name	Description	Note
1	V_{SHDN}	Digital Shutdown Pin	$V_{SHDN} \geq 1.7$ V (Logic HIGH) disables device. $V_{SHDN} \leq 0.9$ V (Logic LOW) enables device.
2, 5, 6, 7, 8, 11, 14	GND/NC	Ground or No Connect	No internal connection to die. These pins can be left unconnected, or be connected to ground (recommended). Use a via as close to the pin as possible if grounded.
3, 4	RF_IN	RF Input	Pins 3 & 4 tied together on system board. Internally matched 50 Ω. An external DC blocking capacitor must be used.
9, 10	RF_OUT/V_{CC2}	PA Output/Bias Voltage	Pins 9 & 10 tied together on system board. V_{CC2} must be applied to this pin via an RF choke.
12	Bias	Bias Circuit Supply	Connect to V_{CC2} through external resistor.
13	V_{CC1}	Bias Voltage	Connect to V_{CC1} through external resistor.
15	V_{EN2}	Enable2 Voltage Input	V_{EN2} and series resistor set I_{CCQ} for the output stage. $V_{EN2} \leq 0.2$ V disables stage 2.
16	V_{EN1}	Enable1 Voltage Input	V_{EN1} and series resistor set I_{CCQ} for the input stage. $V_{EN1} \leq 0.2$ V disables stage 1. Connecting an external de-coupling capacitor to ground is required for optimal NF performance.
PKG BASE	GND	Ground	Provides DC and RF ground for the amplifier, as well as thermal heat sink. Recommend multiple 8 mil vias beneath the package for optimal RF and thermal performance. Refer to evaluation board top layer graphic on schematic page.

Truth Table

Pin	Logic	Condition
V_{SHDN}	LOW	Full Operation
	HIGH	All Amplifiers Off
V_{EN1}	LOW	Stage 1 Amplifier Off
	HIGH	Stage 1 Amplifier On
V_{EN2}	LOW	Stage 2 Amplifier Off
	HIGH	Stage 2 Amplifier On

Downloaded from Arrow.com.

Absolute Ratings

Parameter		Symbol	Min.	Max.	Unit
Supply Voltage		V_{CC}		5.5	V
RF Input Power	50 Ω, V_{CC} = 5 V, CW tone, 100% DC, $T_{PKG\ BASE}$ = 25°C.	$P_{IN\ MAX-1:1}$		13	dBm
	Load VSWR ≤ 8:1, all phase angles, V_{CC} = 5 V, CW tone, 100% DC, $T_{PKG\ BASE}$ = -40 to 105 °C.	$P_{IN\ MAX-8:1}$		6	
Operating Temperature (package base).		$T_{PKG\ BASE}$	-40	105	°C
Maximum Junction Temperature (MTTF > 10^6 hours).		$T_{J\ MAX}$		170	°C
Maximum Dissipated Power Stage 1 (DC only, no RF applied).		$P_{DISS\ MAX}$		500	mW
Maximum Dissipated Power Stage 2 (DC only, no RF applied).		$P_{DISS\ MAX}$		850	mW

Electrostatic Discharge

Charged Device Model	CDM	1000		V
Human Body Model	HBM	1000		V

Storage

Storage Temperature	T_{STG}	-65	150	°C
Moisture Sensitivity Level	MSL		1	--

Caution! ESD Sensitive Device

Exceeding Absolute Maximum Rating conditions may cause permanent damage to the device.

Note: For additional information, please refer to *Manufacturing Note MN-001 — Package and Manufacturing Information.*

All Guerrilla RF products are provided in RoHS compliant lead (Pb)-free packaging requiring no exemptions. Additional information for this topic can be found at this link - *Environmental and Restricted Substance Statement Library.*

Downloaded from Arrow.com.

Recommended Operating Conditions

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Supply Voltage	V_{CC}	3	5	5.5	V	
RF Frequency Range	F_{RF}	700	750	910	MHz	Typical application schematic using the 0.7 to 0.8 GHz tuning set **(notes 1 & 2)**.
Operating Temperature (package base)	$T_{PKG\ BASE}$	-40		105	°C	
RF_IN Port Impedance	Z_{RFIN}		50		Ω	Single-ended with 2-element match.
RF_OUT Port Impedance	Z_{RFOUT}		50		Ω	Single-ended with 3-element match.

Note 1: Operation outside this range is possible, but with degraded performance of some parameters.

Note 2: Additional tuning options can be found on the Guerrilla RF website within the CUSTOM TUNES tab of the GRF5507 product page. This repository of alternative tunes includes a recommended match for extending the operational bandwidth of the device over a wider 700 to 915 MHz frequency range.

Downloaded from Arrow.com.

Nominal Operating Parameters – General

The following conditions apply unless noted otherwise: typical application schematic using the 0.7 to 0.8 GHz tuning set, V_{CC} = 4.75 to 5.25 V, V_{SHDN} = LOW, I_{CCQ} = 195 mA, M5 = 1.7 kΩ, M9 = 3.3 kΩ, P_{OUT} = 23 dBm, F_{TEST} = 0.75 GHz, 50 Ω system impedance, $T_{PKG\ BASE}$ = 25 °C. Evaluation board losses are included within the specifications.

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Supply Quiescent Current	I_{CCQ}		195		mA	I_{CCQ1} + I_{CCQ2}. No RF applied.
Supply Current with RF Applied	I_{CC}		305		mA	I_{CC1} + I_{CC2}. RF applied with P_{OUT} = 23dBm.
Enable Current 1	$I_{ENABLE1}$		2.3		mA	V_{CC} = 5 V.
Enable Current 2	$I_{ENABLE2}$		0.65		mA	V_{CC} = 5 V.
Operating Temperature Range	$T_{PKG\ BASE}$	-40		105	°C	Measured on package base.
Logic Input Low	V_{IL}	0		0.9	V	Applies to V_{SHDN} Input.
Logic Input High	V_{IH}	1.7		V_{CC}	V	Applies to V_{SHDN} Input.
Logic Current Low	I_{IL}		3		nA	Applies to V_{SHDN} Input, V_{IL} = 0.9 V.
Logic Current High	I_{IH}		60		µA	Applies to V_{SHDN} Input, V_{IH} = 1.8 V.
			280			Applies to V_{SHDN} Input, V_{IH} = 3.3 V.
Switching Rise Time	T_{RISE}		500		ns	Applies to V_{SHDN} Input.
Switching Fall Time	T_{FALL}		2800		ns	Applies to V_{SHDN} Input.

Disabled Mode

Supply Quiescent Current	$I_{CCQ-SHDN}$		1		µA	V_{CC} = 5 V, V_{SHDN}/V_{EN1}/V_{EN2} = HIGH.
Enable Current 1	$I_{ENABLE1-SHDN}$		3		mA	V_{CC} = 5 V, V_{SHDN}/V_{EN1}/V_{EN2} = HIGH.
Enable Current 2	$I_{ENABLE2-SHDN}$		1.3		mA	V_{CC} = 5 V, V_{SHDN}/V_{EN1}/V_{EN2} = HIGH.

Thermal Data

Thermal Resistance (Infrared Scan)	Θ_{JC}		38		°C/W	On standard evaluation board.

Guerrilla RF Proprietary Information. • ©2026 Guerrilla RF, Inc. • All rights reserved. • February 16, 2026
www.guerrilla-rf.com • (336) 510-7840 • sales@guerrilla-rf.com • 2000 Pisgah Church Road. Greensboro, NC 27455
Downloaded from Arrow.com.

Nominal Operating Parameters – RF (0.7 to 0.8 GHz, 5 V Operation)


The following conditions apply unless noted otherwise: typical application schematic using the 0.7 to 0.8 GHz tuning set, V_{CC} = 4.75 to 5.25 V, V_{SHDN} = LOW, I_{CCQ} = 195 mA, M5 = 1.7 kΩ, M9 = 3.3 kΩ, P_{OUT} = 23 dBm, F_{TEST} = 0.75 GHz, 50 Ω system impedance, $T_{PKG\ BASE}$ = 25 °C. Evaluation board losses are included within the specifications.


Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Small Signal Gain	S21	28	30.5		dB	LTE 20MHz 100RB TM1.1 downlink waveform with 9.8dB PAR, F_{TEST} = 0.75 GHz, P_{IN} = -25 dBm (**note 3**).
Standby Mode Gain	$S21_{STBY}$		-45		dB	Disabled Mode, LTE 20MHz 100RB TM1.1 Downlink Waveform with 9.8dB PAR, $V_{SHDN}/V_{EN1}/V_{EN2}$ = HIGH, P_{IN} = 0 dBm.
Input Return Loss	S11		> 11.3		dB	F_{RF} = 0.7 to 0.8 GHz.
Output Return Loss	S22		> 4.8		dB	F_{RF} = 0.7 to 0.8 GHz.
Reverse Isolation	S12		> 51		dB	F_{RF} = 0.7 to 0.8 GHz.
Evaluation Board Noise Figure	NF		4.5		dB	
Output 3rd Order Intercept Point	OIP3		47.3		dBm	23 dBm P_{OUT} per tone at 600 kHz spacing.
Output 1 dB Compression Power	OP1dB	31.9	33.4		dBm	Sine wave input, V_{CC} = 5 V (**note 3**).
2nd Harmonic	$2f_0$			-30	dBc	P_{OUT} = 26 dBm (**note 3**).
3rd Harmonic	$3f_0$			-47	dBc	P_{OUT} = 26 dBm (**note 3**).
Adjacent Channel Leakage Ratio	ACLR			-45	dBc	P_{OUT} = 23 dBm, LTE 20MHz 100RB TM1.1 Downlink Waveform with 9.8dB PAR, F_{TEST} = 0.75 GHz, V_{CC} = 5 V.
Output IMD3 Level (Using extended 700-862 MHz tune)	IMD3			-19	dBm	22 dBm P_{OUT} per tone using 600 kHz spacing. Typical Application Schematic using the 0.7 to 0.862 GHz tuning set **(note 3).**


Note 3: MIN/MAX limits defined using *modelled estimates* that account for part-to-part variations and expected process spreads. As additional production lots are fabricated, accumulated test data will be used to refine the MIN/MAX limits.


Downloaded from Arrow.com.


GRF5507W Typical Operating Curves: *Gain vs. P_{OUT} (9.8 dB PAR)*

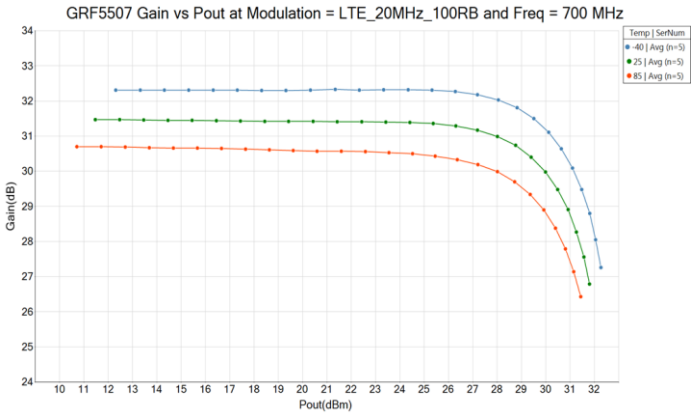


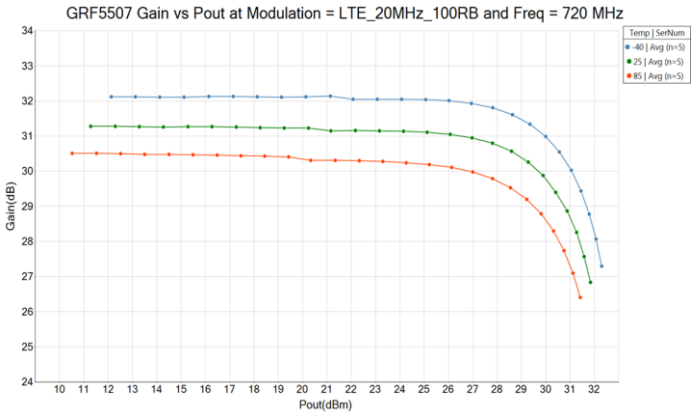

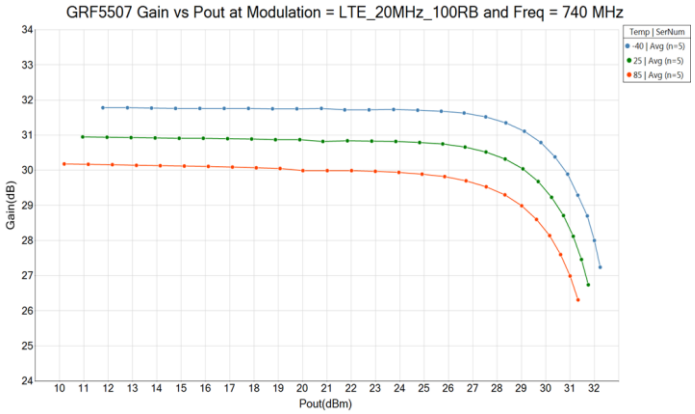

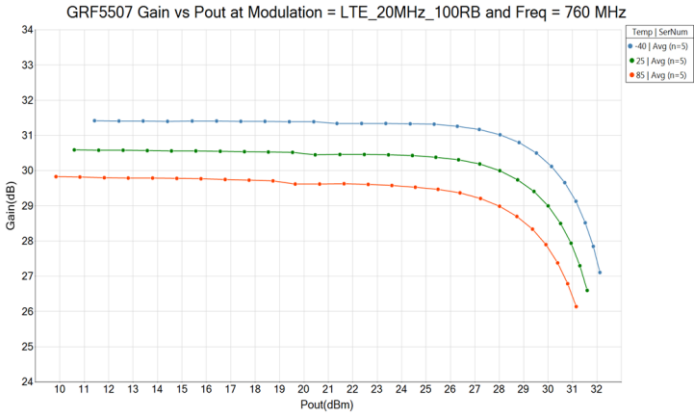


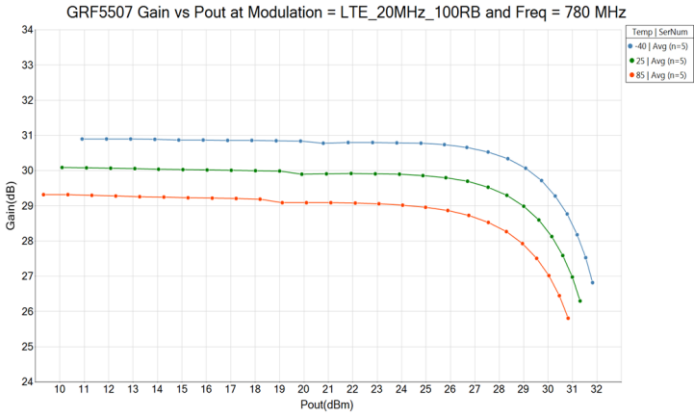


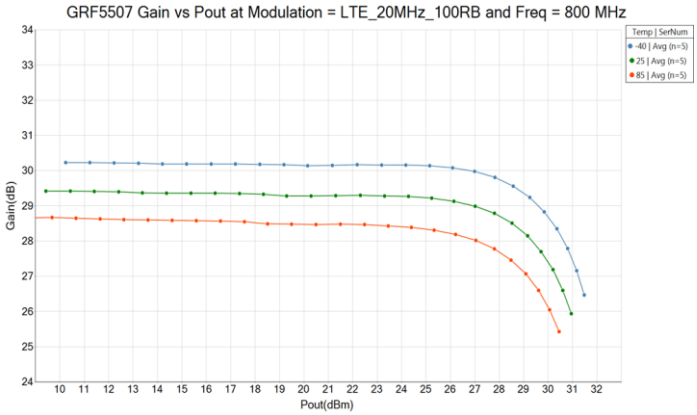



Downloaded from Arrow.com.


GRF5507W Typical Operating Curves: *Gain vs. P_{IN} (Shutdown Mode, V_{SHDN} = 3.3V, 9.6dB PAR)*

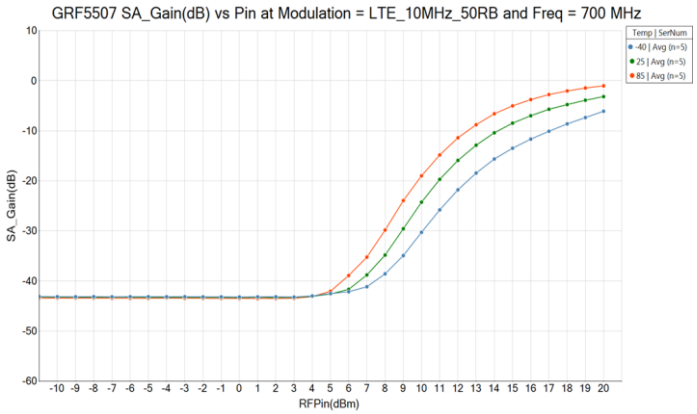


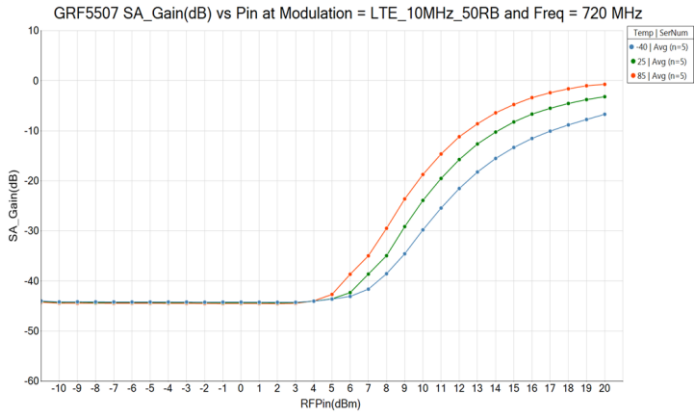

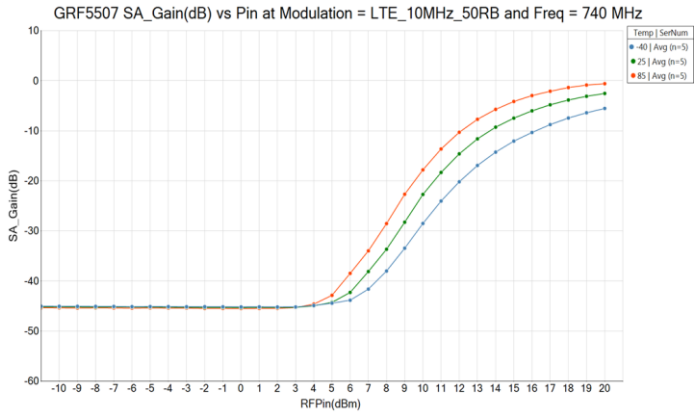

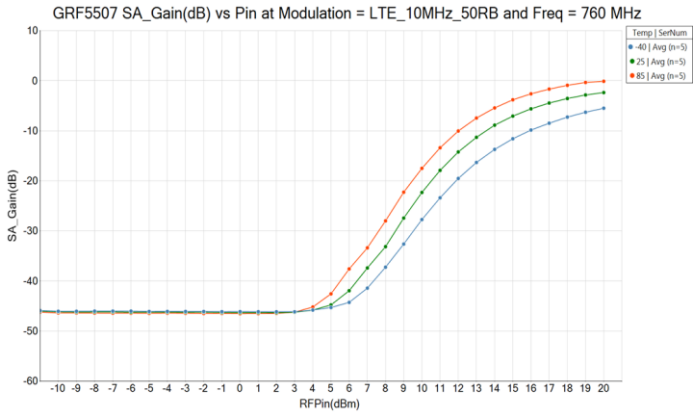


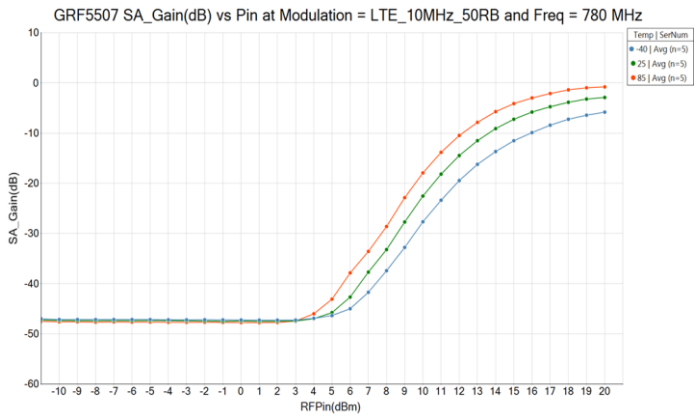


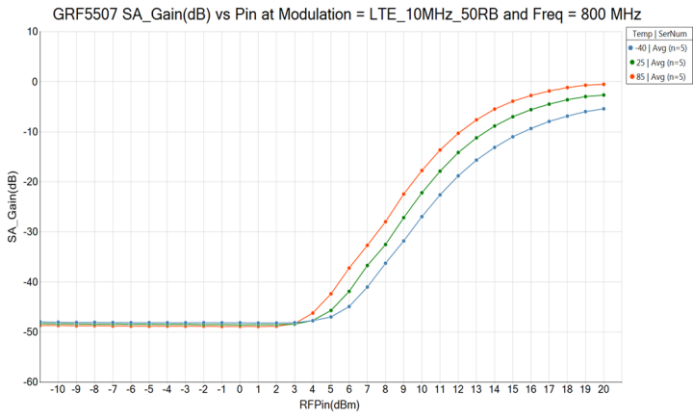



Downloaded from Arrow.com.


GRF5507W Typical Operating Curves: *IMD3 vs. P_{OUT} (600kHz Tone Spacing)*

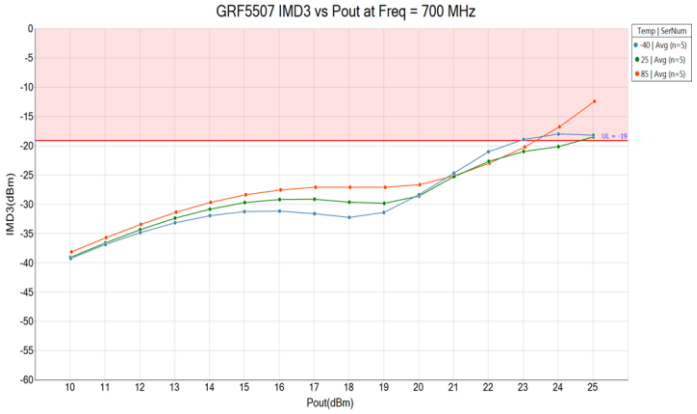


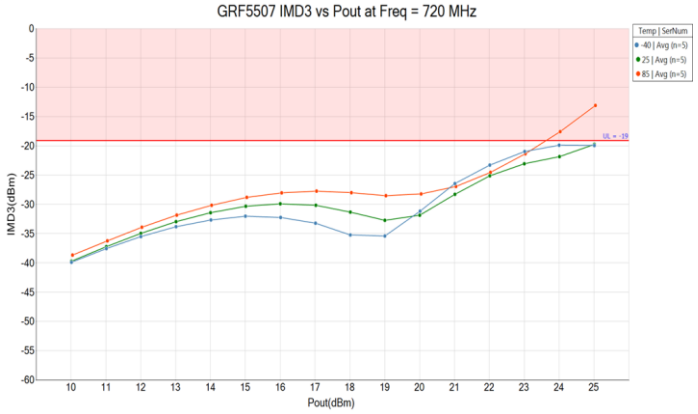

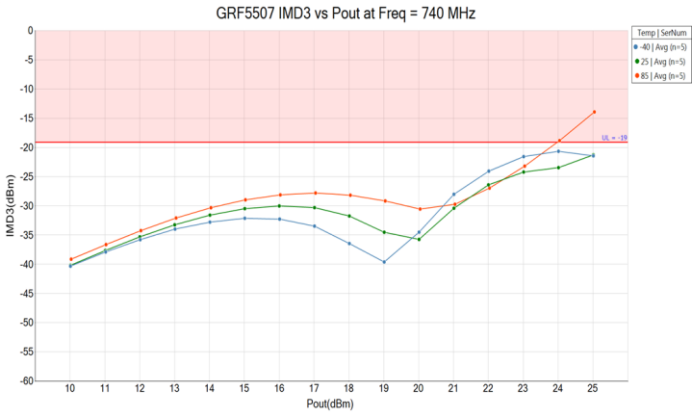

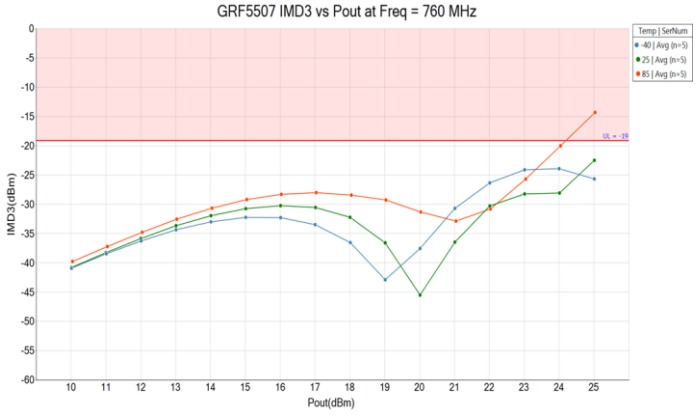


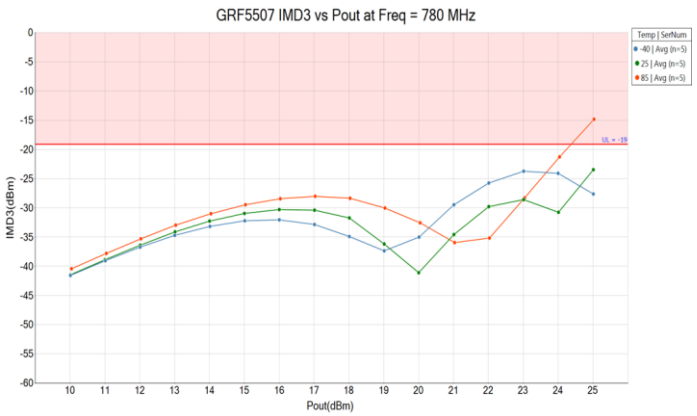


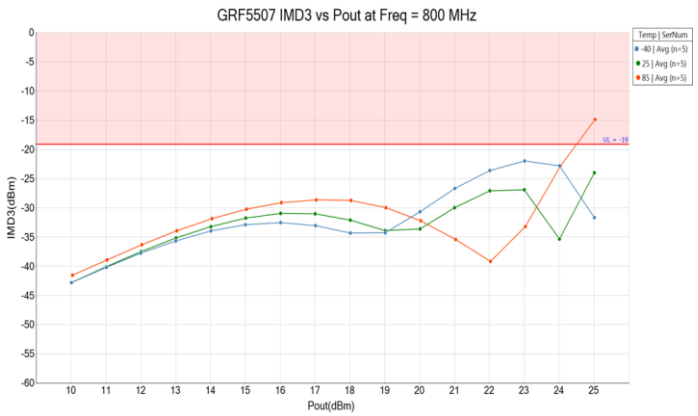



Downloaded from Arrow.com.


GRF5507W Typical Operating Curves: *OIP3 vs. P_{OUT} (600kHz Tone Spacing)*

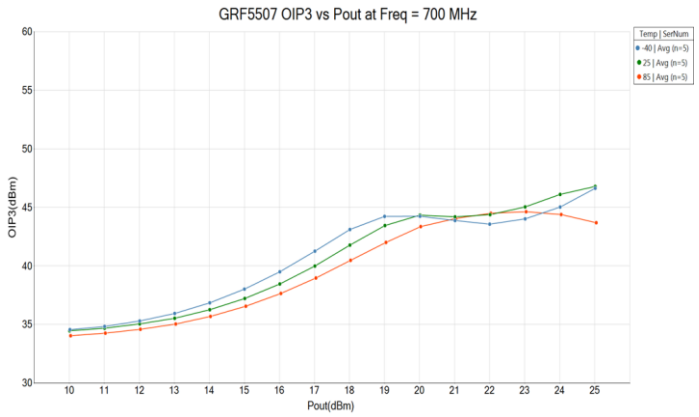


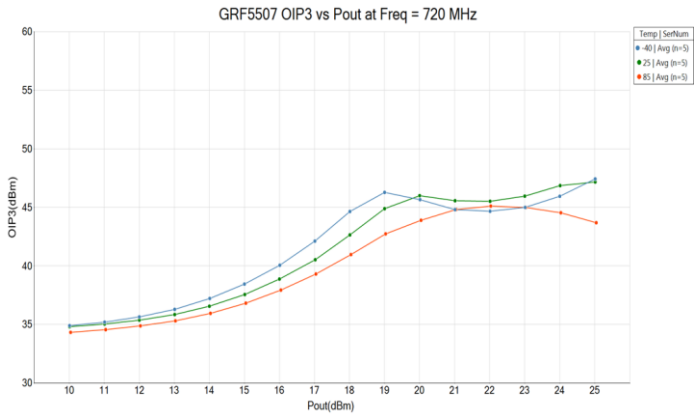

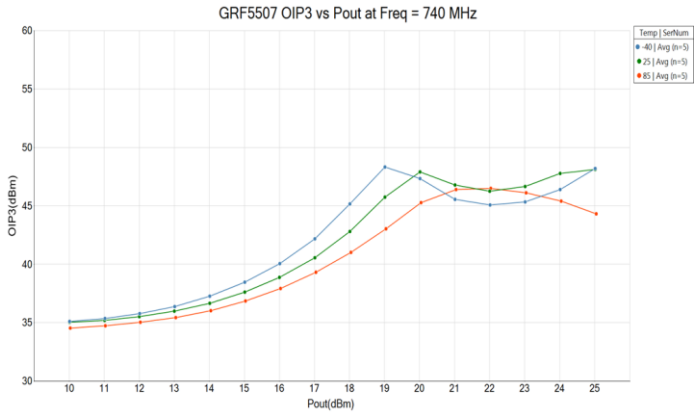

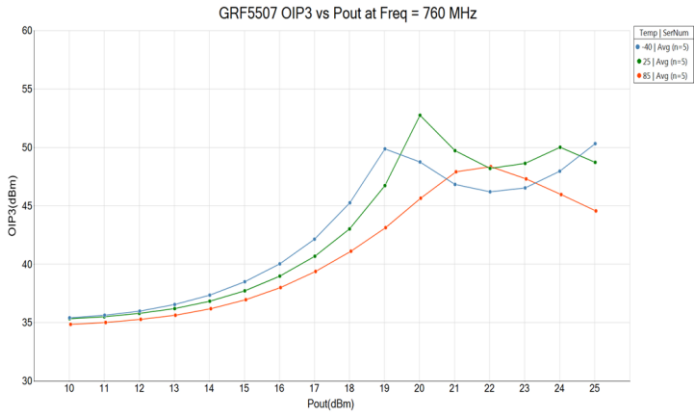


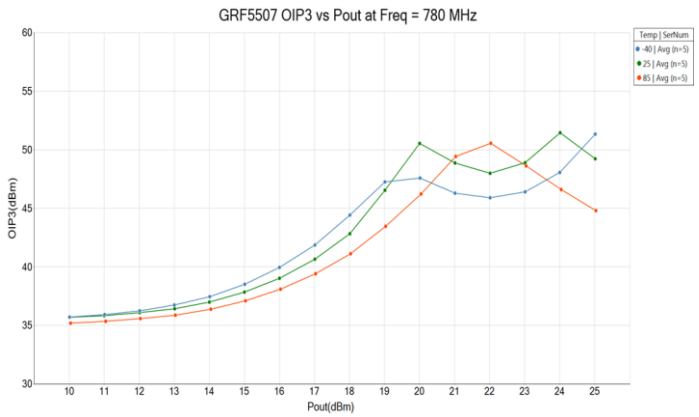


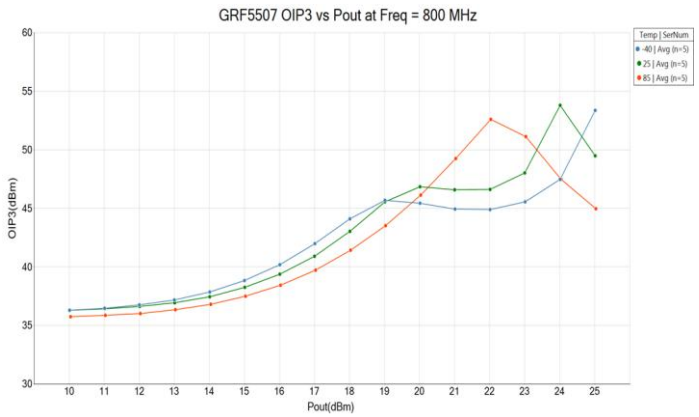



Downloaded from Arrow.com.


GRF5507W Typical Operating Curves: *PAE vs. P_{OUT} (9.8 dB PAR)*

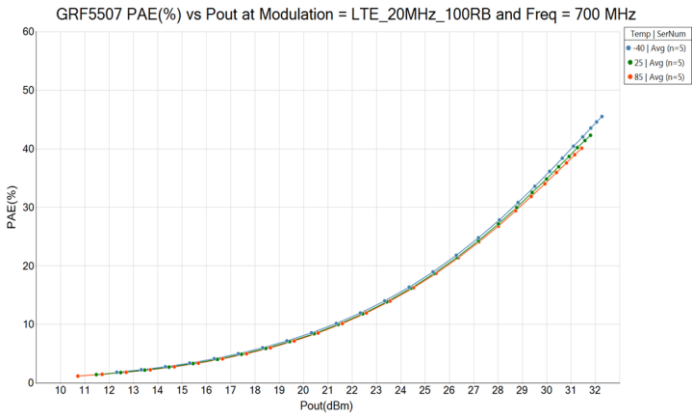


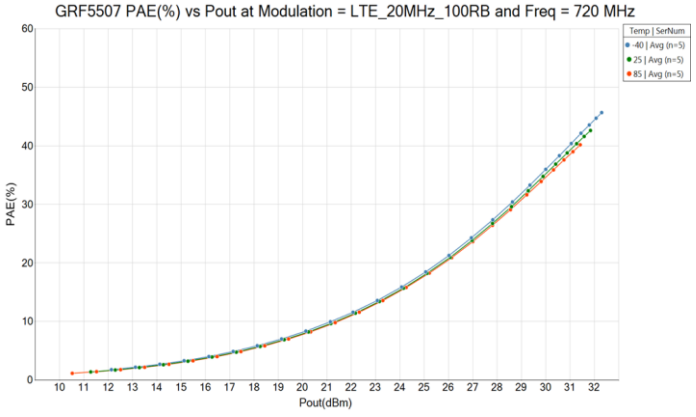

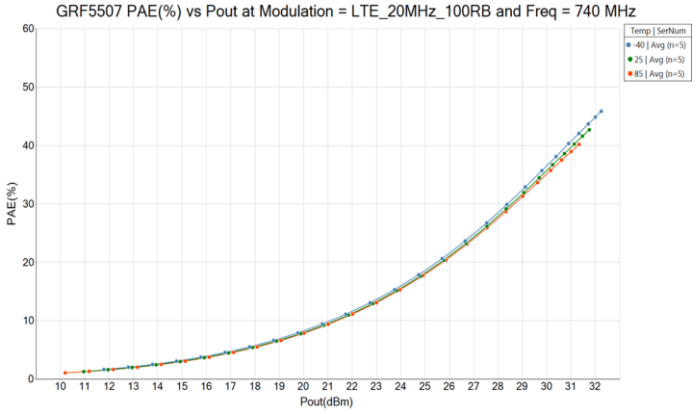

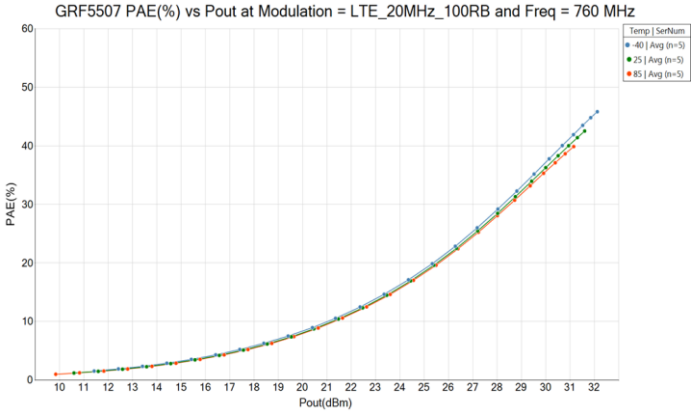


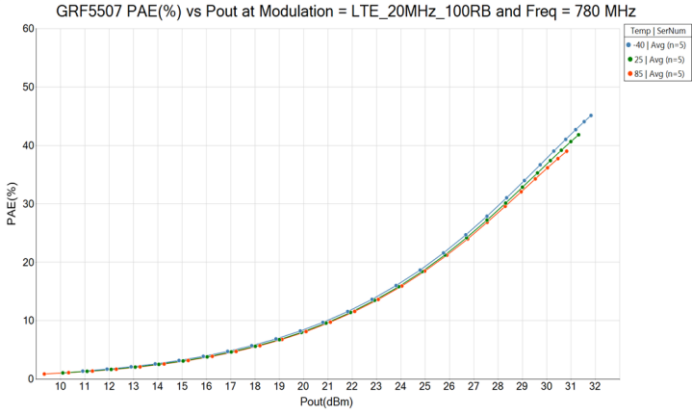


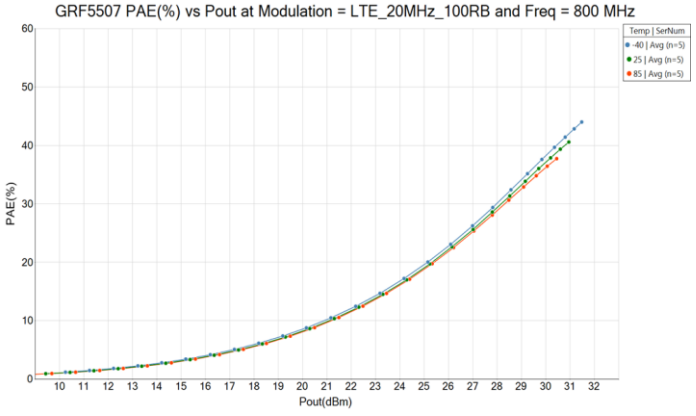



Downloaded from Arrow.com.


GRF5507W Typical Operating Curves: *ACLR vs. P_{OUT} (9.8 dB PAR)*

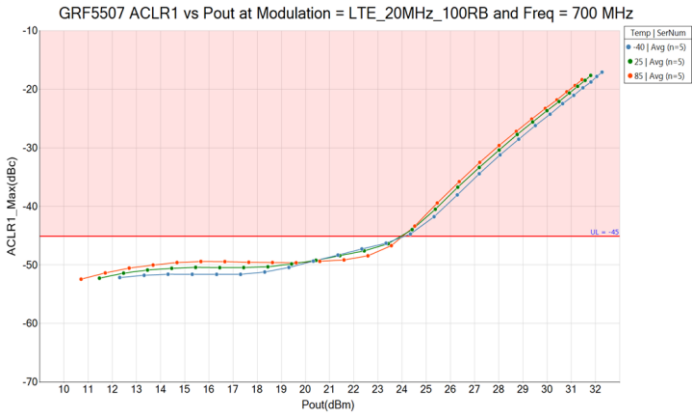


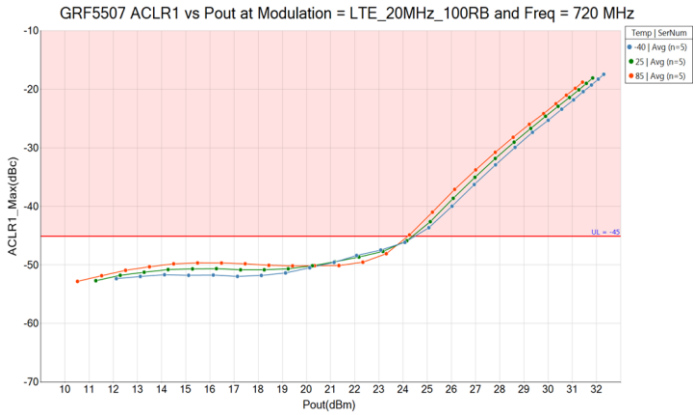

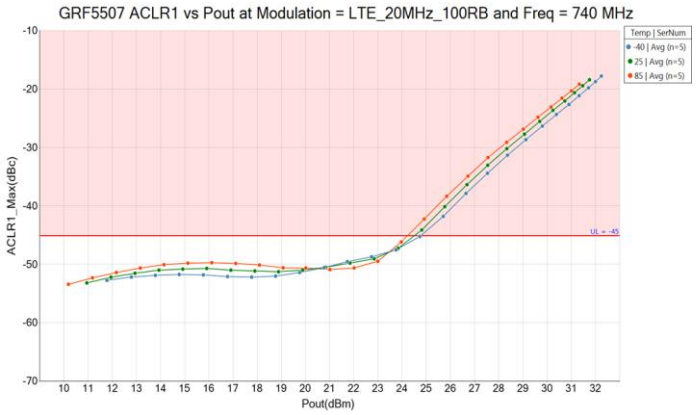

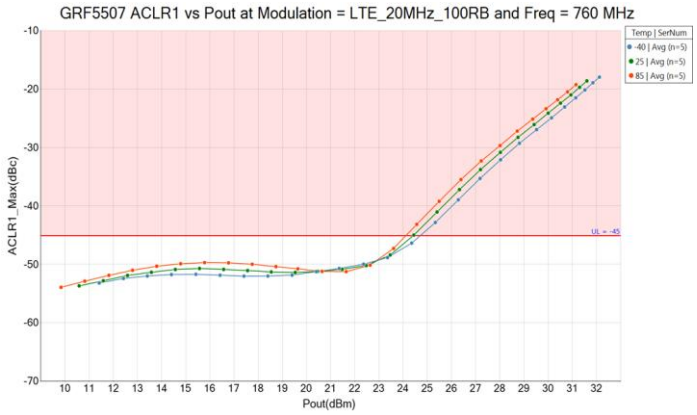


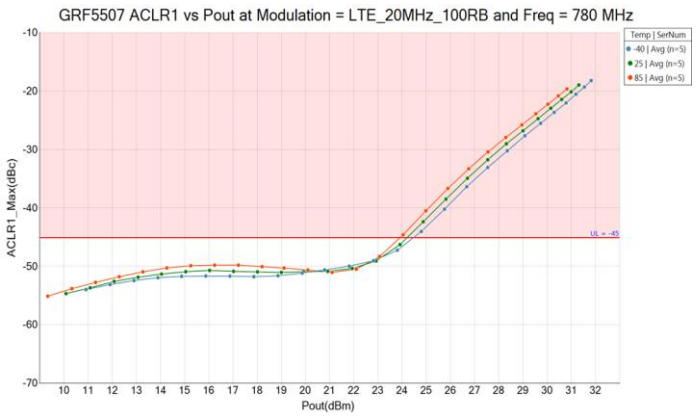


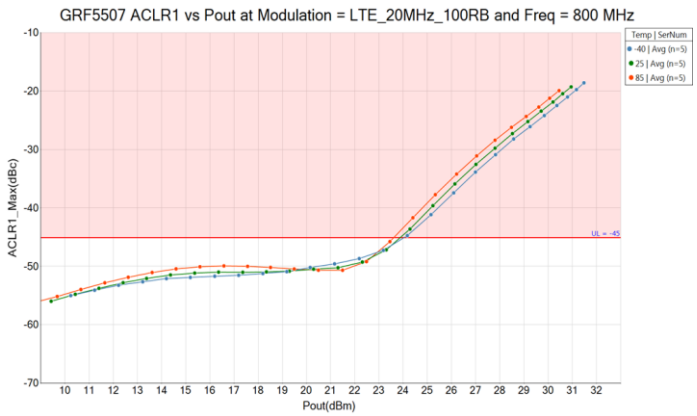



Downloaded from Arrow.com.


GRF5507W Typical Operating Curves: *EVM vs. P_{OUT} (9.8 dB PAR)*

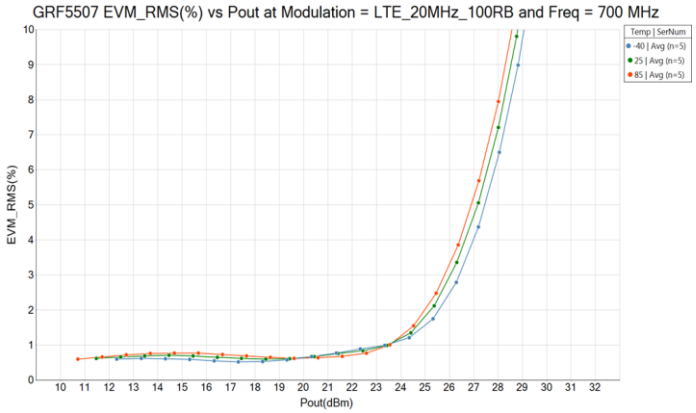


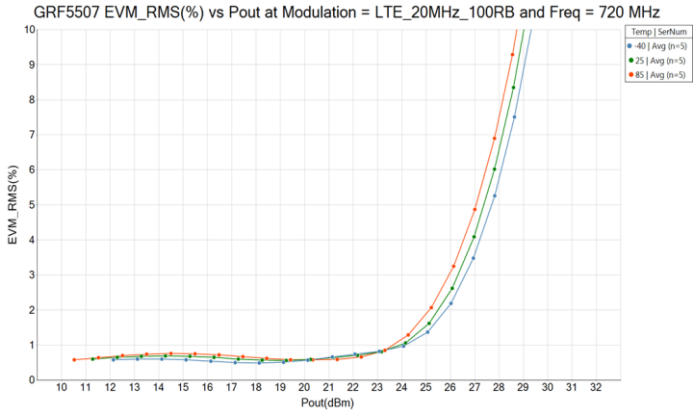

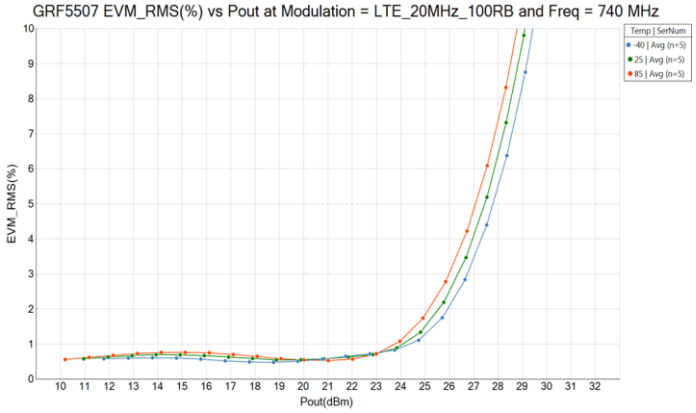

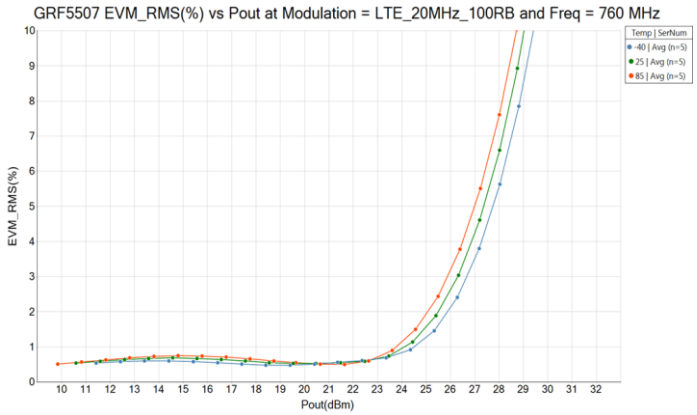


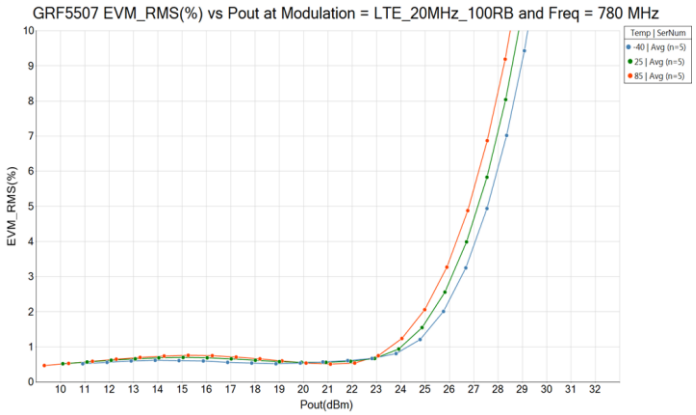


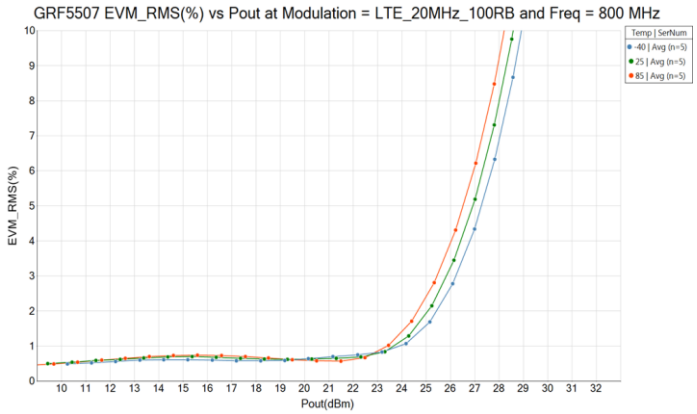



Downloaded from Arrow.com.


GRF5507W Typical Operating Curves: *Stage1 I_{CC} vs. Stage2 P_{OUT} (9.8 dB PAR)*

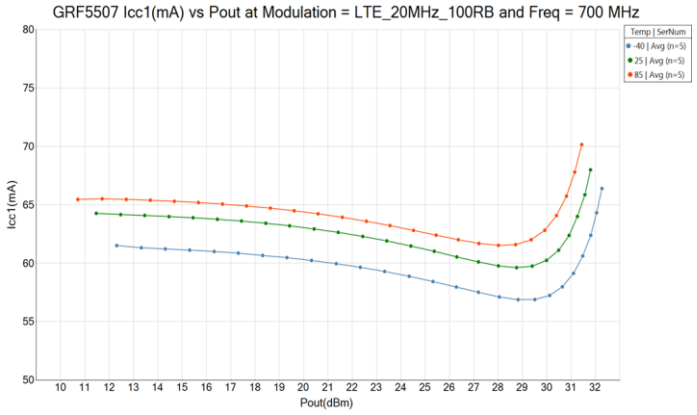


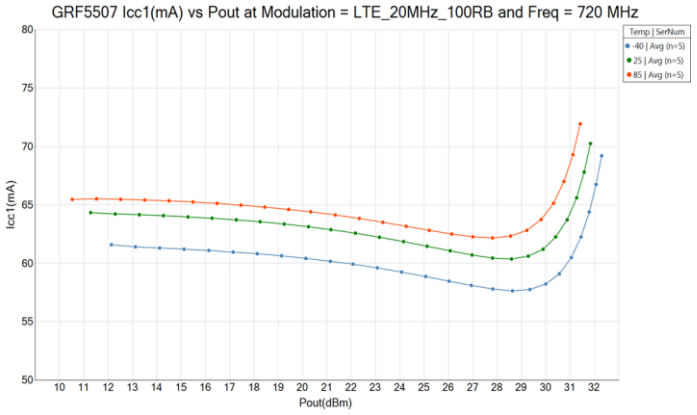

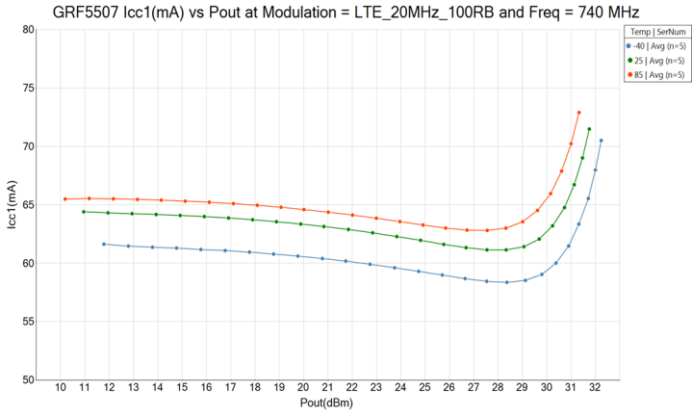

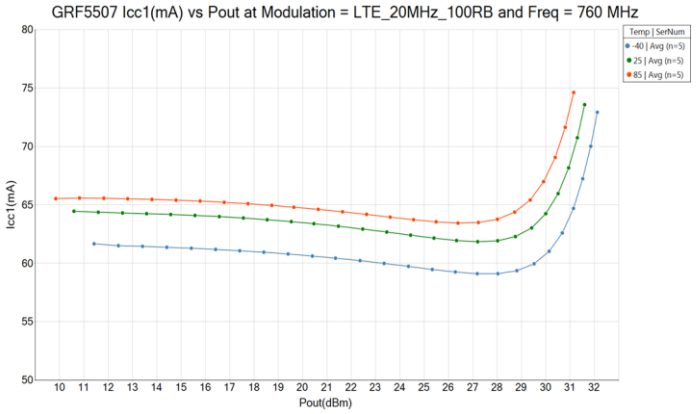


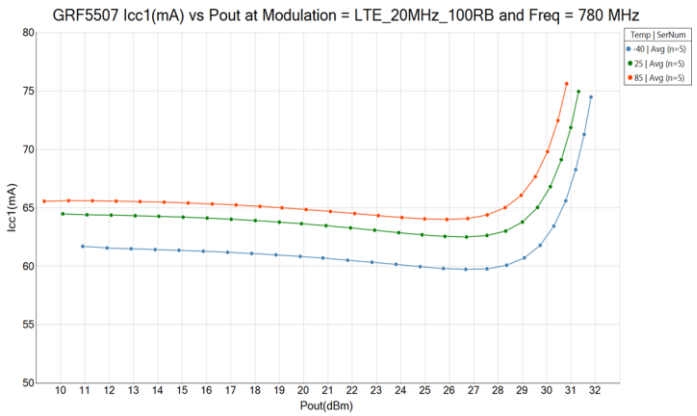


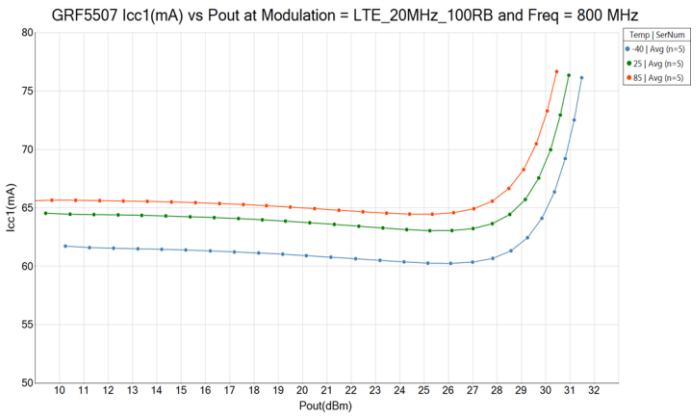



Downloaded from Arrow.com.


GRF5507W Typical Operating Curves: *Stage2 I_{CC} vs. Stage2 P_{OUT} (9.8 dB PAR)*

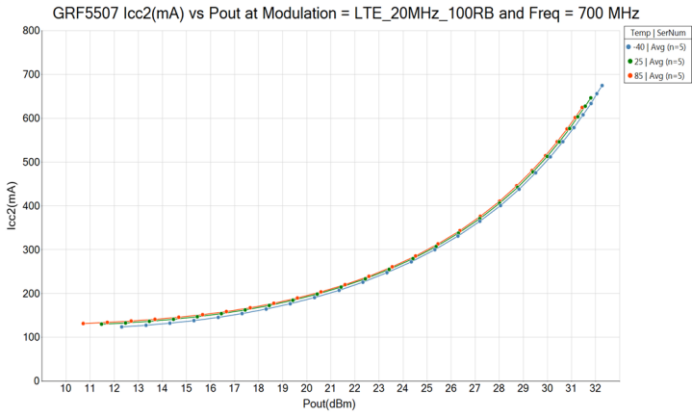


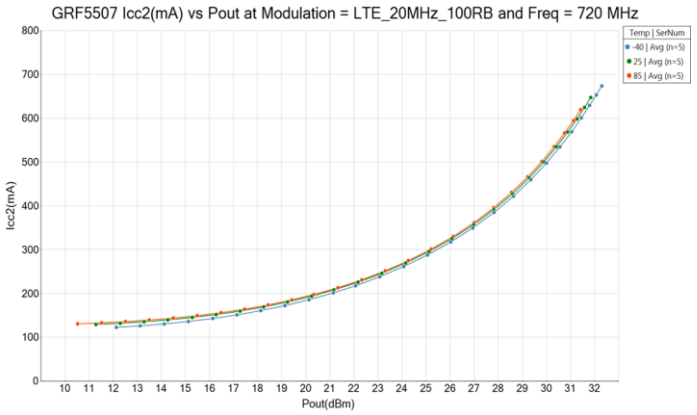

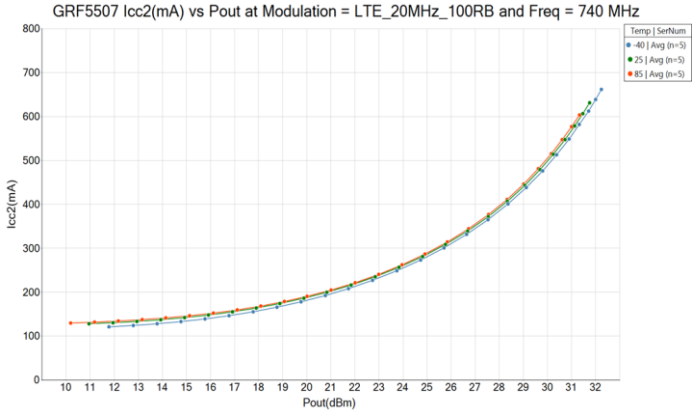

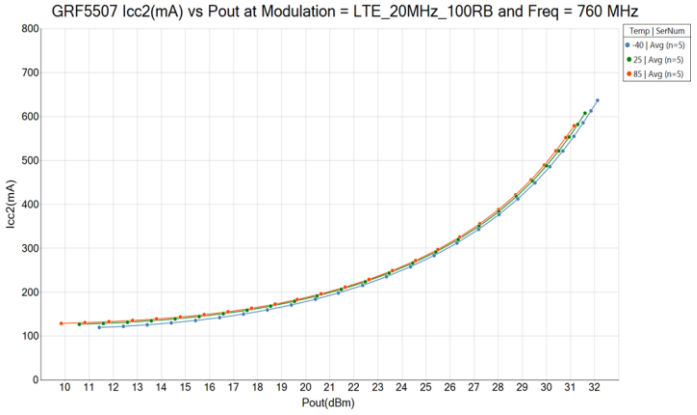


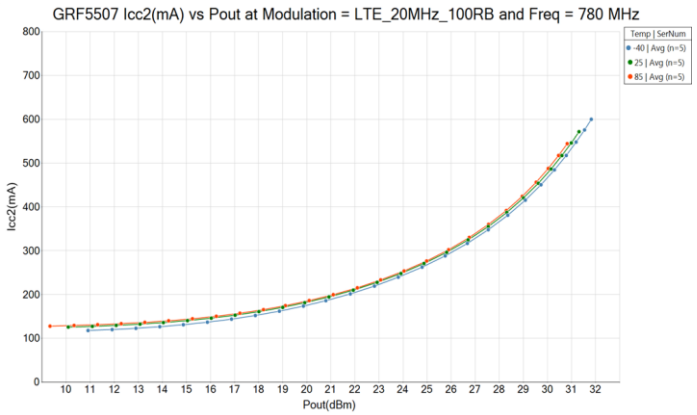


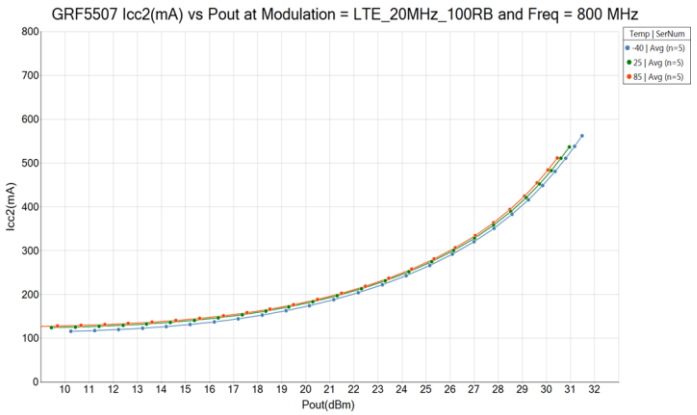



Guerrilla RF Proprietary Information. • ©2026 Guerrilla RF, Inc. • All rights reserved. • February 16, 2026
www.guerrilla-rf.com • (336) 510-7840 • sales@guerrilla-rf.com • 2000 Pisgah Church Road. Greensboro, NC 27455
Downloaded from Arrow.com.

GRF5507W Typical Operating Curves: S-Parameters

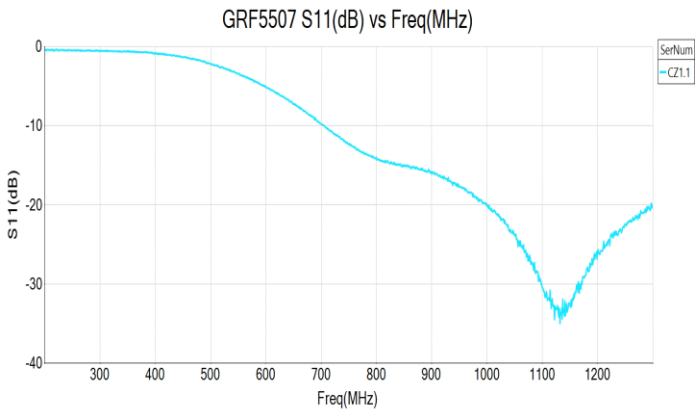

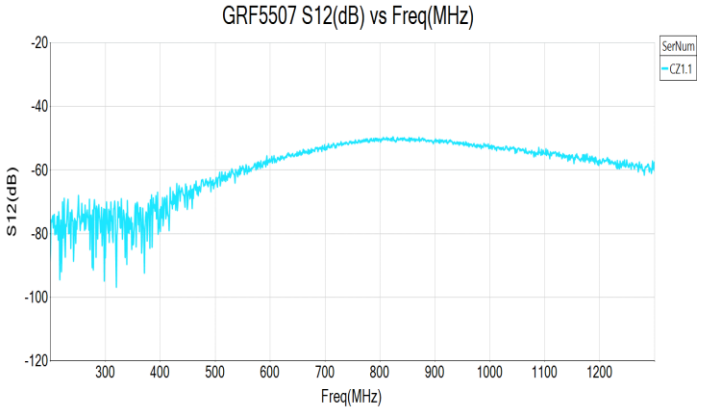


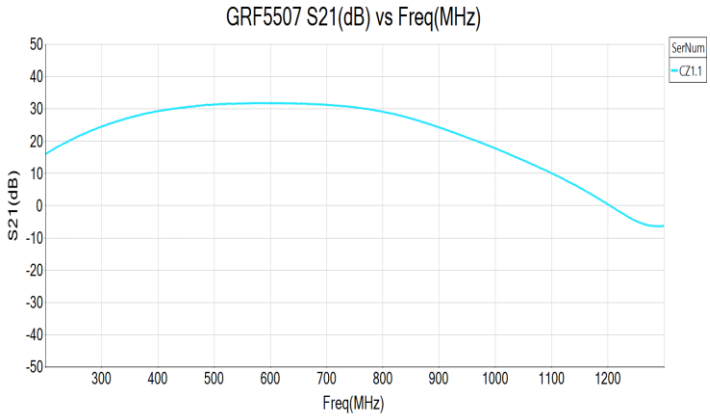


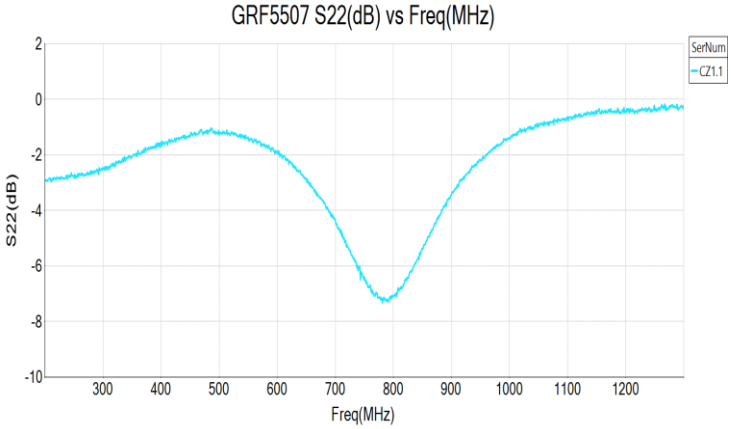



Downloaded from Arrow.com.

GRF5507W Typical Operating Curves: S-Parameters

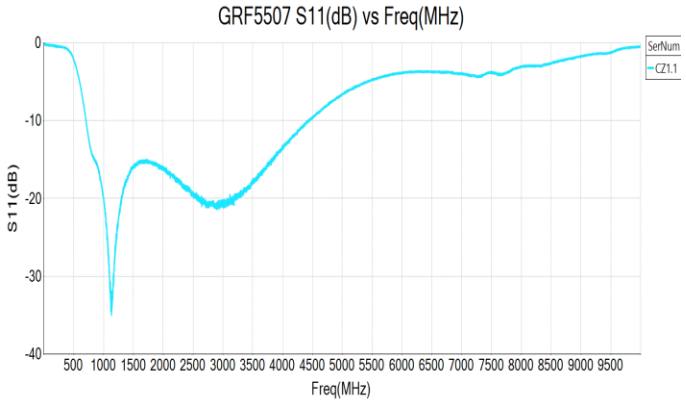


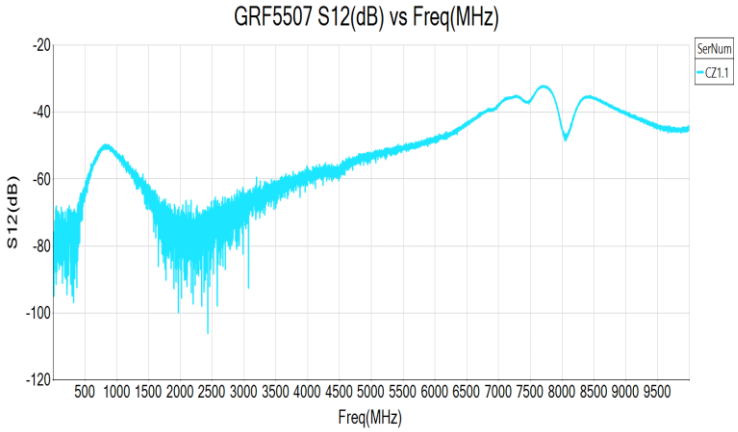

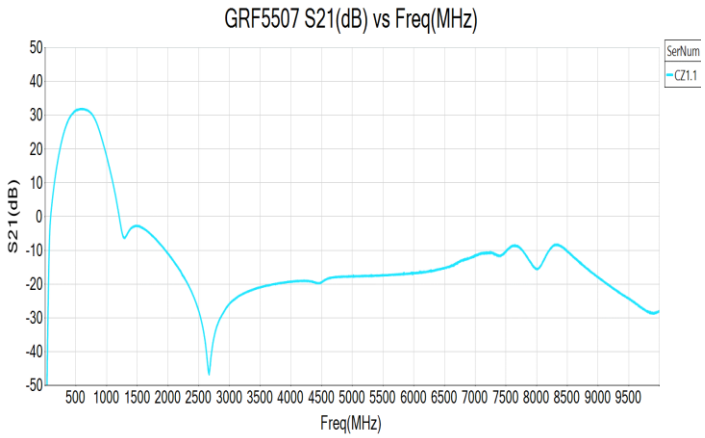


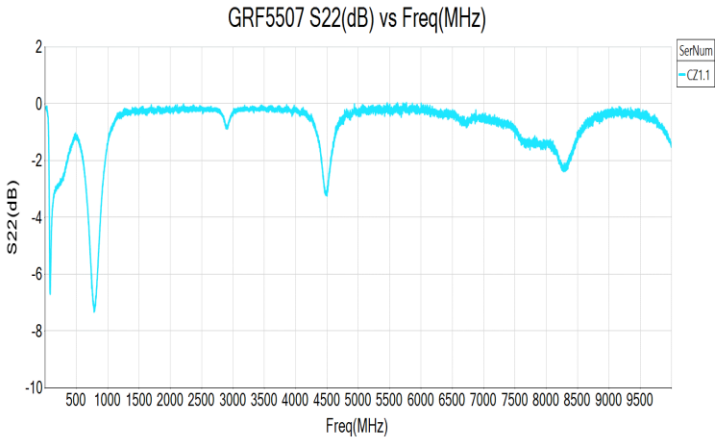

Downloaded from Arrow.com.

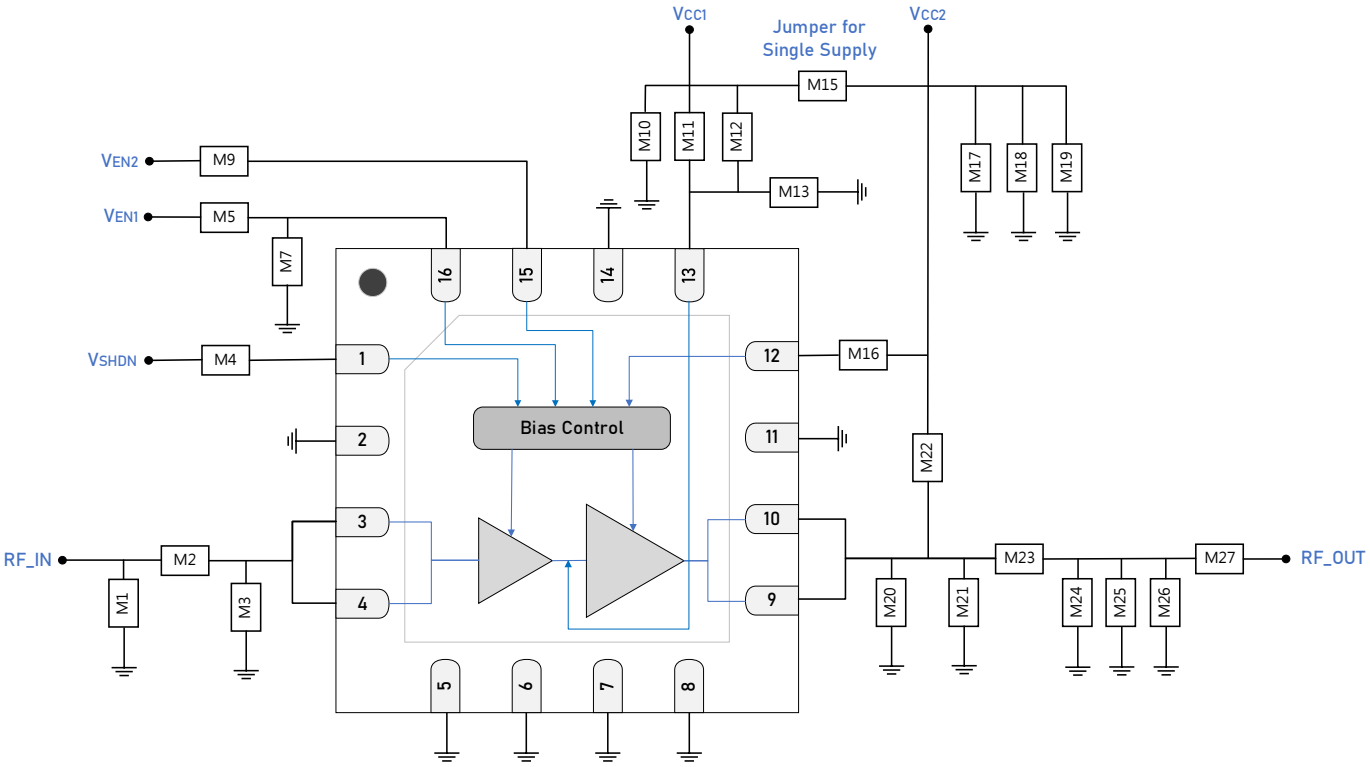

GRF5507W Standard Evaluation Board Schematic

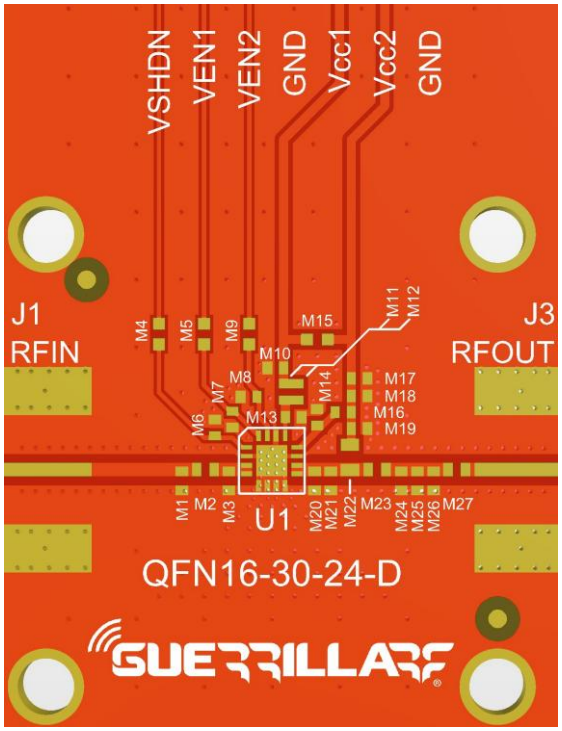

GRF5507W Evaluation Board Assembly Diagram

Downloaded from Arrow.com.

GRF5507W Evaluation Board Assembly Diagram Reference: Standard 0.7 to 0.8 GHz Tune

Component	Type	Manufacturer	Family	Value	Package Size	Substitution
M1	Inductor	Murata	LQG	8.2 nH	0402	ok
M2	Capacitor	Murata	GJM	6.8 pF	0402	ok
M3, M12, M13, M17, M20, M21, M25, M26	DNP	--	--	--	--	--
M4	Resistor (Jumper)	Various	5%	0 Ω	0402	ok
M5	Resistor	Various	5%	1.7 kΩ	0402	ok
M7	Capacitor	Murata	GRM	100 pF	0402	ok
M9	Resistor	Various	5%	3.3 kΩ	0402	ok
M10	Capacitor	Murata	GRM	0.1 µF	0402	ok
M11	Inductor	Murata	LQG	8.2 nH	0402	ok
M15	Resistor (Jumper)	Various	5%	0 Ω	0402	ok
M16	Resistor (Jumper)	Various	5%	0 Ω	0402	ok
M18	Capacitor	Murata	GRM	10 µF	0402	ok
M19	Capacitor	Murata	GRM	100 pF	0402	ok
M22	Inductor: High Q	Murata	LQW	24 nH	0603	ok
M23	Inductor: High Q	Murata	LQW	2.4 nH	0402	ok
M24	Capacitor	Murata	GJM	10 pF	0402	ok
M27	Capacitor	Murata	GJM	47 pF	0402	ok
Evaluation Board	QFN16-30-24-B					

Note 4: Standard evaluation board bias: V_{CC} = 5 V, V_{ENABLE} = 5 V.

Guerrilla RF Proprietary Information. • ©2026 Guerrilla RF, Inc. • All rights reserved. • February 16, 2026
www.guerrilla-rf.com • (336) 510-7840 • sales@guerrilla-rf.com • 2000 Pisgah Church Road. Greensboro, NC 27455

Downloaded from Arrow.com.


GRF5507W Evaluation Board Assembly Diagram Reference: Extended Bandwidth 0.7 to 0.862 GHz Tune

Component	Type	Manufacturer	Family	Value	Package Size	Substitution
M1	Inductor	Murata	LQG	8.2 nH	0402	ok
M2	Capacitor	Murata	GJM	6.8 pF	0402	ok
M3, M12, M13, M17, M20, M21, M25, M26	DNP	--	--	--	--	--
M4	Resistor (Jumper)	Various	5%	0 Ω	0402	ok
M5	Resistor	Various	5%	1.7 kΩ	0402	ok
M7	Capacitor	Murata	GRM	100 pF	0402	ok
M9	Resistor	Various	5%	3.3 kΩ	0402	ok
M10	Capacitor	Murata	GRM	0.1 µF	0402	ok
M11	Inductor	Murata	LQG	8.2 nH	0402	ok
M15	Resistor (Jumper)	Various	5%	0 Ω	0402	ok
M16	Resistor (Jumper)	Various	5%	0 Ω	0402	ok
M18	Capacitor	Murata	GRM	10 µF	0402	ok
M19	Capacitor	Murata	GRM	100 pF	0402	ok
M22	Inductor: High Q	Murata	LQW	24 nH	0603	ok
M23	Inductor: High Q	Murata	LQW	1.8 nH	0402	ok
M24	Capacitor	Murata	GJM	10 pF	0402	ok
M27	Capacitor	Murata	GJM	47 pF	0402	ok
Evaluation Board	QFN16-30-24-B					


Note 5: Standard evaluation board bias: V_{CC} = 5 V, V_{ENABLE} = 5 V. Please consult with GRF Sales or GRF Applications for any additional extended bandwidth data.

Downloaded from Arrow.com.

Package Outline Drawing

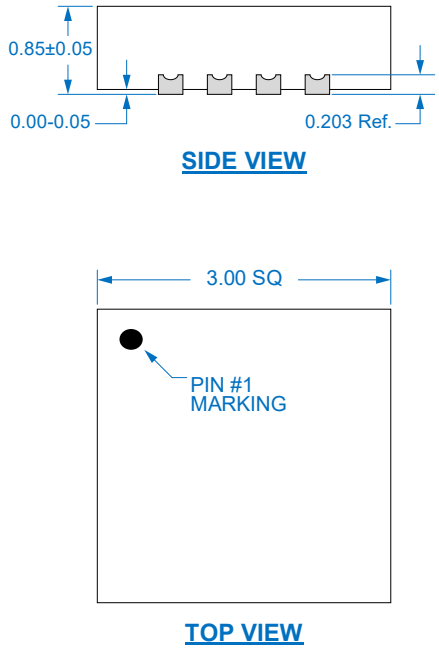

Recommended PCB Footprint

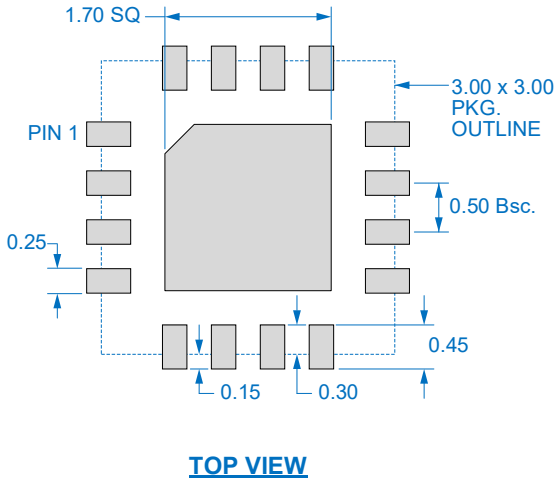

QFN-16 3 x 3 mm Package Dimensions and Suggested Footprint (Top View)

Guerrilla RF Proprietary Information. • ©2026 Guerrilla RF, Inc. • All rights reserved. • February 16, 2026

www.guerrilla-rf.com • (336) 510-7840 • sales@guerrilla-rf.com • 2000 Pisgah Church Road. Greensboro, NC 27455

Downloaded from Arrow.com.

Package Marking Diagram




- Line 1: "YY" = YEAR. "WW" = WORK WEEK the device was assembled.
- Line 2: "GRF" = Guerrilla RF.
- Line 3: "XXXX" = Device PART NUMBER and "W" = W for automotive.

Tape and Reel Information


Guerrilla RF's tape and reel specification complies with Electronic Industries Alliance (EIA) standards for "Embossed Carrier Tape of Surface Mount Components for Automatic Handling" (reference EIA-481). See the following page for the Tape and Reel Specification and Device Package Information table, which includes units per reel.

Devices are loaded with pins down into the carrier pocket with protective cover tape and reeled onto a plastic reel. Each reel is packaged in a cardboard box. There are product labels on the reel, the protective ESD bag and the outside surface of the box.

For the Tape and Reel Reference Table, please refer to: *https://www.guerrilla-rf.com/prodFiles/Manufacturing/MN001.pdf*

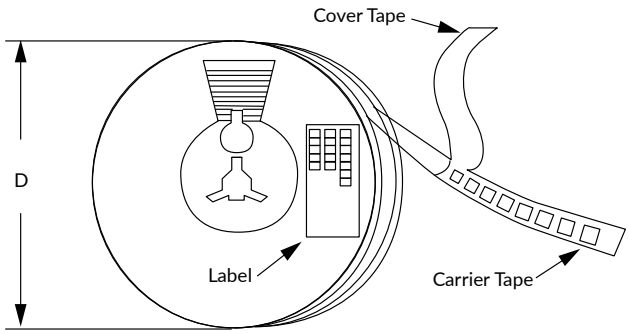

Tape and Reel Packaging with Reel Diameter Noted (D)

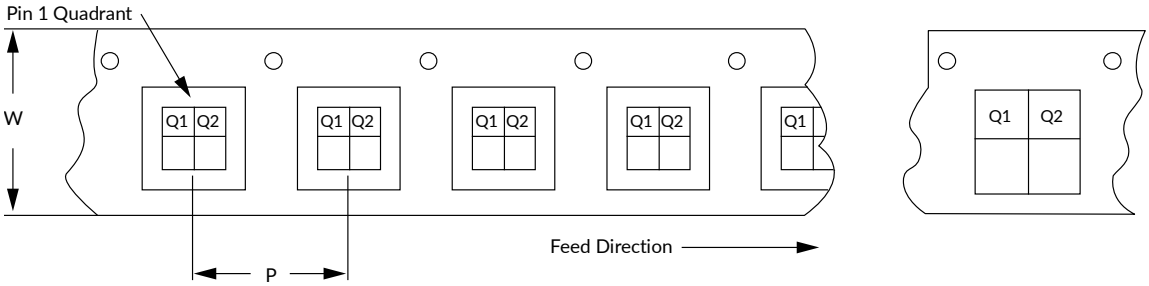

Carrier Tape Width (W), Pitch (P), Feed Direction and Pin 1 Quadrant Information

Guerrilla RF Proprietary Information. • ©2026 Guerrilla RF, Inc. • All rights reserved. • February 16, 2026

Downloaded from Arrow.com.

Revision History

Revision Date	Description of Change
August 26, 2022	Preliminary Data Sheet.
November 1, 2022	Added Note 2 on Page 5.
January 23, 2023	Absolute Ratings Table: added the following condition to Maximum Dissipated Power for Stage 1 & 2: DC only. No RF applied.
May 3, 2023	Release Ø Data Sheet.
September 10, 2023	Release A Data Sheet.
October 12, 2023	Release B Data Sheet. Added 2nd and 3rd Harmonics specification.
December 20, 2024	Updated Data Sheet with minor cosmetic changes only. No changes to device or device specifications.
May 9, 2025	Extended upper frequency range from 800 MHz to 910 MHz.
May 20, 2025	Updated frequency of family of part numbers listed on page 1.
February 16, 2026	Added new evaluation board and package outline drawing.

Guerrilla RF Proprietary Information. • ©2026 Guerrilla RF, Inc. • All rights reserved. • February 16, 2026
www.guerrilla-rf.com • (336) 510-7840 • sales@guerrilla-rf.com • 2000 Pisgah Church Road. Greensboro, NC 27455

Downloaded from Arrow.com.

Data Sheet Classifications

Data Sheet Status	Notes
Advance	S-parameter and NF data based on EM simulations for the fully packaged device using foundry-supplied transistor S-parameters. Linearity estimates based on device size, bias condition and experience with related devices.
Preliminary	All data based on limited evaluation board measurements taken within the Guerrilla RF Applications Lab. All parametric values are subject to change pending the collection of additional data.
Release Ø	All data based on measurements taken with *production-released* material. TYP values are based on a combination of ATE and bench-level measurements, with MIN/MAX limits defined using *modelled estimates* that account for part-to-part variations and expected process spreads. Although unlikely, future refinements to the TYP/MIN/MAX values may be in order as multiple lots are processed through the factory.
Release A-Z	All data based on measurements taken with production-released material *derived from multiple lots which have been fabricated over an extended period of time*. MIN/MAX limits may be refined over previous releases as more statistically significant data is collected to account for process spreads.

Information in this data sheet is specific to the Guerrilla RF, Inc. ("Guerrilla RF") product identified.

This data sheet, including the information contained in it, is provided by Guerrilla RF as a service to its customers and may be used for informational purposes only by the customer. Guerrilla RF assumes no responsibility for errors or omissions on this data sheet or the information contained herein. Information provided is believed to be accurate and reliable, however, no responsibility is assumed by Guerrilla RF for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. Guerrilla RF assumes no liability for any data sheet, data sheet information, materials, products, product information, or other information provided hereunder, including the sale, distribution, reproduction or use of Guerrilla RF products, information or materials.

No license, whether express, implied, by estoppel, by implication or otherwise is granted by this data sheet for any intellectual property of Guerrilla RF, or any third party, including without limitation, patents, patent rights, copyrights, trademarks and trade secrets. All rights are reserved by Guerrilla RF.

All information herein, products, product information, data sheets, and data sheet information are subject to change and availability without notice. Guerrilla RF reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice. Guerrilla RF may further change its data sheet, product information, documentation, products, services, specifications or product descriptions at any time, without notice. Guerrilla RF makes no commitment to update any materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

GUERRILLA RF INFORMATION, PRODUCTS, PRODUCT INFORMATION, DATA SHEETS AND DATA SHEET INFORMATION ARE PROVIDED "AS IS" AND WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. GUERRILLA RF DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. GUERRILLA RF SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Customers are solely responsible for their use of Guerrilla RF products in the Customer's products and applications or in ways which deviate from Guerrilla RF's published specifications, either intentionally or as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Guerrilla RF assumes no liability or responsibility for applications assistance, customer product design, or damage to any equipment resulting from the use of Guerrilla RF products outside of stated published specifications or parameters.

Downloaded from Arrow.com.