
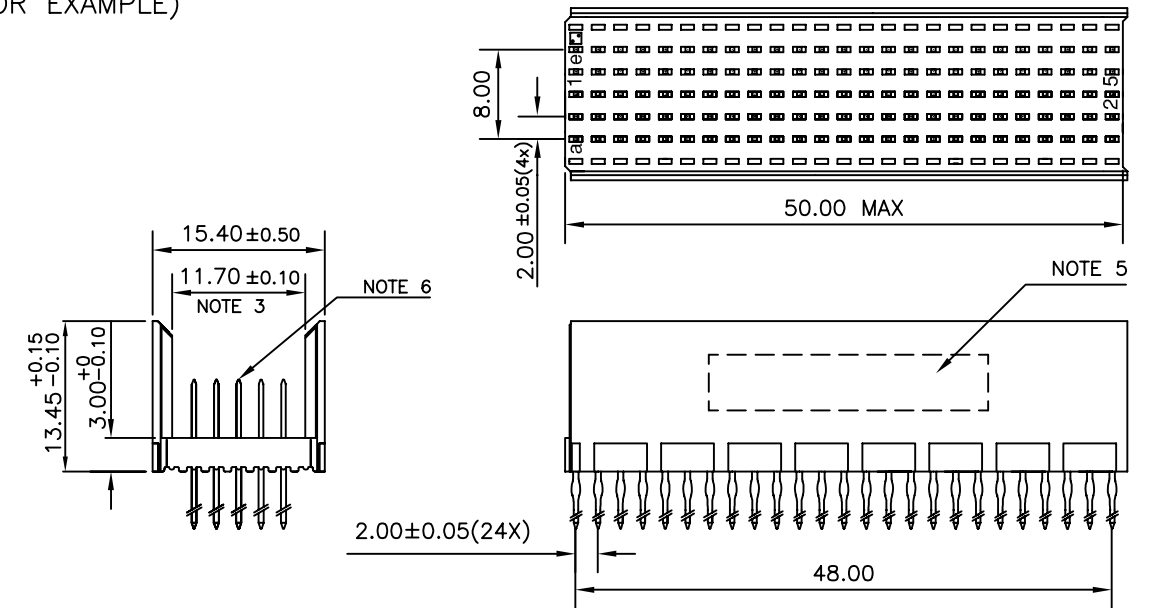


LOADING PATTERN MATING SIDE


f	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
e	4	4	4	4	4	4	4	7	7	7	7	7	7	7	7	7	4	4	4	4	4	4	4
d	4	4	4	4	4	4	4	7	7	7	7	7	7	7	7	7	4	4	4	4	4	4	4
c	4	4	4	4	4	4	4	7	7	7	7	7	7	7	7	7	4	4	4	4	4	4	4
b	4	4	4	4	4	4	4	7	7	7	7	7	7	7	7	7	4	4	4	4	4	4	4
a	4	4	4	4	4	4	4	7	7	7	7	7	7	7	7	7	4	4	4	4	4	4	4
z	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
P	0																						
S	1																						

LOADED CONNECTOR ASSEMBLY
(FOR EXAMPLE)

CONTACT OVERVIEW

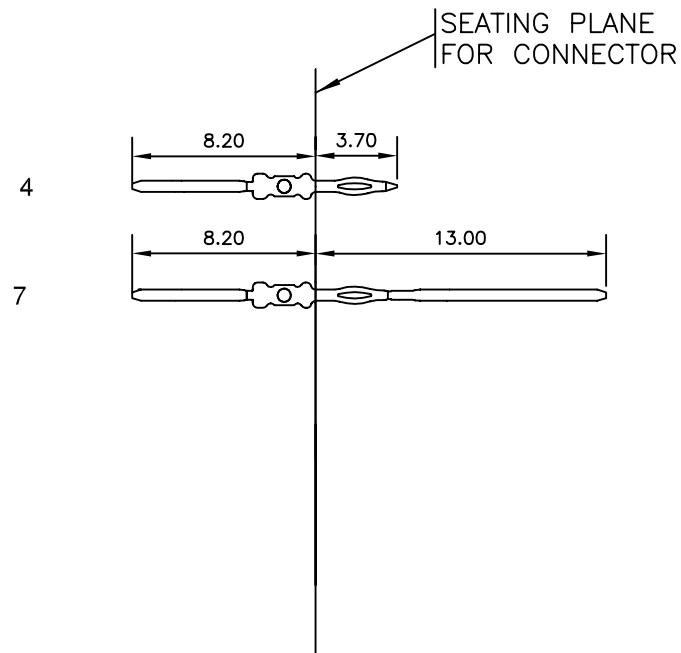

LAY-OUT P.C.B.-HOLE

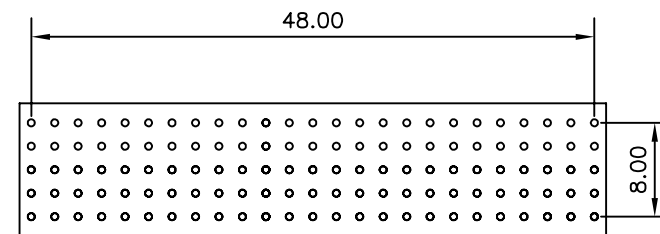

HM2P08PKG3Y0

LEAD FREE INDICATOR : LF = LEAD FREE
(DIGIT 15 & 16)PLATING CODE (DIGIT 13 AND 14)
(REF DRW NO. BS,C , 201844 , 003)

NOTES

- THIS PRODUCT IS CSA APPROVED.
- THIS PRODUCT IS UL RECOGNIZED.
- MEASURED AT THE BOTTOM.
- MATERIAL CONTACT: PHOSPHORBRONZE
HOUSING: CREAM WHITE GLASS FILLED POLYESTER UL-94V0
- CONNECTOR PRINTED WITH P/N AND DATE CODE.
- FOR ACTUAL CONTACT LOADINGS, SEE LOADING PATTERN MATING SIDE.
- SHAPE OF CONNECTOR HOUSING CAN ALTER DEPENDING ON PRODUCTION LOCATION
- THE PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS, A , 201572 , 001

CATALOG NO: HM2P08PKG3Y0----

mat'l. code SEE NOTE 4				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection MM	product family MILLIPACS			
ltr	ecn no	dr	date	tolerances unless otherwise specified		MM	title			
A	105-0149	MINI	2005-08-30	angles	linear		MPACS 5+2R STR HDR PF CONN TYPE B			
B	106-0099	MINI	2006-07-15	0°±1°		scale	—			
				dr	MINI K VANDANATH	2005-08-30	dwg no		sheet 1 of 1	size
				enr	BIJU K PAUL	2005-08-30	BS, C ,203028,282		A3	
				chr	BIJU K PAUL	2006-07-15	type		Product Customer	Drawing
				appd	BIJU K PAUL	2006-07-15				
sheet index	revision	B								
	sheet	1								