

1416282

https://www.phoenixcontact.com/us/products/1416282

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 4-position, PUR halogen-free, black-gray RAL 7021, shielded, Plug straight M12, coding: A, on Socket straight M8, coding: A, cable length: 1.5 m

Commercial data

Item number	1416282
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	BF01
Product key	AF1BJA
GTIN	4055626067520
Weight per piece (including packing)	67 g
Weight per piece (excluding packing)	67 g
Customs tariff number	85444290
Country of origin	PL



https://www.phoenixcontact.com/us/products/1416282

Technical data

Product properties

Product type	Sensor/actuator cable	
Number of positions	4	
No. of cable outlets	1	
Shielded	yes	
Coding	A	
Insulation characteristics		
Overvoltage category	Ш	
Degree of pollution	3	

Material specifications

Flammability rating according to UL 94	НВ
Seal material	NBR
Material of grip body	TPU, hardly inflammable, self-extinguishing
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material for screw connection	Zinc die-cast, nickel-plated

Electrical properties

Insulation resistance	≥ 100 MΩ
Nominal voltage U _N	48 V AC
	60 V DC
Nominal current I _N	4 A

Mechanical properties

Mechanical data			
	Insertion/withdrawal cycles	≥ 100	
Signaling			
	Status display	no	
	Status display present	no	

Connector

Connection 1		
Туре	Plug straight M12	
Number of positions	4	
Coding type	A	
Connection 2		
Туре	Socket straight M8	



1416282

https://www.phoenixcontact.com/us/products/1416282

Number of positions	4
Coding type	A

Cable/line

Cable length

1.5 m

PUR halogen-free black [PUR]

Dimensional drawing



Cable weight	31 kg/km
UL AWM Style	20549
Number of positions	4
Shielded	yes
Cable type	PUR halogen-free black [PUR]
Conductor structure signal line	32x 0.10 mm
AWG signal line	24
Conductor cross section	4x 0.25 mm² (Signal line)
Wire diameter incl. insulation	1.17 mm ±0.02 mm (Signal line)
External cable diameter	4.70 mm ±0.15 mm
Outer sheath, material	PUR
External sheath, color	black-gray RAL 7021
Conductor material	Bare Cu litz wires
Material wire insulation	PP
Single wire, color	brown, white, blue, black
Thickness, insulation	≥ 0.21 mm (Core insulation)
	approx. 0.50 mm (Outer cable sheath)
Overall twist	4 wires, twisted
Optical shield covering	80 %
Max. conductor resistance	max. 78 Ω/km (at 20 °C)
Insulation resistance	≥ 100 GΩ*km (at 20 °C)
Nominal voltage, cable	≤ 300 V
Test voltage	≥ 3000 V
Smallest bending radius, fixed installation	24 mm
Smallest bending radius, movable installation	48 mm
Dynamic load capacity (bending)	Max. bending cycles: 10000000, Bending radius: 48 mm, Traversing path: 10 m, Traversing rate: 3 m/s, Acceleration: 10 m/s²
Halogen-free	in accordance with DIN VDE 0472 part 815
Flame resistance	in accordance with UL 758/1581 FT2



https://www.phoenixcontact.com/us/products/1416282

	DIN EN 60332-2-2 (20 s)
Resistance to oil	in accordance with DIN EN 60811-2-1
Other resistance	Highly resistant to acids, alkaline solutions and solvents
	hydrolysis and microbe resistant
	partly UV-resistant (in accordance with DIN EN ISO 4892-2-A)
Special properties	Flexible cable conduit capable
	Silicone-free
	Free of substances which would hinder coating with paint or varnish
Ambient temperature (operation)	-40 °C 80 °C (cable, fixed installation)
	-25 °C 80 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
	IP67
Ambient temperature (operation)	-25 °C 90 °C (Plug / socket)
	-25 °C 80 °C (cable, fixed installation)
	-5 °C 80 °C (Cable, flexible installation)




1416282

https://www.phoenixcontact.com/us/products/1416282

Drawings

Dimensional drawing

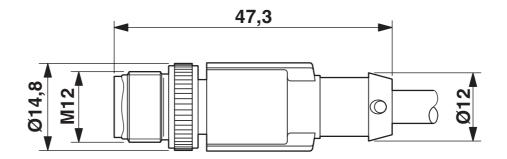


Plug, M12 x 1, straight, shielded



1416282

https://www.phoenixcontact.com/us/products/1416282

Schematic diagram

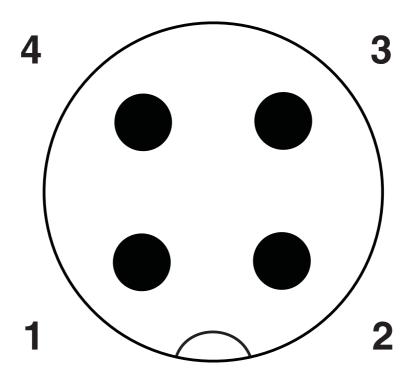


Pin assignment M12 plug, 4-pos., A-coded, view plug side




https://www.phoenixcontact.com/us/products/1416282

Schematic diagram

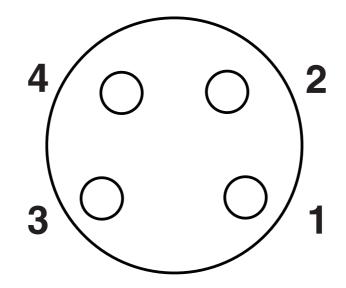

Pin assignment M8 socket, 4-pos.

Circuit diagram

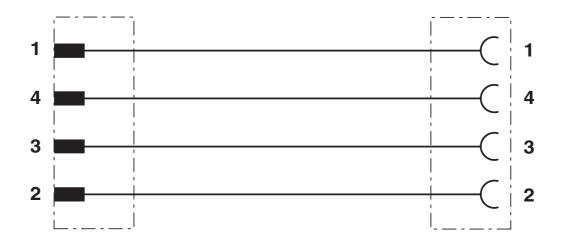

Contact assignment of the M12 plug and the M12 socket



cable

https://www.phoenixcontact.com/us/products/1416282

Classifications

ECLASS

	ECLASS-13.0	27060311	
ET	ETIM		
	ETIM 8.0	EC001855	
U	UNSPSC		
	UNSPSC 21.0	26121600	



https://www.phoenixcontact.com/us/products/1416282

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2025 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com