



### ■ Features :

- Universal AC input / Full range (up to 305VAC)
- Built-in active PFC function
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- Fully isolated plastic case with IP64 level
- Class 2 power unit
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting, Industrial Lighting and moving sign applications
- Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp locations or outdoor application
- 3 years warranty

User's Manual



### ■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>


HLN-60H-15 **A** A : IP64 rated. Output voltage and constant current level can be adjusted through internal potentiometer.  
B : IP64 rated. Constant current level adjustable through output cable with 1~10Vdc or 10V PWM signal or resistance.

### SPECIFICATION

| MODEL                                  | HLN-60H-15                                    | HLN-60H-20                                                                                                                                                   | HLN-60H-24 | HLN-60H-30 | HLN-60H-36 | HLN-60H-42 | HLN-60H-48   | HLN-60H-54  |              |
|----------------------------------------|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|------------|------------|--------------|-------------|--------------|
| OUTPUT                                 | DC VOLTAGE                                    | 15V                                                                                                                                                          | 20V        | 24V        | 30V        | 36V        | 42V          | 48V         | 54V          |
|                                        | CONSTANT CURRENT REGION <small>Note.4</small> | 9 ~ 15V                                                                                                                                                      | 12 ~ 20V   | 14.4 ~ 24V | 18 ~ 30V   | 21.6 ~ 36V | 25.2 ~ 42V   | 28.8 ~ 48V  | 32.4 ~ 54V   |
|                                        | RATED CURRENT                                 | 4A                                                                                                                                                           | 3A         | 2.5A       | 2A         | 1.7A       | 1.45A        | 1.3A        | 1.15A        |
|                                        | RATED POWER                                   | 60W                                                                                                                                                          | 60W        | 60W        | 60W        | 61.2W      | 60.9W        | 62.4W       | 62.1W        |
|                                        | RIPPLE & NOISE (max.) <small>Note.2</small>   | 150mVp-p                                                                                                                                                     | 150mVp-p   | 150mVp-p   | 200mVp-p   | 200mVp-p   | 300mVp-p     | 300mVp-p    | 300mVp-p     |
|                                        | VOLTAGE ADJ. RANGE <small>Note.6</small>      | 13.5 ~ 17V                                                                                                                                                   | 17 ~ 22V   | 22 ~ 27V   | 27 ~ 33V   | 33 ~ 40V   | 40 ~ 46V     | 44 ~ 53V    | 49 ~ 58V     |
|                                        | CURRENT ADJ. RANGE                            | Can be adjusted by internal potentiometer A type only                                                                                                        |            |            |            |            |              |             |              |
|                                        |                                               | 2.4 ~ 4A                                                                                                                                                     | 1.8 ~ 3A   | 1.5 ~ 2.5A | 1.2 ~ 2A   | 1 ~ 1.7A   | 0.87 ~ 1.45A | 0.78 ~ 1.3A | 0.69 ~ 1.15A |
|                                        | VOLTAGE TOLERANCE <small>Note.3</small>       | ±2.0%                                                                                                                                                        | ±1.0%      | ±1.0%      | ±1.0%      | ±1.0%      | ±1.0%        | ±1.0%       | ±1.0%        |
|                                        | LINE REGULATION                               | ±0.5%                                                                                                                                                        | ±0.5%      | ±0.5%      | ±0.5%      | ±0.5%      | ±0.5%        | ±0.5%       | ±0.5%        |
| LOAD REGULATION                        | ±1.5%                                         | ±1.0%                                                                                                                                                        | ±0.5%      | ±0.5%      | ±0.5%      | ±0.5%      | ±0.5%        | ±0.5%       |              |
| SETUP, RISE TIME <small>Note.7</small> | 500ms, 80ms at full load 230VAC / 115VAC      |                                                                                                                                                              |            |            |            |            |              |             |              |
| HOLD UP TIME (Typ.)                    | 16ms/230VAC 16ms/115VAC at full load          |                                                                                                                                                              |            |            |            |            |              |             |              |
| INPUT                                  | VOLTAGE RANGE <small>Note.5</small>           | 90 ~ 305VAC 127 ~ 431VDC                                                                                                                                     |            |            |            |            |              |             |              |
|                                        | FREQUENCY RANGE                               | 47 ~ 63Hz                                                                                                                                                    |            |            |            |            |              |             |              |
|                                        | POWER FACTOR (Typ.)                           | PF>0.98/115VAC, PF>0.95/230VAC, PF>0.92/277VAC at full load (Please refer to "Power Factor Characteristic" curve)                                            |            |            |            |            |              |             |              |
|                                        | TOTAL HARMONIC DISTORTION                     | THD< 20% when output loading≥60% at 115VAC/230VAC input and output loading≥75% at 277VAC input                                                               |            |            |            |            |              |             |              |
|                                        | EFFICIENCY (Typ.)                             | 87%                                                                                                                                                          | 88.5%      | 89%        | 89.5%      | 90%        | 90%          | 90.5%       | 90.5%        |
|                                        | AC CURRENT (Typ.)                             | 0.64A / 115VAC 0.32A / 230VAC 0.3A / 277VAC                                                                                                                  |            |            |            |            |              |             |              |
|                                        | INRUSH CURRENT(Typ.)                          | COLD START 55A(twidth=265μs measured at 50% Ipeak) at 230VAC                                                                                                 |            |            |            |            |              |             |              |
|                                        | MAX. No. of PSUs on 16A CIRCUIT BREAKER       | 9 units (circuit breaker of type B) / 16 units (circuit breaker of type C) at 230VAC                                                                         |            |            |            |            |              |             |              |
| LEAKAGE CURRENT                        | <0.75mA / 277VAC                              |                                                                                                                                                              |            |            |            |            |              |             |              |
| PROTECTION                             | OVER CURRENT <small>Note.4</small>            | 95 ~ 108%<br>Protection type : Constant current limiting, recovers automatically after fault condition is removed                                            |            |            |            |            |              |             |              |
|                                        | SHORT CIRCUIT                                 | Hiccup mode, recovers automatically after fault condition is removed                                                                                         |            |            |            |            |              |             |              |
|                                        |                                               | 18 ~ 24V                                                                                                                                                     | 23 ~ 30V   | 28 ~ 35V   | 35 ~ 43V   | 41 ~ 49V   | 48 ~ 58V     | 54 ~ 65V    | 59 ~ 68V     |
|                                        | OVER VOLTAGE                                  | Protection type : Shut down o/p voltage, re-power on to recover                                                                                              |            |            |            |            |              |             |              |
|                                        | OVER TEMPERATURE                              | Shut down o/p voltage, re-power on to recover                                                                                                                |            |            |            |            |              |             |              |
| ENVIRONMENT                            | WORKING TEMP.                                 | -40 ~ +50℃ (Refer to "Derating Curve")                                                                                                                       |            |            |            |            |              |             |              |
|                                        | WORKING HUMIDITY                              | 20 ~ 95% RH non-condensing                                                                                                                                   |            |            |            |            |              |             |              |
|                                        | STORAGE TEMP., HUMIDITY                       | -40 ~ +80℃, 10 ~ 95% RH                                                                                                                                      |            |            |            |            |              |             |              |
|                                        | TEMP. COEFFICIENT                             | ±0.03%/℃ (0 ~ 40℃)                                                                                                                                           |            |            |            |            |              |             |              |
| SAFETY & EMC                           | VIBRATION                                     | 10 ~ 500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes                                                                                      |            |            |            |            |              |             |              |
|                                        | SAFETY STANDARDS                              | UL8750, CSA C22.2 No. 250.0-08, BS EN/EN 61347-1, BS EN/EN 61347-2-13 independent, IP64, EAC TP TC 004 approved ; design refer to UL60950-1, BS EN/EN60335-1 |            |            |            |            |              |             |              |
|                                        | WITHSTAND VOLTAGE                             | I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC                                                                                                                 |            |            |            |            |              |             |              |
|                                        | ISOLATION RESISTANCE                          | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃ / 70% RH                                                                                                    |            |            |            |            |              |             |              |
|                                        | EMC EMISSION                                  | Compliance to BS EN/EN55015, BS EN/EN61000-3-2 Class C (≥60% load) ; BS EN/EN61000-3-3, EAC TP TC 020                                                        |            |            |            |            |              |             |              |
| OTHERS                                 | EMC IMMUNITY                                  | Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11; BS EN/EN61547, BS EN/EN55024, light industry level (surge 4KV), EAC TP TC 020                                  |            |            |            |            |              |             |              |
|                                        | MTBF                                          | 3400.0K hrs min. Telcordia SR-332(Bellcore) ; 347.4K hrs min. MIL-HDBK-217F (25℃)                                                                            |            |            |            |            |              |             |              |
|                                        | DIMENSION                                     | 161*61.5*35mm (L*W*H)                                                                                                                                        |            |            |            |            |              |             |              |
|                                        | PACKING                                       | 0.46Kg;32pcs/15.7Kg/1.10CUFT                                                                                                                                 |            |            |            |            |              |             |              |


## Mechanical Specification

Case No.HLN-60A

Unit:mm


Tolerance:±1

### A Type:(HLN-60H-\_A)

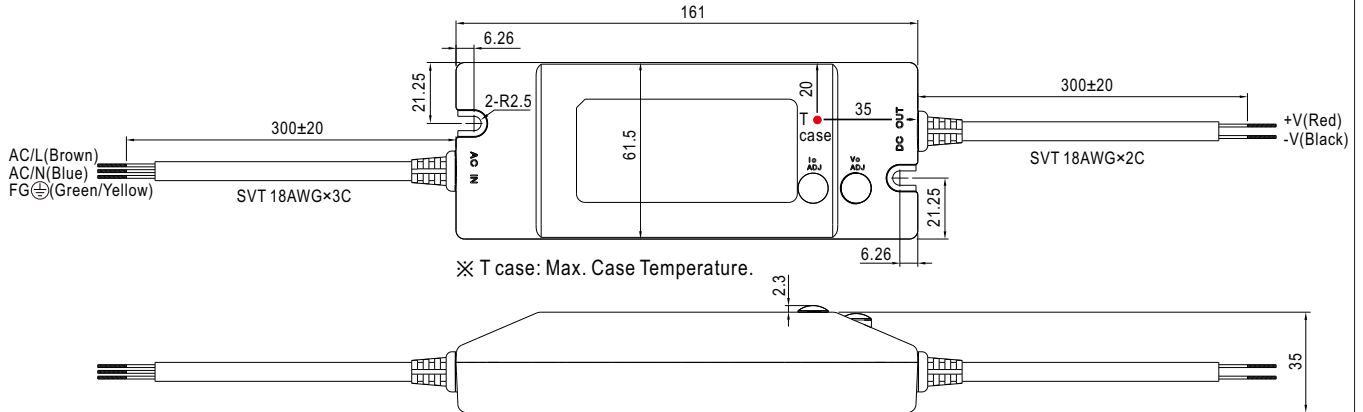


※IP64 rated. Output voltage and constant current level can be adjusted through internal potentiometer.  
(can access by removing the rubber stopper on the case).

### B Type:(HLN-60H-\_B)

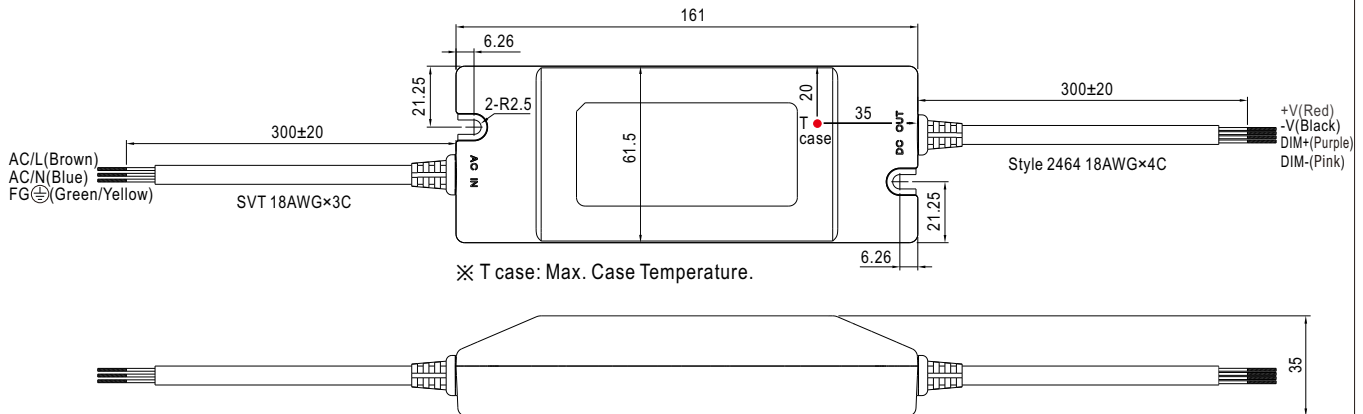


## Block Diagram


fosc : 100KHz

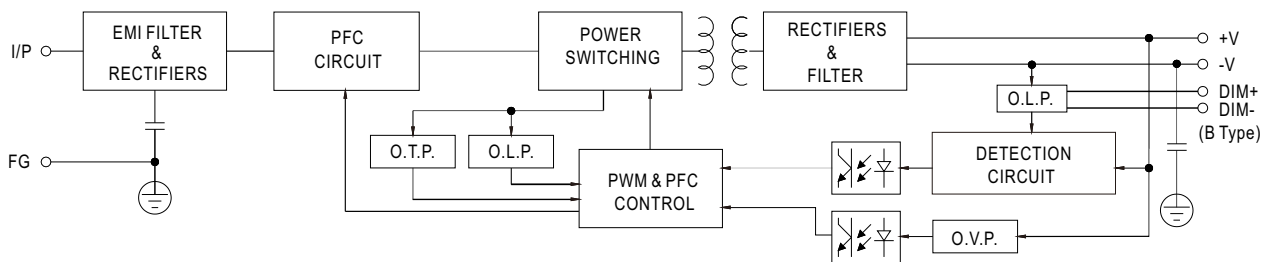

## Derating Curve

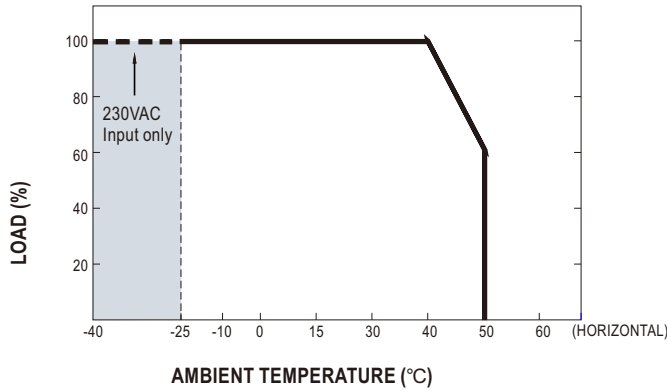


## Static Characteristics

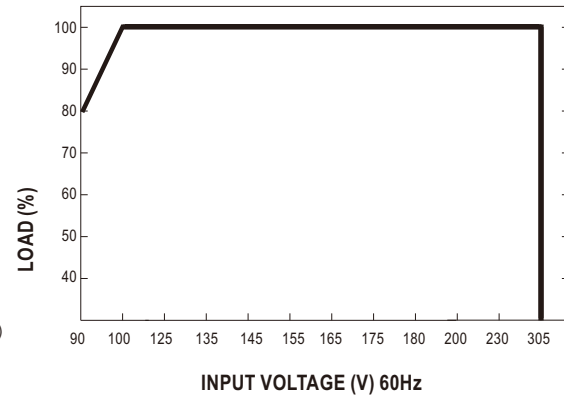


## Power Factor Characteristic

### Constant Current Mode

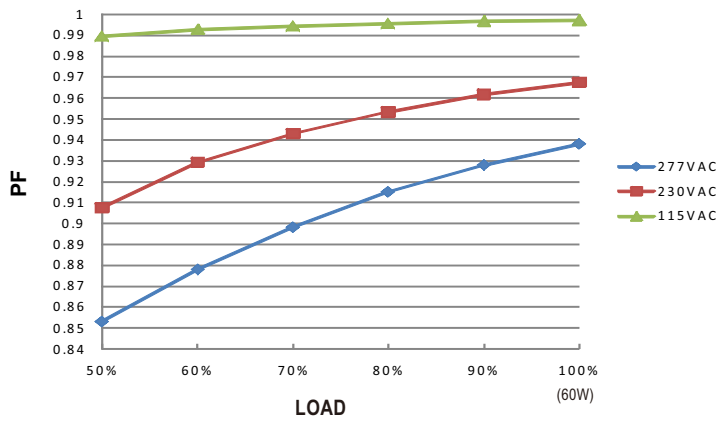

## EFFICIENCY vs LOAD (48V Model)

HLN-60H series possess superior working efficiency that up to 90.5% can be reached in field applications.

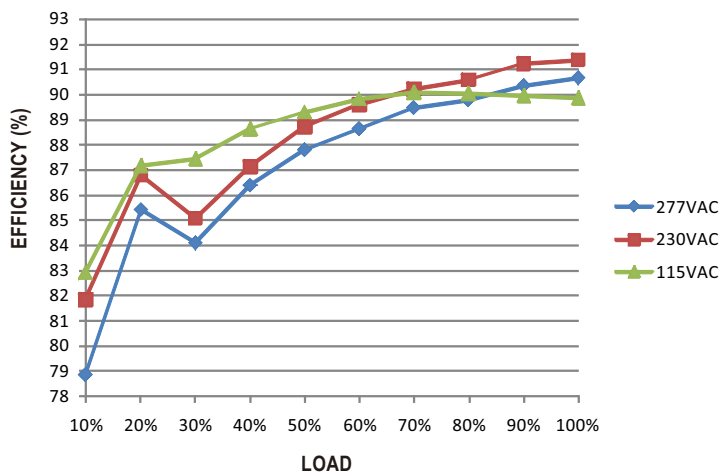


## DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B)).

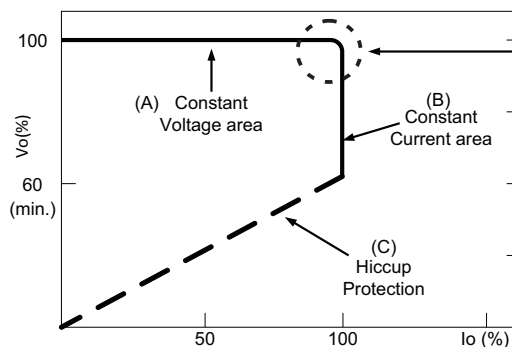


Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.

## DIMMING OPERATION(for B-type only)

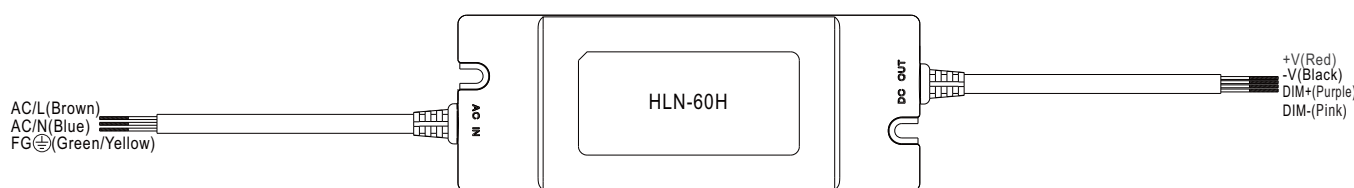

※ Built-in 3 in 1 dimming function, IP64 rated. Output constant current level can be adjusted through output cable by connecting a resistance or 1 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.

※ Please DO NOT connect "DIM-" to "-V".

※ Reference resistance value for output current adjustment (Typical)

| Resistance value            | Single driver                                                              | 10KΩ   | 20KΩ   | 30KΩ   | 40KΩ   | 50KΩ   | 60KΩ   | 70KΩ   | 80KΩ   | 90KΩ   | 100KΩ   | OPEN     |
|-----------------------------|----------------------------------------------------------------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|----------|
|                             | Multiple drivers<br>(N=driver quantity for synchronized dimming operation) | 10KΩ/N | 20KΩ/N | 30KΩ/N | 40KΩ/N | 50KΩ/N | 60KΩ/N | 70KΩ/N | 80KΩ/N | 90KΩ/N | 100KΩ/N | -----    |
| Percentage of rated current |                                                                            | 10%    | 20%    | 30%    | 40%    | 50%    | 60%    | 70%    | 80%    | 90%    | 100%    | 95%~108% |

※ 1 ~ 10V dimming function for output current adjustment (Typical)

| Dimming value               | 1V  | 2V  | 3V  | 4V  | 5V  | 6V  | 7V  | 8V  | 9V  | 10V  | OPEN     |
|-----------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|----------|
| Percentage of rated current | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | 95%~108% |


※ 10V PWM signal for output current adjustment (Typical): Frequency range:100Hz ~ 3KHz

| Duty value                  | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | OPEN     |
|-----------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|----------|
| Percentage of rated current | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | 95%~108% |

※Using the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.

※Direct connecting to LEDs is suggested, but is not suitable for using additional drivers.

Dimming connection diagram for turning the lighting fixture ON/OFF :

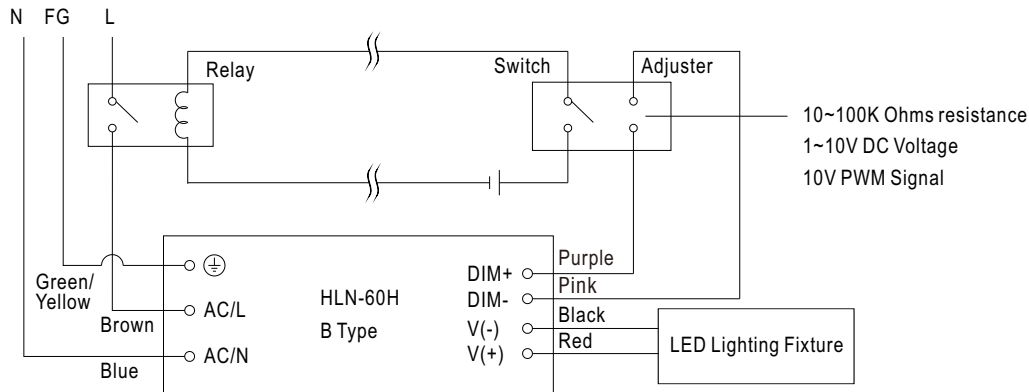

Using a switch and relay can turn ON/OFF the lighting fixture.

1. Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-.
2. The LED lighting fixture can be turned ON/OFF by the switch.