

TOSHIBA Transistor Silicon NPN Epitaxial Type (PCT process) (Bias Resistor built-in Transistor)

**RN1101ACT, RN1102ACT, RN1103ACT
RN1104ACT, RN1105ACT, RN1106ACT**

Switching Applications


Inverter Circuit Applications

Interface Circuit Applications


Driver Circuit Applications

- Incorporating a bias resistor into a transistor reduces the number of parts, which enables the manufacture of ever more compact equipment and saves assembly cost.
- Complementary to RN2101ACT to RN2106ACT

Equivalent Circuit and Bias Resistor Values



Type No.	R1 (k Ω)	R2 (k Ω)
RN1101ACT	4.7	4.7
RN1102ACT	10	10
RN1103ACT	22	22
RN1104ACT	47	47
RN1105ACT	2.2	47
RN1106ACT	4.7	47

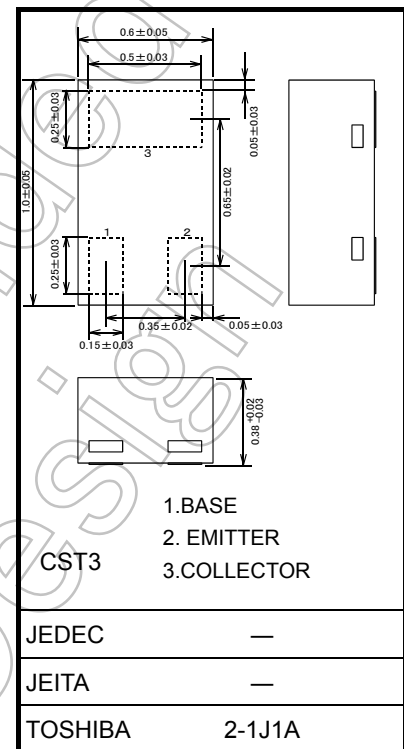

Weight: 0.75 mg (typ.)

Absolute Maximum Ratings (Ta = 25°C)

Characteristics		Symbol	Rating	Unit
Collector-base voltage	RN1101ACT to 1106ACT	V_{CBO}	50	V
Collector-emitter voltage		V_{CEO}	50	V
Emitter-base voltage	RN1101ACT to 1104ACT	V_{EBO}	10	V
	RN1105ACT, 1106ACT		5	
Collector current	RN1101ACT to 1106ACT	I_C	80	mA
Collector power dissipation		P_C (Note1)	100	mW
Junction temperature		T_j	150	°C
Storage temperature range		T_{stg}	-55 to 150	°C

Note1: Mounted on FR4 board (10 mm × 10 mm × 1 mm)







Note2: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings.







Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook (“Handling Precautions”/“Derating Concept and Methods”) and individual reliability data (i.e. reliability test report and estimated failure rate, etc).







Start of commercial production
2004-08







Electrical Characteristics (Ta = 25°C)







Characteristics		Symbol	Test Condition	Min	Typ.	Max	Unit
Collector cut-off current	RN1101ACT to 1106ACT	I_{CBO}	$V_{CB} = 50 \text{ V}, I_E = 0$	—	—	100	nA
		I_{CEO}	$V_{CE} = 50 \text{ V}, I_B = 0$	—	—	500	
Emitter cut-off current	RN1101ACT	I_{EBO}	$V_{EB} = 10 \text{ V}, I_C = 0$	0.89	—	1.33	mA
	RN1102ACT			0.41	—	0.63	
	RN1103ACT			0.18	—	0.29	
	RN1104ACT			0.088	—	0.133	
	RN1105ACT		$V_{EB} = 5 \text{ V}, I_C = 0$	0.085	—	0.127	
	RN1106ACT			0.08	—	0.121	
DC current gain	RN1101ACT	h_{FE}	$V_{CE} = 5 \text{ V}, I_C = 10 \text{ mA}$	30	—	—	
	RN1102ACT			50	—	—	
	RN1103ACT			70	—	—	
	RN1104ACT			80	—	—	
	RN1105ACT			80	—	—	
	RN1106ACT			80	—	—	
Collector-emitter saturation voltage	RN1101ACT	$V_{CE(sat)}$	$I_C = 5 \text{ mA}, I_B = 0.5 \text{ mA}$	—	—	0.15	V
	RN1102ACT to 1106ACT		$I_C = 5 \text{ mA}, I_B = 0.25 \text{ mA}$	—	—	—	
Input voltage (ON)	RN1101ACT	$V_{I(ON)}$	$V_{CE} = 0.2 \text{ V}, I_C = 5 \text{ mA}$	1.2	—	2.2	V
	RN1102ACT			1.2	—	2.6	
	RN1103ACT			1.3	—	3.5	
	RN1104ACT			1.5	—	5.0	
	RN1105ACT			0.6	—	1.1	
	RN1106ACT			0.7	—	1.3	
Input voltage (OFF)	RN1101ACT to 1104ACT	$V_{I(OFF)}$	$V_{CE} = 5 \text{ V}, I_C = 0.1 \text{ mA}$	0.8	—	1.5	V
	RN1105ACT, 1106ACT			0.5	—	0.8	
Collector output capacitance	RN1101ACT~1106ACT	C_{ob}	$V_{CB} = 10 \text{ V}, I_E = 0, f = 1 \text{ MHz}$	—	0.7	—	pF
Input resistor	RN1101ACT	R1	—	3.76	4.7	5.64	kΩ
	RN1102ACT			8	10	12	
	RN1103ACT			17.6	22	26.4	
	RN1104ACT			37.6	47	56.4	
	RN1105ACT			1.76	2.2	2.64	
	RN1106ACT			3.76	4.7	5.64	
Resistor ratio	RN1101ACT to 1104ACT	R1/R2	—	0.8	1.0	1.2	
	RN1105ACT			0.0376	0.0468	0.0562	
	RN1106ACT			0.08	0.1	0.12	

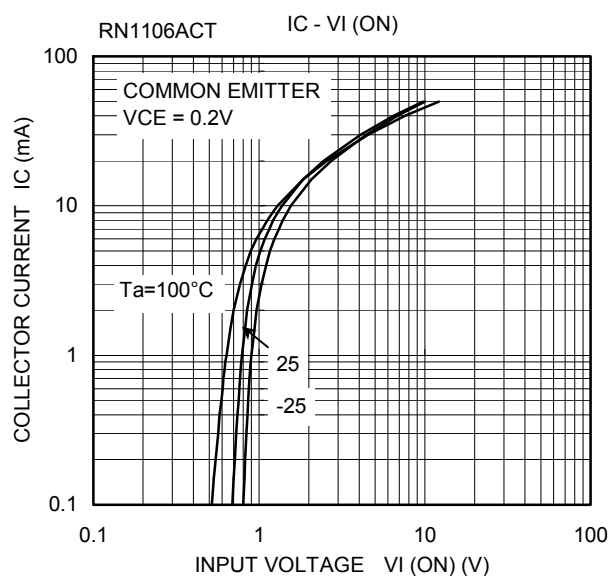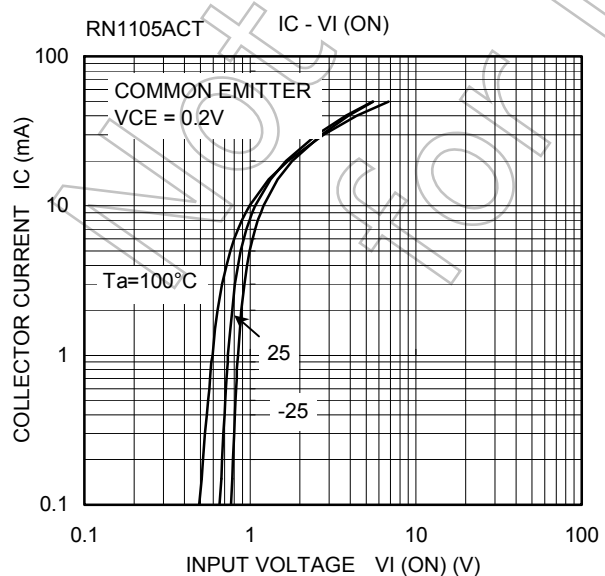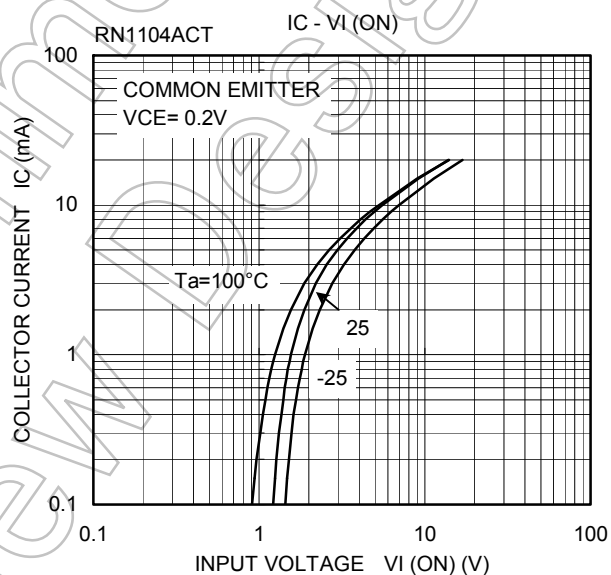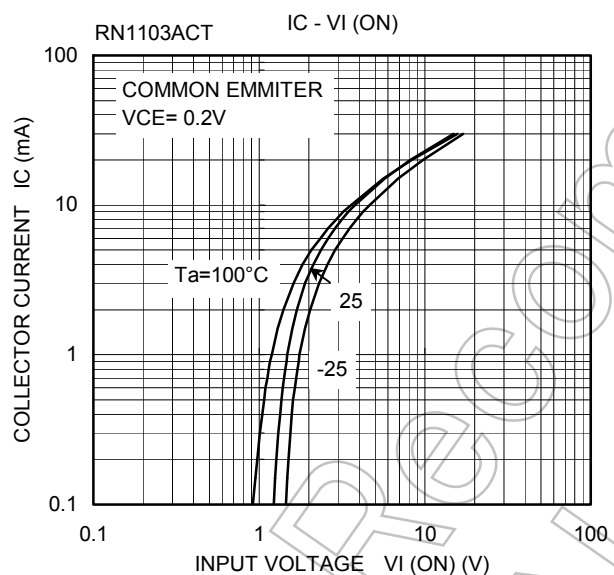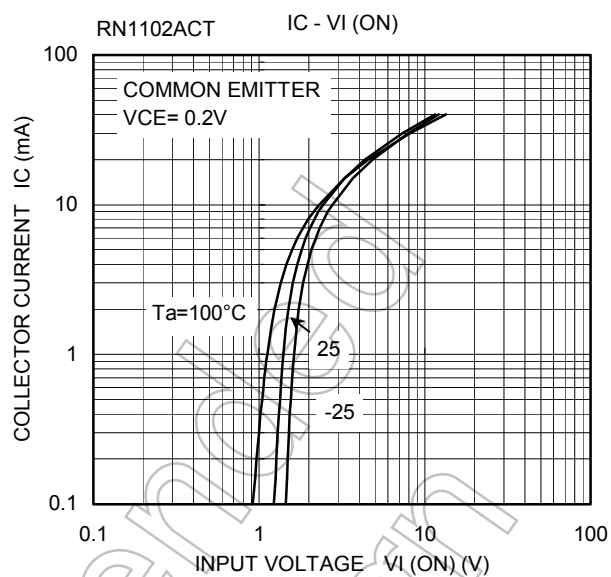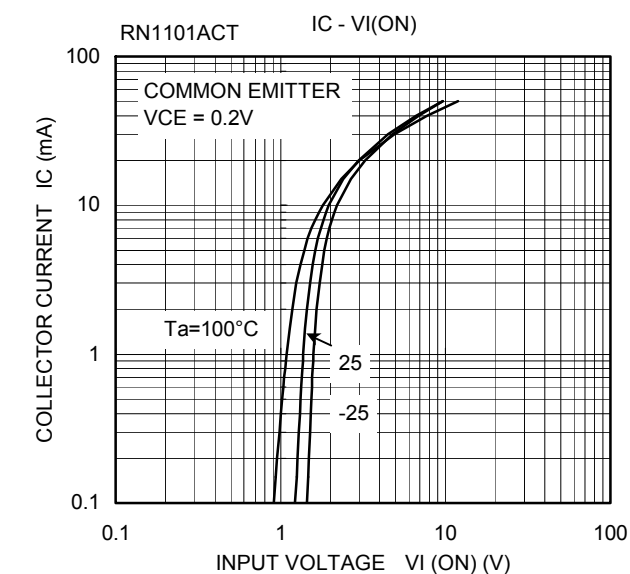

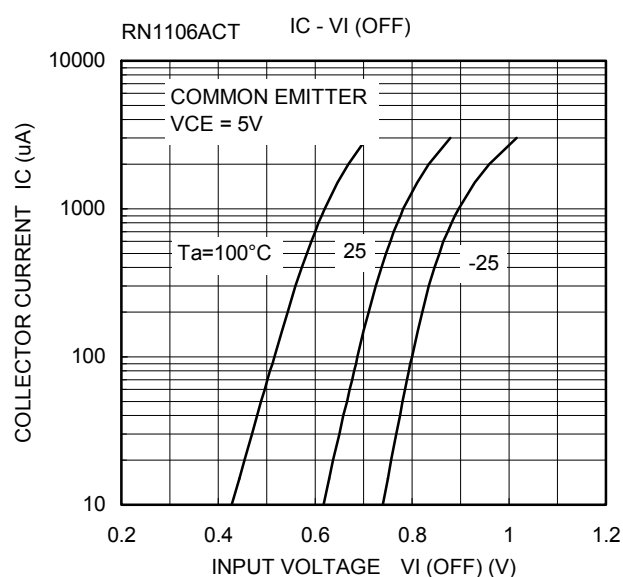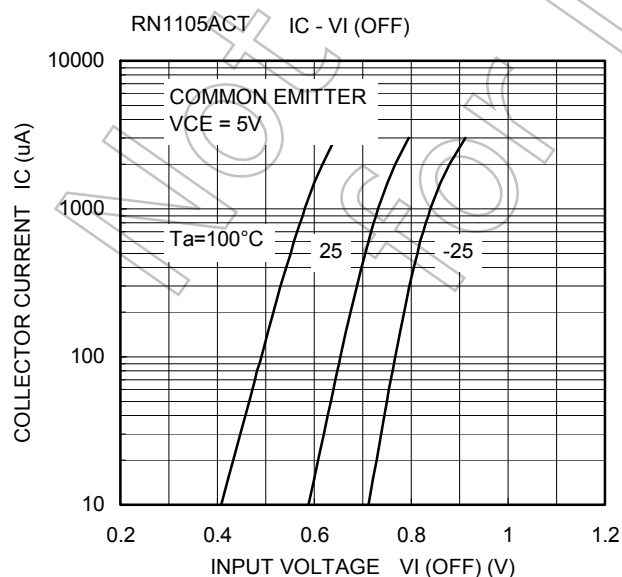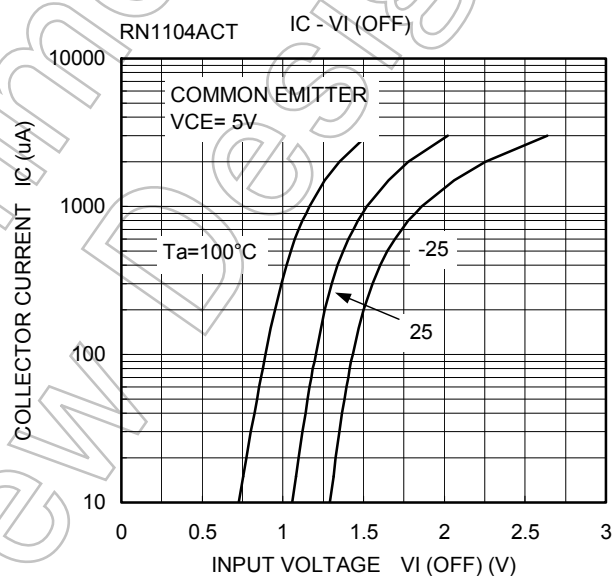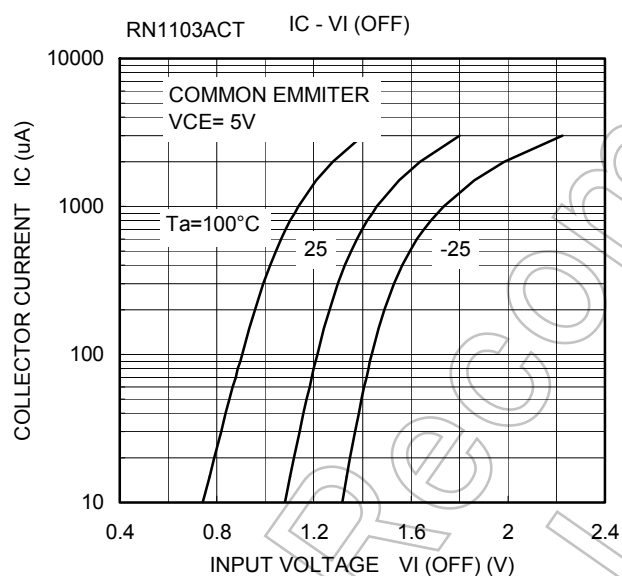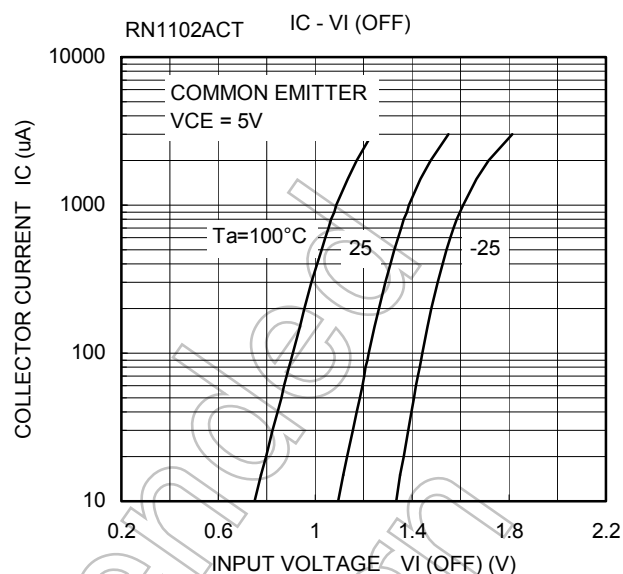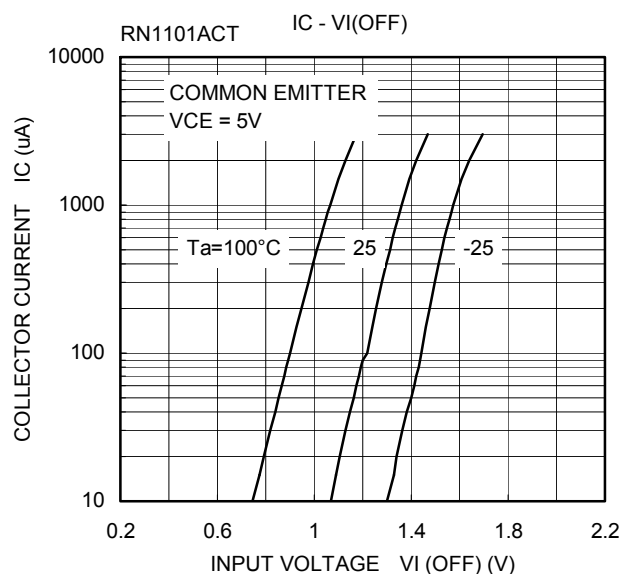

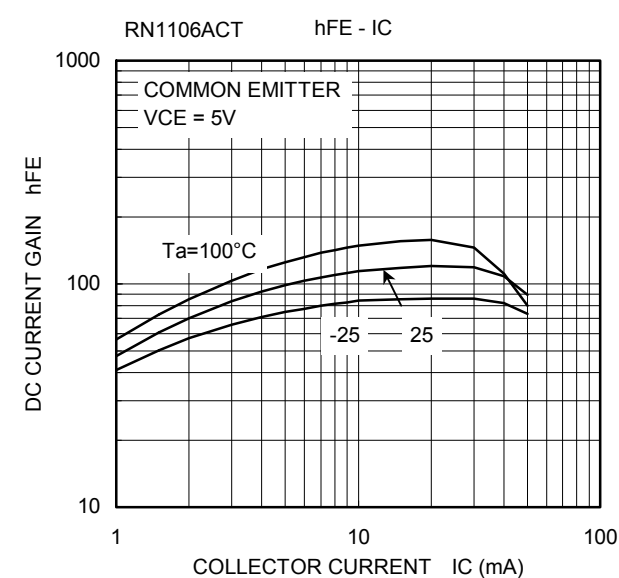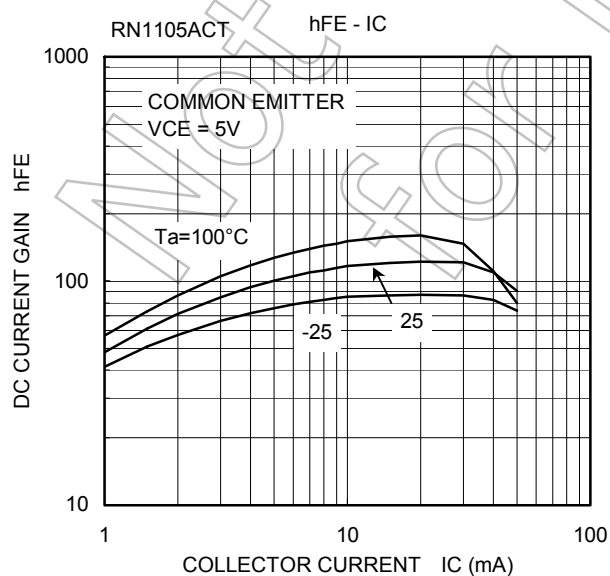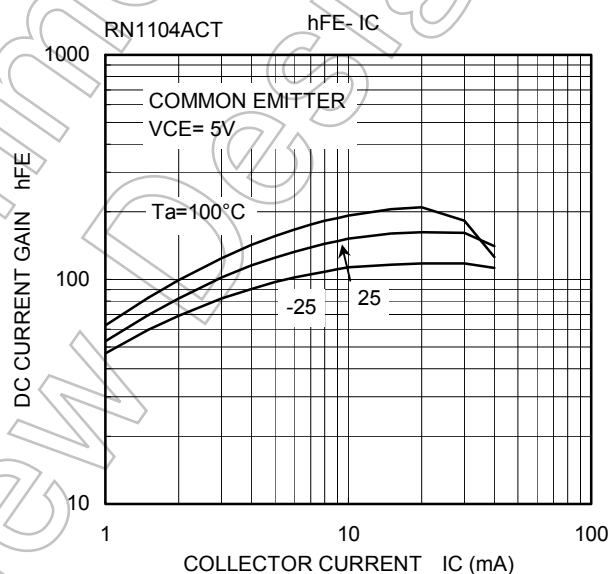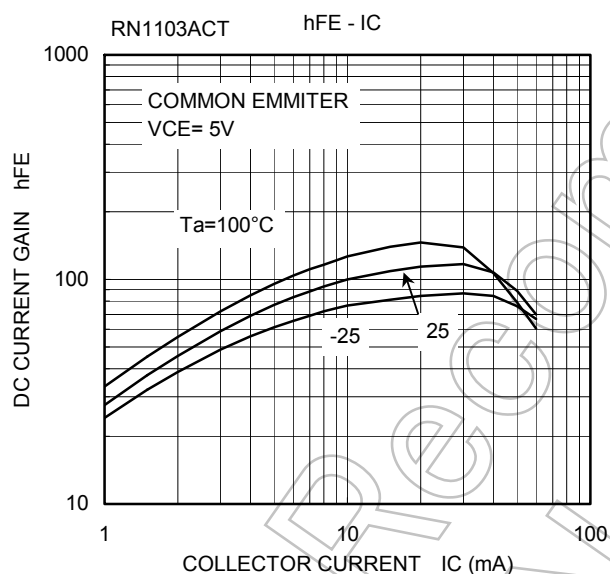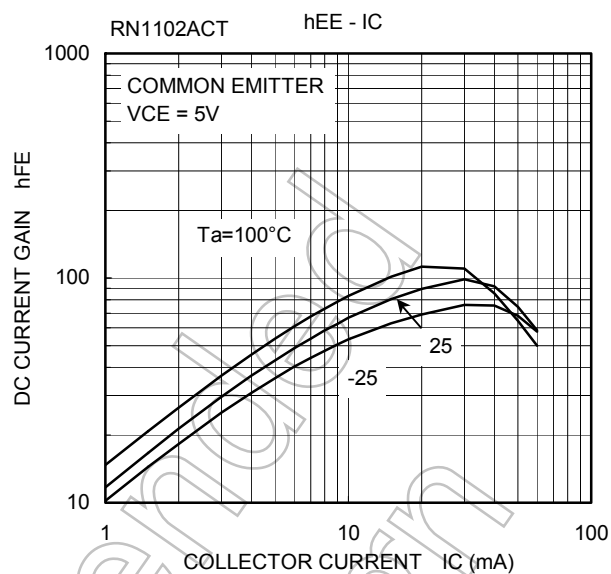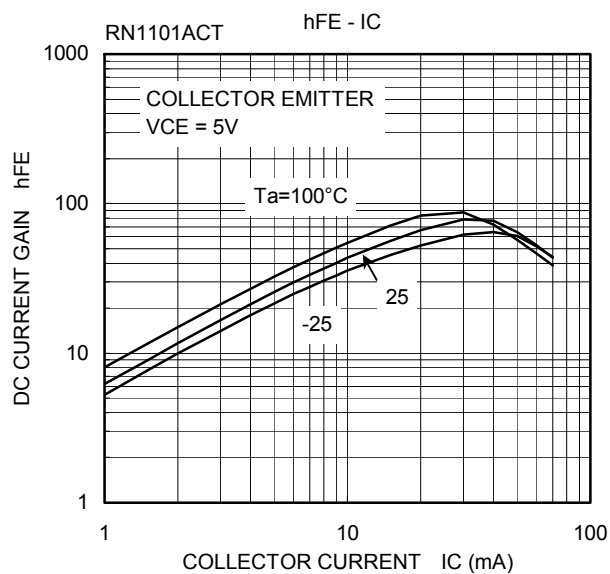

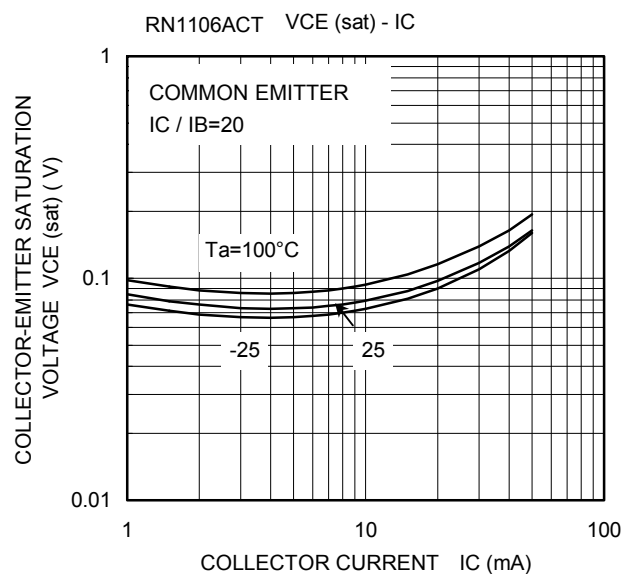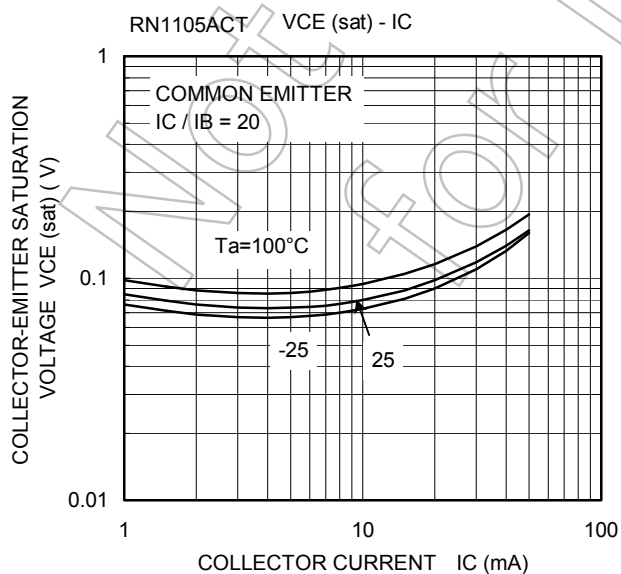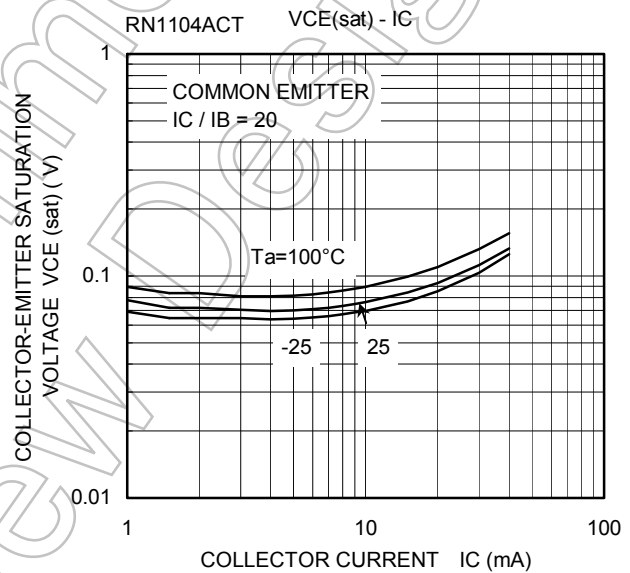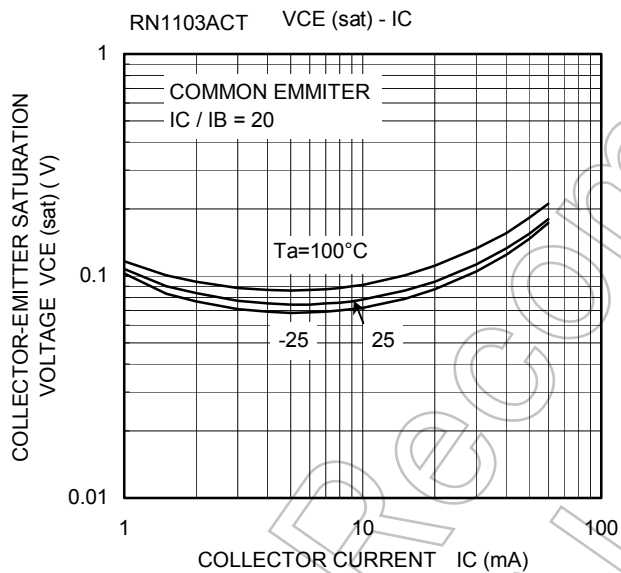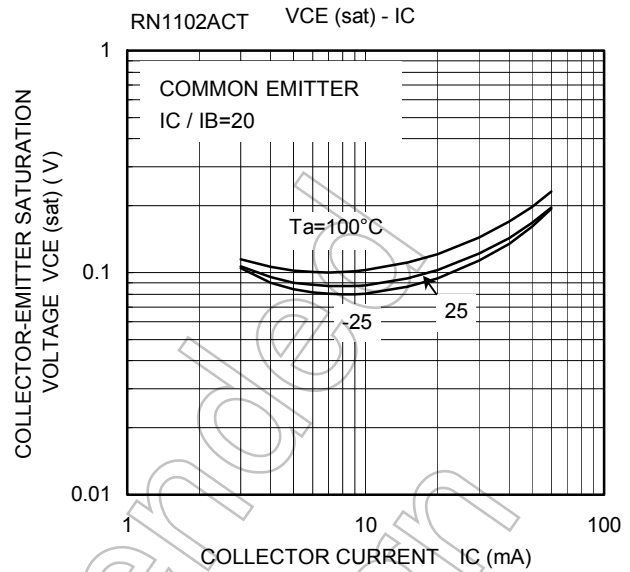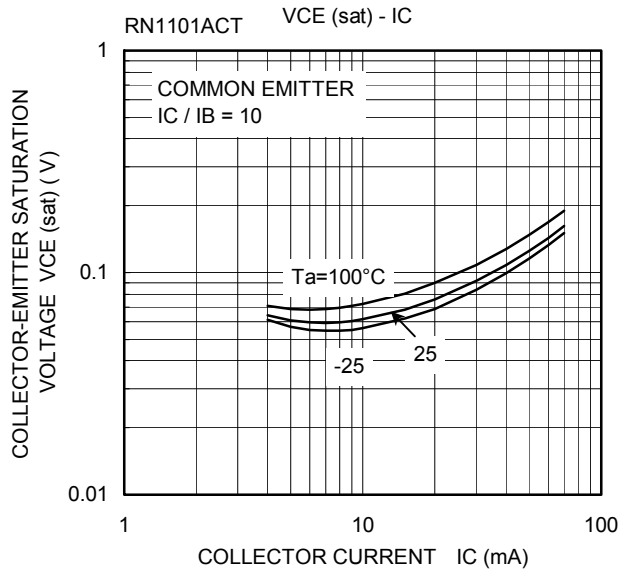

Type Name	Marking
RN1101ACT	 The diagram shows a rectangular marking area with a vertical bar on the left. The bar is divided into two sections labeled 1 and 2. The top section (1) contains the text 'C0'. The bottom section (2) is empty. To the right of the bar is a box labeled 3. An arrow points from the text 'TYPE NAME' to the top of the box 3.
RN1102ACT	 The diagram shows a rectangular marking area with a vertical bar on the left. The bar is divided into two sections labeled 1 and 2. The top section (1) contains the text 'C1'. The bottom section (2) is empty. To the right of the bar is a box labeled 3. An arrow points from the text 'TYPE NAME' to the top of the box 3.
RN1103ACT	 The diagram shows a rectangular marking area with a vertical bar on the left. The bar is divided into two sections labeled 1 and 2. The top section (1) contains the text 'C2'. The bottom section (2) is empty. To the right of the bar is a box labeled 3. An arrow points from the text 'TYPE NAME' to the top of the box 3.
RN1104ACT	 The diagram shows a rectangular marking area with a vertical bar on the left. The bar is divided into two sections labeled 1 and 2. The top section (1) contains the text 'C3'. The bottom section (2) is empty. To the right of the bar is a box labeled 3. An arrow points from the text 'TYPE NAME' to the top of the box 3.
RN1105ACT	 The diagram shows a rectangular marking area with a vertical bar on the left. The bar is divided into two sections labeled 1 and 2. The top section (1) contains the text 'C4'. The bottom section (2) is empty. To the right of the bar is a box labeled 3. An arrow points from the text 'TYPE NAME' to the top of the box 3.
RN1106ACT	 The diagram shows a rectangular marking area with a vertical bar on the left. The bar is divided into two sections labeled 1 and 2. The top section (1) contains the text 'C5'. The bottom section (2) is empty. To the right of the bar is a box labeled 3. An arrow points from the text 'TYPE NAME' to the top of the box 3.

RESTRICTIONS ON PRODUCT USE

- Toshiba Corporation, and its subsidiaries and affiliates (collectively "TOSHIBA"), reserve the right to make changes to the information in this document, and related hardware, software and systems (collectively "Product") without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, devices related to electric power, and equipment used in finance-related fields. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**