

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

V7-3E17E9-143-1

CW-B8426

CATALOG LISTING

V7-3E17E9-143-1

REPLACES

RELEASE NO. PR-18387

M

ISSUE
3

CHECK

REVISIONS

A	REL PR18387
14	BAB JUN 90
B	CO-76231
K D R	21 OCT 93

CHECK

18 JUN 90



J A P

CHECK

14 JUN 90

BAB

DDM/CAD
DRAWN

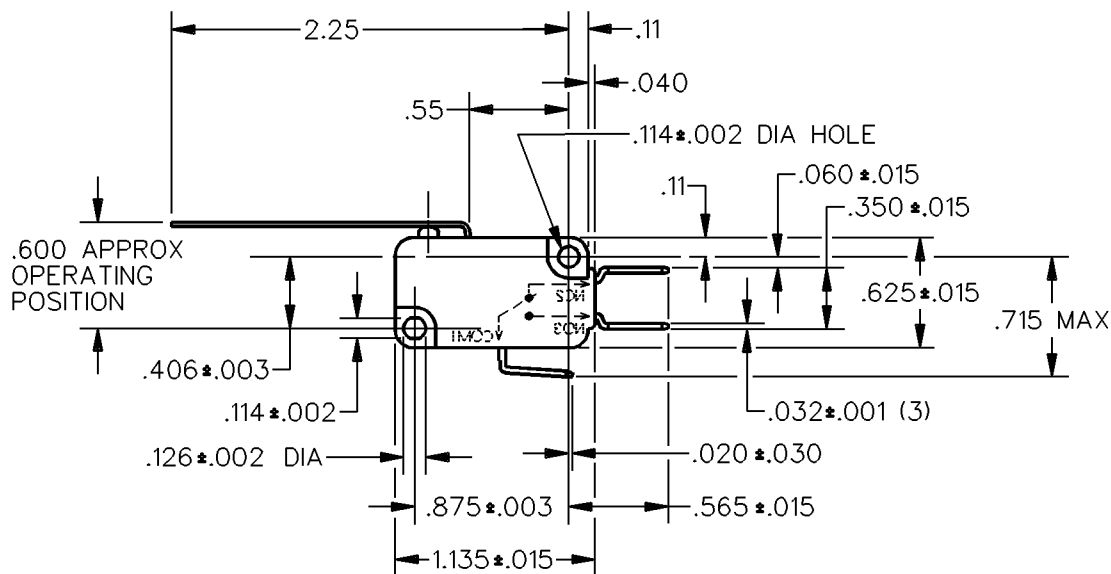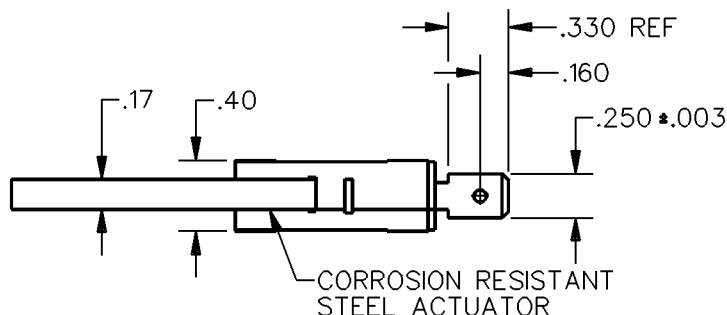


NOTE

- 1 FORCE CHARACTERISTICS TAKEN WITH SWITCH MOUNTING SURFACE HORIZONTAL
- 2 - CAUTION: OVERTRAVEL FORCE ON LEVER MUST NOT RESULT IN AN OVERTRAVEL FORCE ON PLUNGER EXCEEDING FIVE POUNDS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS



OPERATING FORCE -- 16 GRAM APPROX

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

10A-1/3 HP-125, 250, 277 VAC L216
1/2A-125 VDC; 1/4A-250 VDC
4A-125 VAC "L"



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.01) ±.030

TWO PLACE (.00) ±.015

THREE PLACE (.000) ±.005

ANGLES ±

WEIGHT