

Kinetis KE1xZ MCU Family

The Kinetis KE1xZ MCU family provides a highly scalable portfolio of robust 5V MCUs based on the Arm® Cortex®-M0+, extending the Kinetis E series by offering higher performance and broader scalability with robust NXP Touch software, 1 Msps ADC and FlexTimers.

The 5V Kinetis KE1xZ MCU family features a 48/72/96 MHz Arm Cortex-M0+ core with up to 512 KB flash, 96 KB SRAM, and a complete set of analog/digital features. The new TSI provides a high level of stability and accuracy for your HMI system, while the 1 Msps ADC and FlexTimer modules offer an ideal solution for BLDC motor-control systems. CAN IP is ideal for the industrial control nodes.

Target Applications

- Home appliances
- Industry
- CAN bus control node
- Motor control
- Smart lighting
- Circuit breaker

Features

Performance

- Configurable nested vectored interrupt controller
- Memory-mapped divide and square root module
- Up to 8-channel DMA controller extended to 63 channels with DMAMUX

Human machine interface

- Up to 8 high-drive pins providing maximum 20mA current
- Robust new TSI supports both the mutual-cap mode and the self-cap mode, providing flexibility for up to 50 touch sensing channels



Timers

- Up to 3x FlexTimers (FTM) (2/4/6/8 channels)
- Low-power timer (LPTMR) with flexible wake-up control
- Programmable delay block (PDB) with flexible trigger system
- Low-power periodic interrupt timer (LPIT) with 4 channels
- Real timer clock (RTC)

Memory

- Up to 512 KB program flash, 96 KB SRAM
- Up to 32 KB FlexNVM with ECC for data flash and with EEPROM emulation
- Up to 2 KB FlexRAM for EEPROM emulation
- Up to 256 Bytes flash cache
- Up to 8 KB boot ROM with built-in bootloader

Clock interfaces

- System oscillator (OSC) input ranges from 32 KHz, 4-40 MHz
- 32 KHz oscillator (OSC32) input
- High-accuracy fast internal reference clock (FIRC)
- High-accuracy slow internal reference clock (SIRC)

Analog modules

- 12-bit ADC with up to 24-channel analog inputs per module, up to 1 Msps
- High-speed analog comparators (CMP) with internal 8-bit digital-to-analog converter (DAC)


Connectivity and communications

- LPUART, LPSPI, LPI2C with DMA support and low power availability
- 8-ch. programmable module (FlexIO) to emulate various serial, parallel or custom interfaces

MCUXpresso Developer Experience

- NXP Touch Software
- NXP FRDM development platform
 - low cost, standard form factor and headers, easy access to MCU I/Os, and an on-board MCU-Link debugger
- [MCUXpresso software development kit](#) (SDK)
- [Integrated development environments](#) (IDE)
 - MCUXpresso for VS Code
 - MCUXpresso IDE
 - IAR Embedded Workbench®
 - Arm Keil® MDK

Kinetis KE1xZ MCU family block diagram

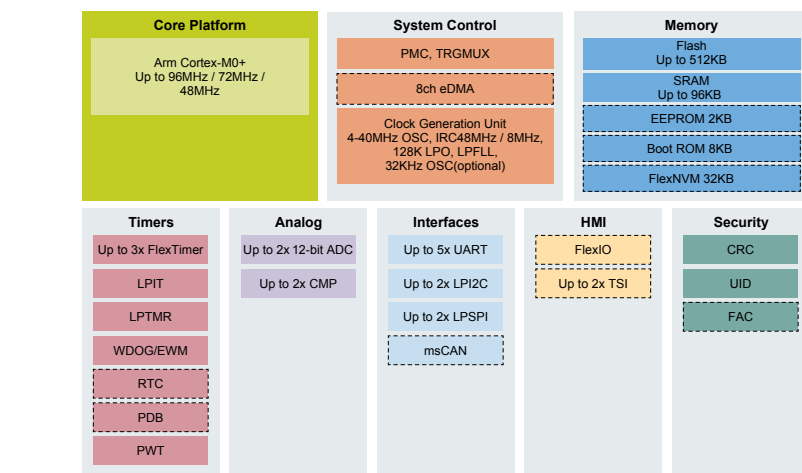

Kinetis KE1xZ MCU family options

Sub-Family	Part Number	CPU (MHz)	Memory (KB)			Features												Package				
			Flash	SRAM	EEPROM	LPUART + UART	LPSPI	LPI2C	TSI	CAN	RTC	FlexIO	16-bit PWM	12-bit ADC	CMP	FlexTimer	Total GPIOs	QFN40	LQFP44	LQFP48	LQFP64	L QFP100
KE12Z	MKE12Z128V**7	72	128	32		3	1	1				✓	16-ch.	1	1	3	58/89			✓	✓	✓
KE12Z	MKE12Z256V**7	72	256	48		3	1	1				✓	16-ch.	1	1	3	58/89			✓	✓	✓
KE12Z	MKE12Z512V**9	96	512	96		3+2	2	2			✓	✓	16-ch	1	1	3	58/89				✓	✓
KE13Z	MKE13Z128V**7	72	128	32		3	1	1	1x 25-ch.			✓	16-ch.	1	1	3	58/89			✓	✓	✓
KE13Z	MKE13Z256V**7	72	256	48		3	1	1	1x 25-ch.			✓	16-ch.	1	1	3	58/89			✓	✓	✓
KE13Z	MKE13Z512V**9	96	512	96		3+2	2	2	1x 25-ch		✓	✓	16-ch	1	1	3	58/89				✓	✓
KE14Z	MKE14Z32V**4	48	32	4		3	1	1			✓		8-ch.	1	1	2	38/42	✓	✓	✓		
KE14Z	MKE14Z64V**4	48	64	8		3	1	1			✓		8-ch.	1	1	2	38/42	✓	✓	✓		
KE14Z	MKE14Z128V**7	72	128	16	2 ¹	3	2	2			✓	✓	16-ch.	2	2	3	58/89				✓	✓
KE14Z	MKE14Z256V**7	72	256	32	2 ¹	3	2	2			✓	✓	16-ch.	2	2	3	58/89				✓	✓
KE15Z	MKE15Z32V**4	48	32	4		3	1	1	1x 25-ch.		✓		8-ch.	1	1	2	38/42	✓	✓	✓		
KE15Z	MKE15Z64V**4	48	64	8		3	1	1	1x 25-ch.		✓		8-ch.	1	1	2	38/42	✓	✓	✓		
KE15Z	MKE15Z128V**7	72	128	16	2 ¹	3	2	2	1x 25-ch.		✓	✓	16-ch.	2	2	3	58/89				✓	✓
KE15Z	MKE15Z256V**7	72	256	32	2 ¹	3	2	2	1x 25-ch.		✓	✓	16-ch.	2	2	3	58/89				✓	✓
KE16Z	MKE16Z32V**4	48	32	4		3	1	1	1x 25-ch.	✓	✓		8-ch.	1	1	2	38/42		✓	✓		
KE16Z	MKE16Z64V**4	48	64	8		3	1	1	1x 25-ch.	✓	✓		8-ch.	1	1	2	38/42		✓	✓		
KE17Z	MKE17Z128V**7	72	128	32		3	1	1	2x 25-ch.			✓	16-ch.	1	1	3	58/89			✓	✓	✓
KE17Z	MKE17Z256V**7	72	256	48		3	1	1	2x 25-ch.			✓	16-ch.	1	1	3	58/89			✓	✓	✓
KE17Z	MKE17Z512V**9	96	512	96		3+2	2	2	2x 25-ch		✓	✓	16-ch	1	1	3	58/89				✓	✓

¹ 32 KB FlexNVM for data flash that can emulate as 2 KB EEPROM

www.nxp.com and www.nxp.com/kinetis/Eseries

NXP, the NXP logo and Kinetis are trademarks of NXP B.V. All other product or service names are the property of their respective owners. Arm, Cortex, and Keil are registered trademarks of Arm Limited (or its subsidiaries) in the EU and/or elsewhere. All rights reserved. © 2016–2024 NXP B.V.

Document Number: KE1xZMUCUFAMFS REV 5