

# ISM RX 3 Click



PID: MIKROE-4828

**ISM RX 3 Click** is a compact add-on board that contains a Sub-GHz RF receiver. This board features the [MAX41470](#), a high-performance, low-power receiver ideal for amplitude shift-keyed (ASK) and frequency shift-keyed (FSK) data from [Analog Devices](#). It can be configured for three sub-1GHz bands using an onboard 16MHz crystal: 287MHz to 320MHz, 425MHz to 480MHz, and 860MHz to 960MHz, fully programmable through an SPI interface. The receiver has excellent RF sensitivity and long-range, allows input signals up to 0dBm of power at the RF input, and features a fully programmable, self-polling (duty cycling) mode with preamble detection and interrupt output to wake up an external MCU. This Click board™ is suitable for cost- and power-sensitive applications, such as home automation and security, building access control, remote keyless entry, garage or gate doors control, and similar applications.

ISM RX 3 Click is supported by a [mikroSDK](#) compliant library, which includes functions that simplify software development. This [Click board™](#) comes as a fully tested product, ready to be used on a system equipped with the [mikroBUS™](#) socket.

## How does it work?

ISM RX 3 Click as its foundation uses the MAX41470, a sub-GHz ISM RF receiver from Analog Devices. This IC is designed to receive ASK/OOK or FSK/GFSK modulated data in the 287MHz to 320MHz (nominally 315MHz), 425MHz to 480MHz (nominally 434MHz), and 860MHz to 960MHz (nominally 868MHz or 915MHz) ISM frequency bands, using an onboard 16MHz crystal. This Click board™ comes with an ASK modulation and 433.92MHz with a 5bps data rate as its default configuration. Its additional features also include automatic gain control (AGC), a received signal strength indicator (RSSI), automatic frequency control (AFC), and a frequency error indicator (FEI).

Mikroe produces entire development toolchains for all major microcontroller architectures.


Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

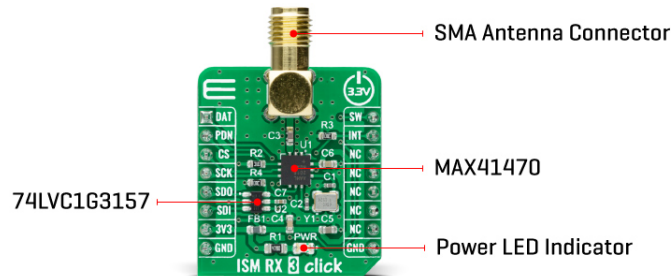

The MAX41470 has four power states: Shutdown, Sleep, Standby, and Receive-Active. Its Power-Down pin, labeled as PDN and routed to the RST pin of the mikroBUS™ socket, optimizes power consumption used for power ON/OFF purposes. When the device is enabled (the PDN pin set to a low logic state), the device operational states are controlled through the serial interface by the internal registers.

This Click board™ communicates with MCU through a standard SPI interface that enables very high clock speeds up to 20MHz, supporting the most common SPI mode, SPI Mode 3 to program the internal registers for complete control of the MAX41470. When in programming mode, the MAX41470 can support a self-polling operation to provide an interrupt signal on the DAT pin routed to the AN pin of the mikroBUS™ socket.

The MAX41470 comes only with one data pin for register programming, both data input/output pin. For that purpose, this Click board™ uses the 74LVC1G3157 multiplexer to avoid conflict with other functions driven by the same pin, enabling both writing and reading via the SPI interface and using the 4-wire SPI interface. The selection of the multiplexer channel, more precisely the MISO or MOSI line, is chosen by a logic level on the S line of the multiplexer, set by an SW pin routed to the PWM pin of the mikroBUS™ socket.

ISM RX 3 Click possesses the SMA antenna connector with an impedance of 50Ω, which can use it to connect the appropriate antenna that Mikroe has in its [offer](#) for improved range and received signal strength.

This Click board™ can be operated only with a 3.3V logic voltage level. The board must perform appropriate logic voltage level conversion before use with MCUs with different logic levels. However, the Click board™ comes equipped with a library containing functions and an example code that can be used, as a reference, for further development.

## Specifications

|                  |                                                                                                                                                     |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Type             | Sub-1 GHz Transceivers                                                                                                                              |
| Applications     | Can be used for home automation and security, building access control, remote keyless entry, garage or gate doors control, and similar applications |
| On-board modules | MAX41470 - sub-GHz ISM RF receiver from                                                                                                             |

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

|                  |                                                                                                                                                                  |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                  | Maxim Integrated, now part of Analog Devices                                                                                                                     |
| Key Features     | Long range with high sensitivity, low power consumption, high performance, self-polling (remote wake-up) for reduced power, gain and frequency control, and more |
| Interface        | SPI                                                                                                                                                              |
| Feature          | No ClickID                                                                                                                                                       |
| Compatibility    | mikroBUS™                                                                                                                                                        |
| Click board size | S (28.6 x 25.4 mm)                                                                                                                                               |
| Input Voltage    | 3.3V                                                                                                                                                             |

## Pinout diagram

This table shows how the pinout on ISM RX 3 Click corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

| Notes                            | Pin         |  |      |     |    | Pin        | Notes                       |
|----------------------------------|-------------|-----------------------------------------------------------------------------------|------|-----|----|------------|-----------------------------|
| Demodulated Received Signal Data | <b>DAT</b>  | 1                                                                                 | AN   | PWM | 16 | <b>SW</b>  | MISO/MOSI Channel Selection |
| Power-Down (Enable)              | <b>PDN</b>  | 2                                                                                 | RST  | INT | 15 | <b>INT</b> | Recovered Clock             |
| SPI Chip Select                  | <b>CS</b>   | 3                                                                                 | CS   | RX  | 14 | NC         |                             |
| SPI Clock                        | <b>SCK</b>  | 4                                                                                 | SCK  | TX  | 13 | NC         |                             |
| SPI Data OUT                     | <b>SDO</b>  | 5                                                                                 | MISO | SCL | 12 | NC         |                             |
| SPI Data IN                      | <b>SDI</b>  | 6                                                                                 | MOSI | SDA | 11 | NC         |                             |
| Power Supply                     | <b>3.3V</b> | 7                                                                                 | 3.3V | 5V  | 10 | NC         |                             |
| Ground                           | <b>GND</b>  | 8                                                                                 | GND  | GND | 9  | <b>GND</b> | Ground                      |

## Onboard settings and indicators

| Label | Name | Default | Description         |
|-------|------|---------|---------------------|
| LD1   | PWR  | -       | Power LED Indicator |

## ISM RX 3 Click electrical specifications

| Description                 | Min | Typ  | Max  | Unit |
|-----------------------------|-----|------|------|------|
| Supply Voltage              | -   | 3.3  | -    | V    |
| Frequency Range             | 287 | -    | 320  | MHz  |
|                             | 425 | -    | 480  |      |
|                             | 860 | -    | 960  |      |
| Data Rate                   | -   | 200  | -    | kbps |
| Sensitivity                 | -   | -127 | -    | dBm  |
| Operating Temperature Range | -40 | +25  | +105 | °C   |

## Software Support

We provide a library for the ISM RX 3 Click as well as a demo application (example), developed using MikroElektronika [compilers](#). The demo can run on all the main MikroElektronika [development boards](#).

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

Package can be downloaded/installed directly from NECTO Studio Package Manager(recommended way), downloaded from our [LibStock™](#) or found on [mikroE github account](#).

## Library Description

This library contains API for ISM RX 3 Click driver.

Key functions:

- ismr3\_reset - Reset function.
- ismr3\_get\_data - Read data output.
- ismr3\_get\_clk - Read clock output.

## Examples description

This example showcases ability of click board to configure and read incoming rf signal and parses data using data and clock line.

The full application code, and ready to use projects can be installed directly from NECTO Studio Package Manager(recommended way), downloaded from our [LibStock™](#) or found on [mikroE github account](#).

Other mikroE Libraries used in the example:

- MikroSDK.Board
- MikroSDK.Log
- Click.ISMRX3

## Additional notes and informations

Depending on the development board you are using, you may need [USB UART click](#), [USB UART 2 click](#) or [RS232 click](#) to connect to your PC, for development systems with no UART to USB interface available on the board. The terminal available in all MikroElektronika [compilers](#), or any other terminal application of your choice, can be used to read the message.

## mikroSDK

This Click board™ is supported with [mikroSDK](#) - MikroElektronika Software Development Kit. To ensure proper operation of mikroSDK compliant Click board™ demo applications, mikroSDK should be downloaded from the [LibStock](#) and installed for the compiler you are using.

For more information about mikroSDK, visit the [official page](#).

## Resources

[mikroBUS™](#)

[mikroSDK](#)

[Click board™ Catalog](#)

[Click Boards™](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

## Downloads

[MAX41470 datasheet](#)

[ISM RX 3 click schematic](#)

[ISM RX 3 click 2D and 3D files](#)

[ISM RX 3 click example on Libstock](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).