Linx TECHNOLOGIES
is now part of
TE connectivity



ANT-5GWWS4-SMA-W shown

ANT-5GWWS4-ccc

Cellular Sub-6 5G Antenna

The ANT-5GWWS4 is a dipole, blade-style antenna for 5G New Radio, LTE, and cellular IoT (LTE-M, NB-IoT) applications requiring a cost-effective but stylish and very capable antenna solution.

The ANT-5GWWS4 antenna is made from rugged ABS plastic and is available in black or white. The hinged design allows for the antenna to be positioned for optimum performance and reduces the potential for damage from impact compared to a fixed whip design. The antenna is available with an SMA plug (male pin) connector.

FEATURES

- Performance at 3300 MHz to 3800 MHz
  - VSWR: ≤ 3.6
  - Peak Gain: 4.9 dBi
  - Efficiency: 58%
- Performance at 698 MHz to 803 MHz
  - VSWR: ≤ 3.9
  - Peak Gain: 2.8 dBi
  - Efficiency: 60%
- Hinged design with detents for straight, 45 degree and 90 degree positioning
- SMA plug (male pin) connection

APPLICATIONS

- Worldwide 5G/4G/3G/2G
- Cellular IoT: LTE-M (Cat-M1) and NB-IoT
- Internet of Things (IoT) devices
- Home and business networking

ORDERING INFORMATION

Part Number	Description
ANT-5GWWS4-SMA	Cellular 5G blade-style antenna with SMA plug (male pin), black
ANT-5GWWS4-SMA-W	Cellular 5G blade-style antenna with SMA plug (male pin), white

Available from Linx Technologies and select distributors and representatives.

Downloaded from Arrow.com.

TABLE 1. ELECTRICAL SPECIFICATIONS

Bands	Frequency Range	VSWR (max.)	Peak Gain (dBi)	Avg. Gain (dBi)	Efficiency (%)
71	617 MHz to 698 MHz	4.3	1.7	-1.8	69
12, 13, 14, 17, 26, 28, 29	698 MHz to 803 MHz	3.9	2.8	-2.6	60
5, 8, 20	791 MHz to 960 MHz	4.7	2.7	-3.7	48
1, 2, 3, 4, 25, 66	1710 MHz to 2200 MHz	3.2	4.4	-2.4	63
30, 40	2300 MHz to 2400 MHz	3.2	4.1	-2.6	57
7, 41	2496 MHz to 2690 MHz	2.5	3.4	-1.2	79
22, 42, 43, 48, 49, 52, n77, n78	3300 MHz to 3800 MHz	3.6	4.9	-2.8	58
48 (CBRS)	3550 MHz to 3700 MHz	3.5	4.8	-2.2	61
C-Band	3700 MHz to 4200 MHz	3.3	4.9	-3.8	50
n79	4400 MHz to 5000 MHz	3.0	5.2	-3.1	53

Electrical specifications and plots measured with the antenna in a free space orientation.

TABLE 2. MECHANICAL SPECIFICATIONS

Parameter	Value
Polarization	Linear
Radiation	Omnidirectional
Max Power	10 W
Wavelength	1/2-wave
Electrical Type	Dipole
Impedance	50 Ω
Operating Temperature Range	-10 °C to +60 °C
Weight	20.4 g (0.72 oz)
Dimensions	176.0 mm x 19.6 mm x 13.0 (6.93 in x 0.77 in x 0.51 in)
Connection	SMA Plug (male pin)
Antenna Color	Black, White (-W)

PACKAGING INFORMATION

The ANT-5GWWS4 antenna is individually sealed in a clear plastic bag. Distribution channels may offer alternative packaging options.

Downloaded from Arrow.com.

PRODUCT DIMENSIONS

Figure 1 provides dimensions of the ANT-5GWWS4-ccc. The antenna whip can be tilted 90 degrees, with a detent at 45 degrees enabling the antenna to be oriented in any direction. The rotating base allows for continuous positioning through 360 degrees even while installed.


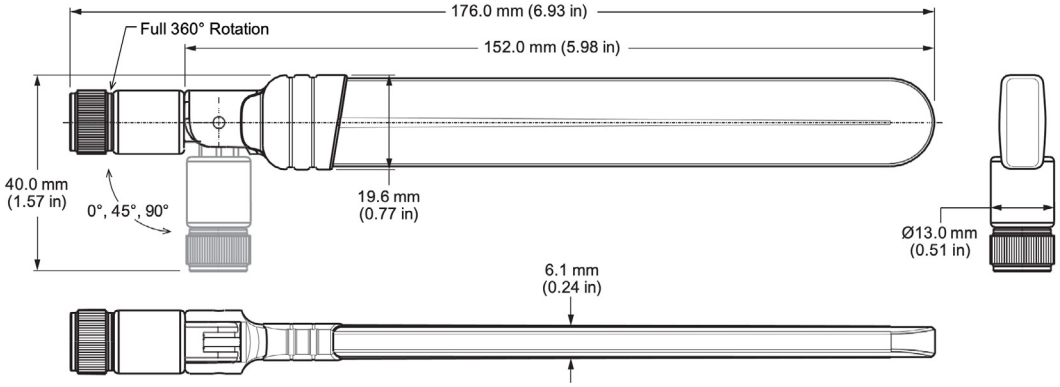


Figure 1. ANT-5GWWS4-ccc Antenna Dimensions

ANTENNA ORIENTATION

The ANT-5GWWS4-ccc antenna is characterized in two antenna orientations as shown in Figure 2. The antenna straight orientation characterizes use of an antenna attached to an enclosure-mounted connector which is connected by cable to a printed circuit board. Although the antenna is a dipole not requiring a ground plane for function, characterization with an adjacent ground plane, (102 mm x 102 mm) provides insight into antenna performance when attached directly to a printed circuit board mounted connector. The two orientations represent the most common end-product use cases.

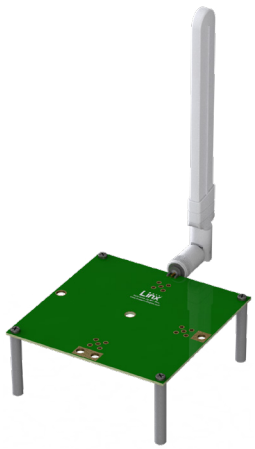

Edge of ground plane, bent 90 degrees



Straight, without ground plane

Figure 2. ANT-5GWWS4-ccc on evaluation PCB

Downloaded from Arrow.com.

EDGE OF GROUND PLANE, BENT 90 DEGREES

The charts on the following pages represent data taken with the antenna oriented at the edge of the ground plane, bent 90 degrees (Edge-Bent), as shown in Figure 3.

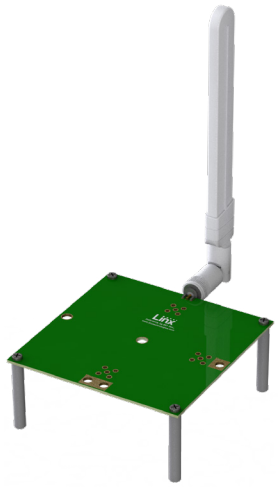


Figure 3. ANT-5GWWS4-ccc on Edge of Ground Plane, Bent 90 Degrees (Edge-Bent)

VSWR

Figure 4 provides the voltage standing wave ratio (VSWR) across the antenna bandwidth. VSWR de-scribes the power reflected from the antenna back to the radio. A lower VSWR value indicates better antenna performance at a given frequency. Reflected power is also shown on the right-side vertical axis as a gauge of the percentage of transmitter power reflected back from the antenna.

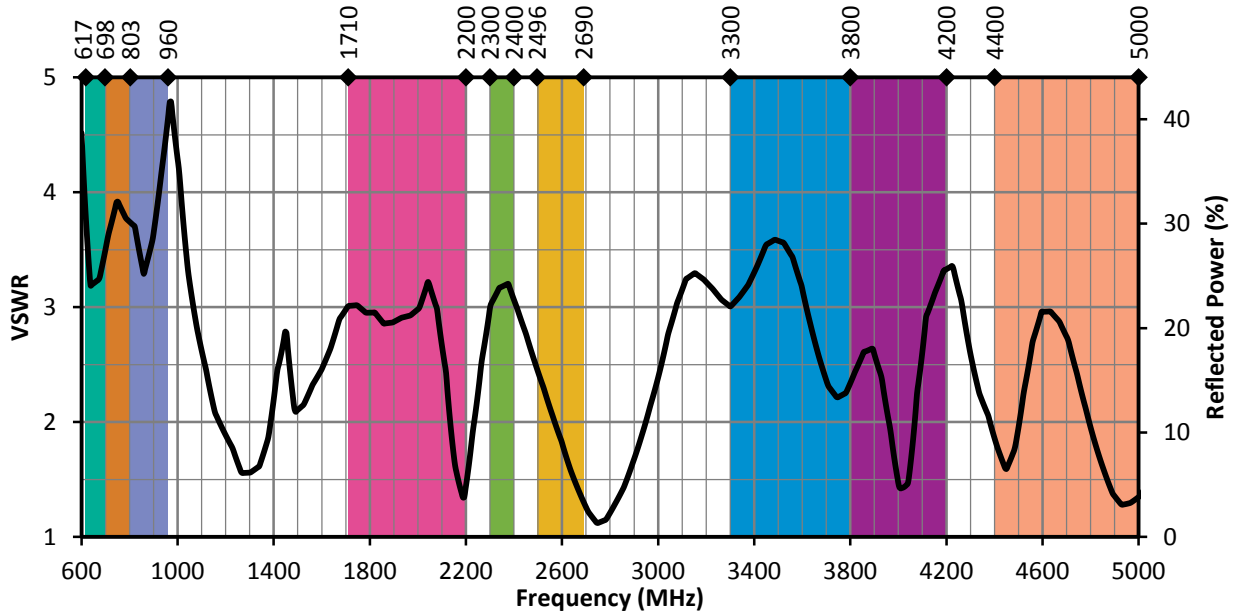


Figure 4. ANT-5GWWS4-ccc VSWR, Edge-Bent

Downloaded from Arrow.com.

RETURN LOSS

Return loss (Figure 5), represents the loss in power at the antenna due to reflected signals. Like VSWR, a lower return loss value indicates better antenna performance at a given frequency.

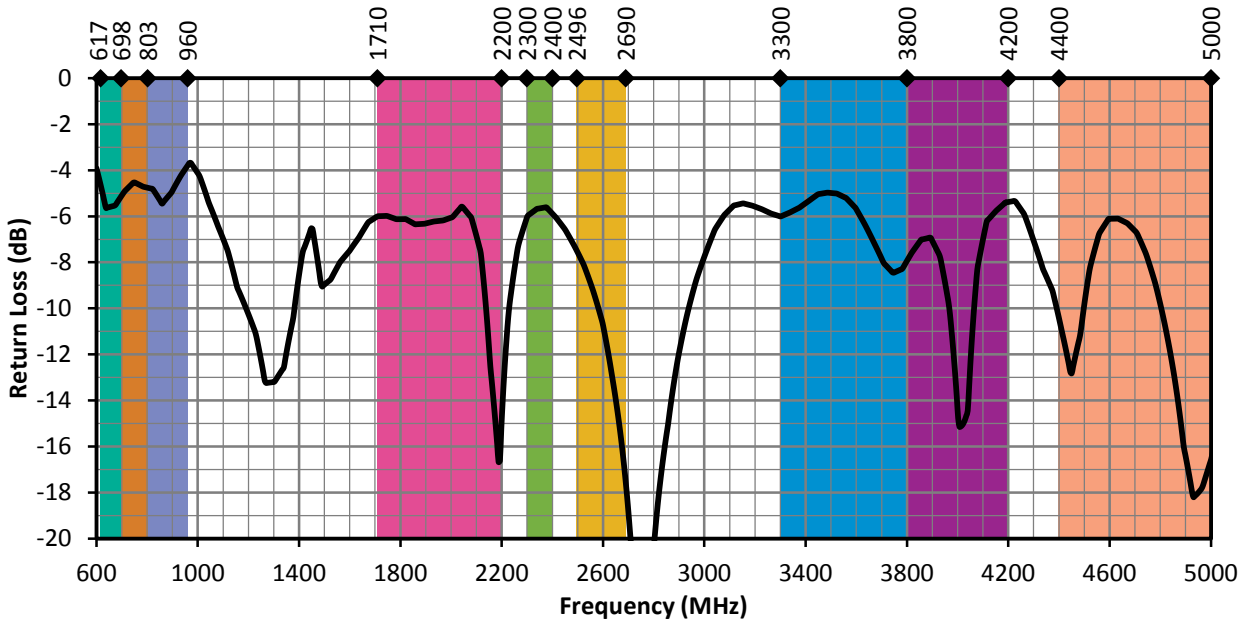


Figure 5. ANT-5GWWS4-ccc Return Loss, Edge-Bent

PEAK GAIN

The peak gain across the antenna bandwidth is shown in Figure 6. Peak gain represents the maximum antenna input power concentration across 3-dimensional space, and therefore peak performance at a given frequency, but does not consider any directionality in the gain pattern.

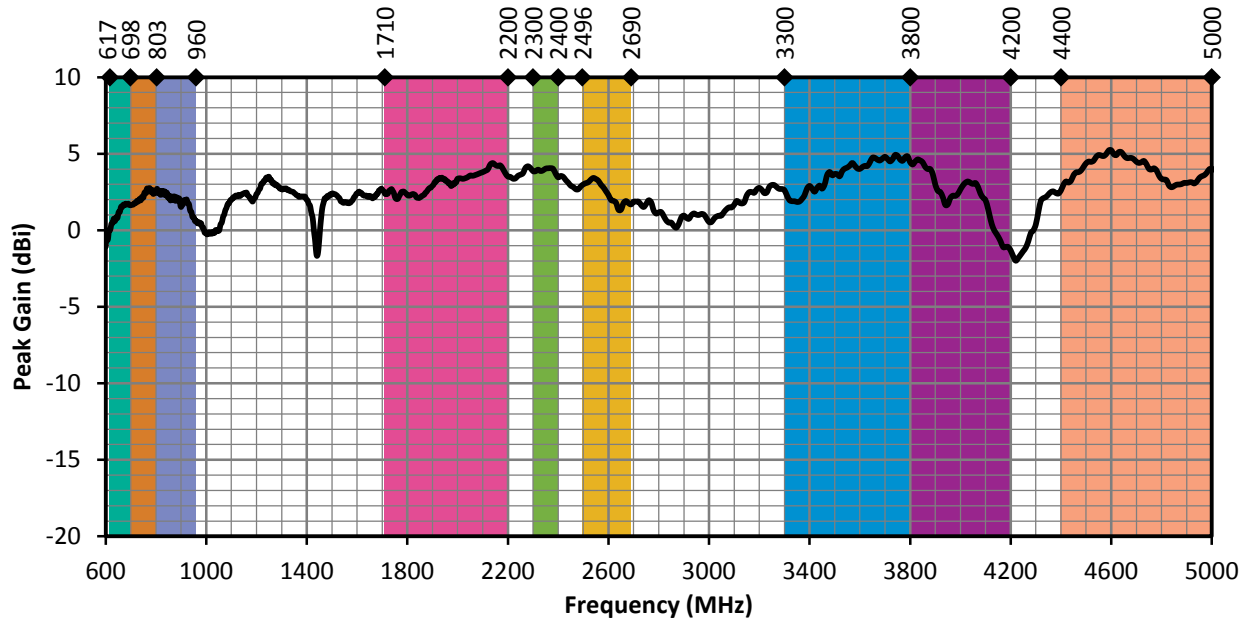


Figure 6. ANT-5GWWS4-ccc Peak Gain, Edge-Bent

Downloaded from Arrow.com.

AVERAGE GAIN

Average gain (Figure 7), is the average of all antenna gain in 3-dimensional space at each frequency, providing an indication of overall performance without expressing antenna directionality.

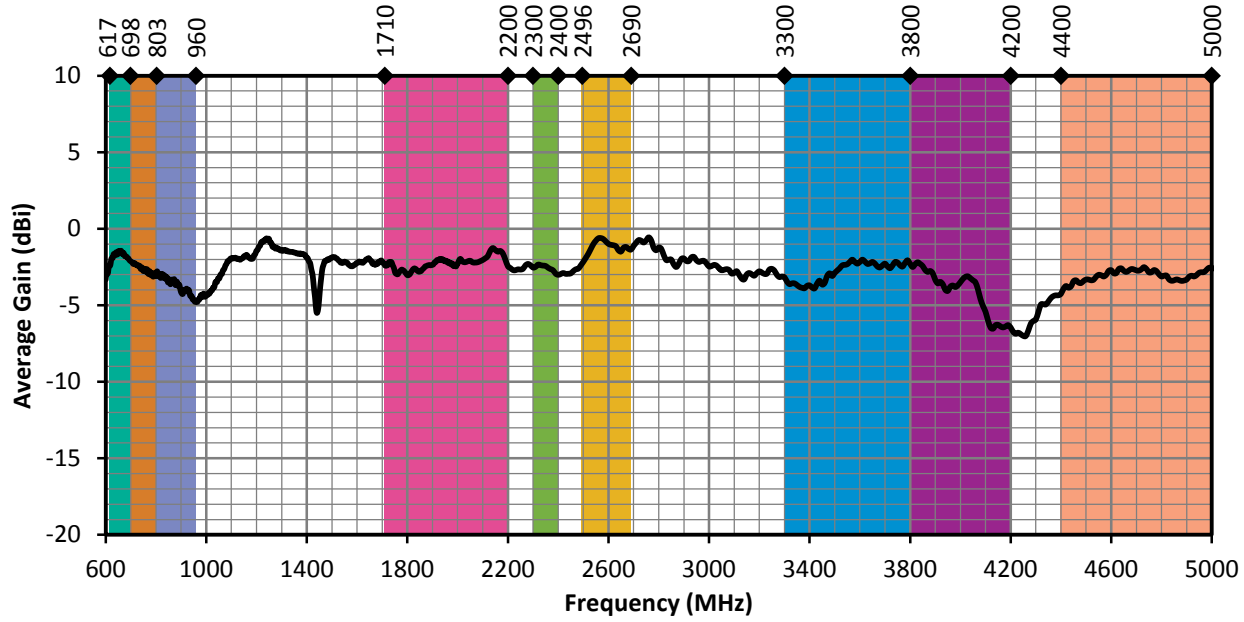


Figure 7. ANT-5GWWS4-ccc Antenna Average Gain, Edge-Bent

RADIATION EFFICIENCY

Radiation efficiency (Figure 8), shows the ratio of power delivered to the antenna relative to the power radiated at the antenna, expressed as a percentage, where a higher percentage indicates better performance at a given frequency.

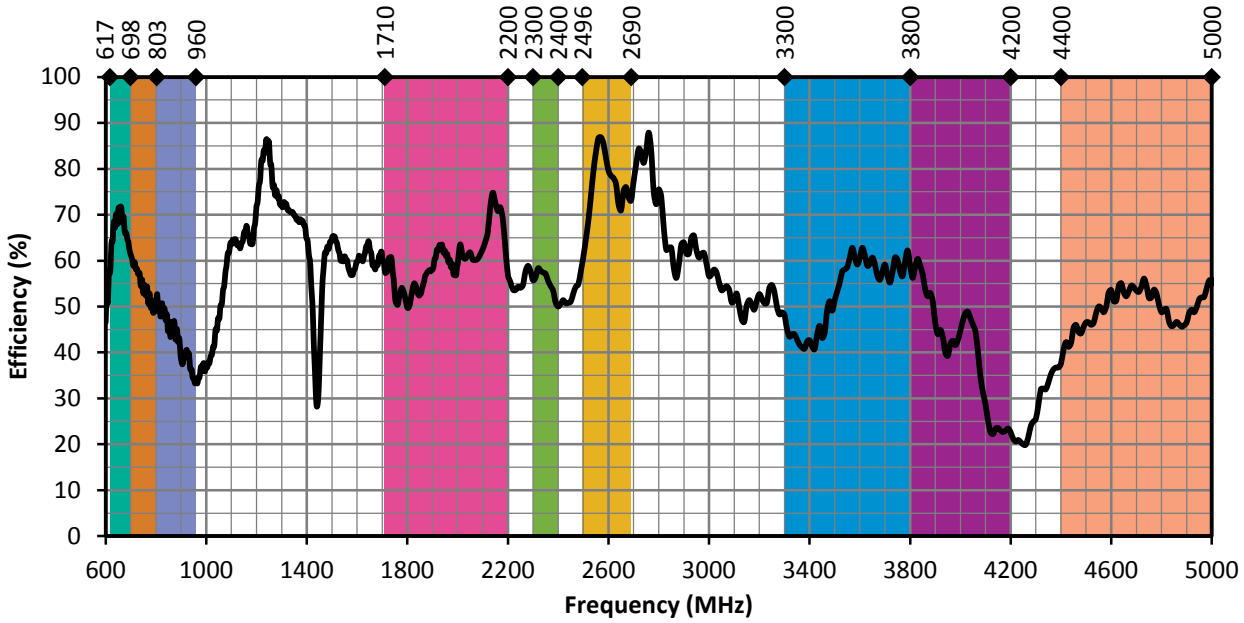



Figure 8. ANT-5GWWS4-ccc Antenna Efficiency, Edge-Bent

Downloaded from Arrow.com.

RADIATION PATTERNS

Radiation patterns provide information about the directionality and 3-dimensional gain performance of the antenna by plotting gain at specific frequencies in three orthogonal planes. Antenna radiation patterns for an Edge-Bent orientation are shown in Figure 9 using polar plots covering 360 degrees. The antenna graphic at the top of the page provides reference to the plane of the column of plots below it. Note: when viewed with typical PDF viewing software, zooming into radiation patterns is possible to reveal fine detail.


RADIATION PATTERNS - EDGE-BENT



XZ-Plane Gain




YZ-Plane Gain




XY-Plane Gain


617 MHz TO 698 MHz (660 MHz)

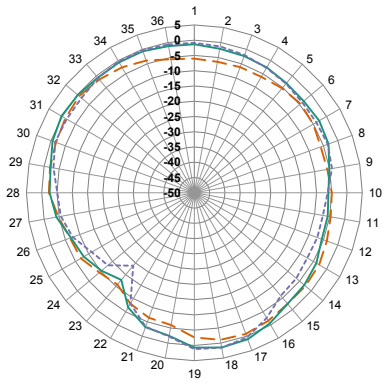

XZ-Plane Gain

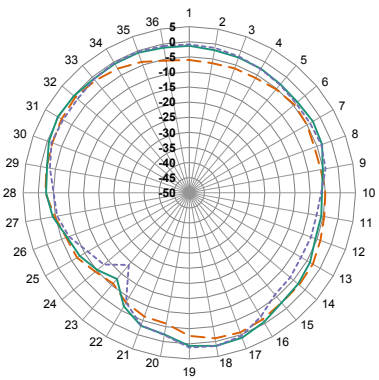


YZ-Plane Gain

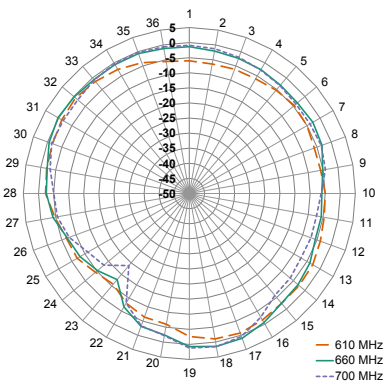


XY-Plane Gain


698 MHz TO 803 MHz (750 MHz)

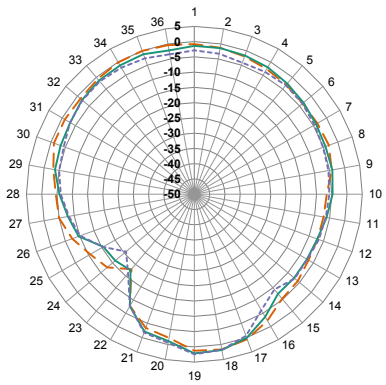

XZ-Plane Gain

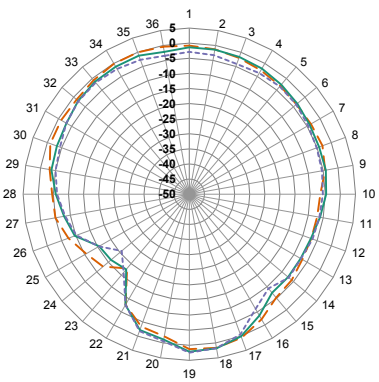

YZ-Plane Gain

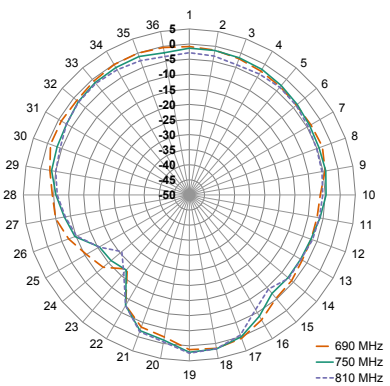


XY-Plane Gain


Downloaded from Arrow.com.

RADIATION PATTERNS - EDGE-BENT


791 MHz TO 960 MHz (870 MHz)

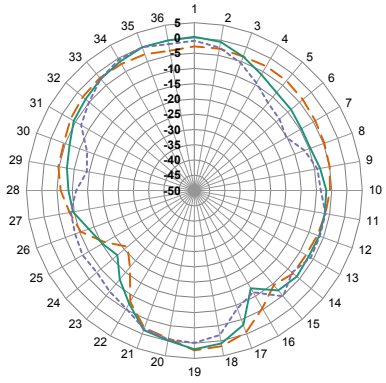

XZ-Plane Gain

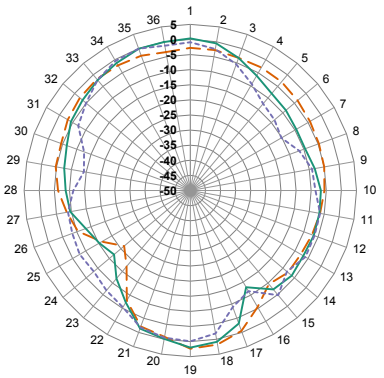


YZ-Plane Gain

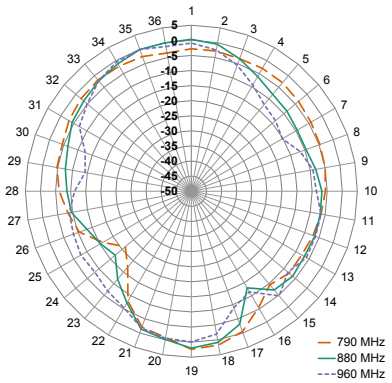


XY-Plane Gain


1710 MHz TO 2200 MHz (1950 MHz)

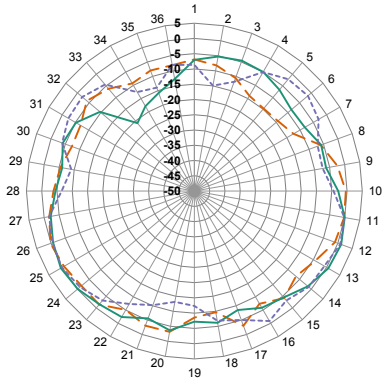

XZ-Plane Gain

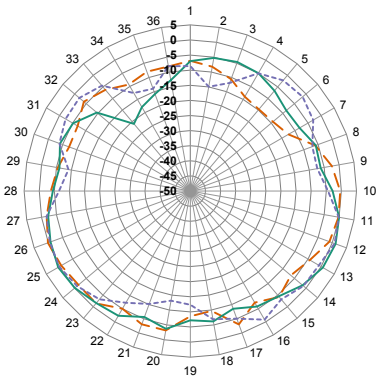


YZ-Plane Gain

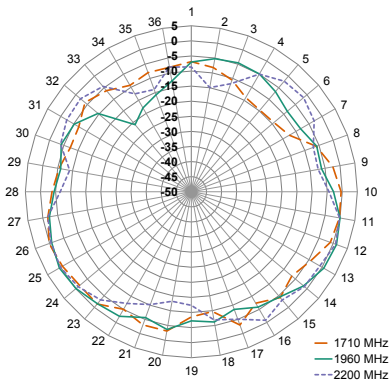


XY-Plane Gain


2496 MHz TO 2690 MHz (2590 MHz)

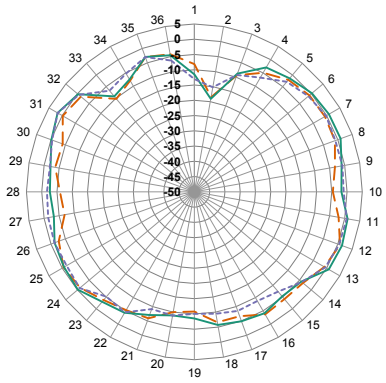

XZ-Plane Gain

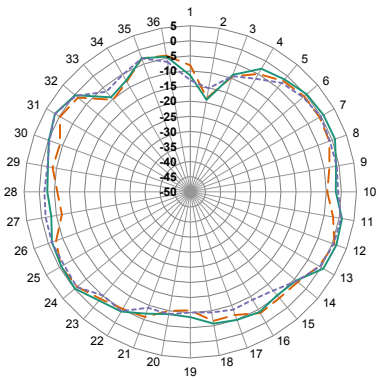

YZ-Plane Gain

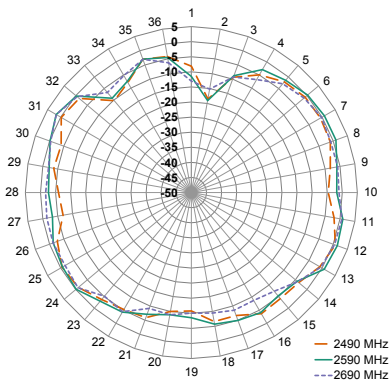


XY-Plane Gain


Downloaded from Arrow.com.

RADIATION PATTERNS - EDGE-BENT


3300 MHz TO 3800 MHz (3550 MHz)

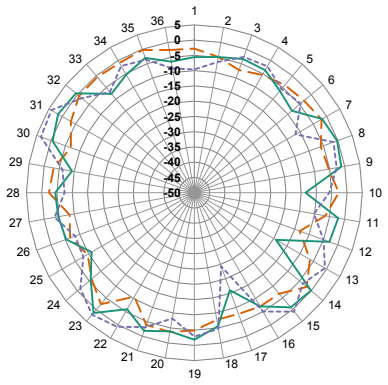

XZ-Plane Gain

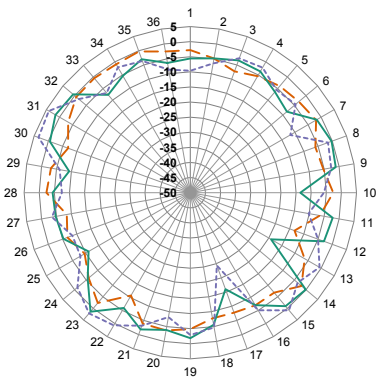


YZ-Plane Gain

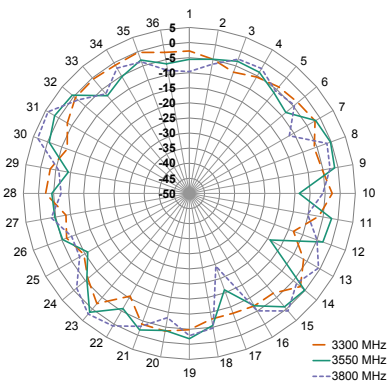


XY-Plane Gain


3550 MHz TO 3700 MHz (3630 MHz)

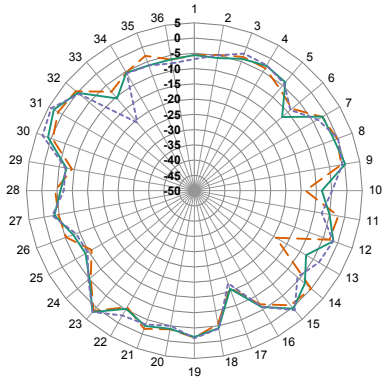

XZ-Plane Gain

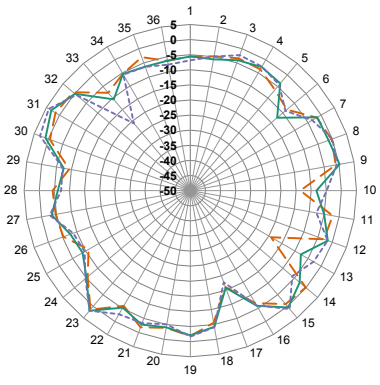


YZ-Plane Gain

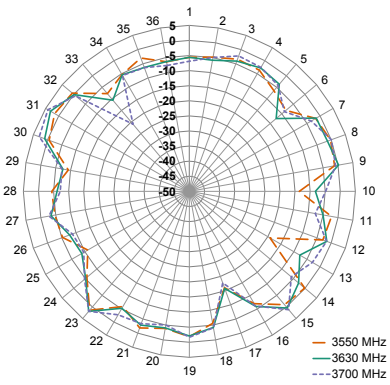


XY-Plane Gain


3700 MHz TO 4200 MHz (3950 MHz)

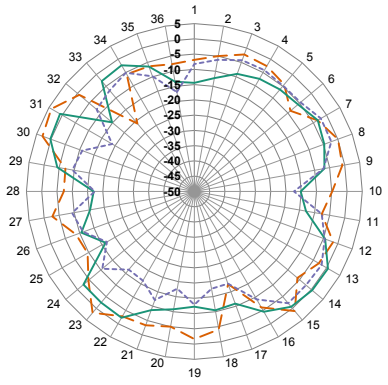

XZ-Plane Gain

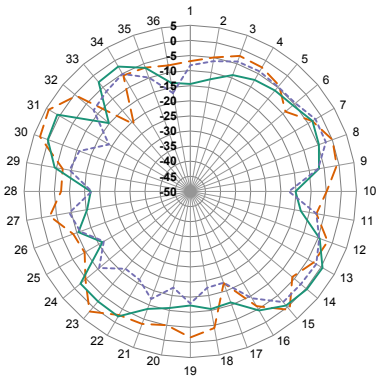

YZ-Plane Gain

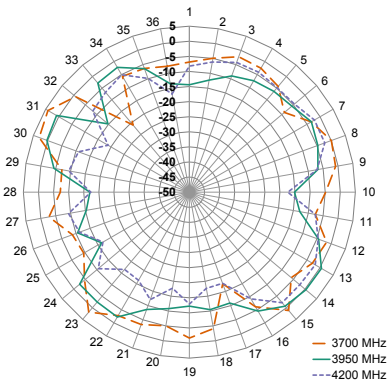


XY-Plane Gain

Downloaded from Arrow.com.

RADIATION PATTERNS - EDGE-BENT

4400 MHz TO 5000 MHz (4700 MHz)

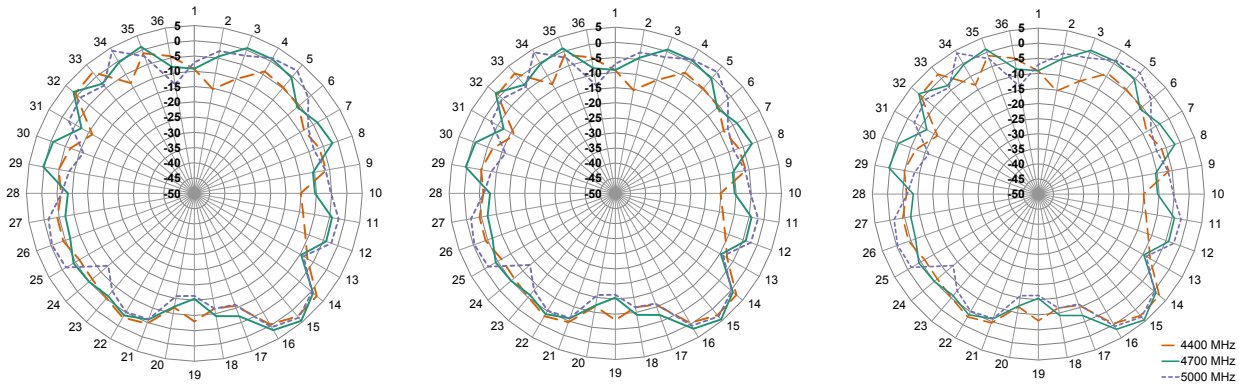

XZ-Plane Gain YZ-Plane Gain XY-Plane Gain

Figure 9. Radiation Patterns for ANT-5GWWS4-ccc, Edge-Bent

Downloaded from Arrow.com.

STRAIGHT, NO GROUND PLANE

The charts on the following pages represent data taken with the antenna oriented straight, as shown in Figure 10.



Figure 10. ANT-5GWWS4-ccc Straight, No Ground Plane (Straight)

VSWR

Figure 11 provides the voltage standing wave ratio (VSWR) across the antenna bandwidth. VSWR describes the power reflected from the antenna back to the radio. A lower VSWR value indicates better antenna performance at a given frequency. Reflected power is also shown on the right-side vertical axis as a gauge of the percentage of transmitter power reflected back from the antenna.

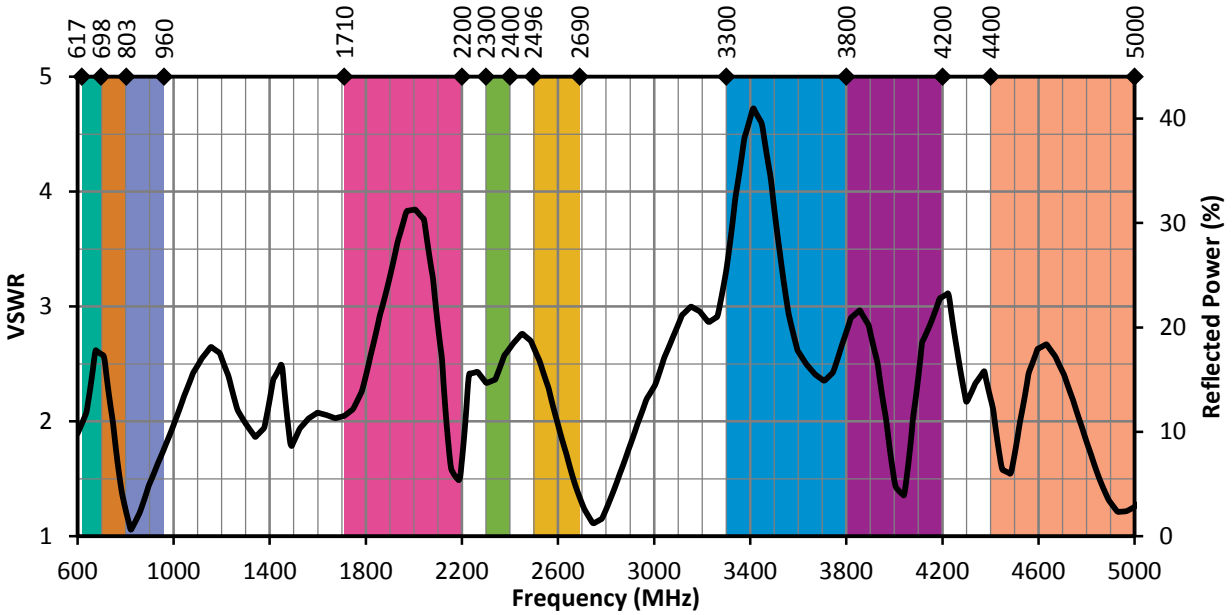


Figure 11. ANT-5GWWS4-ccc VSWR, Straight

Downloaded from Arrow.com.

RETURN LOSS

Return loss (Figure 12), represents the loss in power at the antenna due to reflected signals. Like VSWR, a lower return loss value indicates better antenna performance at a given frequency.

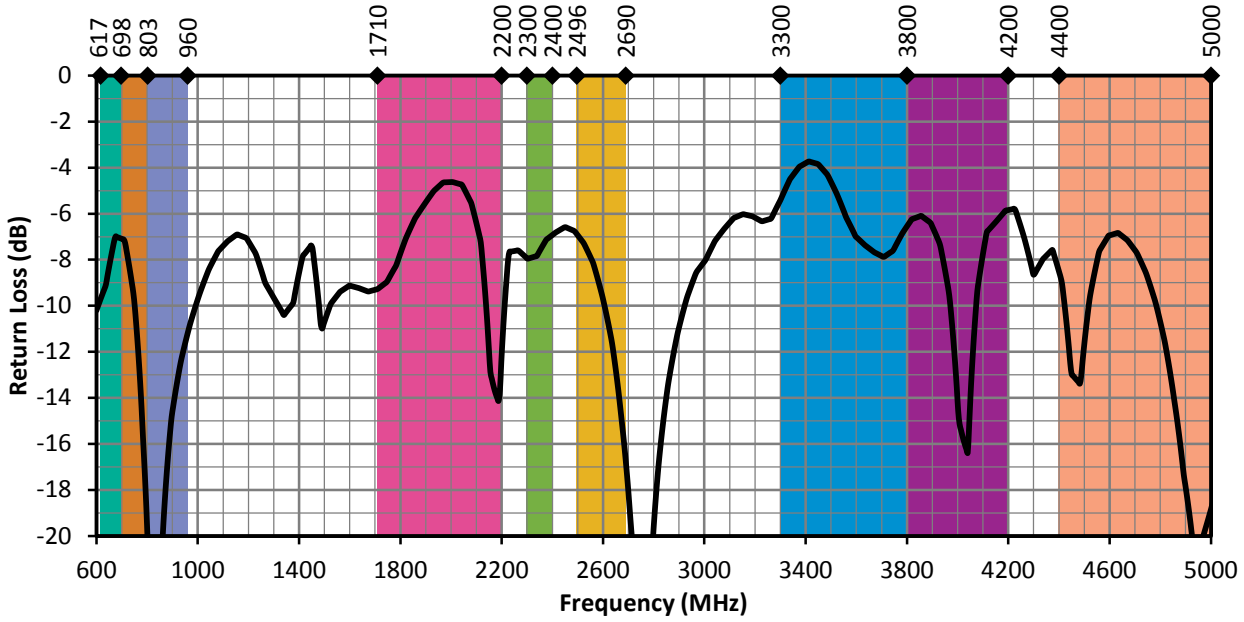


Figure 12. ANT-5GWWS4-ccc Return Loss, Straight

PEAK GAIN

The peak gain across the antenna bandwidth is shown in Figure 13. Peak gain represents the maximum antenna input power concentration across 3-dimensional space, and therefore peak performance at a given frequency, but does not consider any directionality in the gain pattern.

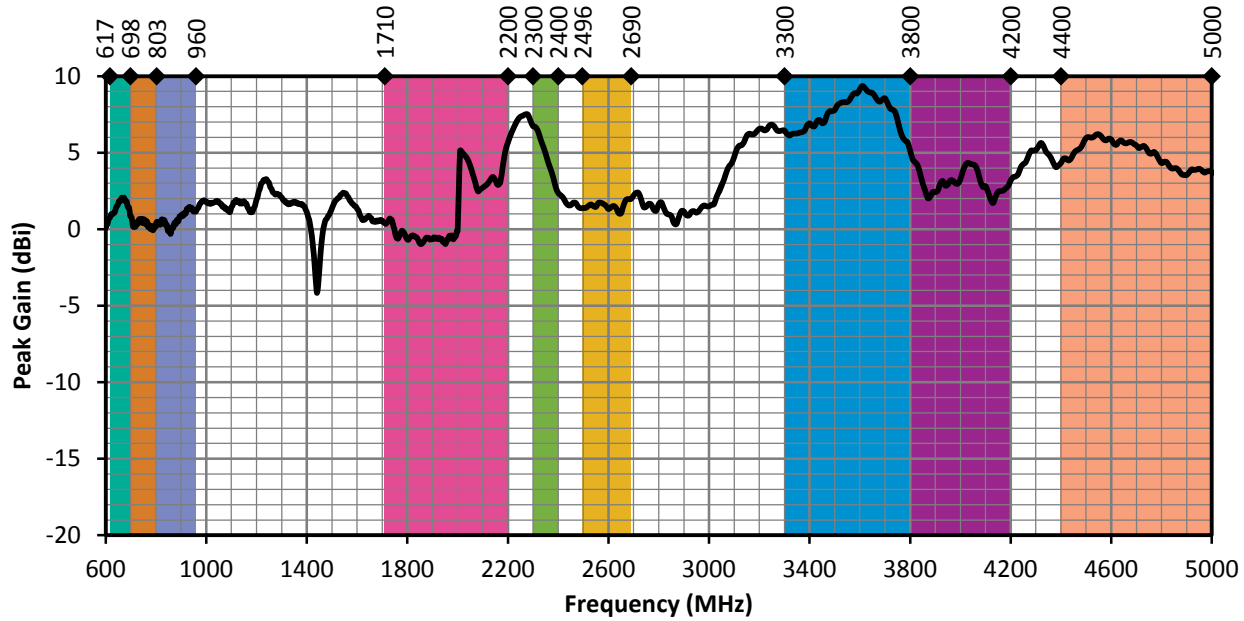


Figure 13. ANT-5GWWS4-ccc Peak Gain, Straight

Downloaded from Arrow.com.

AVERAGE GAIN

Average gain (Figure 14), is the average of all antenna gain in 3-dimensional space at each frequency, providing an indication of overall performance without expressing antenna directionality.

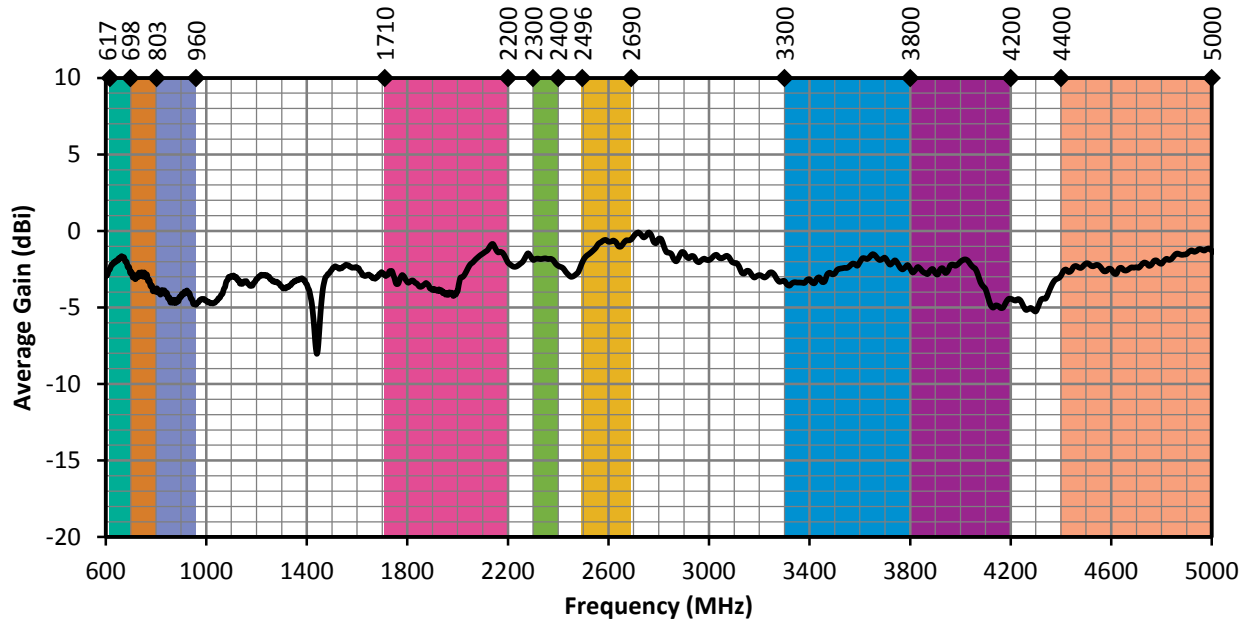


Figure 14. ANT-5GWWS4-ccc Antenna Average Gain, Straight

RADIATION EFFICIENCY

Radiation efficiency (Figure 15), shows the ratio of power delivered to the antenna relative to the power radiated at the antenna, expressed as a percentage, where a higher percentage indicates better performance at a given frequency.

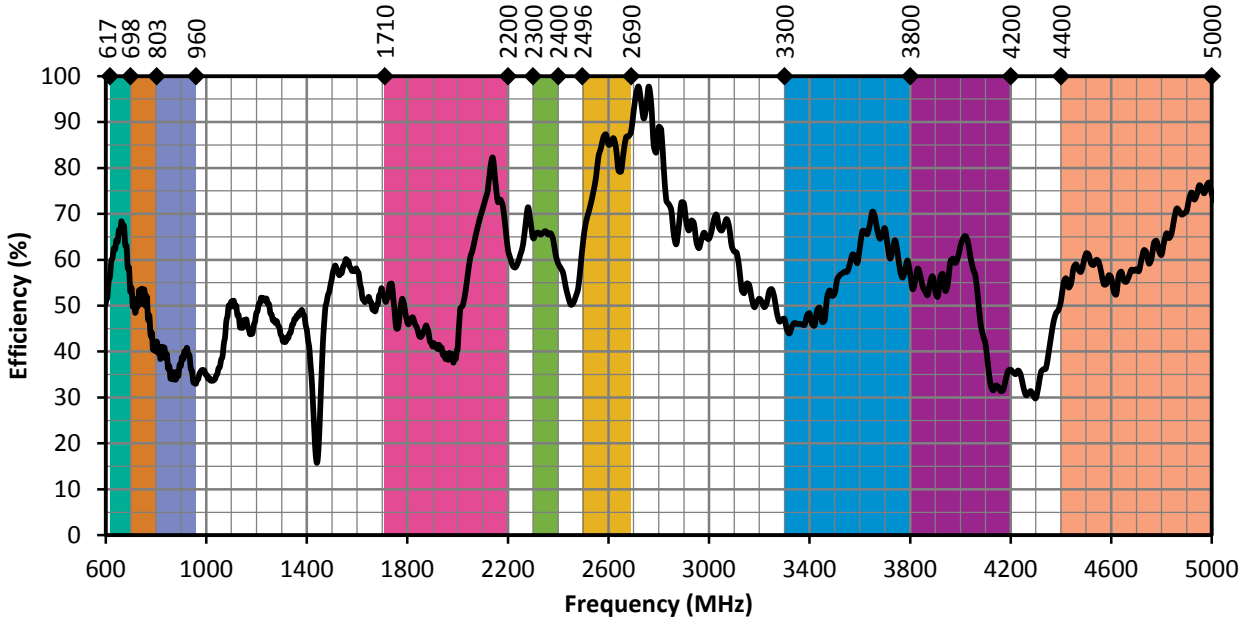


Figure 15. ANT-5GWWS4-ccc Antenna Efficiency, Straight

Downloaded from Arrow.com.


RADIATION PATTERNS

Radiation patterns provide information about the directionality and 3-dimensional gain performance of the antenna by plotting gain at specific frequencies in three orthogonal planes. Antenna radiation patterns for a straight orientation are shown in Figure 16 using polar plots covering 360 degrees. The antenna graphic at the top of the page provides reference to the plane of the column of plots below it. Note: when viewed with typical PDF viewing software, zooming into radiation patterns is possible to reveal fine detail.

RADIATION PATTERNS - STRAIGHT



XZ-Plane Gain




YZ-Plane Gain




XY-Plane Gain


617 MHz TO 698 MHz (660 MHz)

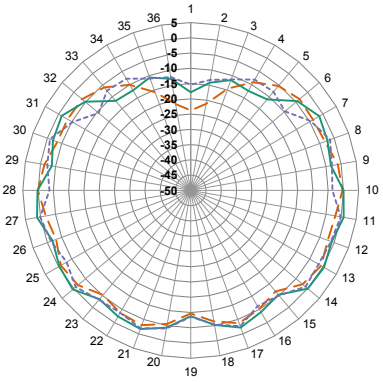

XZ-Plane Gain

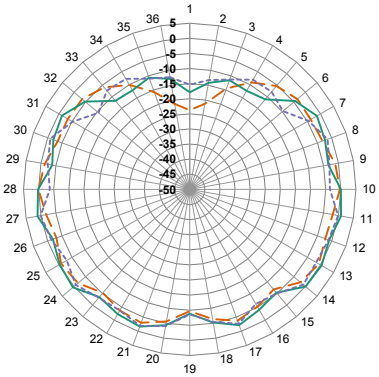


YZ-Plane Gain

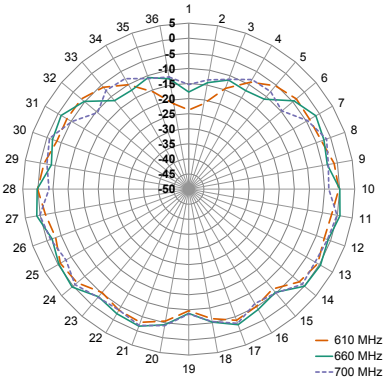


XY-Plane Gain


698 MHz TO 803 MHz (750 MHz)

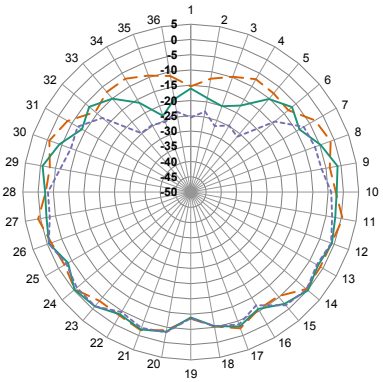

XZ-Plane Gain

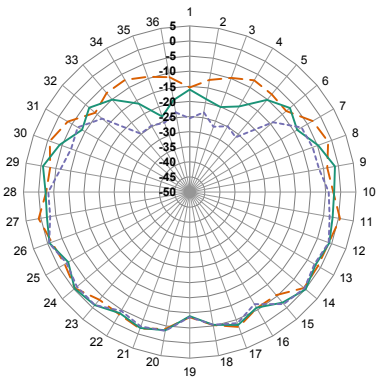

YZ-Plane Gain

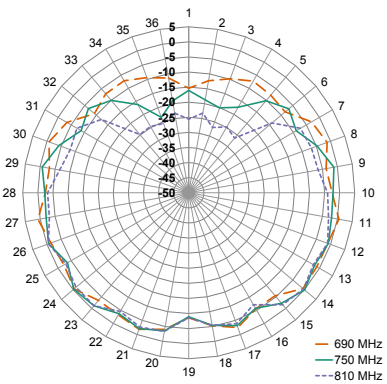


XY-Plane Gain


Downloaded from Arrow.com.

RADIATION PATTERNS - STRAIGHT


791 MHz TO 960 MHz (880 MHz)

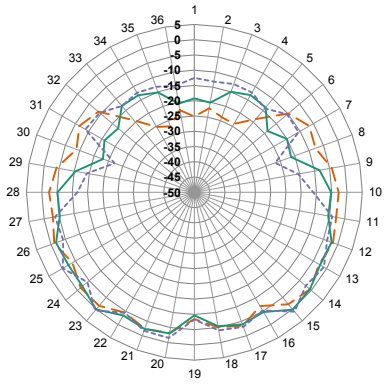

XZ-Plane Gain

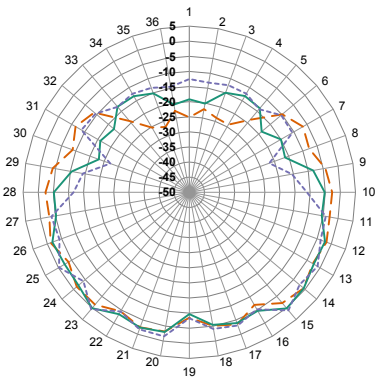


YZ-Plane Gain

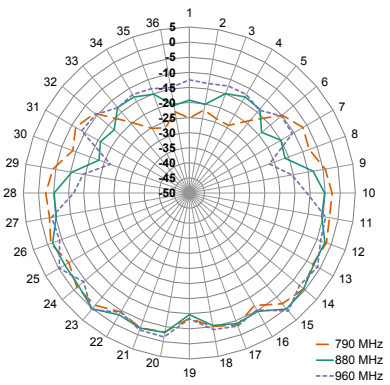


XY-Plane Gain


1710 MHz TO 2200 MHz (1960 MHz)

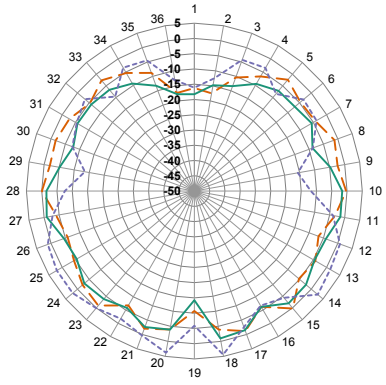

XZ-Plane Gain

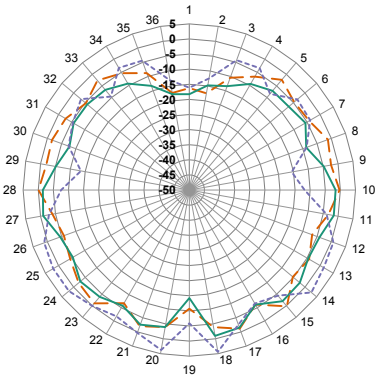


YZ-Plane Gain

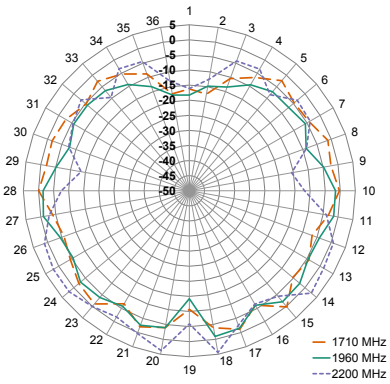


XY-Plane Gain


2300 MHz TO 2400 MHz (2350 MHz)

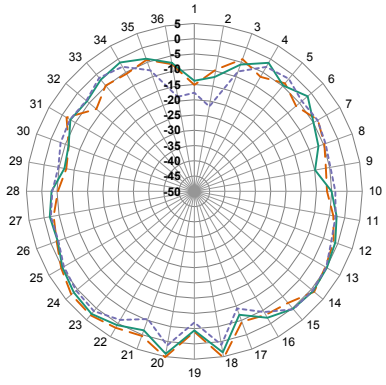

XZ-Plane Gain

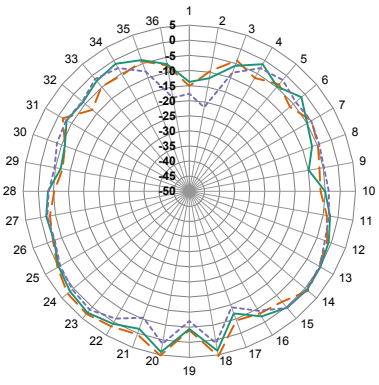

YZ-Plane Gain

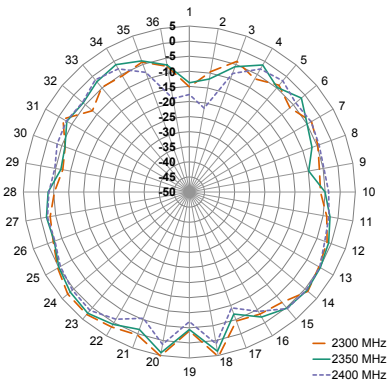


XY-Plane Gain


Downloaded from Arrow.com.

RADIATION PATTERNS - STRAIGHT


2496 MHz TO 2690 MHz (2600 MHz)

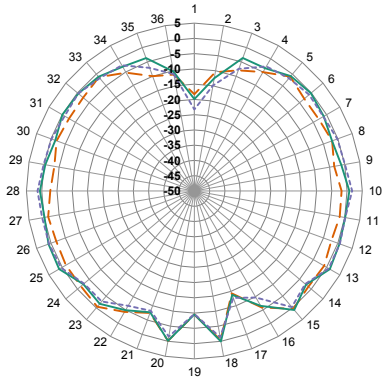

XZ-Plane Gain

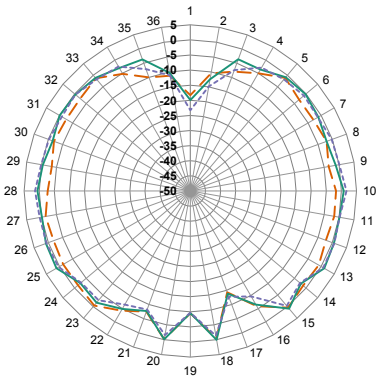


YZ-Plane Gain

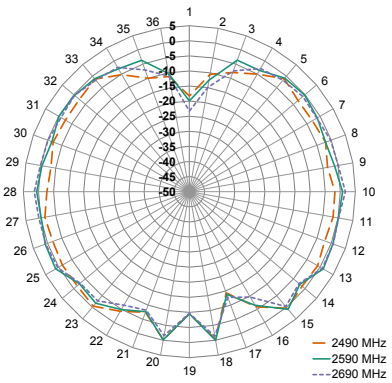


XY-Plane Gain


3300 MHz TO 3800 MHz (3550 MHz)

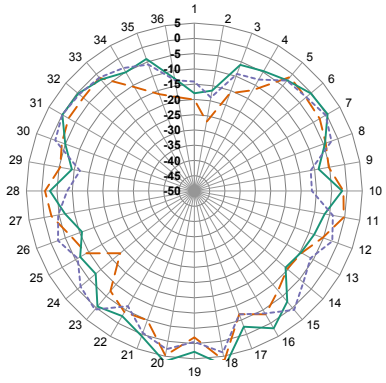

XZ-Plane Gain

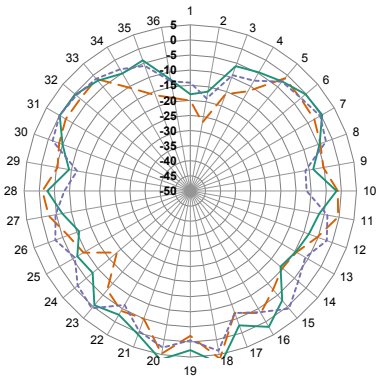


YZ-Plane Gain

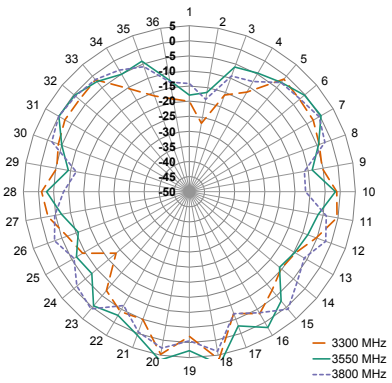


XY-Plane Gain


3550 MHz TO 3700 MHz (3630 MHz)

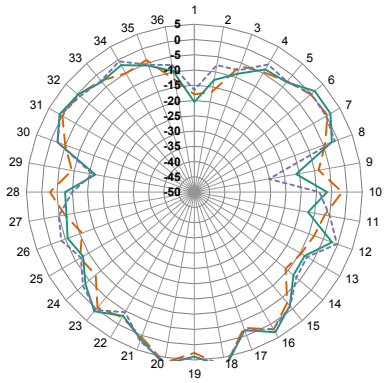

XZ-Plane Gain

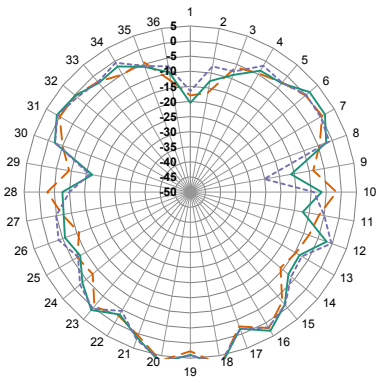

YZ-Plane Gain

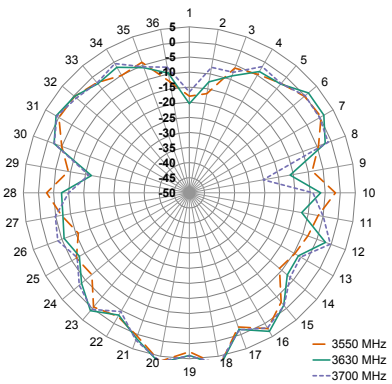


XY-Plane Gain

Downloaded from Arrow.com.


RADIATION PATTERNS - STRAIGHT

3700 MHz TO 4200 MHz (3950 MHz)

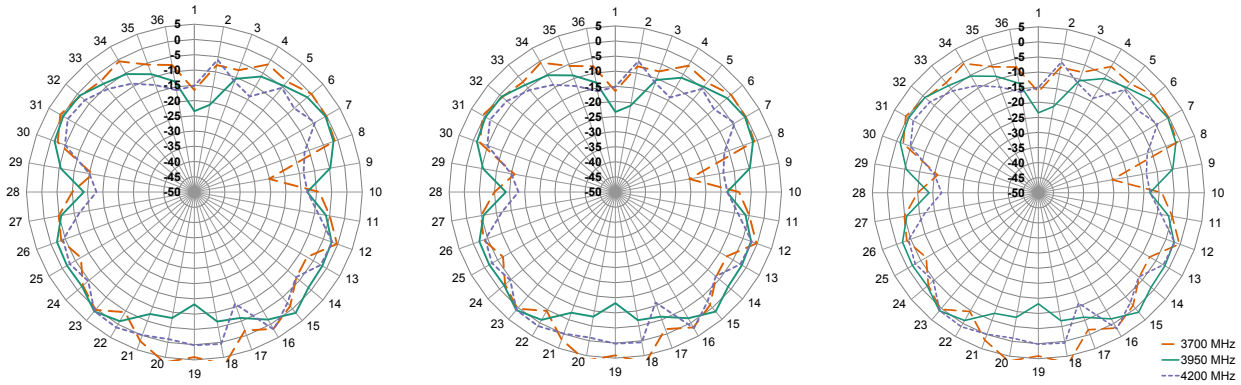

XZ-Plane Gain YZ-Plane Gain XY-Plane Gain

4400 MHz TO 5000 MHz (4700 MHz)

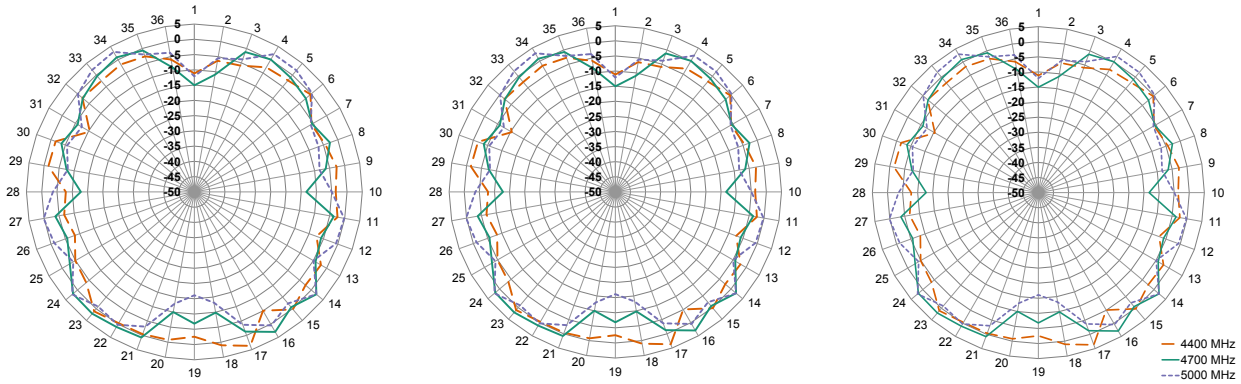

XZ-Plane Gain YZ-Plane Gain XY-Plane Gain

Figure 16. Radiation Patterns for ANT-5GWWS4-ccc, Straight

Downloaded from Arrow.com.

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE Connectivity, TE, TE connectivity (logo), Linx and Linx Technologies are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE Connectivity product is installed. Useful lifetime of the original end product may vary but is not warrantied to exceed one (1) year from the original date of the end product purchase.

©2022 TE Connectivity. All Rights Reserved.

10/22 Original

Linx TECHNOLOGIES is now part of TE connectivity

Downloaded from Arrow.com.