

F

E

D

C


B

A

VICOR CONFIDENTIAL

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF VICOR CORP.

REVISIONS				
REV	DESCRIPTION		DATE	APPROVED
1	RELEASED PER E080575	GK	03/20/08	REJH
2	REVISED PER E091595a	JS	09/10/09	REJH
3	REVISED PER E101310b	KUK	10/22/10	AR

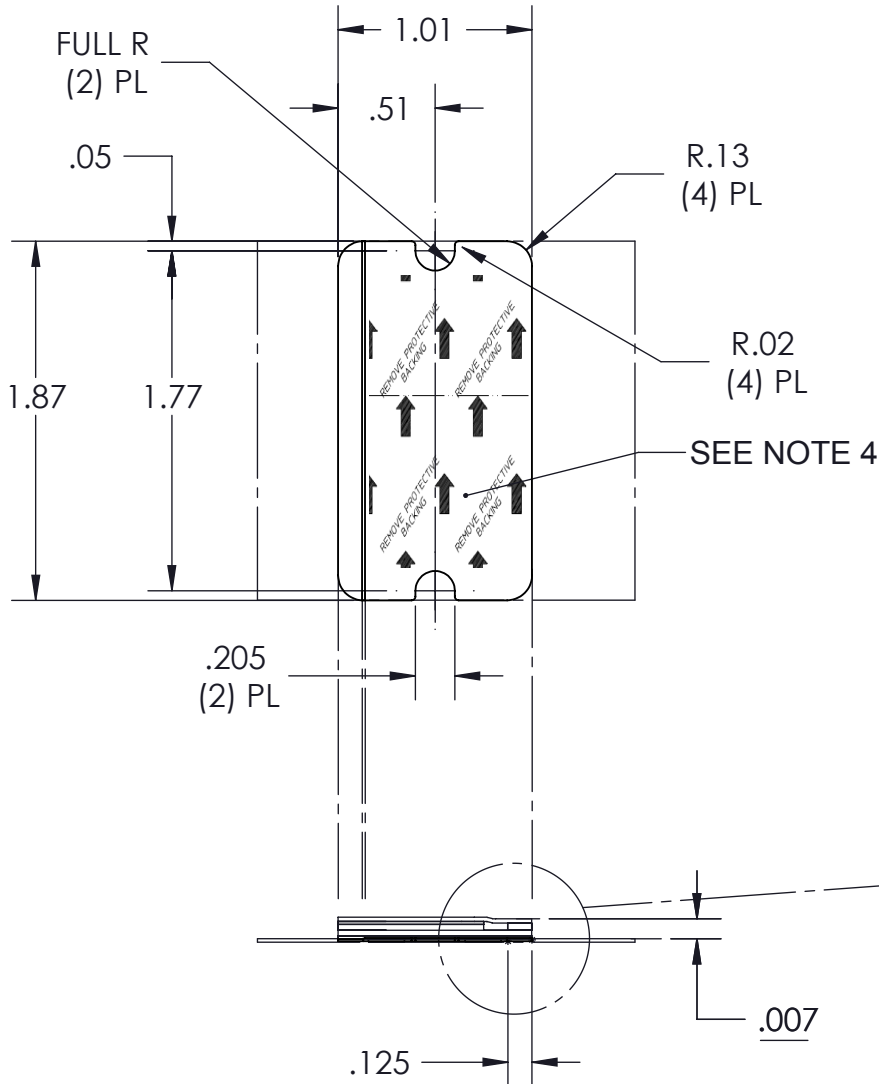


SECTION A-A

(VERTICAL THICKNESS IS NOT SHOWN TO SCALE)

- NOTES:
1. MATERIAL: MAKE FROM HENKEL AL-2-18H-101
 2. THICKNESS: .007±.001.
 3. SEE DETAIL FOR ASSY ORDER.
 4. FOR ARTWORK SHOWN HERE SEE DWG# 20200.
 5. RoHS COMPLIANT PER CST-0001 LATEST REVISION.
 6. PRIOR TO ASSEMBLY, PRODUCTS SHALL BE STORED IN A COOL, DRY LOCATION IN ORIGINAL PACKAGING AT TEMPERATURES BELOW 40±C (104±F). UNDER THESE CONDITIONS THE SHELF LIFE IS INDEFINITE. THERMMATE PADS CAN BE PRE-APPLIED TO BASEPLATES OR HEAT SINKS WHICH ARE THEN SHIPPED TO A FINAL ASSEMBLY LOCATION, AS LONG AS THE TEMPERATURE DOES NOT EXCEED THE LEVEL INDICATED ABOVE.

SEE DETAIL

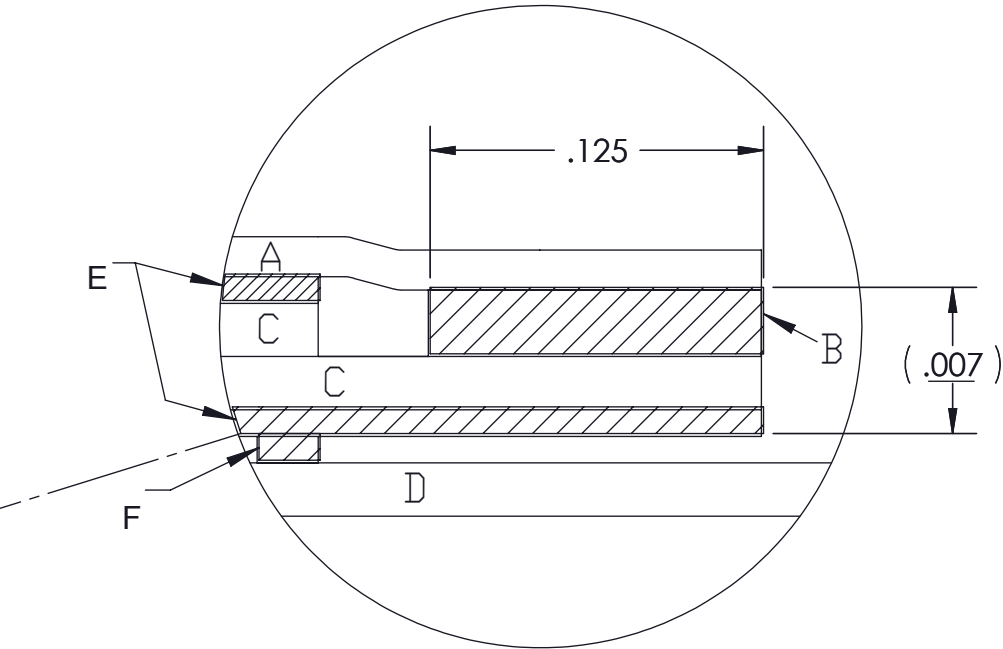

- DETAIL :
- A. SPLIT RELEASE LINER.
 - B. ADHESIVE STRIP; .0025 THICK .125 WIDE.
 - C. ALUMINUM ALLOY 1145-0; .002 THICK.
 - D. ROLL CARRIER WITH ADHESIVE STRIP BONDING.
 - E. PHASE CHANGE THERMAL COMPOUND.
 - F. ADHESIVE STRIPS ON ROLL CARRIER.



F



E

D

C

B

A

DRAWN		DATE		<div></div> <div>SWD</div>			
R.E.J.HICKEY		02/05/08					
<div>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCH [MM] TOLERANCES ARE: DECIMALS ANGLES X.XX [X.X] = ±0.01 [0.25] ±1° X.XXX [X.XX] = ±0.005 [0.127]</div>				<div>THERMAL INTERFACE PAD, THERMATE® VIBRICK, A SIZE P/N 34636</div>			
<div>THIRD ANGLE PROJECTION</div> <div></div> <div>DO NOT SCALE DRAWING</div>				SIZE	CAGE CODE	DWG NO	REV
				B	67131	34581	3
				SCALE 1: 1		SHEET 1 OF 1	