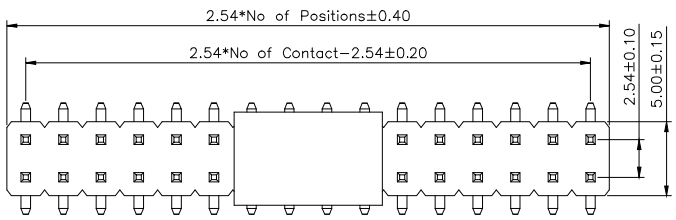

Dim'A	Note
5.00mm	2*2−2*4P
10.00mm	2*5−2*40P



NOTES:

MATERIAL
1.Insulator Material:PA6T+30%GF(UL94V-0)
2.Contact Material : Brass
3.Contact Plating :
A-SL254-DG-GxxMx1:1μ" Au Over Ni ②
A-SL254-DG-ZxxMx1: Tin Over Ni

ELECTRICAL
1.Current Rating : 3.0AMP
2.Withstand Voltage : 500V AC/DC
3.Contact Resistance : 20mΩ max
4.Insulation Resistance: 1000MΩ min

ENVIRONMENTAL
1.Operation Temperature: -40°C to +105°C
2.Packing :

A-SL254-DG-x xx M R 1:Tape&Reel+Cap:2*2P~2*25P
A-SL254-DG-x xx M P 1:Tube+Cap:2*4P~2*40P
Contact Plating: G- 1u"Au, Z-Tin
No. of Contacts

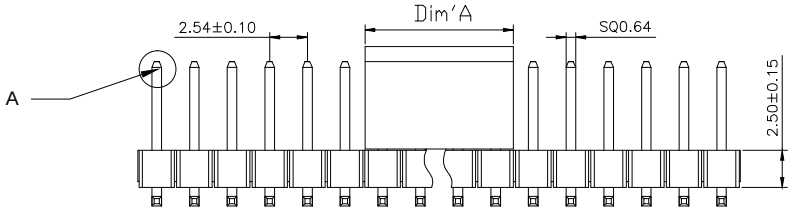



Recommended PCB Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

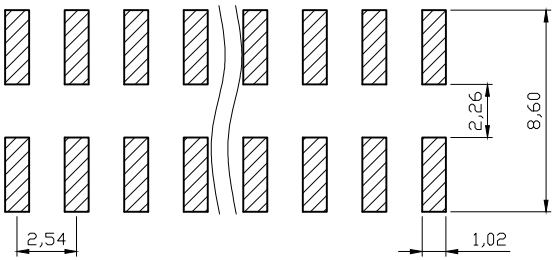



DETAIL A
SC 2:1

RoHS compliant
Unit:mm

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
DIM	TOL
Angle	±3°

Id.	Modification	Date	Name		Date	Name
⑥	Add the detail of pin tail	02.08.2021	Winnie			
⑤	Update the packing	08.04.2015	Winnie	Drawn	27.03.2009	Dean
④	Update	06.20.2014	Jesse	Approved	02.08.2021	Winnie
③	Change of production plant	09.2012	Winnie			
②	Update	06.03.2012	Lucas			
①	Drawn	27.03.2009	Dean			

ASSMANN wsw components

Customer-No.

ASSMANN WSW-No. ②
A-SL254-DG-xxxMx1

Drawing-No.
ASS 3444 CO

rev06

Replace

Sheet

SV2720

Downloaded from Arrow.com.