


GSD

KH-59-26

REVISIONS	
ISSUE	CHANGES
6	CN 33595 E REDRAWN WJM 12/13/91
7	CN 38454 C TML 11/21/01
8	CN 39242 E HMN 03/15/05
9	CN 39307 B JLA 07/27/05

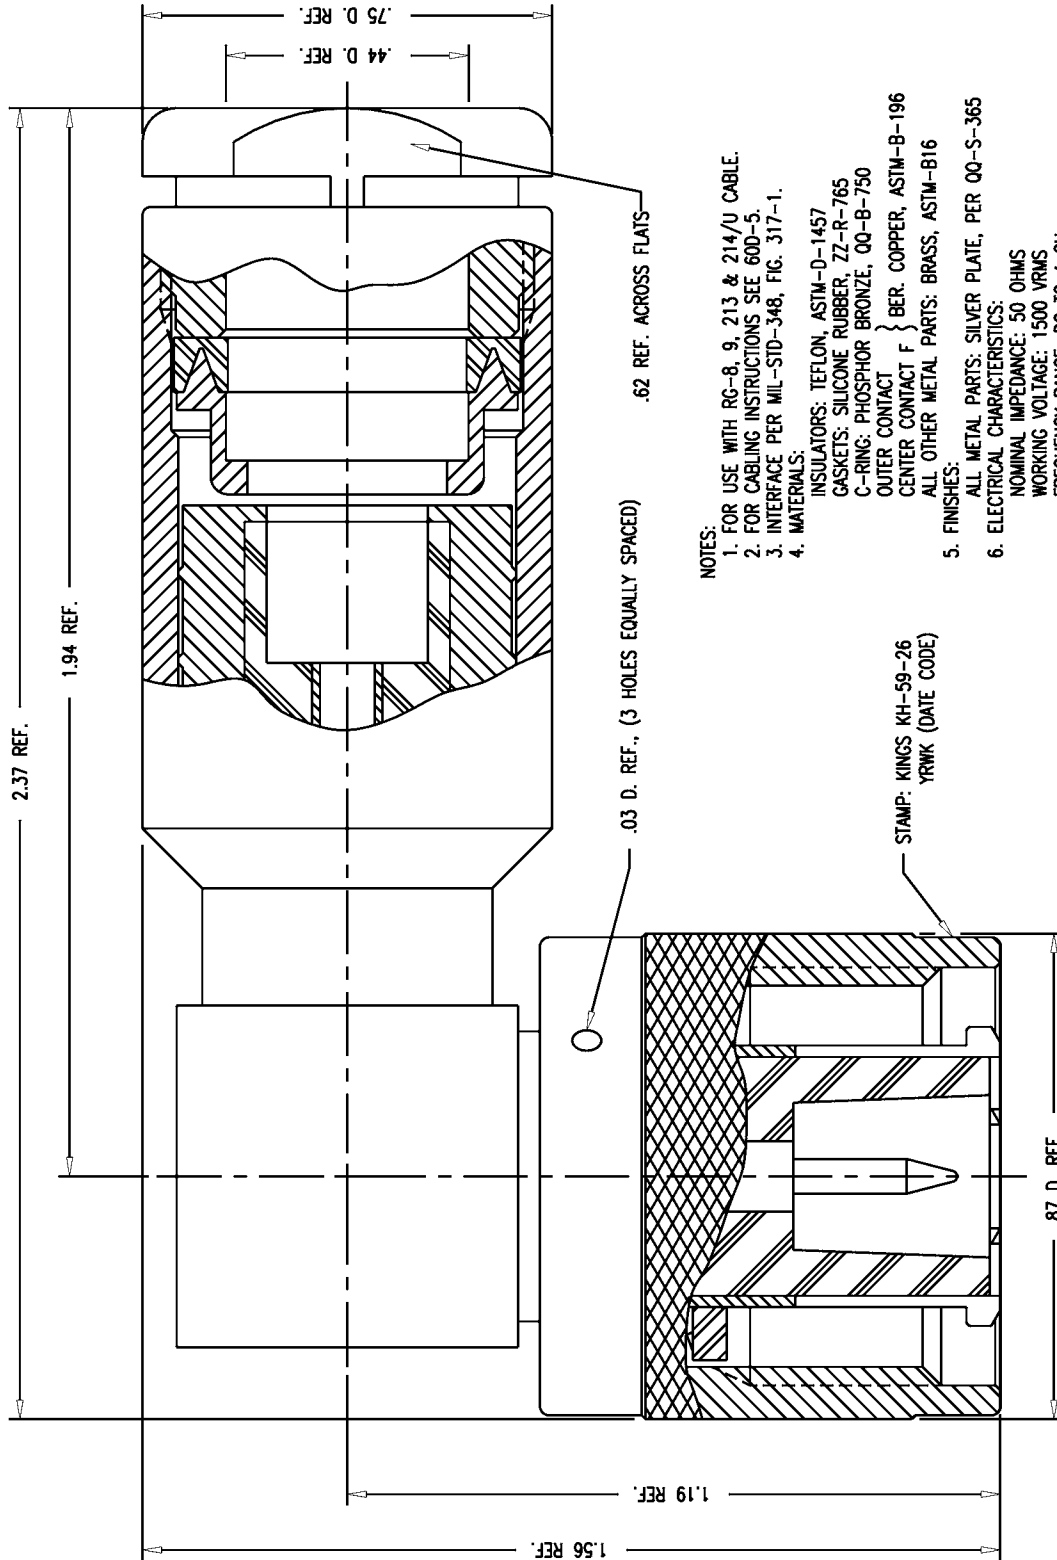

NOTES:

1. FOR USE WITH RG-8, 9, 213 & 214/U CABLE.
2. FOR CABLING INSTRUCTIONS SEE 600-5.
3. INTERFACE PER MIL-STD-348, FIG. 317-1.
4. MATERIALS:
 - INSULATORS: TEFLON, ASTM-D-1457
 - GASKETS: SILICONE RUBBER, ZZ-R-765
 - C-RING: PHOSPHOR BRONZE, QQ-B-750
 - OUTER CONTACT } BER. COPPER, ASTM-B-196
 - CENTER CONTACT F } BRASS, ASTM-B16
5. FINISHES:
 - ALL METAL PARTS: SILVER PLATE, PER QQ-S-365
6. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 50 OHMS
 - WORKING VOLTAGE: 1500 VRMS
 - FREQUENCY RANGE: DC TO 4 GHz.
7. MARK PACKAGE: HS6087-2
KH-59-26
91836
YRWK (DATE CODE)

GSD

KINGS	
ELECTRONICS CO., INC.	
ROCK HILL, SOUTH CAROLINA 29730	
KH-59-26	

KH-59-26SR8

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF: McD. Douglas HS6087-2

PLUG, ANGLE, HN

DRAWN WJM DATE 12/13/91

DESIGN MJB DATE 02/05/92

APPR. DATE