

GSR Click



PID: MIKROE-2860

GSR click can be used to measure the electrodermal activity (EDA) of the human body, also known as the galvanic skin response (GSR). EDA is actually the property of the human body that causes continuous variation in the electrical characteristics of the skin. EDA monitoring is usually combined with the monitoring of the heart rate, respiratory rate, and blood pressure, giving a complete insight into some of the parameters of the autonomous nervous systems of the human body.

EDA measurement is a component of modern polygraph devices, often used as lie detectors. Recent research reveals that there is more to EDA than it seems, so the studies continue in that direction. GSR click is ideally suited to be used as the research and experimenting tool, as well as for building useful test applications based on the EDA response - such as the polygraphs.

GSR click can be used to measure the electrodermal activity (EDA) of the human body, also known as the galvanic skin response (GSR). EDA is actually the property of the human body that causes continuous variation in the electrical characteristics of the skin. EDA monitoring is usually combined with the monitoring of the heart rate, respiratory rate, and blood pressure, giving a complete insight into some of the parameters of the autonomous nervous systems of the human body.

EDA measurement is a component of modern polygraph devices, often used as lie detectors. Recent research reveals that there is more to EDA than it seems, so the studies continue in that direction. GSR click is ideally suited to be used as the research and experimenting tool, as well as for building useful test applications based on the EDA response - such as the polygraphs.

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.




ISO 9001: 2015 certification of quality management system (QMS).

How does it work?

EDA is a common measure of autonomic nervous system activity. Skin conductance is not under conscious control, it is autonomously controlled by the sympathetic activity and cognitive and emotional states on a subconscious level. Therefore, the skin electric resistance offers direct insights into autonomous emotional regulation.

The working principle of the GSR click is based on the voltage divider, composed of two resistors. One resistor is a fixed resistor 100kΩ (R4) and the second resistor is the human skin, which acts as the variable resistor. DC Voltage is applied to the skin via one electrode, connected to the 3.3V rail. The other electrode is used to close the electrical circuit through the skin and back to the click board. Depending on the resistance of the skin, the voltage at the voltage divider will vary.

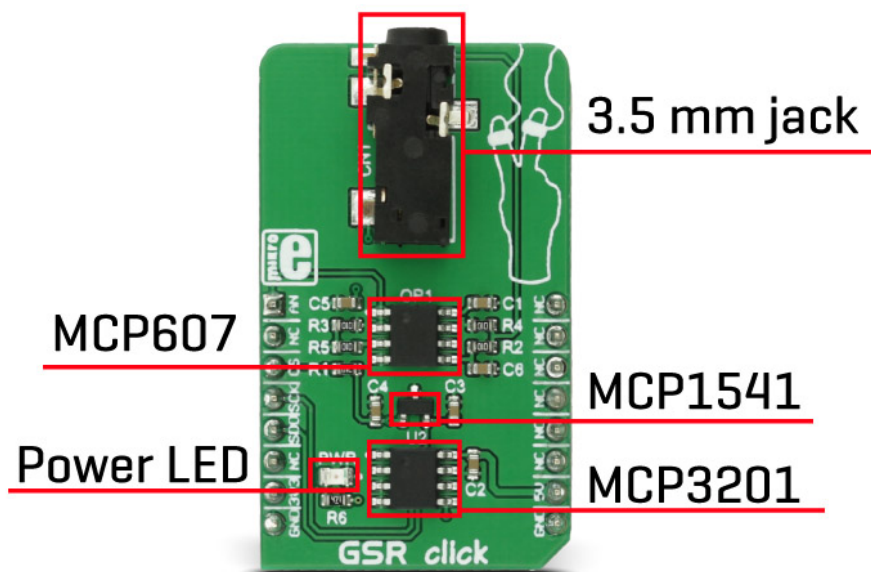

GSR click uses the [MCP607](#), a dual CMOS low-noise OPAMP made by [Microchip](#), as well as the [MCP3201](#), a 12bit SAR type ADC, made by the same company. The input stage consists of the aforementioned voltage divider and a frequency limiting capacitor. This signal is then fed to the first half of the OPAMP, set to a unity gain. It is used to condition the signal before entering the ADC.

The onboard ADC IC uses the SPI for communication with the MCU. The SPI interface pins are routed to the appropriate mikroBUS™ pins. MCP3201 ADC also needs a clean and stable reference voltage, which is provided by the MCP1541, a small, 3-pin specialized reference voltage IC, from Microchip. The 5V rail is routed to the input of the voltage reference, as well as the VCC pin of the ADC IC and the OPAMP IC. This means that the click board™ needs both 3.3V and 5V for a proper operation.

The other half of the OPAMP is used as the input buffer for the measured signal and its output is routed to the AN pin of the mikroBUS™. This signal is analog and can be used for either more accurate sampling or for applying some other type of measured signal processing.

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

GSR click has an onboard 3.5 mm jack, used to securely connect the electrodes to the board.

Specifications

Type	Biometrics
Applications	The GSR click can be used for measurement of the EDA factor of the human body, allowing the insight in some of the human autonomic nervous system parameters
On-board modules	MCP607 2.5V to 6.0V Micropower CMOS Op Amp, MCP3201 2.7V 12-Bit A/D Converter with SPI Serial Interface, MCP1541 2.5V, and 4.096V Voltage References
Key Features	The click features a precise 12bit AD converter so that the measured data can be digitally processed by the MCU via the SPI, it also outputs buffered analog signal for further processing (analog or digital)
Interface	Analog, SPI
Feature	No ClickID
Compatibility	mikroBUS™
Click board size	M (42.9 x 25.4 mm)
Input Voltage	3.3V, 5V

Pinout diagram

This table shows how the pinout on **GSR click** corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

Notes	Pin					Pin	Notes
Analog	AN	1	AN	PWM	16	NC	
	NC	2	RST	INT	15	NC	
Chip Select	CS	3	CS	RX	14	NC	
SPI Clock	SCK	4	SCK	TX	13	NC	
SPI Data Output	SDO	5	MISO	SCL	12	NC	
	NC	6	MOSI	SDA	11	NC	
Power Supply	+3V3	7	3.3V	5V	10	+5V	Power Supply
Ground	GND	8	GND	GND	9	GND	Ground

Onboard settings and indicators

Label	Name	Default	Description
PWR	PWR	-	Power LED indicator
CN1	CN1	-	3.5mm jack

Software support

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

We provide a library for GSR click on our [LibStock](#) page, as well as a demo application (example), developed using MikroElektronika [compilers](#) and [mikroSDK](#). The provided click library is mikroSDK standard compliant. The demo application can run on all the main MikroElektronika [development boards](#).

Key functions

uint16_t gsr_readMCP3201()- Function reads the value of the ADC converter

Example description

Measure the galvanic skin response by reading voltage level of sensor on the skin.

```
void applicationTask()
{
    voltage = gsr_readMCP3201();
    IntToStr(voltage, text);
    LOG_write("ADC Value: ", _LOG_TEXT);
    LOG_write(text, _LOG_LINE);
    Delay_ms(1000);
}
```

The full application code, and ready to use projects can be found on our [LibStock](#) page.

Other MikroElektronika libraries used in the example:

- UART
- SPI

Additional notes and information

Depending on the development board you are using, you may need [USB UART click](#), [USB UART 2 click](#) or [RS232 click](#) to connect to your PC, for development systems with no UART to USB interface available on the board. The terminal available in all MikroElektronika [compilers](#), or any other terminal application of your choice, can be used to read the message.

mikroSDK

This click board is supported with [mikroSDK](#) - MikroElektronika Software Development Kit. To ensure proper operation of mikroSDK compliant click board demo applications, mikroSDK should be downloaded from the [LibStock](#) and installed for the compiler you are using.

For more information about mikroSDK, visit the [official page](#).

Resources

[mikroBUS™ standard specifications](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

[mikroSDK](#)

[Click board™ Catalog](#)

[Click Boards™](#)

Downloads

[MCP607 datasheet](#)

[MCP3201 datasheet](#)

[GSR click example on Libstock](#)

[GSR click schematic](#)

[GSR click 2D and 3D files](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).