# 1-1563878-1 - ACTIVE

AMP | Heavy Duty Sealed Connector Series

TE Internal #: 1-1563878-1 15 Position Housing, Housing for Female Terminals, Wire-to-Wire, 4 mm / 6 mm [.157 in / .236 in] Centerline, Heavy Duty Sealed Connector Series

#### View on TE.com >

Automotive Parts > Automotive Connectors > Automotive Housings > 48V Ready Mixed (Signal and Power) Connectors



Number of Positions: 15

Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 1.5 mm, 2.8 mm [.059 in, .11 in]

Connector System: Wire-to-Wire

Centerline (Pitch): 4 mm, 6 mm [.157 in, .236 in ]

#### All 48V Ready Mixed (Signal and Power) Connectors (10)



# Features

### **Product Type Features**

Mixed & Hybrid Connector	Yes	
Connector Shape	Rectangular	
Connector & Housing Type	Housing for Female Terminals	
Connector System	Wire-to-Wire	
Sealable	Yes	
Primary Locking Feature	On the Terminal	
Connector & Contact Terminates To	Wire & Cable	
Configuration Features		
Number of Positions	15	
Number of Rows	2	
Electrical Characteristics		
Operating Voltage	60 VDC	

15 Position Housing, Housing for Female Terminals, Wire-to-Wire, 4 mm / 6 mm [.157 in / .236 in] Centerline, Heavy Duty Sealed Connector Series



Nominal Voltage Architecture	12 V, 24 V, 42 V, 60 V
Body Features	
Cable Exit Angle	180°, 90°
Primary Product Color	Black
Connector & Keying Code	A
Contact Features	
Contact Size	1.5K, 2.8mm
Contact Type	Receptacle
Mating Tab Width	1.5 mm, 2.8 mm[.059 in][.11 in]
Contact Current Rating (Max)	40 A
Mechanical Attachment	
Strain Relief	Without
Terminal Position Assurance	No
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

# Housing Features

Housing Material	PBT GF30	
Centerline (Pitch)	4 mm, 6 mm[.157 in][.236 in]	
Dimensions		
Product Width	25.7 mm[1.012 in]	
Product Length	67.2 mm[2.646 in]	
Connector Height	31.25 mm[1.23 in]	
Usage Conditions		
Operating Temperature (Max)	140 °C[284 °F]	
Operating Temperature Range	-40 – 140 °C[-40 – 284 °F]	
Operation/Application		
Circuit Application	Power	
Industry Standards		
IP Rating	IP67	
UL Flammability Rating	UL 94V-0	
Packaging Features		

wnloaded from Arrow.com.

15 Position Housing, Housing for Female Terminals, Wire-to-Wire, 4 mm / 6 mm [.157 in / .236 in] Centerline, Heavy Duty Sealed Connector Series



Packaging Method	Box
Packaging Quantity	230
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

## **Product Compliance**

#### For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

15 Position Housing, Housing for Female Terminals, Wire-to-Wire, 4 mm / 6 mm [.157 in / .236 in] Centerline, Heavy Duty Sealed Connector Series








TE Part # 964972-1 EINZELLEITERDICHTNG

# Also in the Series | Heavy Duty Sealed Connector Series

Automotive Connector Caps & Covers (25)	Automotive Housings(215)	Automotive Seals & Cavity Plugs(5)	Data Connectivity Headers(18)

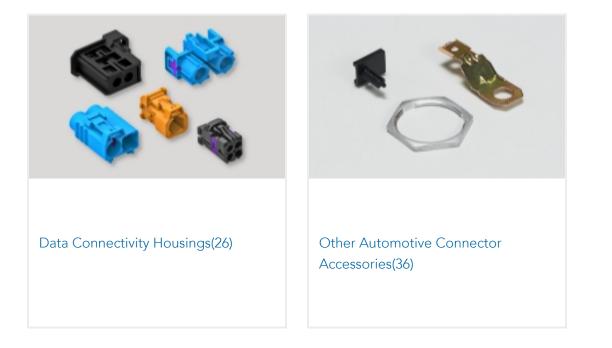

# Customers Also Bought

wnloaded from Arrow.com.

15 Position Housing, Housing for Female Terminals, Wire-to-Wire, 4 mm / 6 mm [.157 in / .236 in] Centerline, Heavy Duty Sealed Connector Series







## Documents

Product Drawings 15POS, MIXED, REC HSG, SEALED, AS

English

#### **CAD** Files

Customer View Model ENG\_CVM\_CVM\_1-1563878-1\_J.2d\_dxf.zip

English

#### 3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_1-1563878-1\_J.3d\_igs.zip

English


Customer View Model

ENG\_CVM\_CVM\_1-1563878-1\_J.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

#### Datasheets & Catalog Pages



15 Position Housing, Housing for Female Terminals, Wire-to-Wire, 4 mm / 6 mm [.157 in / .236 in] Centerline, Heavy Duty Sealed Connector Series



#### Heavy Duty Sealed Connector Series

English

HDSCS Catalog

English

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications Application Specification

English