

BAS100AS

SURFACE MOUNT SCHOTTKY DIODES

Voltage

100 V

Current

0.5 A


Features

- Low forward voltage drop
- Deal for automated placement
- Low power loss, high efficiency
- High surge current capability
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

Mechanical Data

- Case: SOD-123 Package
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0004 ounces, 0.001 grams

SOD-123



Maximum Ratings and Thermal Characteristics ($T_A = 25^{\circ}\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNITS
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	100	V
Maximum Rms Voltage	V_{RMS}	70	V
Maximum Dc Blocking Voltage	V_{DC}	100	V
Maximum Average Forward Current	$I_{F(AV)}$	0.5	A
Peak Forward Surge Current: 8.3 ms Single Half Sine-Wave Superimposed On Rated Load	I_{FSM}	5.5	A
Typical Junction Capacitance Measured at 1 MHz And Applied $V_R = 4\text{ V}$	C_J	21	pF
Typical Thermal Resistance	$R_{\theta JA}^{(1)}$	510	$^{\circ}\text{C/W}$
	$R_{\theta JC}^{(2)}$	100	
Operating Junction Temperature Range	T_J	-55~150	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-55~150	$^{\circ}\text{C}$



BAS100AS

Electrical Characteristics ($T_A = 25^{\circ}\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Forward Voltage	V_F	$I_F = 0.1\text{ A}, T_J = 25^{\circ}\text{C}$	-	0.59	-	V
		$I_F = 0.25\text{ A}, T_J = 25^{\circ}\text{C}$	-	0.70	-	
		$I_F = 0.5\text{ A}, T_J = 25^{\circ}\text{C}$	-	-	0.85	
		$I_F = 0.1\text{ A}, T_J = 125^{\circ}\text{C}$	-	0.48	-	
		$I_F = 0.25\text{ A}, T_J = 125^{\circ}\text{C}$	-	0.57	-	
		$I_F = 0.5\text{ A}, T_J = 125^{\circ}\text{C}$	-	0.64	-	
Reverse Current	$I_R^{(3)}$	$V_R = 50\text{ V}, T_J = 25^{\circ}\text{C}$	-	5	-	nA
		$V_R = 80\text{ V}, T_J = 25^{\circ}\text{C}$	-	15	-	
		$V_R = 100\text{ V}, T_J = 25^{\circ}\text{C}$	-	-	1	uA
		$V_R = 100\text{ V}, T_J = 125^{\circ}\text{C}$	-	40	-	

NOTES:

1. Mounted on a FR4 PCB, single-sided copper, mini pad
2. Mounted on a FR4 PCB, single-sided copper, with 100 cm² copper pad area
3. Short duration pulse test used to minimize self-heating effect

BAS100AS

TYPICAL CHARACTERISTIC CURVES

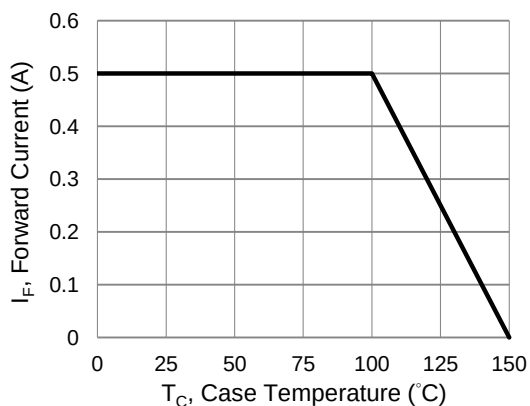


Fig.1 Forward Current Derating Curve

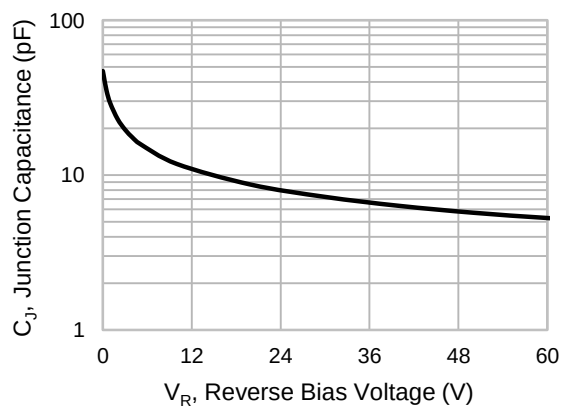


Fig.2 Typical Junction Capacitance

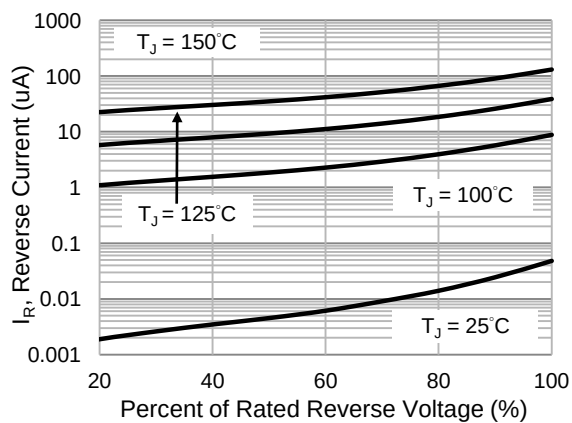


Fig.3 Typical Reverse Characteristics

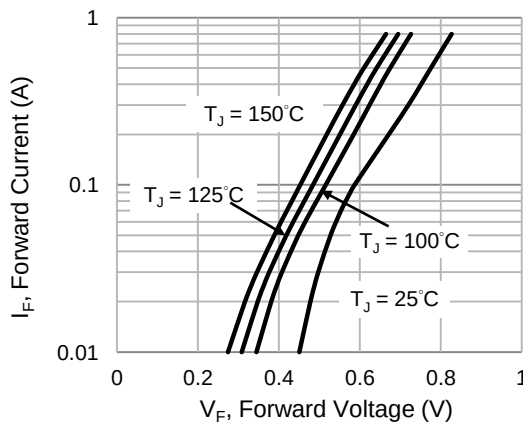


Fig.4 Typical Forward Characteristics

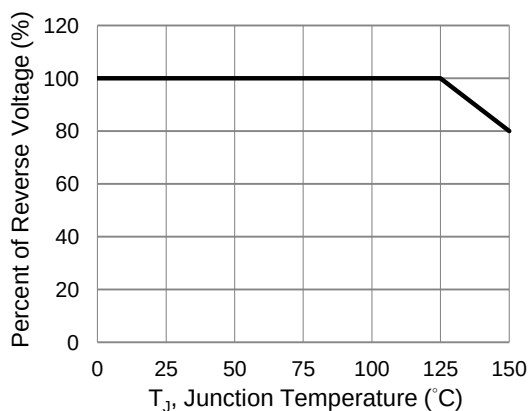




Fig.5 Operating Temperature Derating Curve

BAS100AS

Part No Packing Code Version

Part No Packing Code	Package Type	Packing Type	Marking	Version
BAS100AS_R1_00001	SOD-123	3K / 7" Reel	0AS	Halogen free

Packaging Information & Mounting Pad Layout

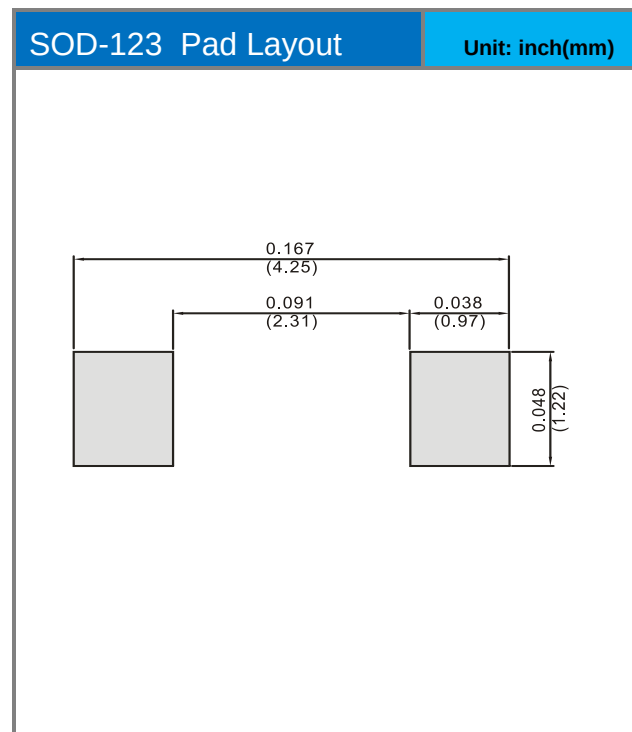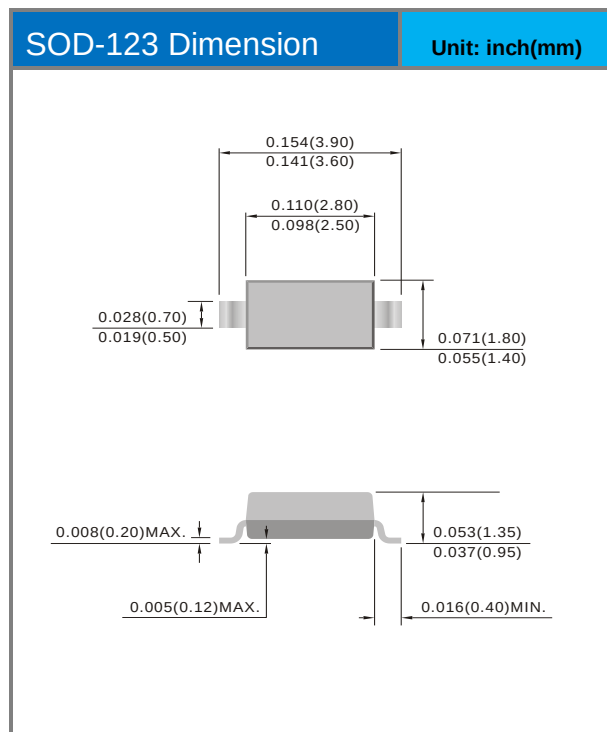



BAS100AS

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.