To our customers,

Old Company Name in Catalogs and Other Documents

On April 1st, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: http://www.renesas.com

April 1st, 2010
Renesas Electronics Corporation

Not recommend for new design

Issued by: Renesas Electronics Corporation (http://www.renesas.com)

Send any inquiries to http://www.renesas.com/inquiry.

Downloaded from Arrow.com.

Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: "Standard", "High Quality", and "Specific". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as "Specific" without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as "Specific" or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is "Standard" unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.

   "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.

   "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.

   "Specific": Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

Not recommend for new design

Downloaded from Arrow.com.

RENESAS

DATA SHEET

SiGe BiCMOS INTEGRATED CIRCUIT

μPD5740T6N

LOW NOISE WIDEBAND AMPLIFIER IC WITH THROUGH FUNCTION

DESCRIPTION

The μPD5740T6N is a low noise wideband amplifier IC mainly designed for the portable digital TV application. This IC has achieved low noise figure and the wideband operation. The μPD5740T6N has an LNA pass-through function (bypass function) to prevent the degradation of the received signal quality at the strong electric field, and achieve the high reception sensitivity and low power consumption.

The package is a 6-pin plastic TSON (Thin Small Out-line Non-leaded) (T6N) suitable for surface mount.

This IC is manufactured using our latest SiGe BiCMOS process that shows superior high frequency characteristics.

Not recommend for new design

FEATURES

- Low voltage operation : V_{CC} = 2.3 to 3.3 V (2.8 V TYP.)
- Low mode control voltage : $V_{cont\ (H)}$ = 1.0 V to V_{CC}, $V_{cont\ (L)}$ = 0 to 0.5 V
- Low current consumption : $I_{CC}1$ = 5.0 mA TYP. @ V_{CC} = 2.8 V (LNA-mode)
  : $I_{CC}2$ = 1 μA MAX. @ V_{CC} = 2.8 V (Bypass-mode)
- Low noise (LNA-mode) : NF1 = 1.5 dB TYP. @ V_{CC} = 2.8 V, f = 470 MHz
  : NF2 = 1.5 dB TYP. @ V_{CC} = 2.8 V, f = 770 MHz
- High gain (LNA-mode) : G_P1 = 15.0 dB TYP. @ V_{CC} = 2.8 V, f = 470 MHz
  : G_P2 = 13.5 dB TYP. @ V_{CC} = 2.8 V, f = 770 MHz
- Low insertion loss (Bypass-mode) : $L_{ins}1$ = 1.1 dB TYP. @ V_{CC} = 2.8 V, f = 470 MHz
  : $L_{ins}2$ = 1.3 dB TYP. @ V_{CC} = 2.8 V, f = 770 MHz
- High-density surface mounting : 6-pin plastic TSON (T6N) package (1.5 × 1.5 × 0.37 mm)
- Included protection circuits for ESD

APPLICATION

- Low noise amplifier for the portable and mobile digital TV system, etc.

ORDERING INFORMATION

Part Number	Order Number	Package	Marking	Supplying Form
μPD5740T6N-E2	μPD5740T6N-E2-A	6-pin plastic TSON (T6N) (Pb-Free)	C3U	• 8 mm wide embossed taping • Pin 1, 6 face the perforation side of the tape • Qty 3 kpcs/reel

Remark To order evaluation samples, please contact your nearby sales office.
Part number for sample order: μPD5740T6N

Caution Observe precautions when handling because these devices are sensitive to electrostatic discharge.

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.
Not all products and/or types are available in every country. Please check with an NEC Electronics sales representative for availability and additional information.


Document No. PU10764EJ01V0DS (1st edition)
Date Published June 2009 NS
Printed in Japan

© NEC Electronics Corporation 2009

Downloaded from Arrow.com.

PIN CONNECTIONS AND INTERNAL BLOCK DIAGRAM

(Top View) (Top View) (Bottom View)

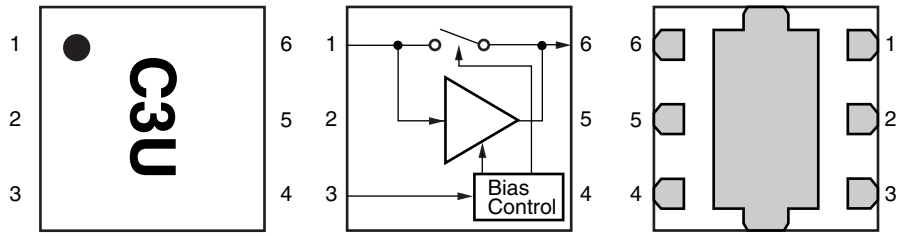

Pin No.	Pin Name
1	INPUT
2	GND
3	V_{cont}
4	V_{CC}
5	NC
6	OUTPUT

Remark Exposed pad : GND

TRUTH TABLE

V_{cont}	Gain	Mode
H	High	LNA-mode
L	Low	Bypass-mode

Remark "H" = $V_{cont\ (H)}$, "L" = $V_{cont\ (L)}$

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Test Conditions	Ratings	Unit
Supply Voltage	V_{CC}	T_A = +25°C	3.6	V
Mode Control Voltage	V_{cont}	T_A = +25°C	3.6	V
Total Power Dissipation	P_{tot}		150	mW
Operating Ambient Temperature	T_A		–40 to +85	°C
Storage Temperature	T_{stg}		–55 to +150	°C
Input Power	P_{in}		+33	dBm

Not recommend for new design

RECOMMENDED OPERATING RANGE

Parameter	Symbol	MIN.	TYP.	MAX.	Unit
Supply Voltage	V_{CC}	2.3	2.8	3.3	V
Mode Control Voltage (H)	$V_{cont\ (H)}$	1.0	–	V_{CC}	V
Mode Control Voltage (L)	$V_{cont\ (L)}$	0	–	0.5	V
Operating Frequency	f	50	–	1 800	MHz
Operating Ambient Temperature	T_A	–40	+25	+85	°C
Input Power (LNA-mode)	P_{in}	–	–	+7	dBm
Input Power (Bypass-mode)	P_{in}	–	–	+15	dBm

Downloaded from Arrow.com.

ELECTRICAL CHARACTERISTICS 1 (DC Characteristics)
(T_A = +25°C, V_{CC} = 2.8 V, unless otherwise specified)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Circuit Current 1	$I_{CC}1$	V_{cont} = 2.8 V, No Signal (LNA-mode)	3.8	5.0	6.5	mA
Circuit Current 2	$I_{CC}2$	V_{cont} = 0 V, No Signal (Bypass-mode)	–	–	1	μA
Mode Control Current 1	$I_{cont}1$	V_{cont} = 2.8 V, No Signal (LNA-mode)	–	40	100	μA
Mode Control Current 2	$I_{cont}2$	V_{cont} = 0 V, No Signal (Bypass-mode)	–	–	1	μA

ELECTRICAL CHARACTERISTICS 2 (LNA-mode)
(T_A = +25°C, V_{CC} = V_{cont} = 2.8 V, unless otherwise specified)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Power Gain 1	G_P1	f = 470 MHz, P_{in} = –30 dBm	13.0	15.0	17.0	dB
Power Gain 2	G_P2	f = 770 MHz, P_{in} = –30 dBm	11.5	13.5	15.5	dB
Noise Figure 1	NF1	f = 470 MHz, excluded PCB and connector losses **Note**	–	1.5	2.0	dB
Noise Figure 2	NF2	f = 770 MHz, excluded PCB and connector losses **Note**	–	1.5	2.0	dB
Input Return Loss 1	$RL_{in}1$	f = 470 MHz, P_{in} = –30 dBm	7	12	–	dB
Input Return Loss 2	$RL_{in}2$	f = 770 MHz, P_{in} = –30 dBm	7	10	–	dB
Output Return Loss 1	$RL_{out}1$	f = 470 MHz, P_{in} = –30 dBm	7	14	–	dB
Output Return Loss 2	$RL_{out}1$	f = 770 MHz, P_{in} = –30 dBm	7	11	–	dB
Input 3rd Order Intercept Point 1	$IIP_3$1	f1 = 470 MHz, f2 = 471 MHz, P_{in} = –30 dBm	–4.0	–1.0	–	dBm
Input 3rd Order Intercept Point 2	$IIP_3$2	f1 = 770 MHz, f2 = 771 MHz, P_{in} = –30 dBm	–1.0	+2.0	–	dBm

Note Input PCB and connector losses: 0.05 dB (at 470 MHz), 0.08 dB (at 770 MHz)

Not recommend for new design

Downloaded from Arrow.com.

ELECTRICAL CHARACTERISTICS 3 (Bypass-mode)

(T_A = +25°C, V_{CC} = 2.8 V, unless otherwise specified)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Insertion Loss 1	$L_{ins}1$	f = 470 MHz, P_{in} = –10 dBm, excluded PCB and connector losses **Note**	–	1.1	2	dB
Insertion Loss 2	$L_{ins}2$	f = 770 MHz, P_{in} = –10 dBm, excluded PCB and connector losses **Note**	–	1.3	2	dB
Input Return Loss 1	$RL_{in}1$	f = 470 MHz, P_{in} = –10 dBm	10	20	–	dB
Input Return Loss 2	$RL_{in}2$	f = 770 MHz, P_{in} = –10 dBm	10	17	–	dB
Output Return Loss 1	$RL_{out}1$	f = 470 MHz, P_{in} = –10 dBm	10	20	–	dB
Output Return Loss 2	$RL_{out}1$	f = 770 MHz, P_{in} = –10 dBm	10	17	–	dB
Input 3rd Order Intercept Point	IIP_3	f1 = 770 MHz, f2 = 771 MHz, P_{in} = –2.5 dBm	+20	+30	–	dBm

Note Input-output PCB and connector losses: 0.10 dB (at 470 MHz), 0.16 dB (at 770 MHz)

Not recommend for new design

Downloaded from Arrow.com.


STANDARD CHARACTERISTICS FOR REFERENCE 1 (LNA-mode)
(T_A = +25°C, V_{CC} = V_{cont} = 2.8 V, unless otherwise specified)

Parameter	Symbol	Test Conditions	Reference	Unit
Isolation 1	ISL1	f = 470 MHz, P_{in} = –30 dBm	20	dB
Isolation 2	ISL2	f = 770 MHz, P_{in} = –30 dBm	20	dB
Gain 1 dB Compression Output Power 1	$P_{O(1\ dB)}$ 1	f = 470 MHz	–5.5	dBm
Gain 1 dB Compression Output Power 2	$P_{O(1\ dB)}$ 2	f = 770 MHz	–5.0	dBm

STANDARD CHARACTERISTICS FOR REFERENCE 2 (Bypass-mode)
(T_A = +25°C, V_{CC} = 2.8 V, V_{cont} = 0 V, unless otherwise specified)

Parameter	Symbol	Test Conditions	Reference	Unit
Gain 1 dB Compression Output Power	$P_{O(1\ dB)}$	f = 770 MHz	+8	dBm

TEST CIRCUIT

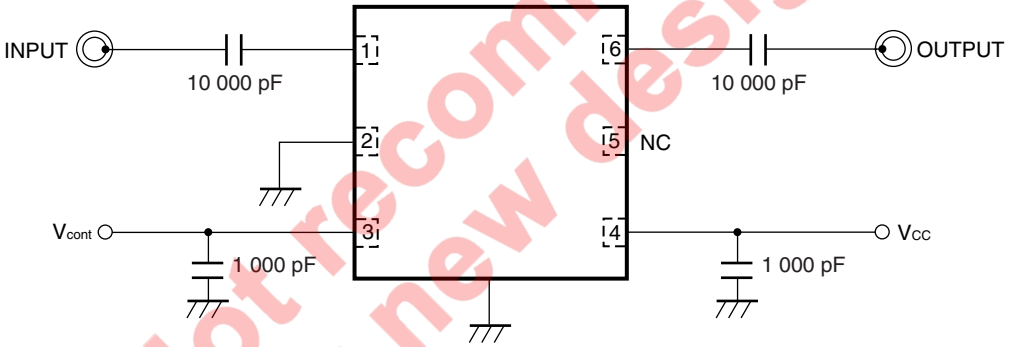


Not recommend for new design


Downloaded from Arrow.com.

TYPICAL CHARACTERISTICS 1 (DC Characteristics) (T_A = +25°C, unless otherwise specified)


CIRCUIT CURRENT vs. SUPPLY VOLTAGE

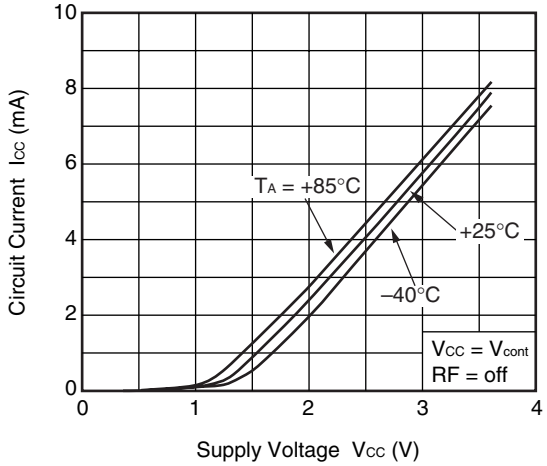


CIRCUIT CURRENT vs. OPERATING AMBIENT TEMPERATURE

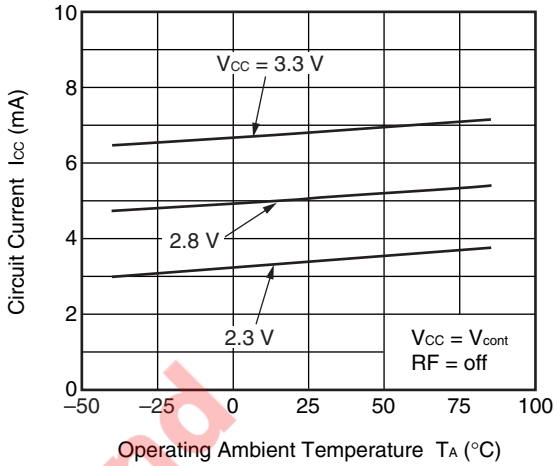


MODE CONTROL CURRENT vs. SUPPLY VOLTAGE

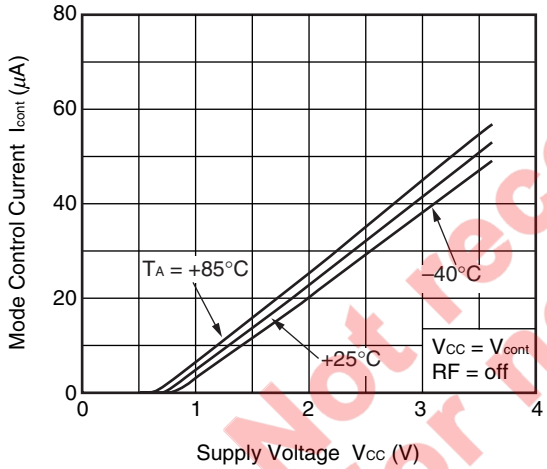


MODE CONTROL CURRENT vs. OPERATING AMBIENT TEMPERATURE

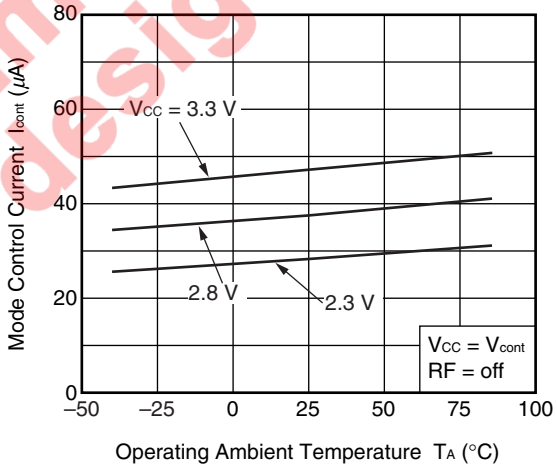

CIRCUIT CURRENT vs. MODE CONTROL VOLTAGE

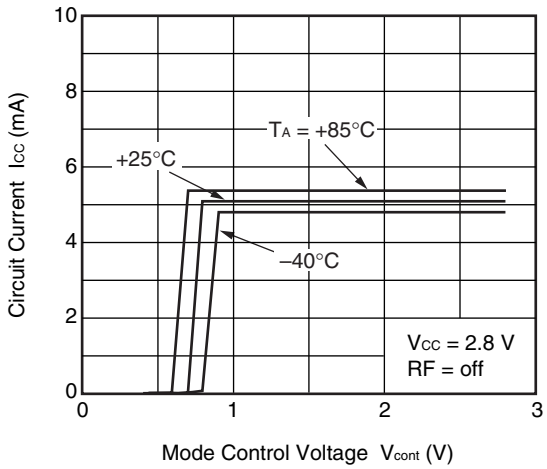

MODE CONTROL CURRENT vs. MODE CONTROL VOLTAGE

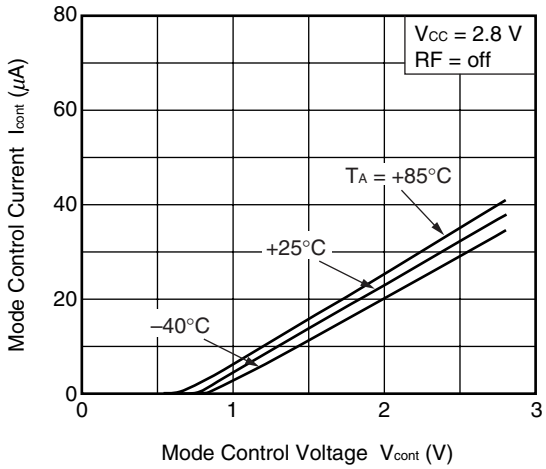


Remark The graphs indicate nominal characteristics.

Not recommend for new design


Downloaded from Arrow.com.

TYPICAL CHARACTERISTICS 2 (LNA-mode) (T_A = +25°C, unless otherwise specified)


NOISE FIGURE vs. FREQUENCY

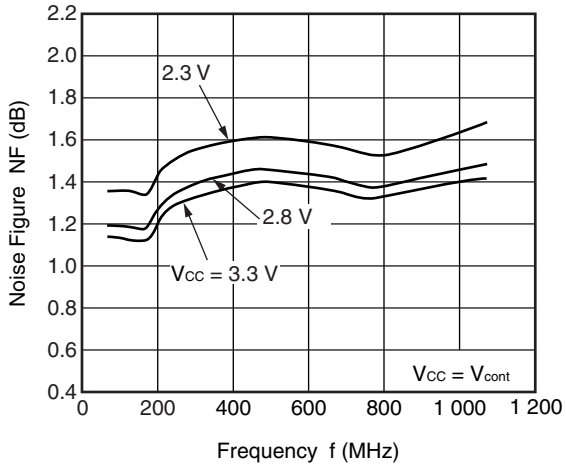


NOISE FIGURE vs. FREQUENCY

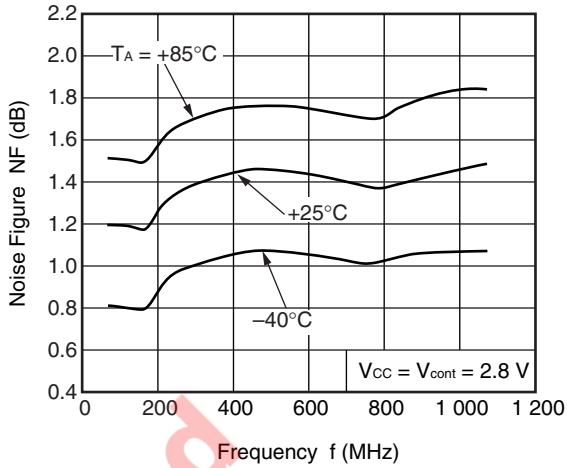

NOISE FIGURE vs. SUPPLY VOLTAGE

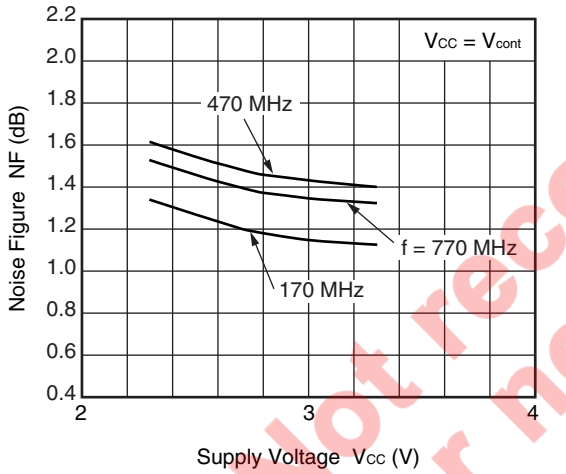


NOISE FIGURE vs. OPERATING AMBIENT TEMPERATURE

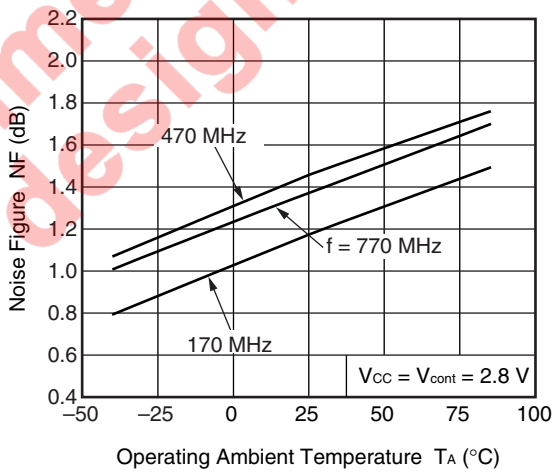


Not recommend for new design

POWER GAIN vs. FREQUENCY

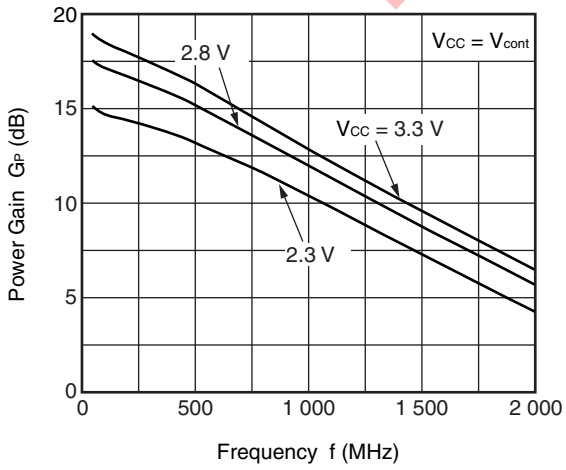


POWER GAIN vs. FREQUENCY

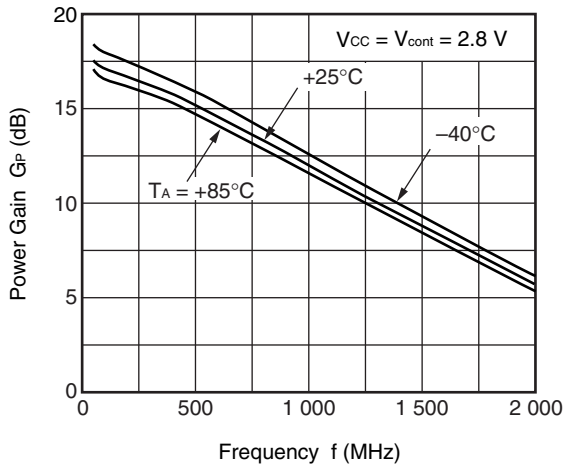


Remark The graphs indicate nominal characteristics.

Downloaded from Arrow.com.


POWER GAIN vs. SUPPLY VOLTAGE

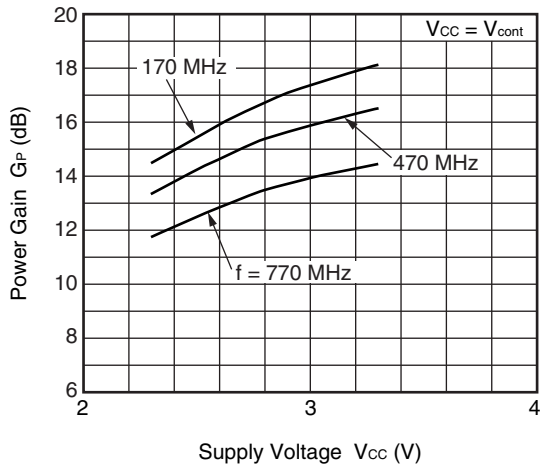


POWER GAIN vs. OPERATING AMBIENT TEMPERATURE

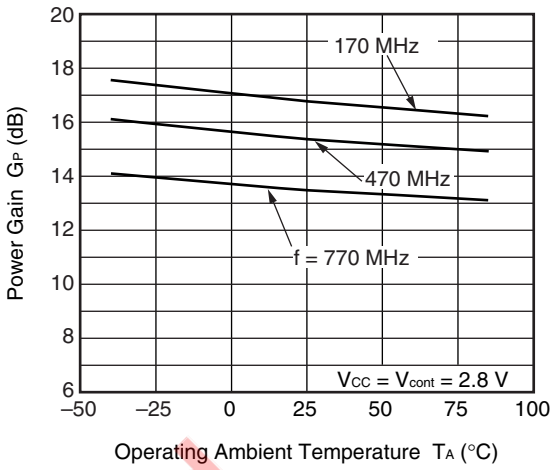


INPUT RETURN LOSS vs. FREQUENCY

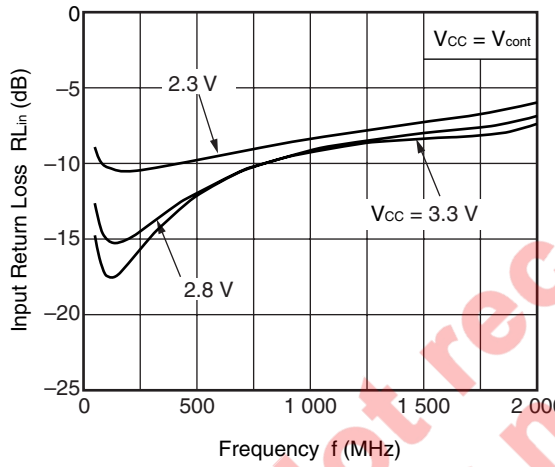


INPUT RETURN LOSS vs. FREQUENCY

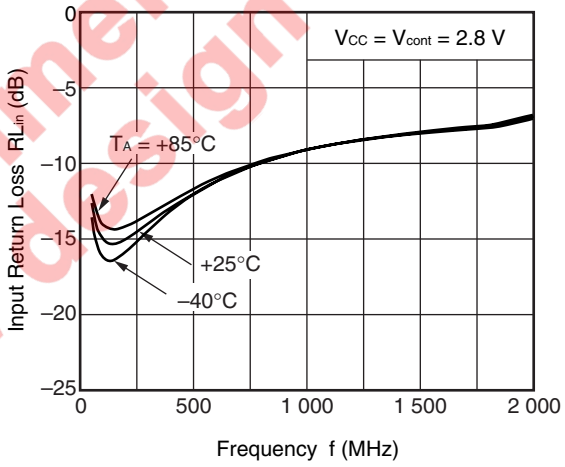

OUTPUT RETURN LOSS vs. FREQUENCY

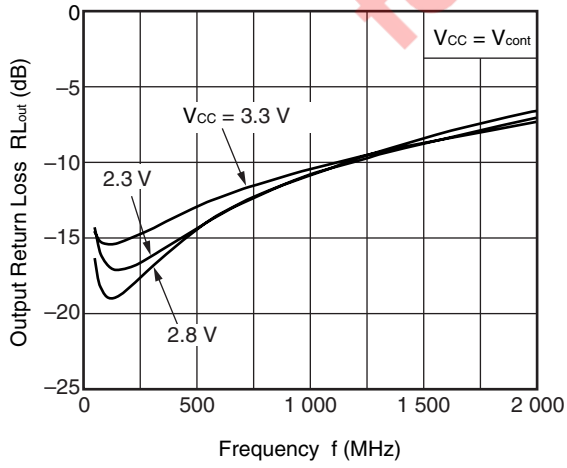

OUTPUT RETURN LOSS vs. FREQUENCY

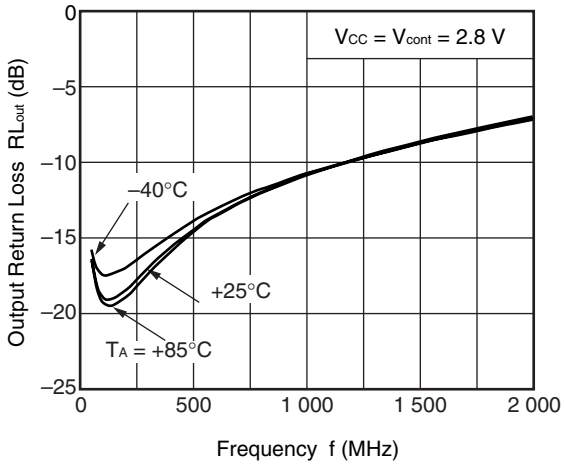


Not recommend for new design


Remark The graphs indicate nominal characteristics.

Downloaded from Arrow.com.


ISOLATION vs. FREQUENCY

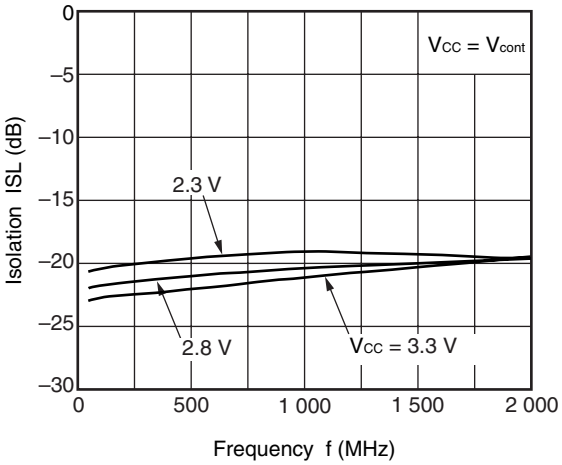


ISOLATION vs. FREQUENCY

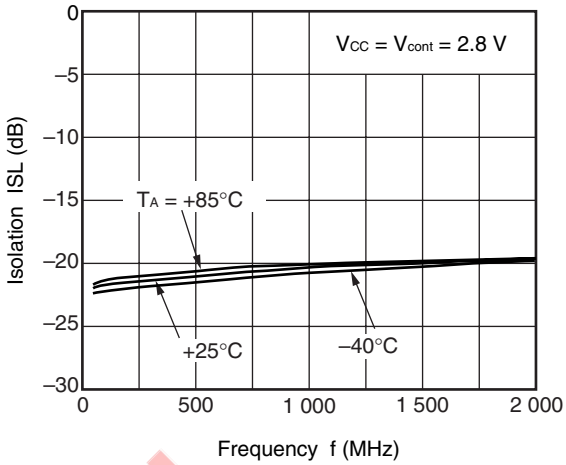


K FACTOR vs. FREQUENCY

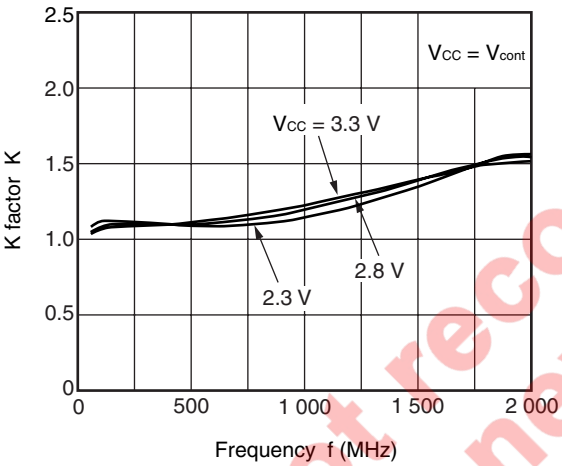


K FACTOR vs. FREQUENCY

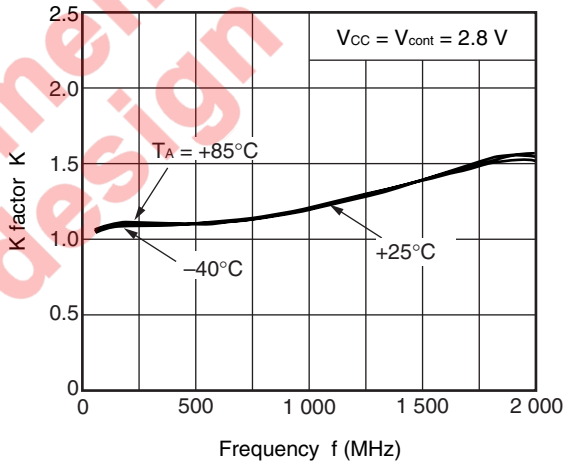

OUTPUT POWER vs. INPUT POWER

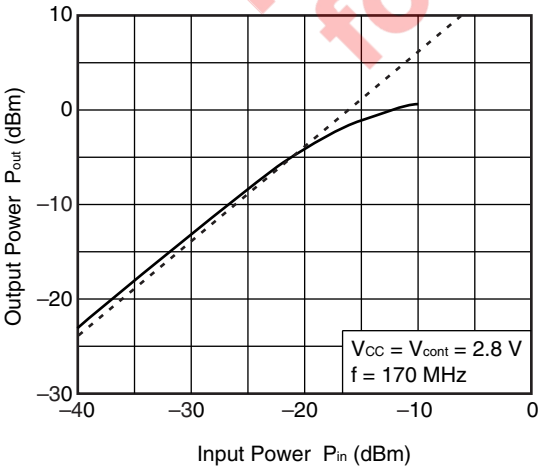

POWER GAIN, CIRCUIT CURRENT vs. INPUT POWER

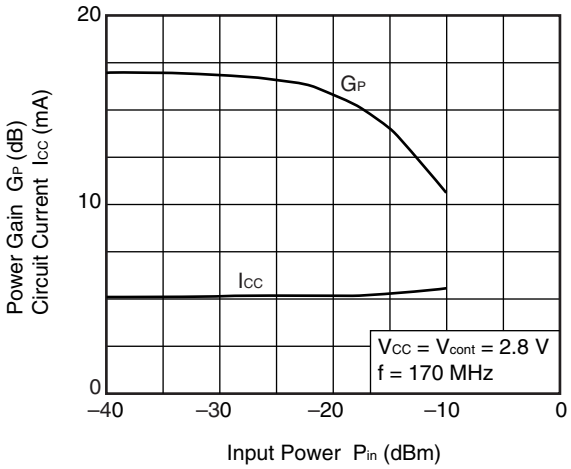


Not recommend for new design


Remark The graphs indicate nominal characteristics.

Downloaded from Arrow.com.


OUTPUT POWER vs. INPUT POWER

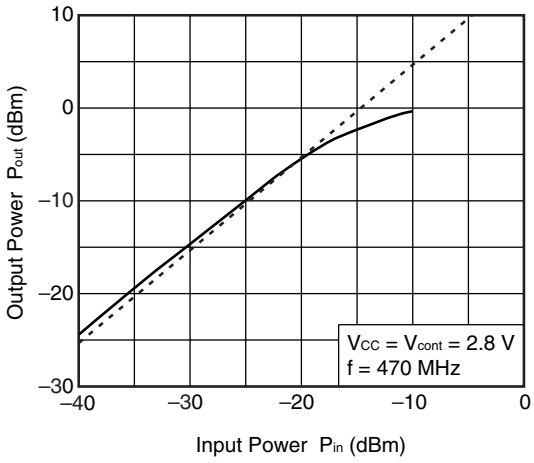


POWER GAIN, CIRCUIT CURRENT vs. INPUT POWER

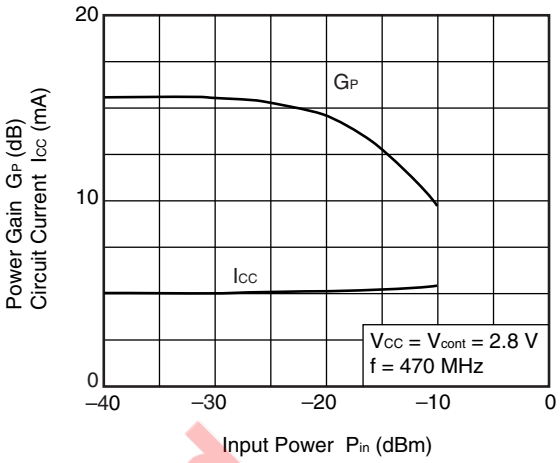


OUTPUT POWER vs. INPUT POWER

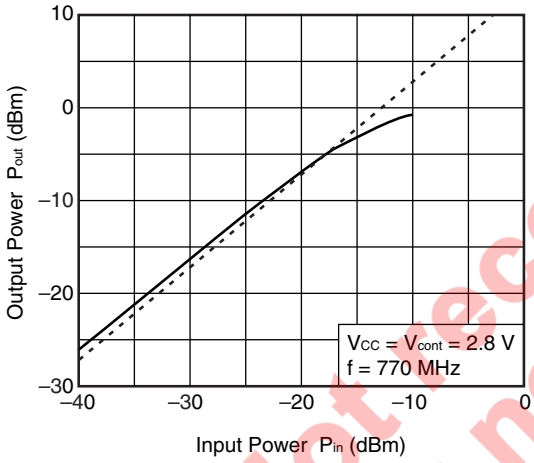


POWER GAIN, CIRCUIT CURRENT vs. INPUT POWER

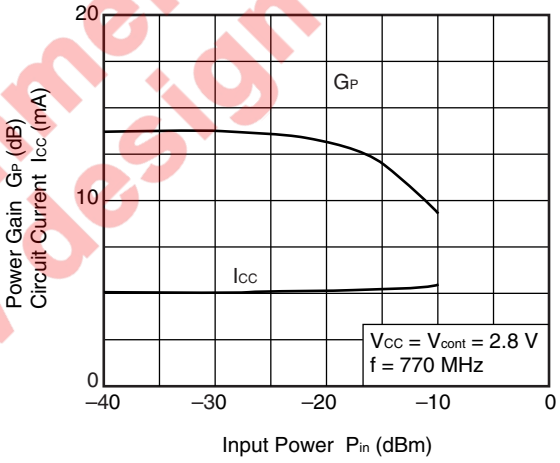

GAIN 1 dB COMPRESSION OUTPUT POWER vs. SUPPLY VOLTAGE

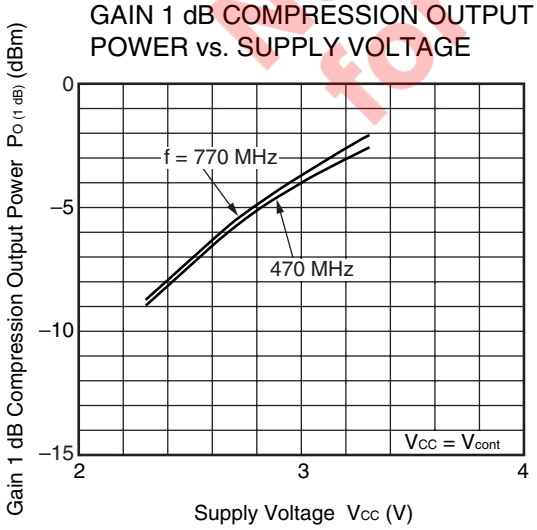

GAIN 1 dB COMPRESSION OUTPUT POWER vs. OPERATING AMBIENT TEMPERATURE

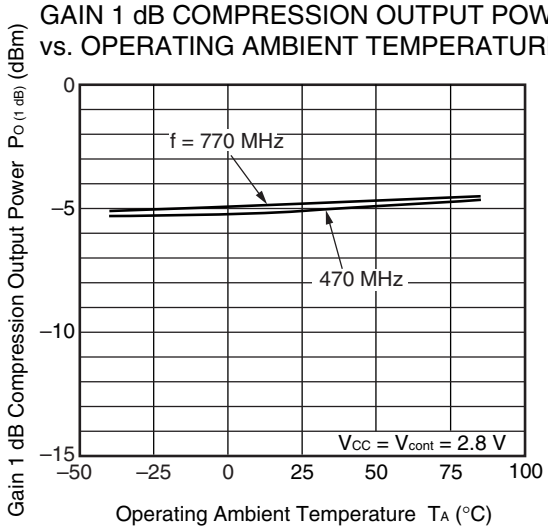


Remark The graphs indicate nominal characteristics.


Not recommend for new design

Downloaded from Arrow.com.


OUTPUT POWER, IM3 vs. INPUT POWER

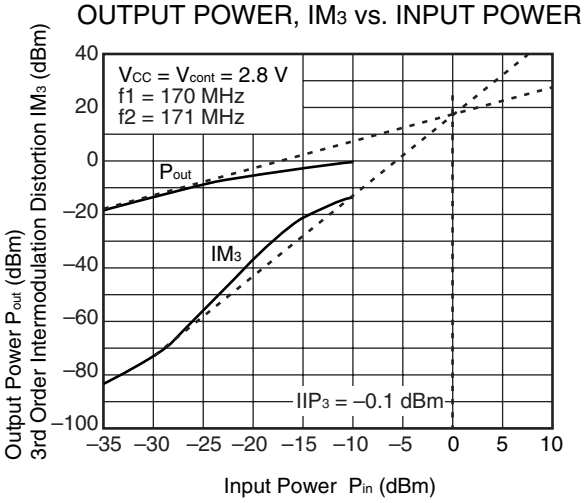


OUTPUT POWER, IM3 vs. INPUT POWER

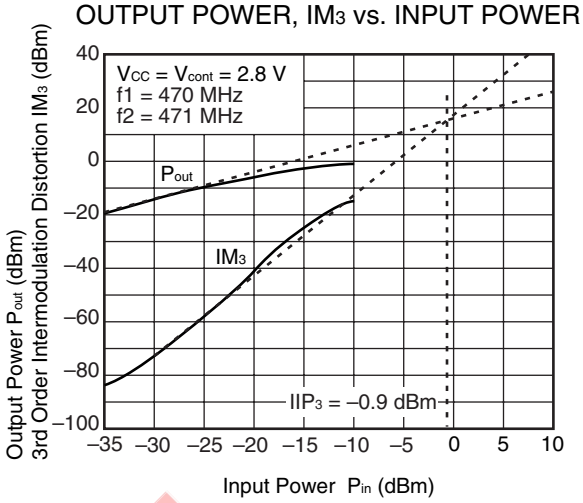


OUTPUT POWER, IM3 vs. INPUT POWER

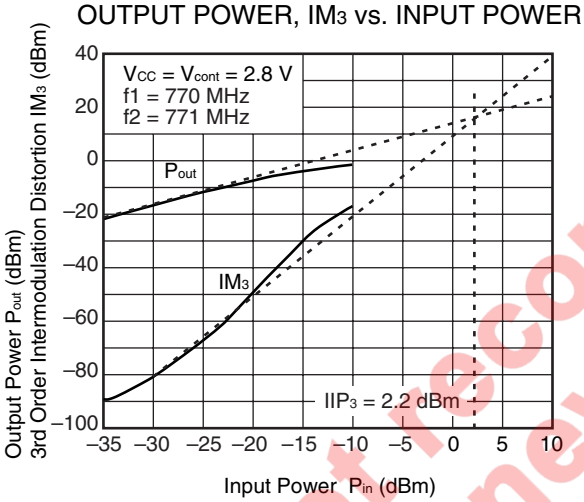

IIP3, OIP3 vs. SUPPLY VOLTAGE

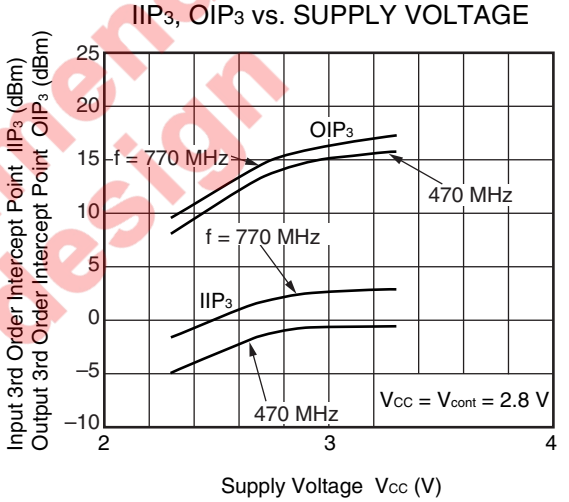

IIP3, OIP3 vs. OPERATING AMBIENT TEMPERATURE

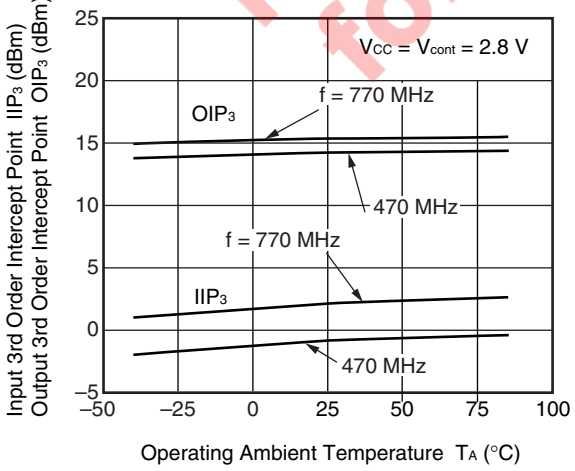


Not recommend for new design

Remark The graphs indicate nominal characteristics.


Downloaded from Arrow.com.

S-PARAMETERS 1 (LNA-mode) (T_A = +25°C, V_{CC} = V_{cont} = 2.8 V, monitored at connector on board)

S_{11}–FREQUENCY

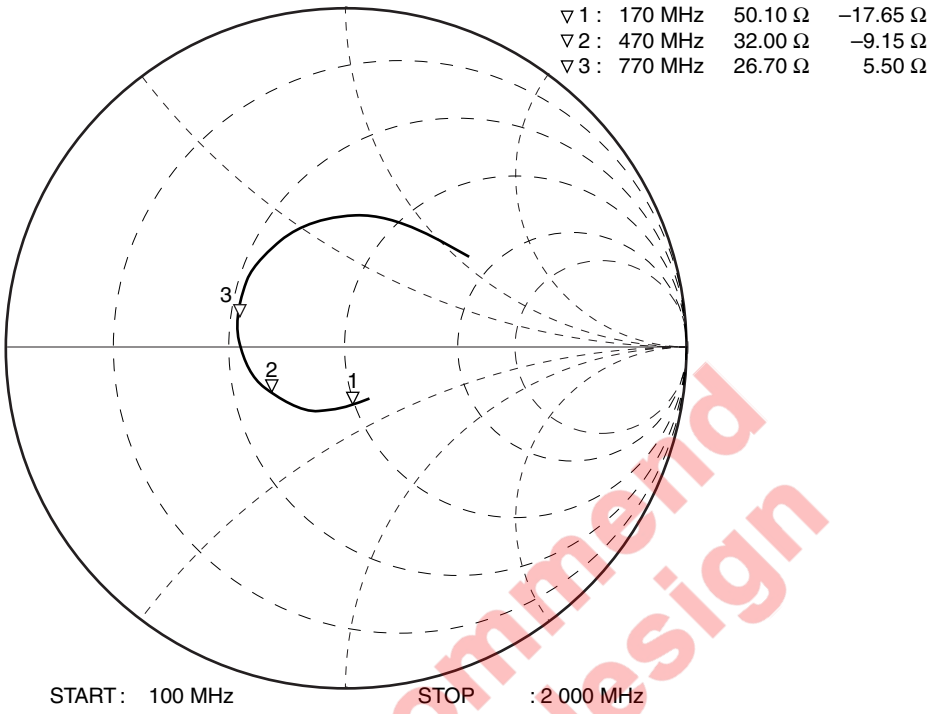

S_{22}–FREQUENCY

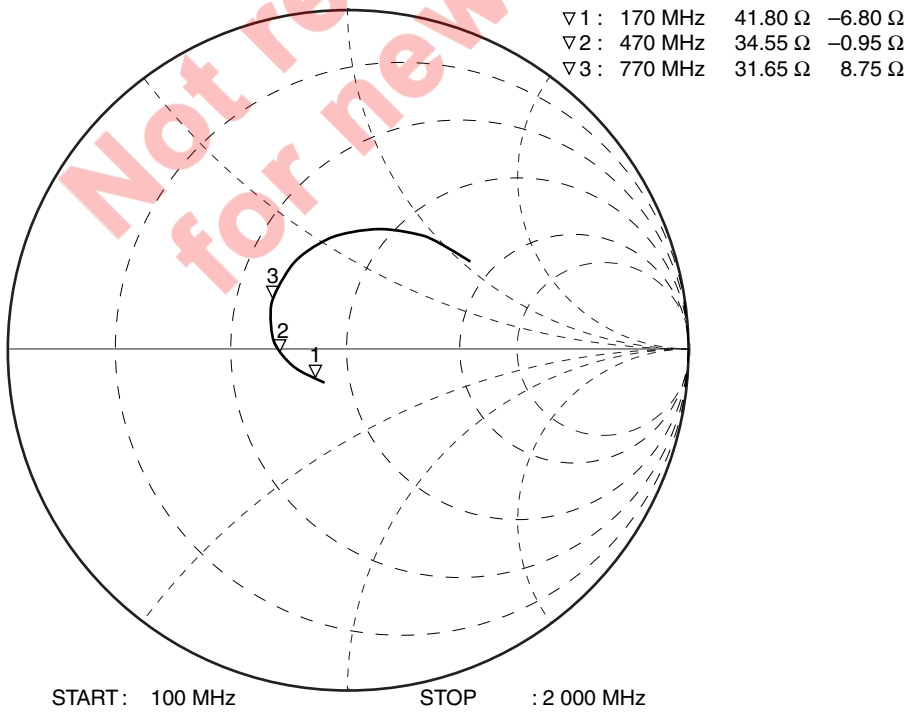


Not recommend for new design

Remark The graphs indicate nominal characteristics.


Downloaded from Arrow.com.

TYPICAL CHARACTERISTICS 3 (Bypass-mode) (T_A = +25°C, unless otherwise specified)


INSERTION LOSS vs. FREQUENCY

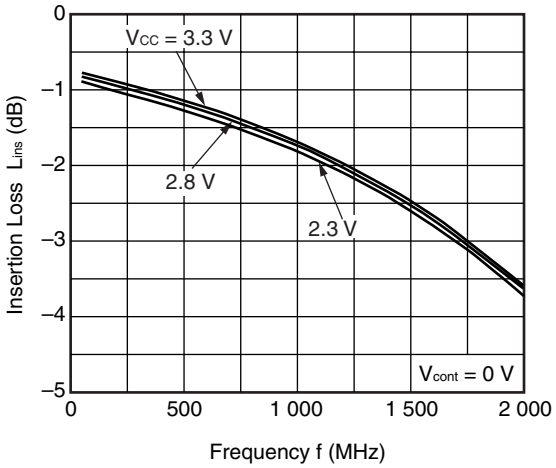


INSERTION LOSS vs. FREQUENCY

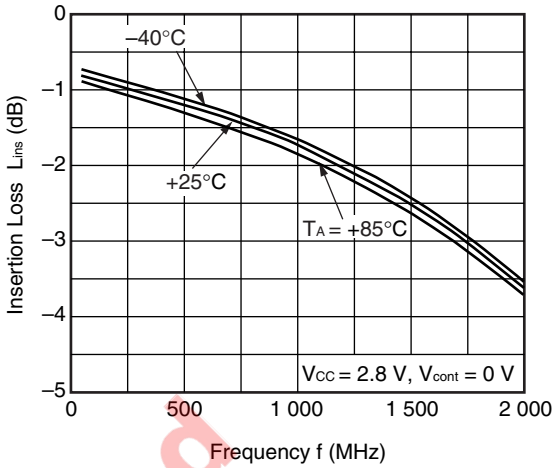


INPUT RETURN LOSS vs. FREQUENCY

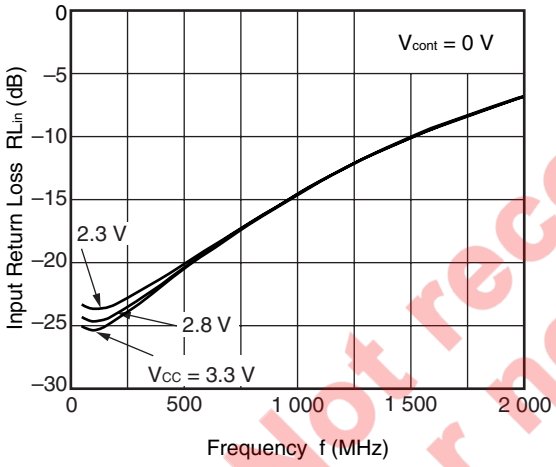


INPUT RETURN LOSS vs. FREQUENCY

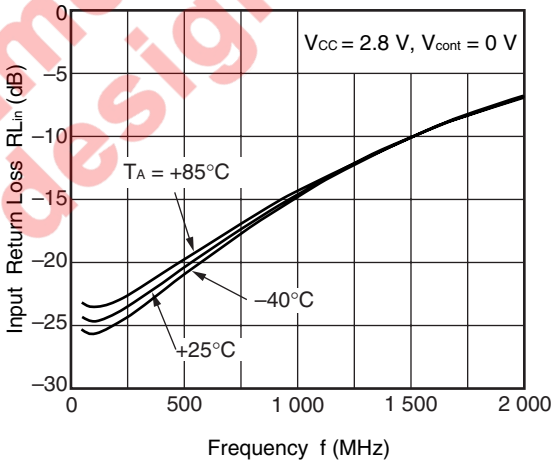

OUTPUT RETURN LOSS vs. FREQUENCY

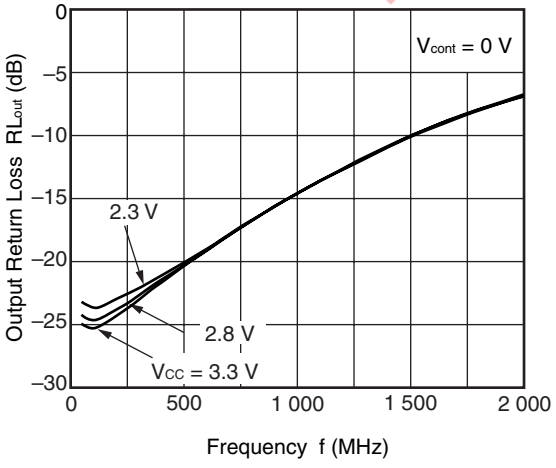

OUTPUT RETURN LOSS vs. FREQUENCY

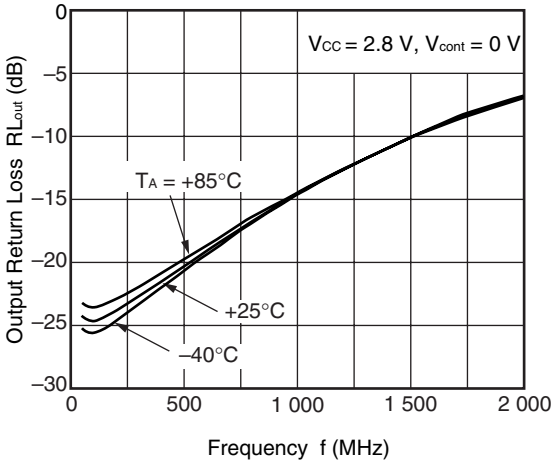


Not recommend for new design


Remark The graphs indicate nominal characteristics.

Downloaded from Arrow.com.


K FACTOR vs. FREQUENCY

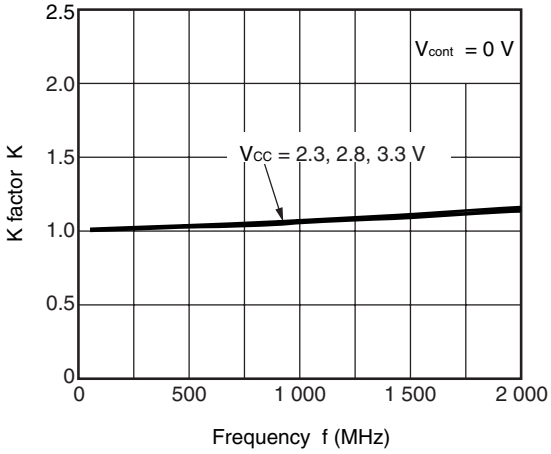


K FACTOR vs. FREQUENCY

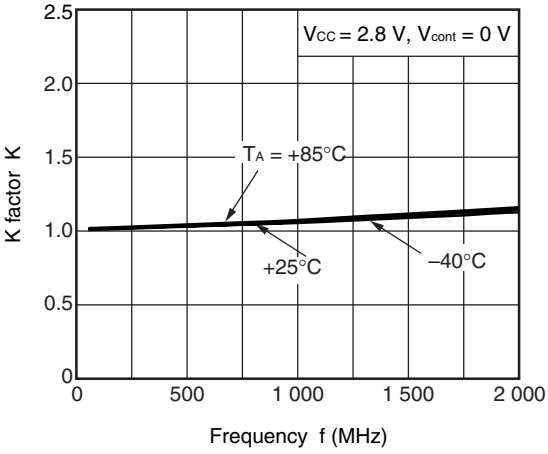


OUTPUT POWER vs. INPUT POWER

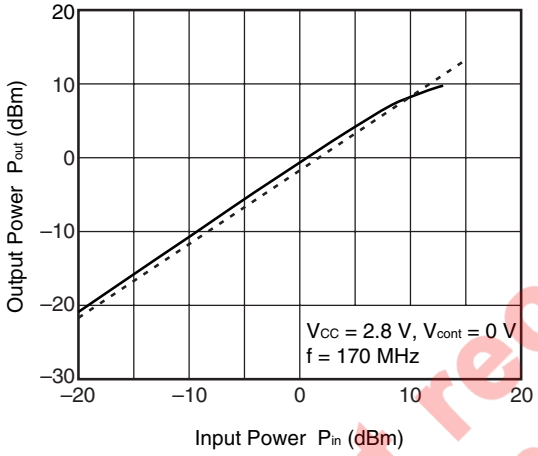


INSERTION LOSS, CIRCUIT CURRENT vs. INPUT POWER

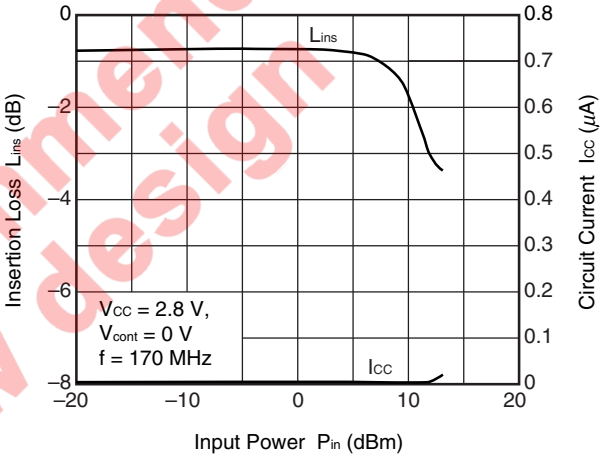

OUTPUT POWER vs. INPUT POWER

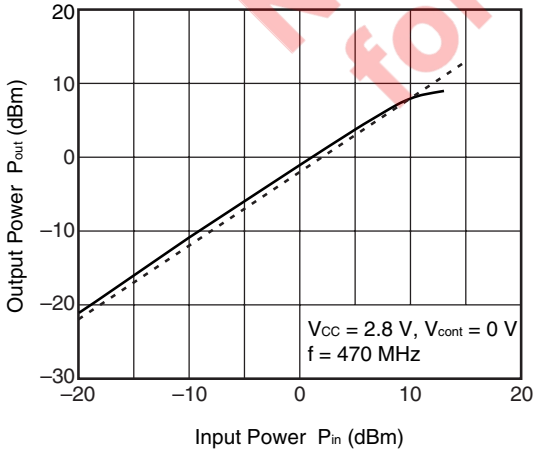

INSERTION LOSS, CIRCUIT CURRENT vs. INPUT POWER

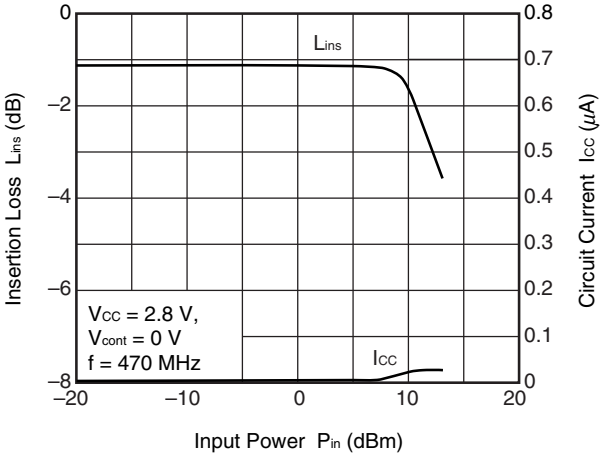


Not recommend for new design


Remark The graphs indicate nominal characteristics.

Downloaded from Arrow.com.


OUTPUT POWER vs. INPUT POWER

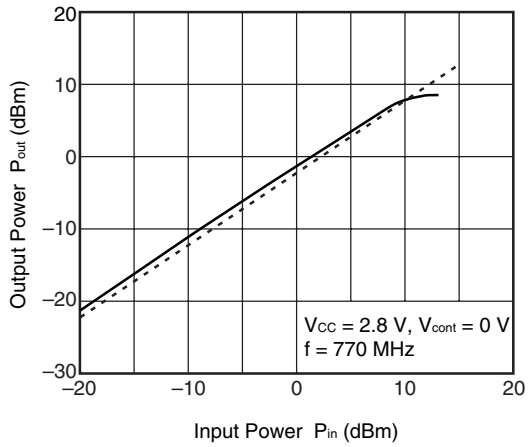


INSERTION LOSS, CIRCUIT CURRENT vs. INPUT POWER

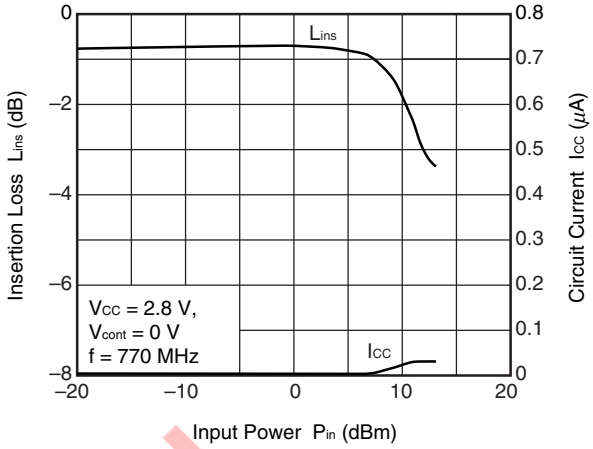


GAIN 1 dB COMPRESSION OUTPUT POWER vs. SUPPLY VOLTAGE

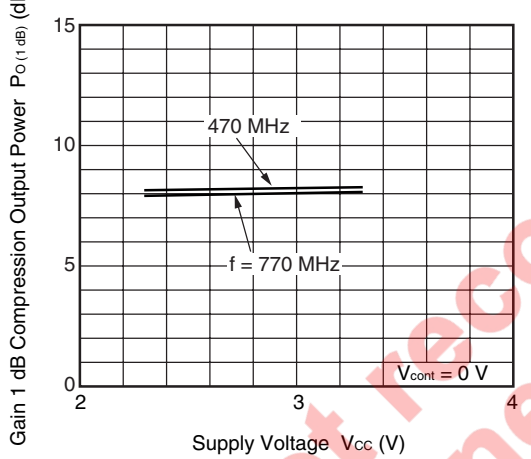


GAIN 1 dB COMPRESSION OUTPUT POWER vs. OPERATING AMBIENT TEMPERATURE

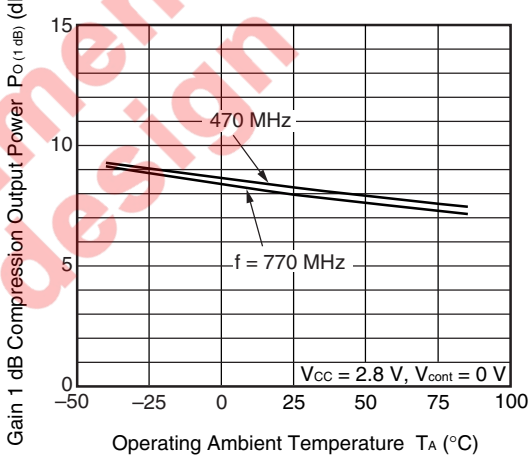

OUTPUT POWER, IM3 vs. INPUT POWER

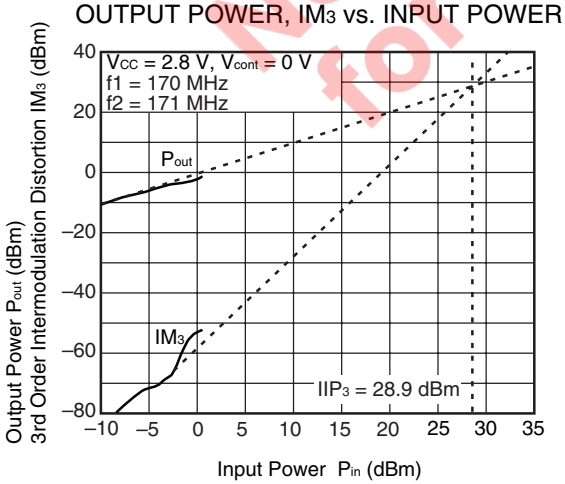

OUTPUT POWER, IM3 vs. INPUT POWER

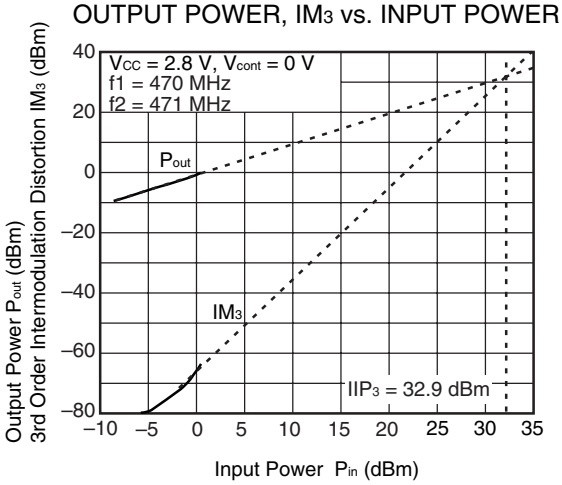


Not recommend for new design


Remark The graphs indicate nominal characteristics.

Downloaded from Arrow.com.


OUTPUT POWER, IM_3 vs. INPUT POWER

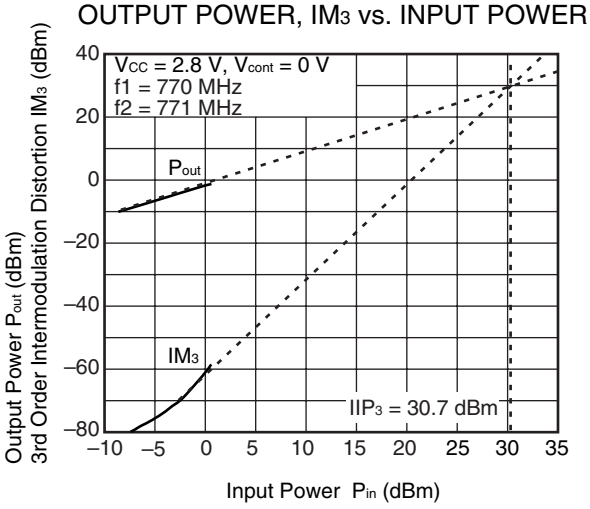

IIP_3 vs. SUPPLY VOLTAGE

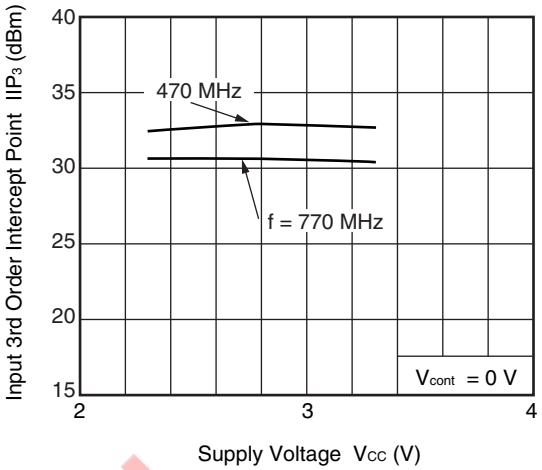

IIP_3 vs. OPERATING AMBIENT TEMPERATURE

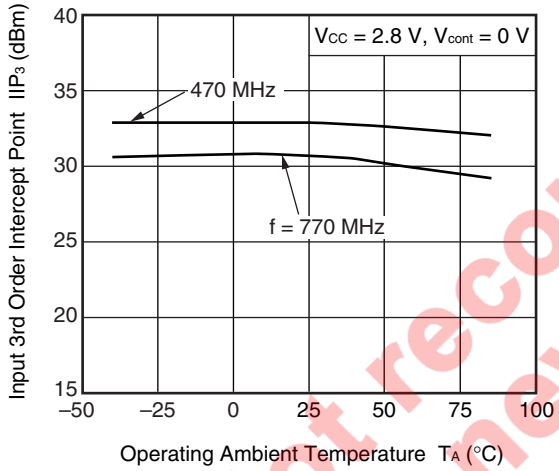

Remark The graphs indicate nominal characteristics.


Not recommend for new design

Downloaded from Arrow.com.


S-PARAMETERS 2 (Bypass-mode)

(T_A = +25°C, V_{CC} = 2.8 V, V_{cont} = 0 V, monitored at connector on board)

S_{11}–FREQUENCY

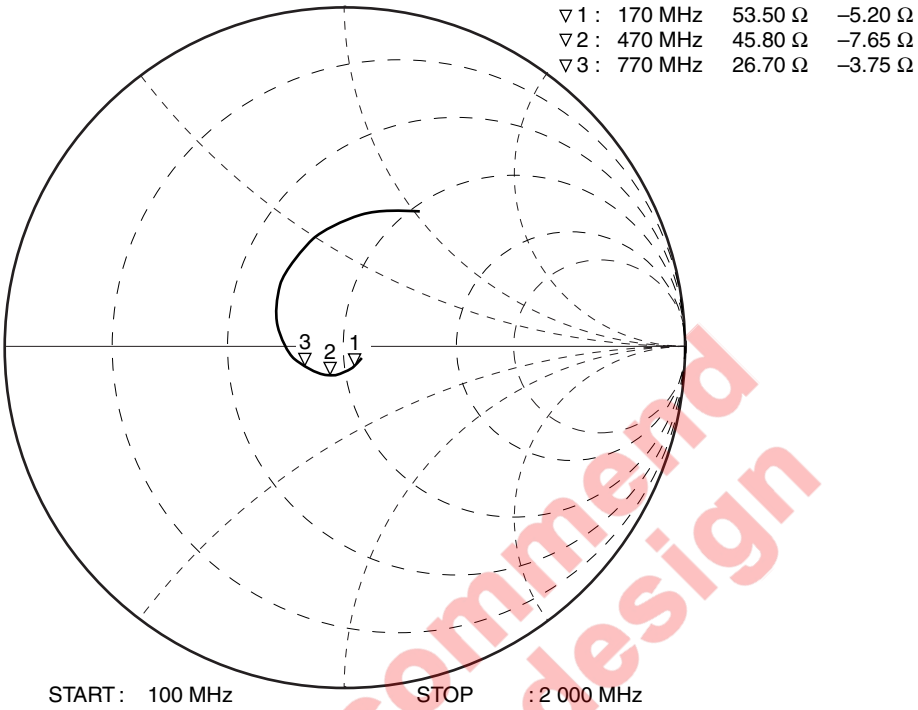

S_{22}–FREQUENCY

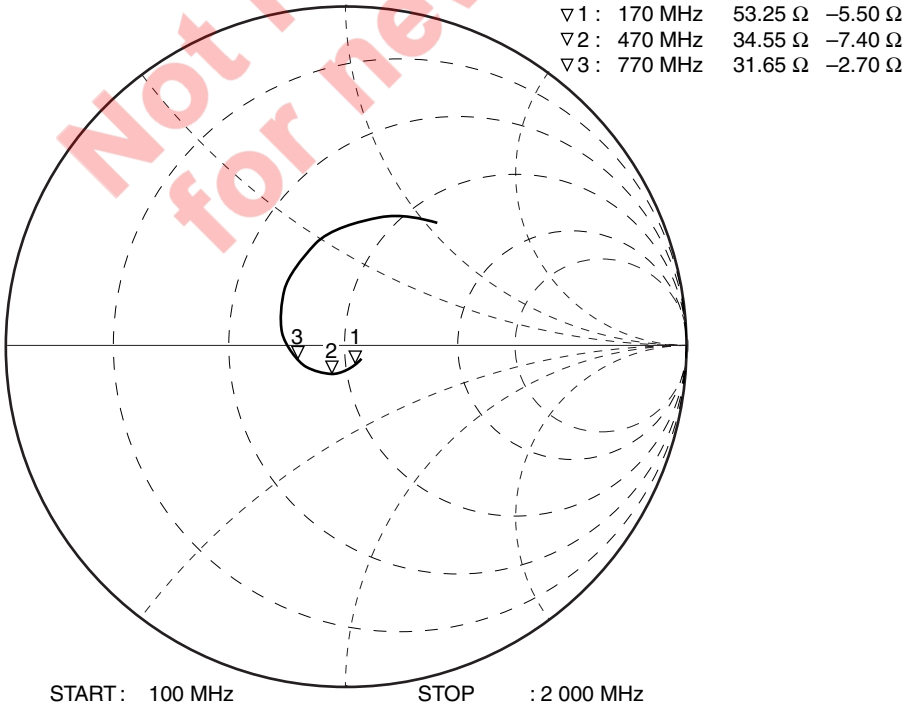


Not recommend for new design

Remark The graphs indicate nominal characteristics.

Downloaded from Arrow.com.

PACKAGE DIMENSIONS

6-PIN PLASTIC TSON (T6N) (UNIT: mm)

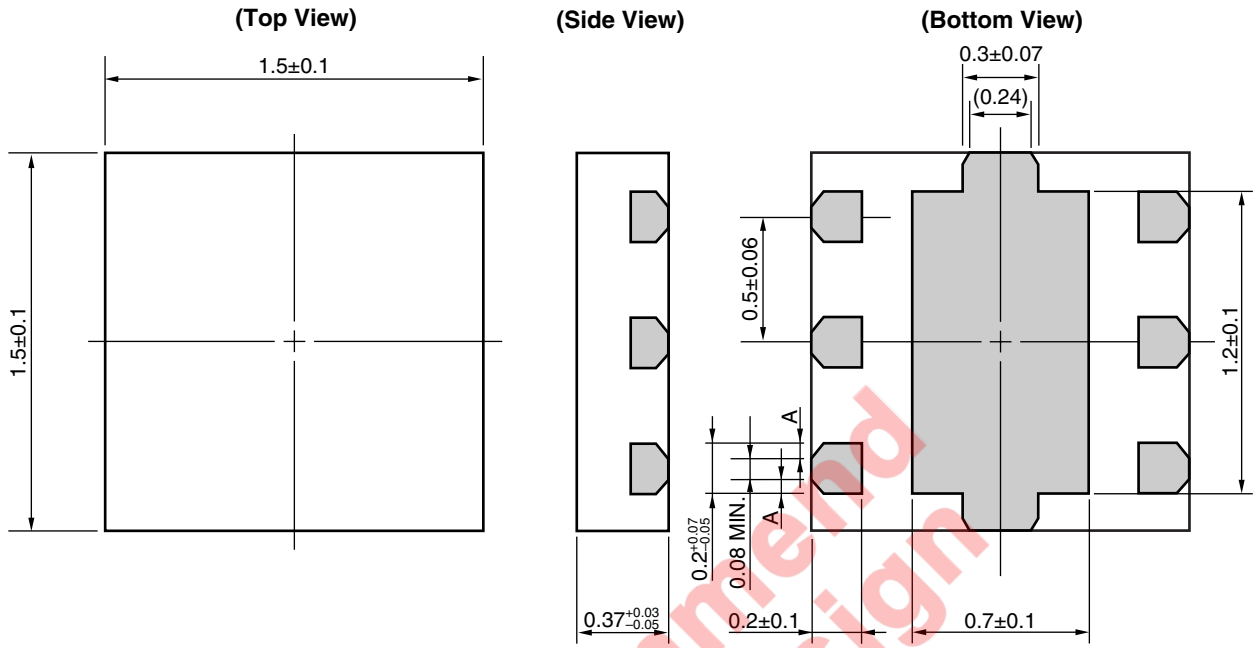

Remark A>0

( ) : Reference value

Not recommend for new design

Downloaded from Arrow.com.

NOTES ON CORRECT USE

(1) Observe precautions for handling because of electro-static sensitive devices.

(2) Form a ground pattern as widely as possible to minimize ground impedance (to prevent undesired oscillation). All the ground terminals must be connected together with wide ground pattern to decrease impedance difference.

(3) The bypass capacitor should be attached to V_{CC} line.

(4) Do not supply DC voltage to INPUT pin.

(5) Pin 5 (NC) should be connected to the ground pattern.

RECOMMENDED SOLDERING CONDITIONS

This product should be soldered and mounted under the following recommended conditions. For soldering methods and conditions other than those recommended below, contact your nearby sales office.

Soldering Method	Soldering Conditions		Condition Symbol
Infrared Reflow	Peak temperature (package surface temperature) Time at peak temperature Time at temperature of 220°C or higher Preheating time at 120 to 180°C Maximum number of reflow processes Maximum chlorine content of rosin flux (% mass)	: 260°C or below : 10 seconds or less : 60 seconds or less : 120±30 seconds : 3 times : 0.2%(Wt.) or below	IR260
Partial Heating	Peak temperature (terminal temperature) Soldering time (per side of device) Maximum chlorine content of rosin flux (% mass)	: 350°C or below : 3 seconds or less : 0.2%(Wt.) or below	HS350

Caution Do not use different soldering methods together (except for partial heating).

Not recommend for new design

Downloaded from Arrow.com.

- **The information in this document is current as of June, 2009. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC Electronics data sheets, etc., for the most up-to-date specifications of NEC Electronics products. Not all products and/or types are available in every country. Please check with an NEC Electronics sales representative for availability and additional information.**
- No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Electronics. NEC Electronics assumes no responsibility for any errors that may appear in this document.
- NEC Electronics does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC Electronics products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Electronics or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of a customer's equipment shall be done under the full responsibility of the customer. NEC Electronics assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
- While NEC Electronics endeavors to enhance the quality and safety of NEC Electronics products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. In addition, NEC Electronics products are not taken measures to prevent radioactive rays in the product design. When customers use NEC Electronics products with their products, customers shall, on their own responsibility, incorporate sufficient safety measures such as redundancy, fire-containment and anti-failure features to their products in order to avoid risks of the damages to property (including public or social property) or injury (including death) to persons, as the result of defects of NEC Electronics products.
- NEC Electronics products are classified into the following three quality grades: "Standard", "Special" and "Specific".
  The "Specific" quality grade applies only to NEC Electronics products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of an NEC Electronics product depend on its quality grade, as indicated below. Customers must check the quality grade of each NEC Electronics product before using it in a particular application.
  "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots.
  "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support).
  "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.

The quality grade of NEC Electronics products is "Standard" unless otherwise expressly specified in NEC Electronics data sheets or data books, etc. If customers wish to use NEC Electronics products in applications not intended by NEC Electronics, they must contact an NEC Electronics sales representative in advance to determine NEC Electronics' willingness to support a given application.

(Note)
(1) "NEC Electronics" as used in this statement means NEC Electronics Corporation and also includes its majority-owned subsidiaries.
(2) "NEC Electronics products" means any product developed or manufactured by or for NEC Electronics (as defined above).

M8E0904E

Not recommend for new design

Downloaded from Arrow.com.