

Gravity: I2C LCD1602 Arduino LCD Display Module

SKU: DFR0555\DF0556\DFR0557

[Home](#) > [Modules](#) > [LCDs, LEDs & Displays](#) > [LCD](#)

Contents [\[hide\]](#)

1

[Introduction](#)

2

[Specification](#)

3

[Board Overview](#)

4

[Tutorial](#)

4.1

[Requirements](#)

4.2

[Connection Diagram](#)

4.3

[Sample Code](#)

4.4

[Expected Results](#)

5

[FAQ](#)

6

[More Documents](#)

Introduction

Referring to the LCD16020, I believe that everyone is not unfamiliar the square shape, green color, a row of 2.54 pin header.... LCD1602 module is a product of the DFRobot Gravity IIC series, which has been greatly optimized for its original LCD1602 appearance. This module does not need to adjust the contrast, retain the backlight controllable function, simultaneously compatible with 3.3V and 5V voltage. The optimization of function and the appearance brings you the different experience. This kind of module has the blue screen, the green screen, the gray screen.



Gravity: I2C LCD1602 Arduino LCD Display Module



Specification

- Operating Voltage: 3.3V~5.0V
- Operating Current: ≤20mA
- Display Description: 16*2

- Communication Mode: IIC/I2C
- Backlight: Blue/Green/Gray
- Operating Temperature: -20 to +70°C
- Storage Temperature: -30 to +80°C
- Dimension: 87.0*32.0*13.0mm/3.43*1.26*0.51in

Board Overview



Num	Label	Description
1	VCC	3.3~5V
2	GND	GND
3	SCL	IIC_Clock
4	SDA	IIC_Data

Tutorial


Follow the pin description to connect the hardware, then download the sample code to UNO. After upload finished, you can see the LCD display and backlight gradient effect.

Requirements

- **Hardware**
 - [DFRduino UNO R3](#) (or similar) x 1
 - Gravity: I2C LCD1602 Arduino LCD Display Module.
 - M-M/F-M/F-F Jumper wires
- **Software**
 - Arduino IDE, [Click to Download Arduino IDE from Arduino®](#)

Connection Diagram



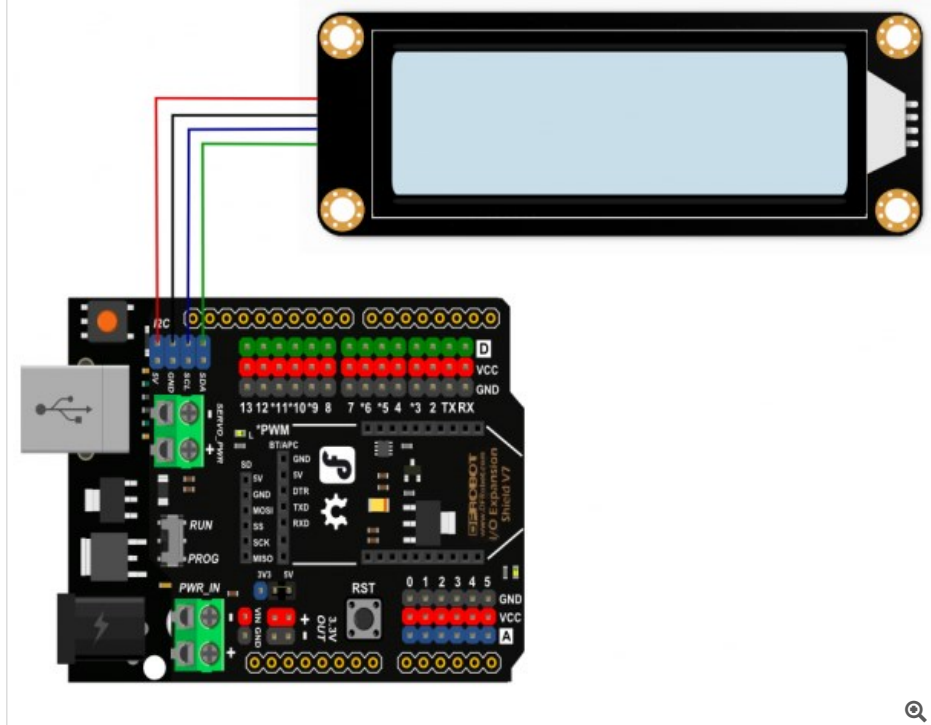

Sample Code

Download [DFRobot LCD Library](#) [How to install Libraries in Arduino IDE](#)

```
/*!
 * file Fade.ino
 * brief Fade.
 *
 * Copyright [DFRobot](http://www.dfrobot.com), 2016
 * Copyright GNU Lesser General Public License
 *
 * version V1.0
 * date 2018-1-13
 */

#include

#include "DFRobot_LCD.h"

DFRobot_LCD lcd(16,2); //16 characters and 2 lines of show

void breath(unsigned char color){
    for(int i=0; i<255; i++){
        lcd.setPWM(color, i);
        delay(5);
    }

    delay(500);
    for(int i=254; i>=0; i--){
        lcd.setPWM(color, i);
        delay(5);
    }

    delay(500);
}

void setup() {
    // initialize
    lcd.init();
    // Print a message to the LCD.
    lcd.setCursor(4, 0);
    lcd.print("DFRobot");
    lcd.setCursor(1, 1);
    lcd.print("lcd1602 module");
}

void loop() {
```

```
    breath(REG_ONLY);  
}
```

Expected Results

- In the first row, the fifth pane of the screen shows "DFRobot"
- The second row, the second pane of screen shows "lcd1602 module"
- The screen backlight shows the breathing state while the caption is displayed

FAQ

For any questions, advice or cool ideas to share, please visit the [DFRobot Forum](#).

More Documents

- [LCD1602 Datasheet](#)

-  Get [Gravity: I2C LCD1602 Arduino LCD Display Module \(Blue\)](#) from DFRobot Store or [DFRobot Distributor](#).
-  Get [Gravity: I2C LCD1602 Arduino LCD Display Module \(Green\)](#) from DFRobot Store or [DFRobot Distributor](#).
-  Get [Gravity: I2C LCD1602 Arduino LCD Display Module \(Gray\)](#) from DFRobot Store or [DFRobot Distributor](#).

[What links here](#)[Related changes](#)[Special pages](#)[Printable version](#)[Permanent link](#)[Page information](#)

This page was last modified on 22 May 2018, at 15:53.

Content is available under [GNU Free Documentation License 1.3 or later](#) unless otherwise noted.

[Privacy policy](#)[About DFRobot Electronic Product Wiki and Tutorial: Arduino and Robot Wiki-DFRobot.com](#)[Disclaimers](#)