


Customer Information Sheet


IF IN DOUBT - ASK	©	NOT TO SCALE	THIRD ANGLE PROJECTION	ALL DIMENSIONS IN mm

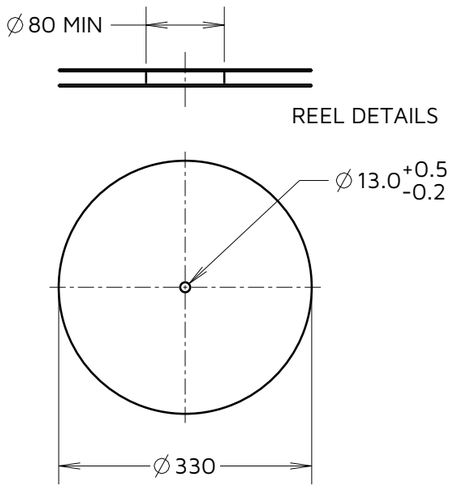


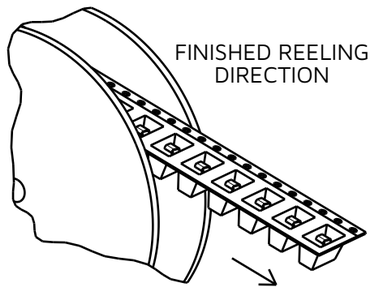


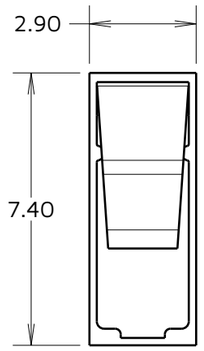


RECOMMENDED PCB LAYOUT

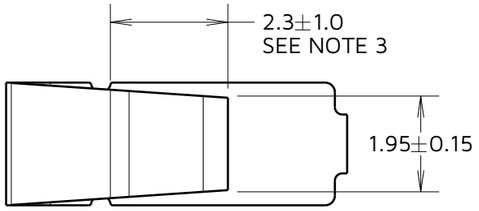

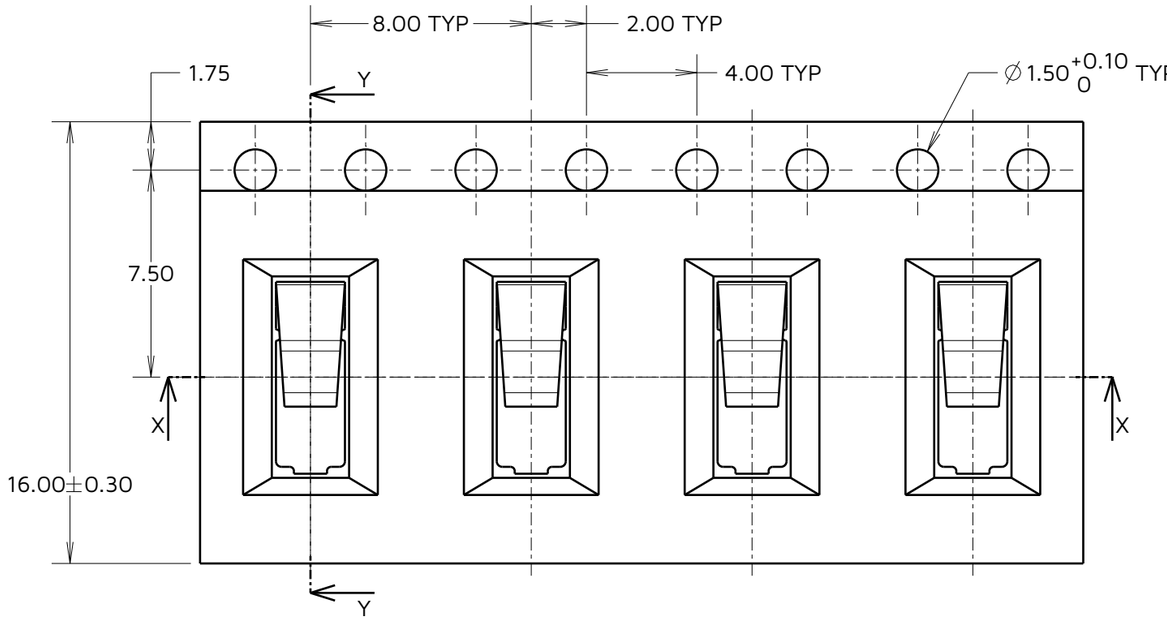


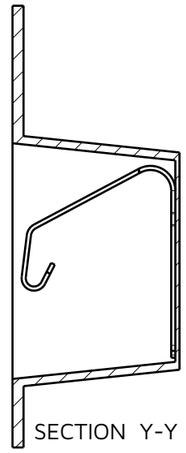


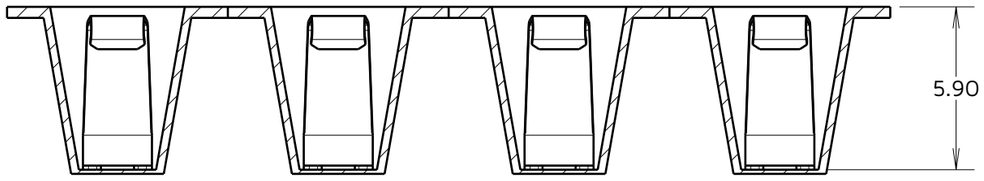

SECTION X-X

CROPPED COMPONENT DIMENSIONS

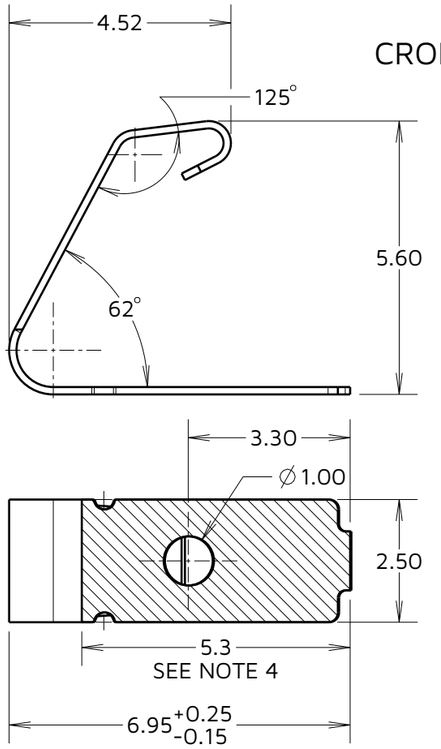

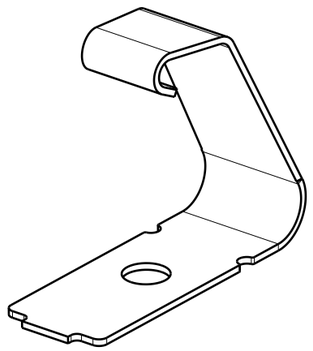

COMPONENT SPECIFICATION
MATERIAL:
42 = TITANIUM COPPER ALLOY, 0.15mm THICK
46 = BERYLLIUM COPPER ALLOY, 0.15mm THICK
FINISH:
42 =100% TIN ON FOOT AREA, GOLD FLASH ON CONTACT, NICKEL ALL OVER.
46 =100% TIN OVER NICKEL ALL OVER.

NOTES:
1. QUANTITY OF COMPONENTS PER REEL:
   S7061-42R = 1500,
   S7061-46R = 1200.
2. THIS PRODUCT IS TAPED AND REELED IN GENERAL ACCORDANCE WITH EIA-481-2 (ELECTRONICS INDUSTRIES ASSOCIATION).
3. GOLD PLATING AREA ON S7061-42R.
4. TIN PLATING AREA ON S7061-42R.

ORDER CODE:
S7061-XXR
FINISH:
42 - SELECTIVE GOLD & TIN OVER NICKEL
46 - TIN OVER NICKEL

MJ	13	19.11.24	35078
NAME	ISS.	DATE	CN/CO
APPROVED:	M. JELLEY		
CHECKED:	A. BOXALL		
DRAWN:	S.BENNETT		

HARWiN
www.harwin.com

TOLERANCES
X. = ±1mm
X.X = ±0.50mm
X.XX = ±0.20mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

MATERIAL & FINISH:
SEE ABOVE

TITLE:
SMT SHIELD FINGER IN TAPE AND REEL

DRAWING NUMBER:
S7061-XXR

SHT 3 OF 3

Downloaded from Arrow.com.