
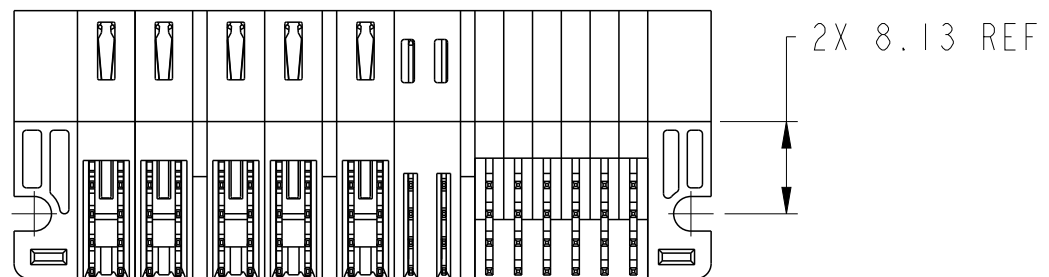
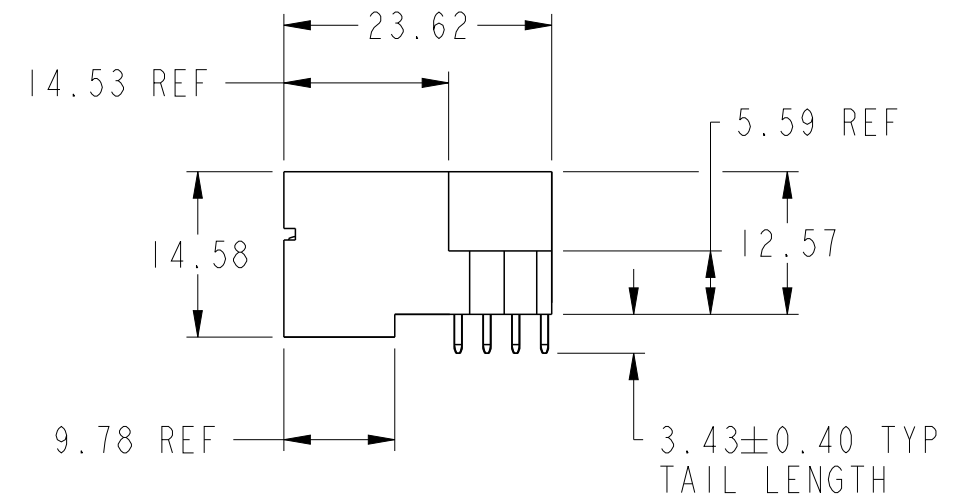
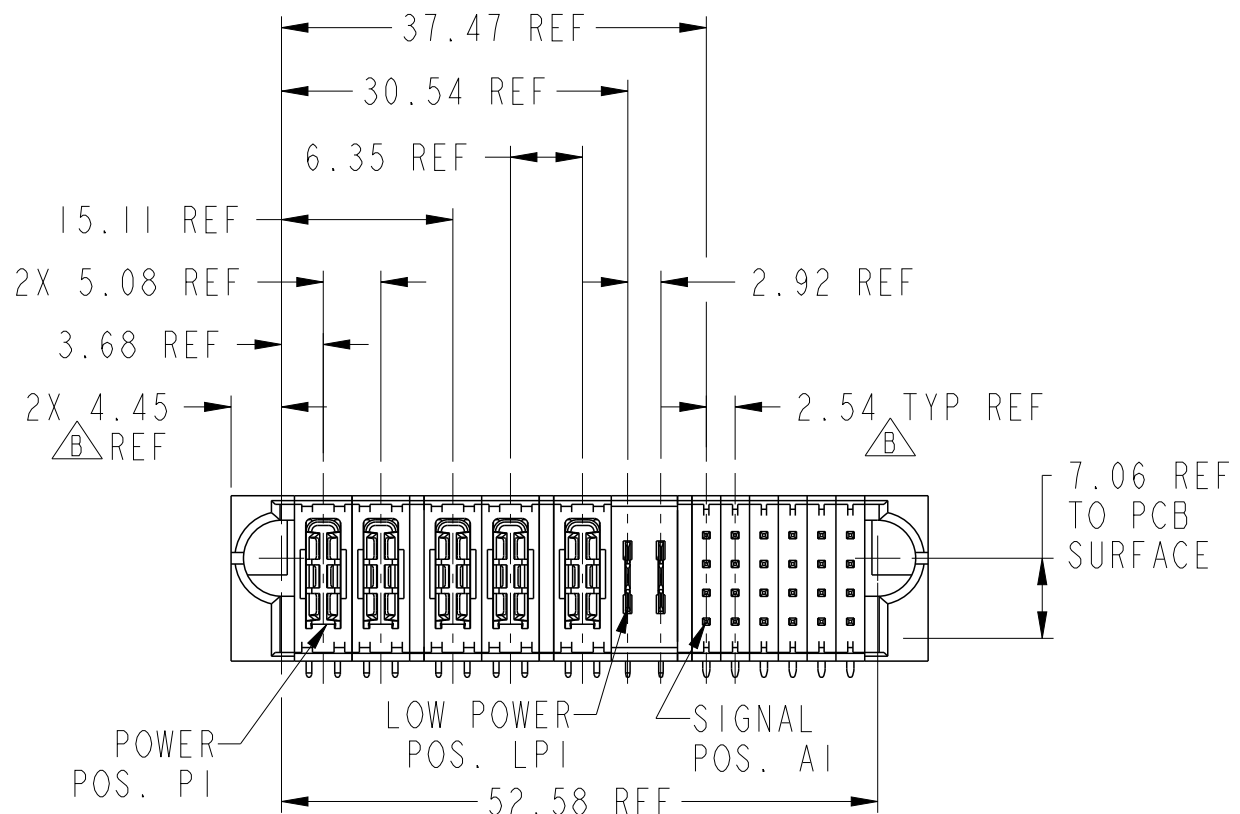


PART NUMBER 10106262-5206001LF

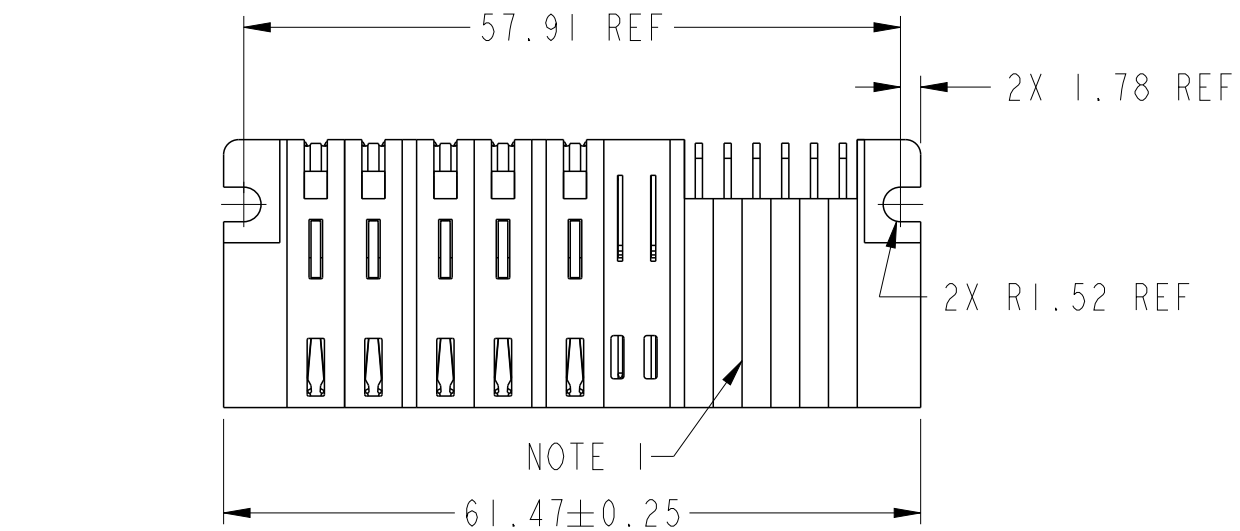

spec ref		*	
tolerance std ASME Y14.5		TOLERANCES UNLESS OTHERWISE SPECIFIED	
surface ✓ ASME Y14.5	linear	0.X	±0.5
		0.XX	±0.25
		0.XXX	±0.10
	angular	0°	±2°

dr	Peng-Bing Fu	2012/02/26	<div>projection</div> <div></div>	<div>MM</div> <div></div>	size	A3	scale	3:2	
eng	Peng-Bing Fu	2012/11/13			ecn no	ELX-DG-013147-1			
chr	Shao-Qi Kuang	2012/11/13							
appr	Pei-Ming Zheng	2012/11/13	product family		PwrBlade+		rel level	Released	
<div></div>			title		5HP + 2LP + 24S		dwg no		rev
			RA SOLDER HEADER		10106262-5206001				B
www.fci.com			cat. no.		Product - Customer Drw			sheet 1 of 3	

A

B

C

D


A

B

C




D

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE P/N CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15±0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02±0.07MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
- 9) A  SYMBOL WILL BE NEXT TO ANY DIMENSION,VIEW,OR NOTE WHICH HAS BEEN
MODIFIED WITH THE CURRENT DRAWING REVISION.



Copyright FCI.

dr	Peng-Bing Fu	2012/02/26	<div>projection</div> <div></div>	<div>MM</div> <div></div>	size	scale
eng	Peng-Bing Fu	2012/11/13			A3	3:2
chr	Shao-Qi Kuang	2012/11/13			ecn no	ELX-DG-013147-1
appr	Pei-Ming Zheng	2012/11/13	product family	PwrBlade+	rel level	Released
<div></div>		5HP + 2LP + 24S			dwg no	rev
www.fci.com		RA SOLDER HEADER			10106262-5206001	B
cat. no.			Product - Customer Drw			sheet 3 of 3