

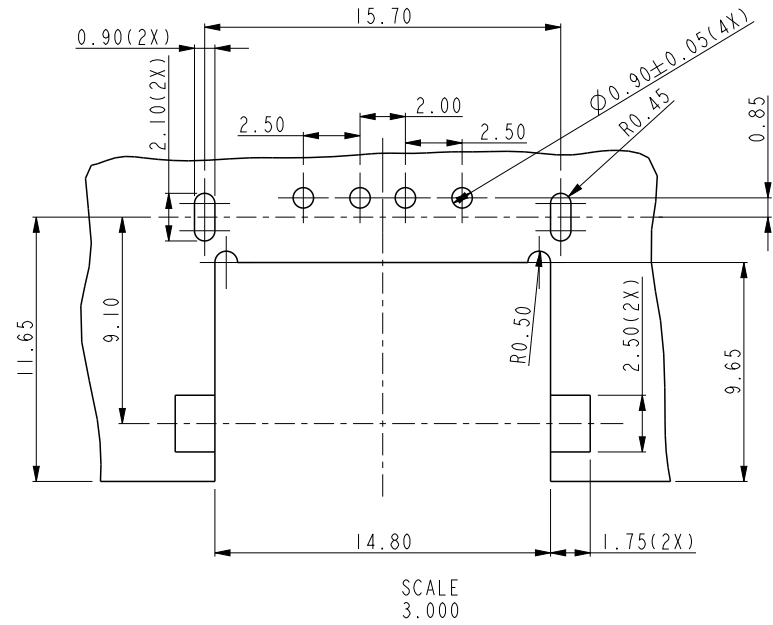
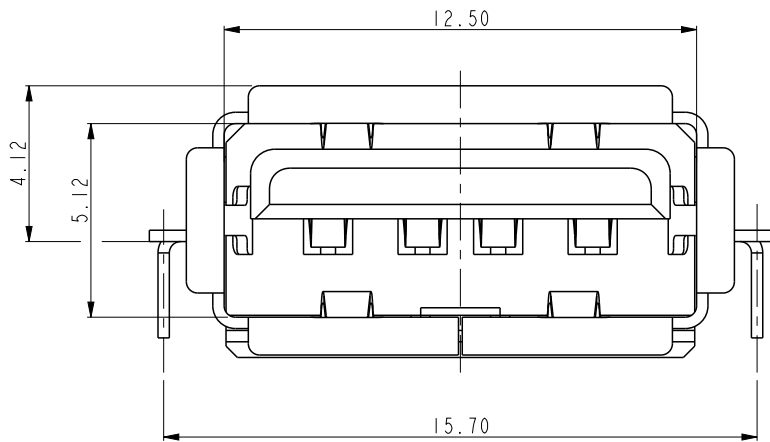


PART NUMBER
SEE NOTE 6

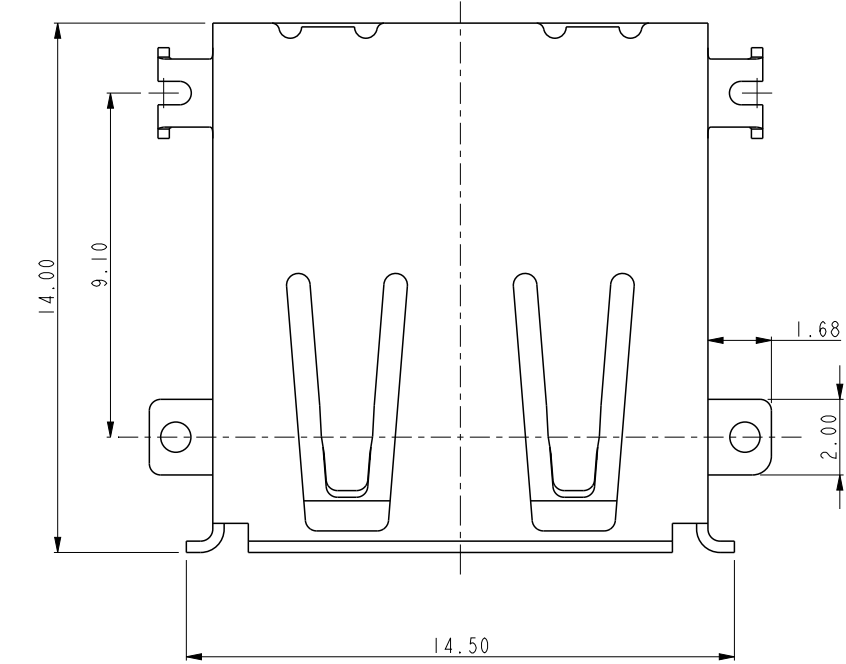

SCALE
3.000
RECOMMENDED PCB LAYOUT (THICKNESS=1.2MM)
TOLERANCE ±0.05

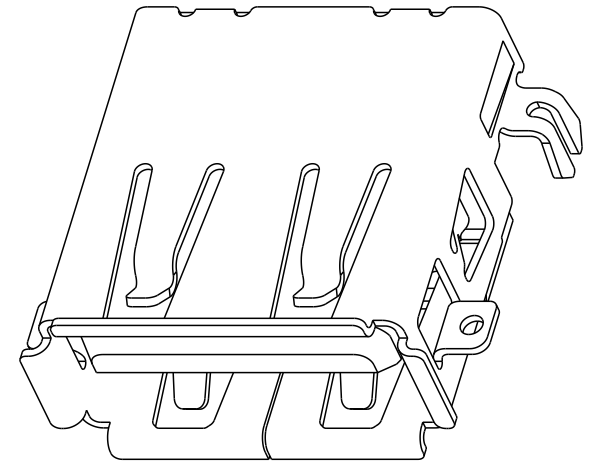

- NOTES:
- MATERIAL:
HOUSING: HIGH TEMPERATURE THERMAL PLASTIC,
UL94V-0, BLACK.
TERMINAL: COPPER ALLOY.
SHELL: COPPER ALLOY.
 - FINISH:
TERMINAL:
30u" GXT/Au ON CONTACT AREA.
100u" MATTE TIN ON SOLDER TAIL.
UNDER PLATING: 50u" Ni MIN. OVER ALL.
SHELL:
MATTE TIN OVER 50u" Ni OVER ALL.
100u" MATTE TIN MIN ON SOLDER TAIL OVER 50u" Ni.
 - THIS PRODUCT WILL WITHSTAND EXPOSURE TO 260°C PEAK
TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRA-RED
OR VAPOR PHASE REFLOW OVEN;
 - FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES AND
OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
 - THE PRODUCT CAN BE USED FOR PIP PROCESS.
 - PART NUMBER DEFINITION:
10126196 - X 0X X LF
- LEAD FREE
PACKING TYPE
B: TUBE
R: TAPE & REEL
01: DIM A=2.54
02: DIM A=2.00
PLATING CODE
1: 30u" GXT ON CONTACT AREA
2: 30u" Au ON CONTACT AREA

spec ref	-	dr	John Han	2013/07/17	projection	MM	size	A3	scale	1.000
tolerance std	ISO 406 ISO 1101	eng	Laurence Zang	2017/11/20	chr	-	ecn no	ELX-N-28523-1	rel level	Released
surface	ISO 1302	appr	Tim Yao	2017/11/22	product family	-	rel level	Released	rev	C
linear	0.X ±0.3 0.XX ±0.20 0.XXX ±0.10	Amphenol FCi	USB 2.0 A TYPE RECEPTACLE	dwg no	10126196	cat. no.	-	Product - Customer Drw	sheet 1 of 1	
angular	0° ±2°	www.fci.com	OFFSET TYPE							