

TBR2100

GSM/3G Dipole Antenna

Features

- ◆ Groundplane Independent
- ◆ Covers 900/1800 and 2100 MHz bands
- ◆ Locks in three positions for flexibility
- ◆ Ideal for fixed and mobile terminals

Specifications

Radiating element	1/2 Wave Element
Frequency range	900/1800/2100 MHz
Peak gain	2.0 dBi
Polarisation	Linear
Return loss	-7 dB
Power rating	10W
Connector	SMA-Male RA
Dimensions	138 x 13mm

Popular Ordering Options

FTBR35107-SM-KR	TBR2100 with SMA-Male connector
FTBR35107-TNM-KR	TBR2100 with TNC-Male connector

www.ead-ltd.com

Specifications subject to change without notice.


5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK

Tel: +44 (0)1280 825044
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com


EAD
embedded antenna design ltd

TBR2100| Tri Band GSM/3G Dipole Antenna

Return Loss

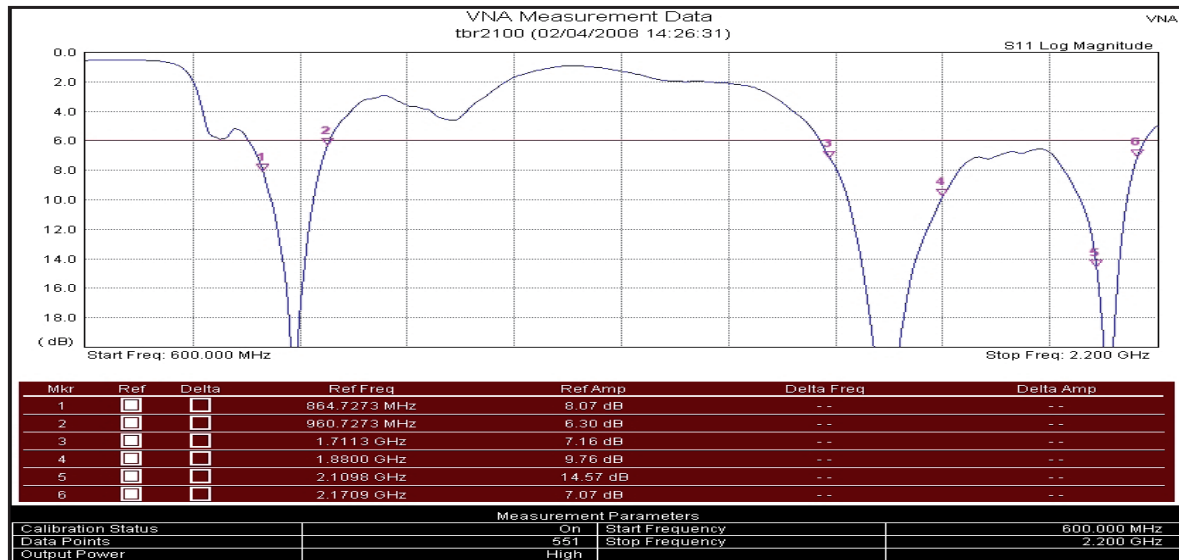

Outline Drawing

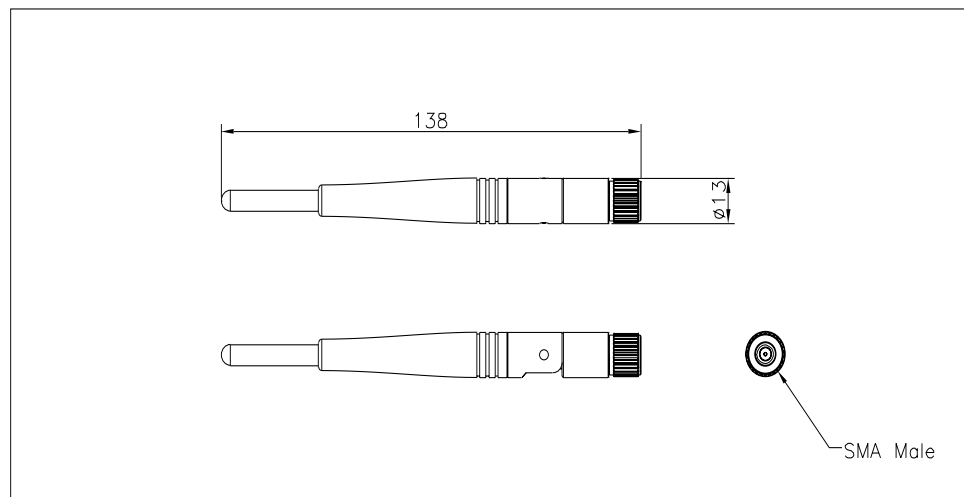

Specifications subject to change without notice.

5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK

Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com

EAD
embedded antenna design ltd