



**Mallory Sonalert Products, Inc.**

Part #:

**MSW5GL**

## Sales Outline Drawing

Revision:

**C**

### Specifications:

### cUL Recognized to IEC60601-1-8 AMD2:2020


Sound Level Category:	Loud
Mode of Operation:	General Auditory Pointer - Low Priority Low Priority Alarm repeating every 20 sec
Voltage Rating:	3.3 - 5.5 VDC
Loudness @ 10cm:	85 to 95 dB(A) Typ.
Average Current Draw:	<200mA Typ
Ipk Current*:	400mA
Housing Material:	Valox (UL94V-0), Color: Black
Storage Temperature:	-30° to +60° C
Operating Temperature:	-30° to +55° C
Weight Typical:	6.0g
Options:	Please contact factory.

**Dimensions:** Inches (mm)

### cUL Recognized

PATENT NUMBER: 7880593

### ROHS Compliant

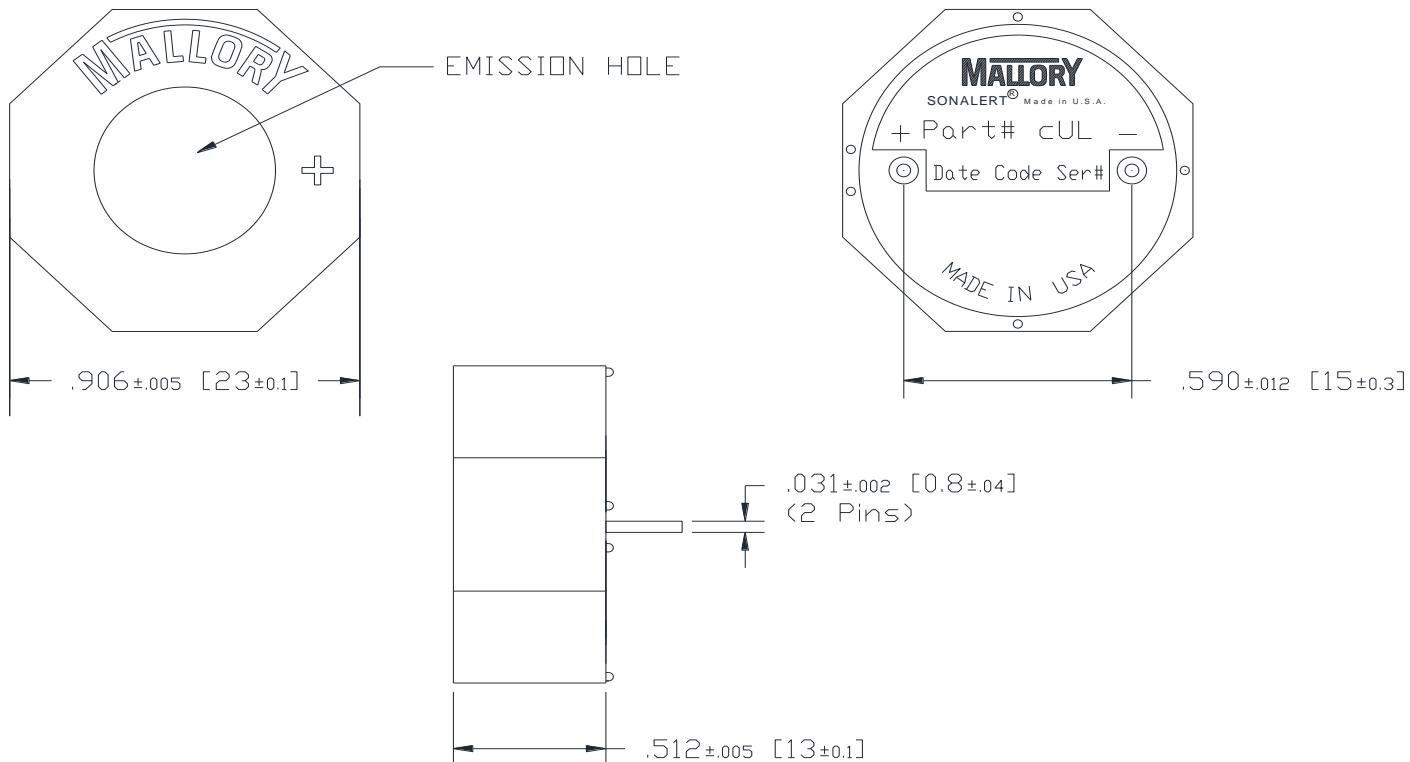

NOTE A:

TERMINALS - .031" DIA. NICKEL/TIN COATED BRASS.

NOTE B:

MOUNTING- INSERT INTO PRINTED CIRCUIT BOARD AND HAND OR MACHINE SOLDER. UNITS ARE SUITABLE FOR WAVE SOLDERING. BOARDS ARE NOT SUITABLE FOR WASH. RECOMMENDED MAXIMUM TEMPERATURE AND TIME DURATION FOR WAVE SOLDERING IS +270°C AND 3 SECONDS RESPECTIVELY.

\*Ipk = Instantaneous Peak

4411 South High School Road, Indianapolis, Indiana 46241 U.S.A. · Phone: (317) 612-1000 Fax: (317) 612-1010

[www.mspindy.com](http://www.mspindy.com)