



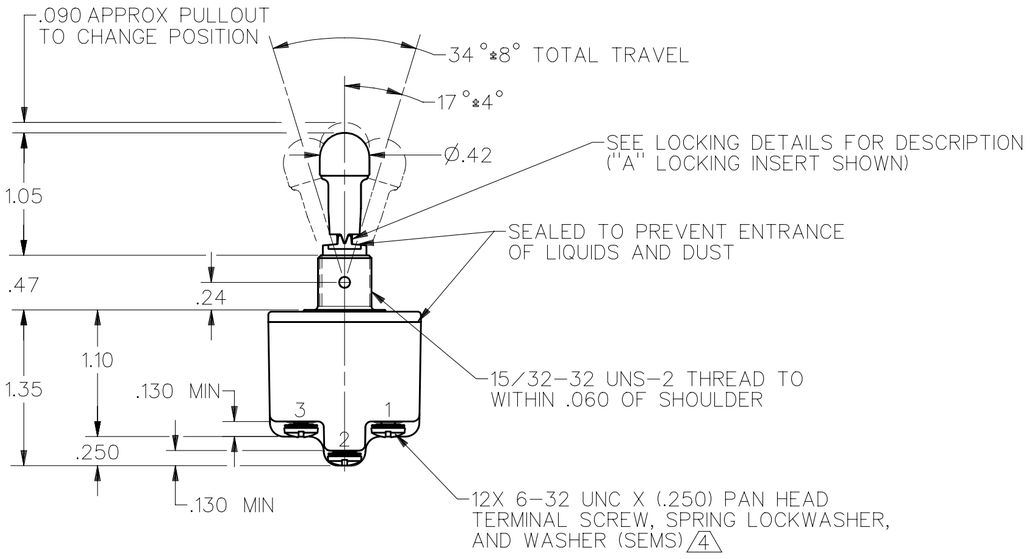


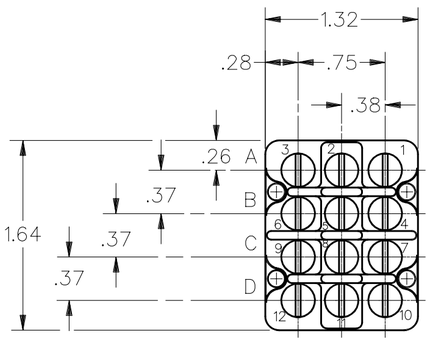


M 4TL11 SERIES CHART 2

CATALOG LISTING 6	AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERED DETAILS	CIRCUIT MADE WITH TOGGLE MEVER IN			CURRENT CAPACITY (AMPS)							
		KEYWAY SIDE	CENTER	OPPOSITE KEYWAY	RESISITIVE LOAD DC VOLTS 30	115	250	AC VOLTS 115	230	LAMP LOAD 30	115 VAC	INDUCTIVE LOAD 30 VDC	115 VAC
4TL11-1	A,B,D,E,F,G,H,J,K,L,M,N,P	ON	OFF	ON									
4TL11-2	D, F, G	OFF	NONE	ON									
4TL11-3	D, F, G	ON	NONE	ON	20	.75	.5	15	6	5	4	12	15
4TL11-21	E, F, K, M	NONE	OFF	ON									
4TL11-31	E, F, K, M, N	NONE	ON	ON									
4TL11-4	F	MOM OFF	NONE	ON									
4TL11-5	E, F, K, L, M, N	MOM ON	OFF	ON									
4TL11-6	F	MOM ON	NONE	OFF									
4TL11-7	E, L, N	MOM ON	OFF	MOM ON	18	.75	.5	11	6	4	2	10	8
4TL11-8	F	MOM ON	NONE	ON									
4TL11-51	E, N	NONE	ON	MOM ON									
4TL11-61	E	MOM ON	OFF	NONE									
4TL11-82	G	ON	NONE	MOM ON									


"A" 3 LOCKED IN THREE POSITIONS	"B" 3 LOCKED IN CENTER AND EXTREME POS. (KEYWAY SIDE)	"D" 3 LOCKED OUT OF CENTER POSITION	"E" 3 LOCKED IN CENTER POSITION	"F" 3 LOCKED IN EXTREME POS. (OPP. KEYWAY)	"G" 3 LOCKED IN EXTREME POS. (KEYWAY SIDE)
"H" 3 LOCKED OUT OF CENTER AND EXTREME POS. (KEYWAY SIDE)	"J" 3 LOCKED OUT OF CENTER AND EXTREME POS. (OPP. KEYWAY)	"K" 3 LOCKED IN CENTER AND EXTREME POS. (OPP. KEYWAY)	"L" 3 LOCKED OUT OF EXTREME POS. (KEYWAY SIDE)	"M" 3 LOCKED OUT OF AND INTO EXTREME POS. (OPP. KEYWAY)	"N" 3 LOCKED OUT OF EXTREME POS. (OPP. KEYWAY)
"P" 3 LOCKED OUT OF AND INTO EXTREME POS. (KEYWAY SIDE)					



LOCKWASHER 4



LOCKING RING 4



2X HEX NUT 4

NOTES
1 – SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
2 – MICRO SWITCH CATALOG LISTING, TERMINAL, POLE AND CIRCUIT DESIGNATION MARKED ON SIDE OF SWITCH
3 KEYWAY SHOWN ON LEFT SIDE
4 FURNISHED UNASSEMBLED
5 – FOR TERMINAL COVER SEE MICRO SWITCH CATALOG LISTING 5PA9
6 SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE TOGGLE LOCKING. SEE CHART FOR AVAILABLE LOCKING COMBINATIONS
7 FROM BOTTOM OF KEYWAY TO MAJOR Ø OF 15/32 THREAD

DRAWING NUMBER 4TL11 SERIES CHART 2 | PAGE 1 OF 1 | RELEASE NO. CO-13170 | REPLACES
ISSUE M 15
REVISIONS
A PR22860 TSM 6 AUG 97
DRAWN TSM 6 AUG 97 | CHECK | CHECK | CHECK | DDM/CAD

MASTER REDUCED
ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH a Honeywell Division
FED. MFG. CODE 91929

SWITCH – TOGGLE

CATALOG LISTING
4TL11 SERIES
CHART 2

THIRD ANGLE PROJECTION
SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACES	(.00)	±.015
THREE PLACES	(.000)	±.005
ANGLES		±

WEIGHT .19 LB EST

Downloaded from Arrow.com.