

## Evaluating the ADL8154 Low Phase Noise Amplifier, 10 MHz to 6 GHz

### FEATURES

- ▶ 4-layer, Rogers 4350B and Isola 370HR evaluation board
- ▶ End launch, 2.92 mm RF connectors
- ▶ Through calibration path (depopulated)

### EVALUATION KIT CONTENTS

- ▶ ADL8154-EVALZ evaluation board

### EQUIPMENT NEEDED

- ▶ RF signal generator
- ▶ RF spectrum analyzer
- ▶ RF attenuator: 20 dB, 1 W (optional)
- ▶ RF coupler: 20 dB (optional)
- ▶ RF power meter and power sensor (optional)
- ▶ RF network analyzer
- ▶ 5.5 V, 300 mA power supply

### GENERAL DESCRIPTION

The ADL8154-EVALZ is a 4-layer printed circuit board (PCB) fabricated from a 10 mil thick (0.25 mm) Rogers 4350B and Isola 370HR copper clad, forming a nominal thickness of 62 mils (1.57 mm). The RFIN and RFOUT ports on the ADL8154-EVALZ are populated with 2.92 mm, female coaxial connectors, and the corresponding RFIN and RFOUT traces have a 50  $\Omega$  characteristic impedance. The ADL8154-EVALZ is populated with components suitable for use over the entire  $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  operating temperature range of the ADL8154. The ADL8154-EVALZ includes a calibration path (see Figure 6 and Table 3). THRU CAL (J1 and J2) must be populated with RF connectors to use the through calibration path. The calibration path includes two AC coupling capacitors (C11 and C12), which must be populated to mimic the AC coupling capacitors in the main signal path.

Incorporated on the ADL8154-EVALZ is the LT3045 ultralow noise, ultrahigh power supply rejection ratio (PSRR), linear regulator. This low noise regulator provides a clean power source to bias the ADL8154.

The RFIN and RFOUT traces on the ADL8154-EVALZ are 50  $\Omega$ , grounded, coplanar waveguide. The package ground leads and the exposed pad connect directly to the ground plane. Multiple vias connect the top and bottom ground planes with particular focus on the area directly beneath the ground pad to provide adequate electrical conduction and thermal conduction.

The power supply decoupling capacitors on the ADL8154-EVALZ represent the configuration used to characterize and qualify the device.

For full details on the ADL8154, see the ADL8154 data sheet, which must be consulted in conjunction with this user guide when using the ADL8154-EVALZ evaluation board.

### EVALUATION BOARD PHOTOGRAPHS

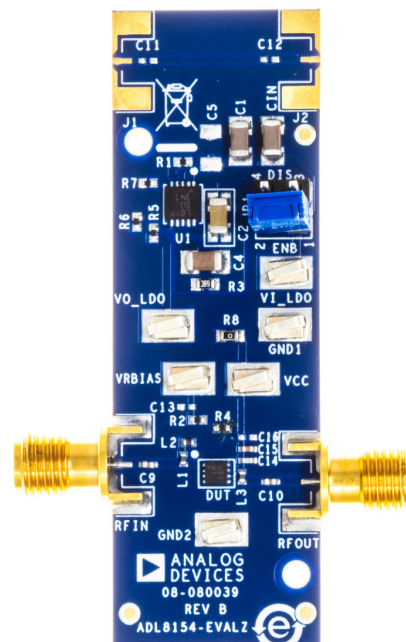


Figure 1. ADL8154-EVALZ Evaluation Board Photograph, Primary Side



Figure 2. ADL8154-EVALZ Evaluation Board Photograph, Secondary Side

TABLE OF CONTENTS

Features.....	1	Power-Up Sequence.....	3
Evaluation Kit Contents.....	1	Power-Down Sequence.....	3
Equipment Needed.....	1	Evaluation Board Schematic and Artwork.....	6
General Description.....	1	Ordering Information.....	8
Evaluation Board Photographs.....	1	Bill of Materials.....	8
Operating the ADL8154-EVALZ.....	3		

REVISION HISTORY

11/2024—Revision 0: Initial Version

## OPERATING THE ADL8154-EVALZ

The ADL8154-EVALZ is equipped with the [LT3045](#) ultralow noise regulator. By default, the ADL8154-EVALZ is configured to use the regulator to power the [ADL8154](#). The regulator is configured to provide 5 V to the ADL8154. To adjust the output voltage ( $V_{OUT}$ ), change the R3 resistor value (see [Table 1](#)). When using the regulator, connect a 5.5 V, 300 mA power supply between the surface-mount technology (SMT) pins, VI\_LDO and GND1.

**Table 1. R3 Resistor Values vs. Regulator  $V_{OUT}$**

R3 (k $\Omega$ )	$V_{OUT}$ (V)
40.2	4.0
45.3	4.5
49.9	5.0
55	5.5

To connect a different supply, bypass the regulator by removing R8 and directly power the ADL8154 from an external power supply by connecting a 5.0 V power supply between the SMT terminals, VCC and GND2.

### POWER-UP SEQUENCE


The recommended power-up bias sequence follows:

1. Connect a 5.5 V, 300 mA power supply to the SMT test point, VI\_LDO.
2. Connect the ground reference to the GND1 test point.
3. Apply RF.

### POWER-DOWN SEQUENCE

The recommended power-down bias sequence follows:

1. Turn off the RF.
2. Set the power supply to 0 V.

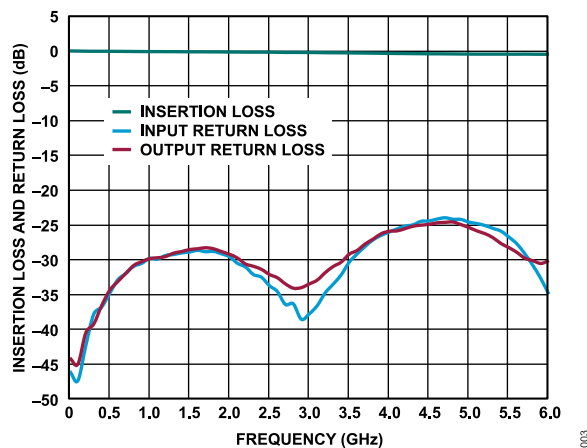

**Figure 3. Insertion Loss and Return Loss of the Through Calibration Path**

**Table 2. Insertion Loss of the Through Calibration Path**

Frequency (GHz)	Insertion Loss (dB)
0.01	-0.001
0.21	-0.02
0.4	-0.03
0.6	-0.04
0.8	-0.06
1.0	-0.07
1.3	-0.08
1.5	-0.1
1.8	-0.11
2.0	-0.13
2.4	-0.15
2.7	-0.19
3.0	-0.2
3.3	-0.24
3.6	-0.27
4.0	-0.33
4.5	-0.39
5.0	-0.43
5.5	-0.45
6.0	-0.45

## OPERATING THE ADL8154-EVALZ

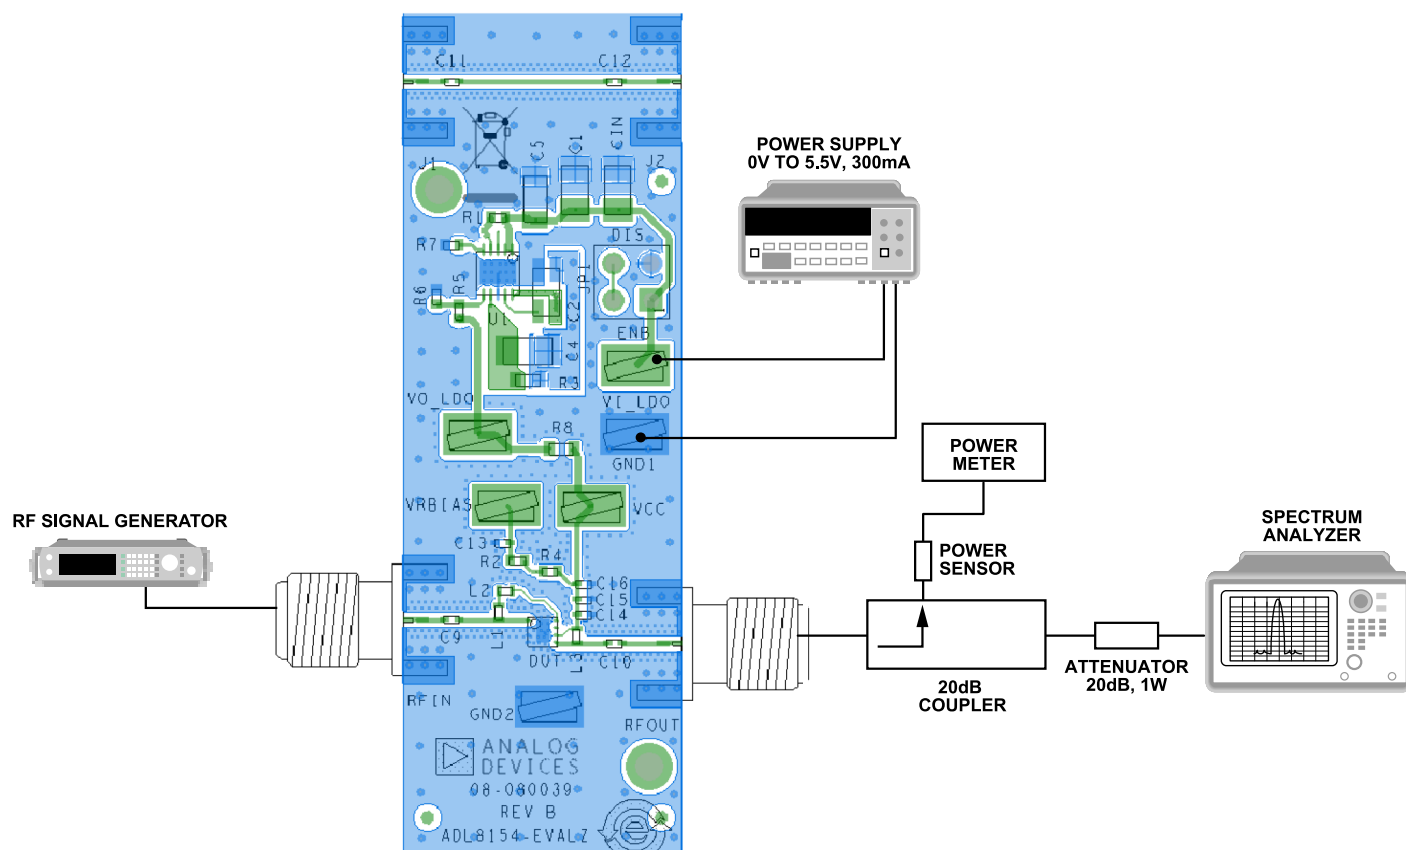


Figure 4. Power Test Equipment Setup

## OPERATING THE ADL8154-EVALZ

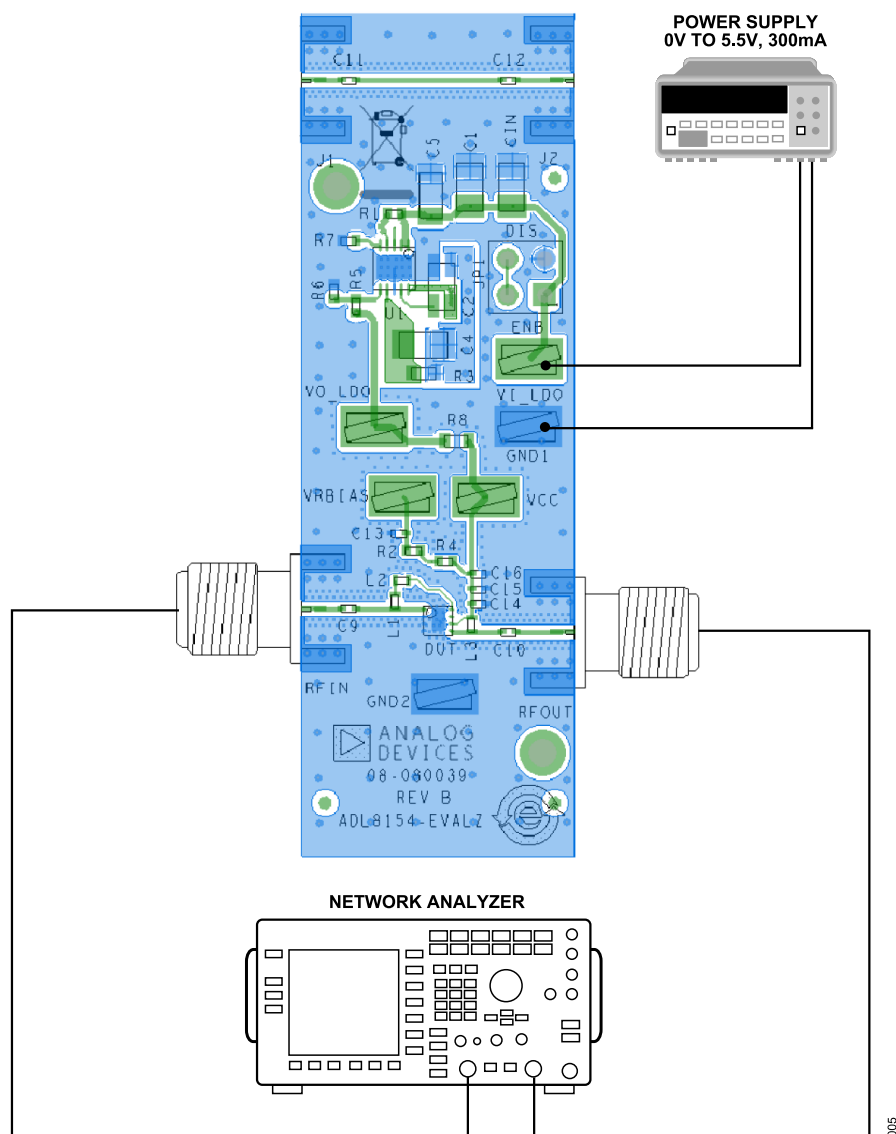


Figure 5. S-Parameter Test Equipment Setup

EVALUATION BOARD SCHEMATIC AND ARTWORK

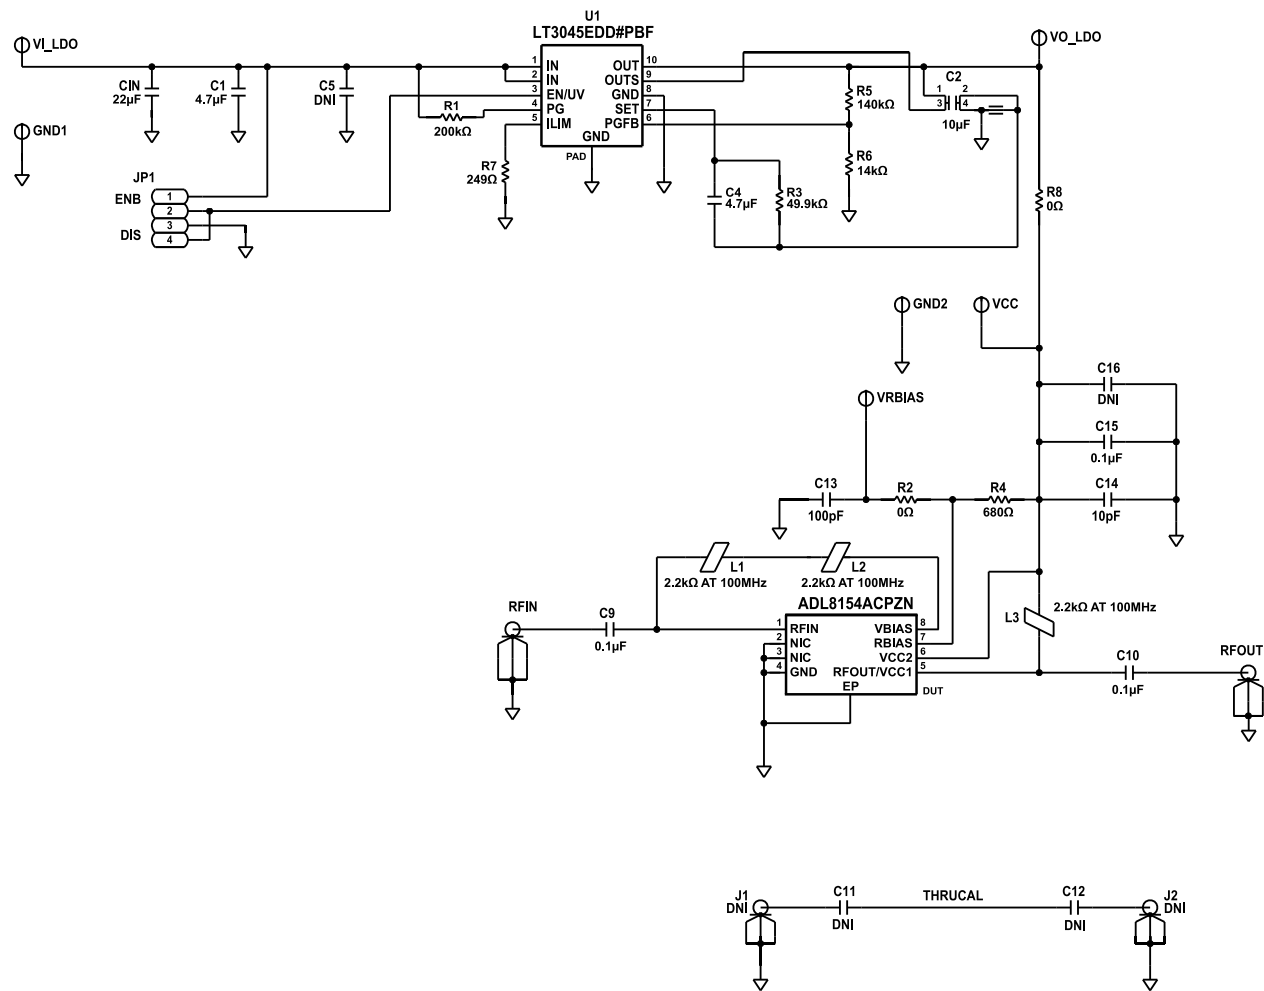


Figure 6. ADL8154-EVALZ Schematic

006

## EVALUATION BOARD SCHEMATIC AND ARTWORK

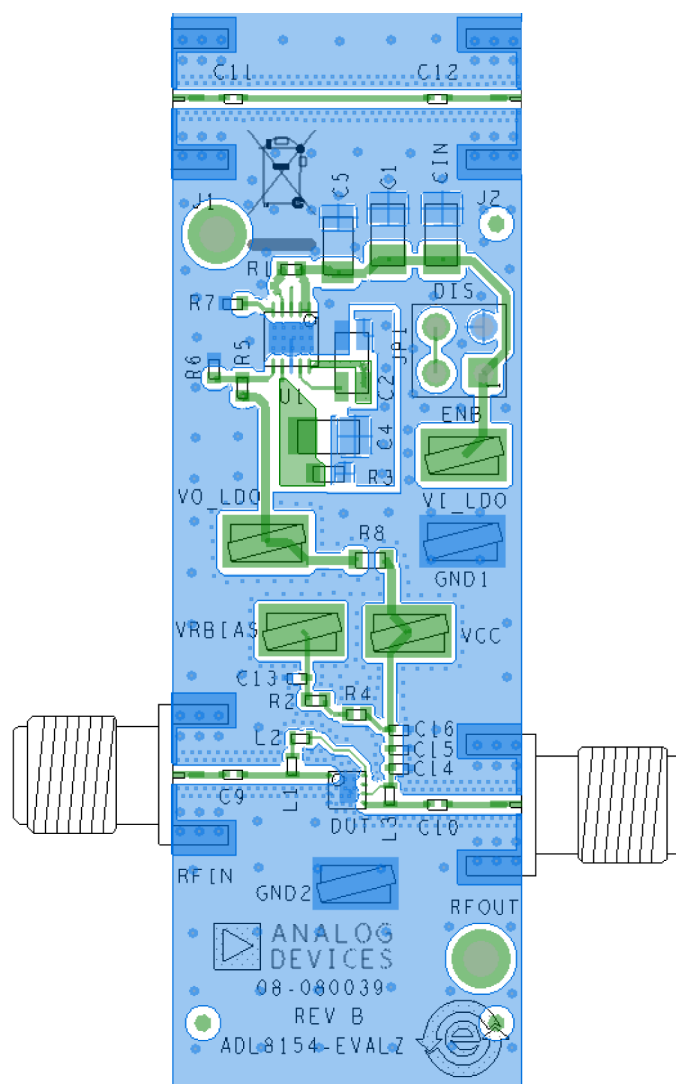


Figure 7. ADL8154-EVALZ Assembly Drawing (J1, J2, C11, and C12 Not Installed)

## ORDERING INFORMATION

## BILL OF MATERIALS

Table 3. Bill of Materials

Reference Designator	Description	Manufacturer	Part Number
C1, C4	Capacitors, ceramic, 4.7 $\mu$ F, 25 V, X7R, 1206	Kemet	C1206C475K3RACTU
C2	Capacitor, ceramic, 25 V, 10%, X5R, 1206, split pads	Yageo	CC1206KKX5R8BB106
C9, C10	Capacitors, ceramic, 0.1 $\mu$ F, 16 V, $\pm 20\%$ to $\pm 25\%$ , 0402, ultrabroadband	American Technical Ceramics	560L104YTRN
C14	Capacitor, ceramic, 10 pF, 50 V, 2%, C0G, 0402, ultralow equivalent series resistance (ESR)	AVX	04025U100GAT2A
C15	Capacitor, ceramic, 0.1 $\mu$ F, 50 V, 10%, X7R, 0402, soft termination	TDK	C1005X7R1H104K050BE
CIN GND1, GND2, VCC, VI_LDO, V_LDO, VRBIAS	Capacitor, ceramic, 22 $\mu$ F, 35 V, 20%, X5R, 1206, low ESR SMTs	TDK Keystone Electronics	C3216X5R1V226M160AC 5016
JP1	Connector, vertical header, 4-position double row, 2.54 mm pitch	Samtec, Inc.	TSW-102-07-T-D
Not applicable	Mini jumper	Amphenol, FCI	65474-001LF
L1, L2, L3	Ferrite beads, 2.2 k $\Omega$ , 25%, 100 MHz, 0.15 A, 0402	TDK	MMZ1005A222ET000
R1	Resistor, 200 k $\Omega$ , 1%, 1/10 W, 0402, AEC-Q200	Panasonic	ERJ-2RKF2003X
R2	Resistor, 0 $\Omega$ , jumper, 1/16 W, 0402	Yageo	RC0402JR-070RL
R3	Resistor, 49.9 k $\Omega$ , 1%, 1/10 W, 0603, AEC-Q200	Panasonic	ERJ-3EKF4992V
R4	Resistor, 680 $\Omega$ , 1%, 1/10 W, 0402, AEC-Q200	Panasonic	ERJ-2RKF6800X
R5	Resistor, 140 k $\Omega$ , 1%, 1/10 W, 0402, AEC-Q200	Panasonic	ERJ-2RKF1403X
R6	Resistor, 14 k $\Omega$ , 1%, 1/16 W, 0402, AEC-Q200	Panasonic	ERA-2AEB1402X
R7	Resistor, 249 $\Omega$ , 1%, 1/16 W, 0402	Venkel	CR0402-16W-2490FT
R8	Resistor, 0 $\Omega$ , jumper, 1/3 W, 0603, AEC-200	VISHAY	CRCW06030000Z0EAHP
RFIN, RFOUT	Connectors, 2.92 mm, jack, printed circuit board (PCB) mount receptacle	Winchester Interconnect	25-146-1000-92
U1	20 V, 500 mA, ultralow noise, ultrahigh power supply rejection ratio (PSRR) linear regulator	Analog Devices, Inc.	<a href="#">LT3045EDD#PBF</a>
DUT	Low phase noise amplifier, 10 MHz to 6 GHz	Analog Devices	<a href="#">ADL8154ACPZN</a>
C5	Ceramic capacitor, do not install (DNI)	Not applicable	Not applicable
C11, C12	Capacitors, ceramic, 0.1 $\mu$ F, 16 V, $\pm 20\%$ to $\pm 25\%$ , 0402, ultrabroadband, DNI	American Technical Ceramics	560L104YTRN
C13	Capacitor, ceramic, 100 pF, 25 V, 10%, C0G, 0402	AVX	04023A101KAT2A
C16	Capacitor, ceramic, 1 $\mu$ F, 25 V, 10%, X5R, 0402, DNI	TDK	C1005X5R1E105K050BC
J1, J2	Connectors, 2.9 mm, jack, PCB mount receptacle, DNI	SRI Connector Gage Co.	25-146-1000-92



## ORDERING INFORMATION

## NOTES

**ESD Caution**

**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

**Legal Terms and Conditions**

By using the evaluation board discussed herein (together with any tools, components documentation or support materials, the "Evaluation Board"), you are agreeing to be bound by the terms and conditions set forth below ("Agreement") unless you have purchased the Evaluation Board, in which case the Analog Devices Standard Terms and Conditions of Sale shall govern. Do not use the Evaluation Board until you have read and agreed to the Agreement. Your use of the Evaluation Board shall signify your acceptance of the Agreement. This Agreement is made by and between you ("Customer") and Analog Devices, Inc. ("ADI"), with its principal place of business at Subject to the terms and conditions of the Agreement, ADI hereby grants to Customer a free, limited, personal, temporary, non-exclusive, non-sublicensable, non-transferable license to use the Evaluation Board FOR EVALUATION PURPOSES ONLY. Customer understands and agrees that the Evaluation Board is provided for the sole and exclusive purpose referenced above, and agrees not to use the Evaluation Board for any other purpose. Furthermore, the license granted is expressly made subject to the following additional limitations: Customer shall not (i) rent, lease, display, sell, transfer, assign, sublicense, or distribute the Evaluation Board; and (ii) permit any Third Party to access the Evaluation Board. As used herein, the term "Third Party" includes any entity other than ADI, Customer, their employees, affiliates and in-house consultants. The Evaluation Board is NOT sold to Customer; all rights not expressly granted herein, including ownership of the Evaluation Board, are reserved by ADI. CONFIDENTIALITY. This Agreement and the Evaluation Board shall all be considered the confidential and proprietary information of ADI. Customer may not disclose or transfer any portion of the Evaluation Board to any other party for any reason. Upon discontinuation of use of the Evaluation Board or termination of this Agreement, Customer agrees to promptly return the Evaluation Board to ADI. ADDITIONAL RESTRICTIONS. Customer may not disassemble, decompile or reverse engineer chips on the Evaluation Board. Customer shall inform ADI of any occurred damages or any modifications or alterations it makes to the Evaluation Board, including but not limited to soldering or any other activity that affects the material content of the Evaluation Board. Modifications to the Evaluation Board must comply with applicable law, including but not limited to the RoHS Directive. TERMINATION. ADI may terminate this Agreement at any time upon giving written notice to Customer. Customer agrees to return to ADI the Evaluation Board at that time. LIMITATION OF LIABILITY. THE EVALUATION BOARD PROVIDED HEREUNDER IS PROVIDED "AS IS" AND ADI MAKES NO WARRANTIES OR REPRESENTATIONS OF ANY KIND WITH RESPECT TO IT. ADI SPECIFICALLY DISCLAIMS ANY REPRESENTATIONS, ENDORSEMENTS, GUARANTEES, OR WARRANTIES, EXPRESS OR IMPLIED, RELATED TO THE EVALUATION BOARD INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, TITLE, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. IN NO EVENT WILL ADI AND ITS LICENSORS BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES RESULTING FROM CUSTOMER'S POSSESSION OR USE OF THE EVALUATION BOARD, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DELAY COSTS, LABOR COSTS OR LOSS OF GOODWILL. ADI'S TOTAL LIABILITY FROM ANY AND ALL CAUSES SHALL BE LIMITED TO THE AMOUNT OF ONE HUNDRED US DOLLARS (\$100.00). EXPORT. Customer agrees that it will not directly or indirectly export the Evaluation Board to another country, and that it will comply with all applicable United States federal laws and regulations relating to exports. GOVERNING LAW. This Agreement shall be governed by and construed in accordance with the substantive laws of the Commonwealth of Massachusetts (excluding conflict of law rules). Any legal action regarding this Agreement will be heard in the state or federal courts having jurisdiction in Suffolk County, Massachusetts, and Customer hereby submits to the personal jurisdiction and venue of such courts. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this Agreement and is expressly disclaimed.

