
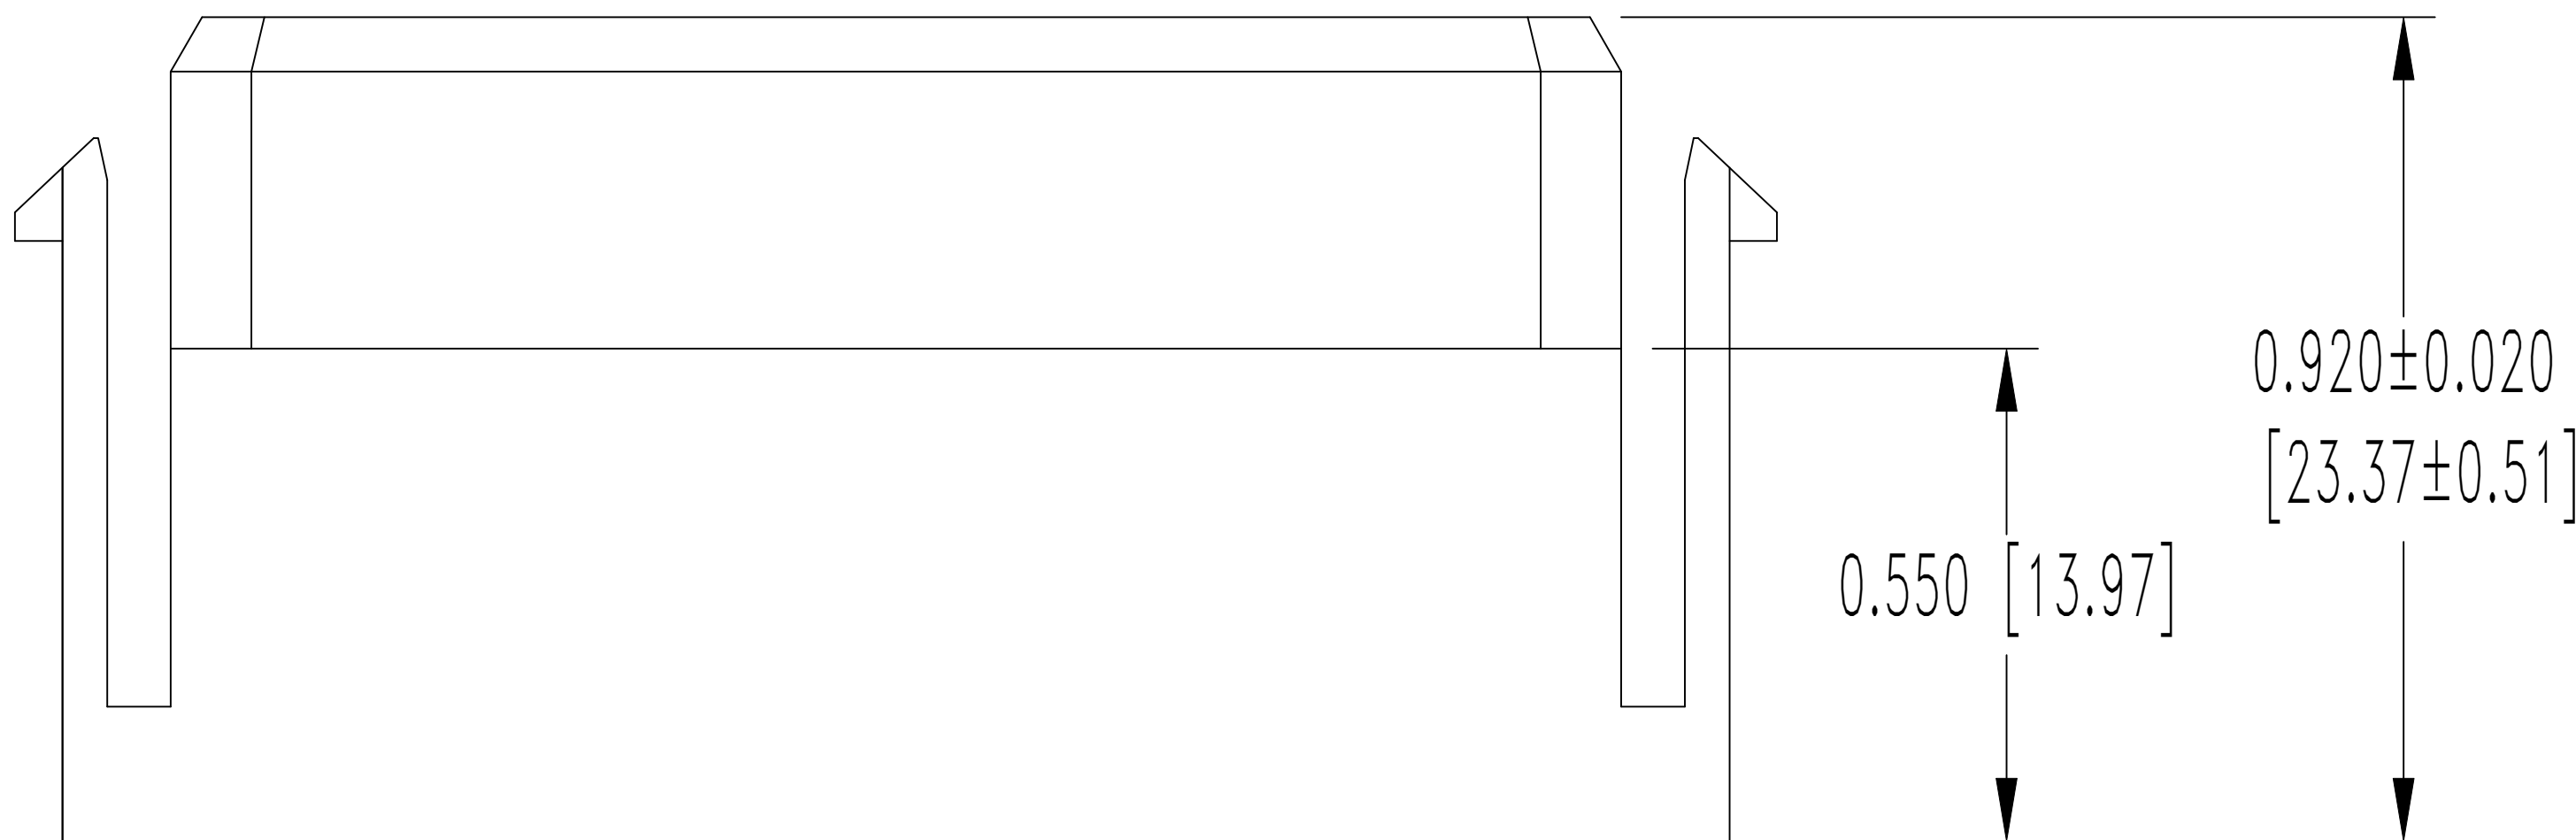
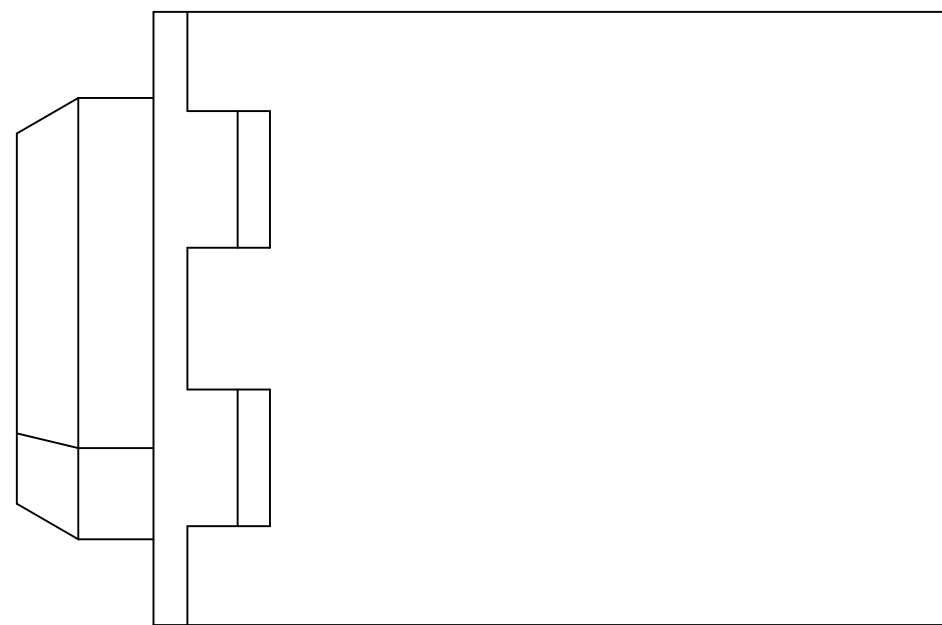



THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND IT'S SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

		SK4146			
DATE	REV	REVISION RECORD		APP	DR
1-28-02	NC	ECO 18893		RCW	YK
5-19-04	A	ECO 22443		YK	
				COLE	

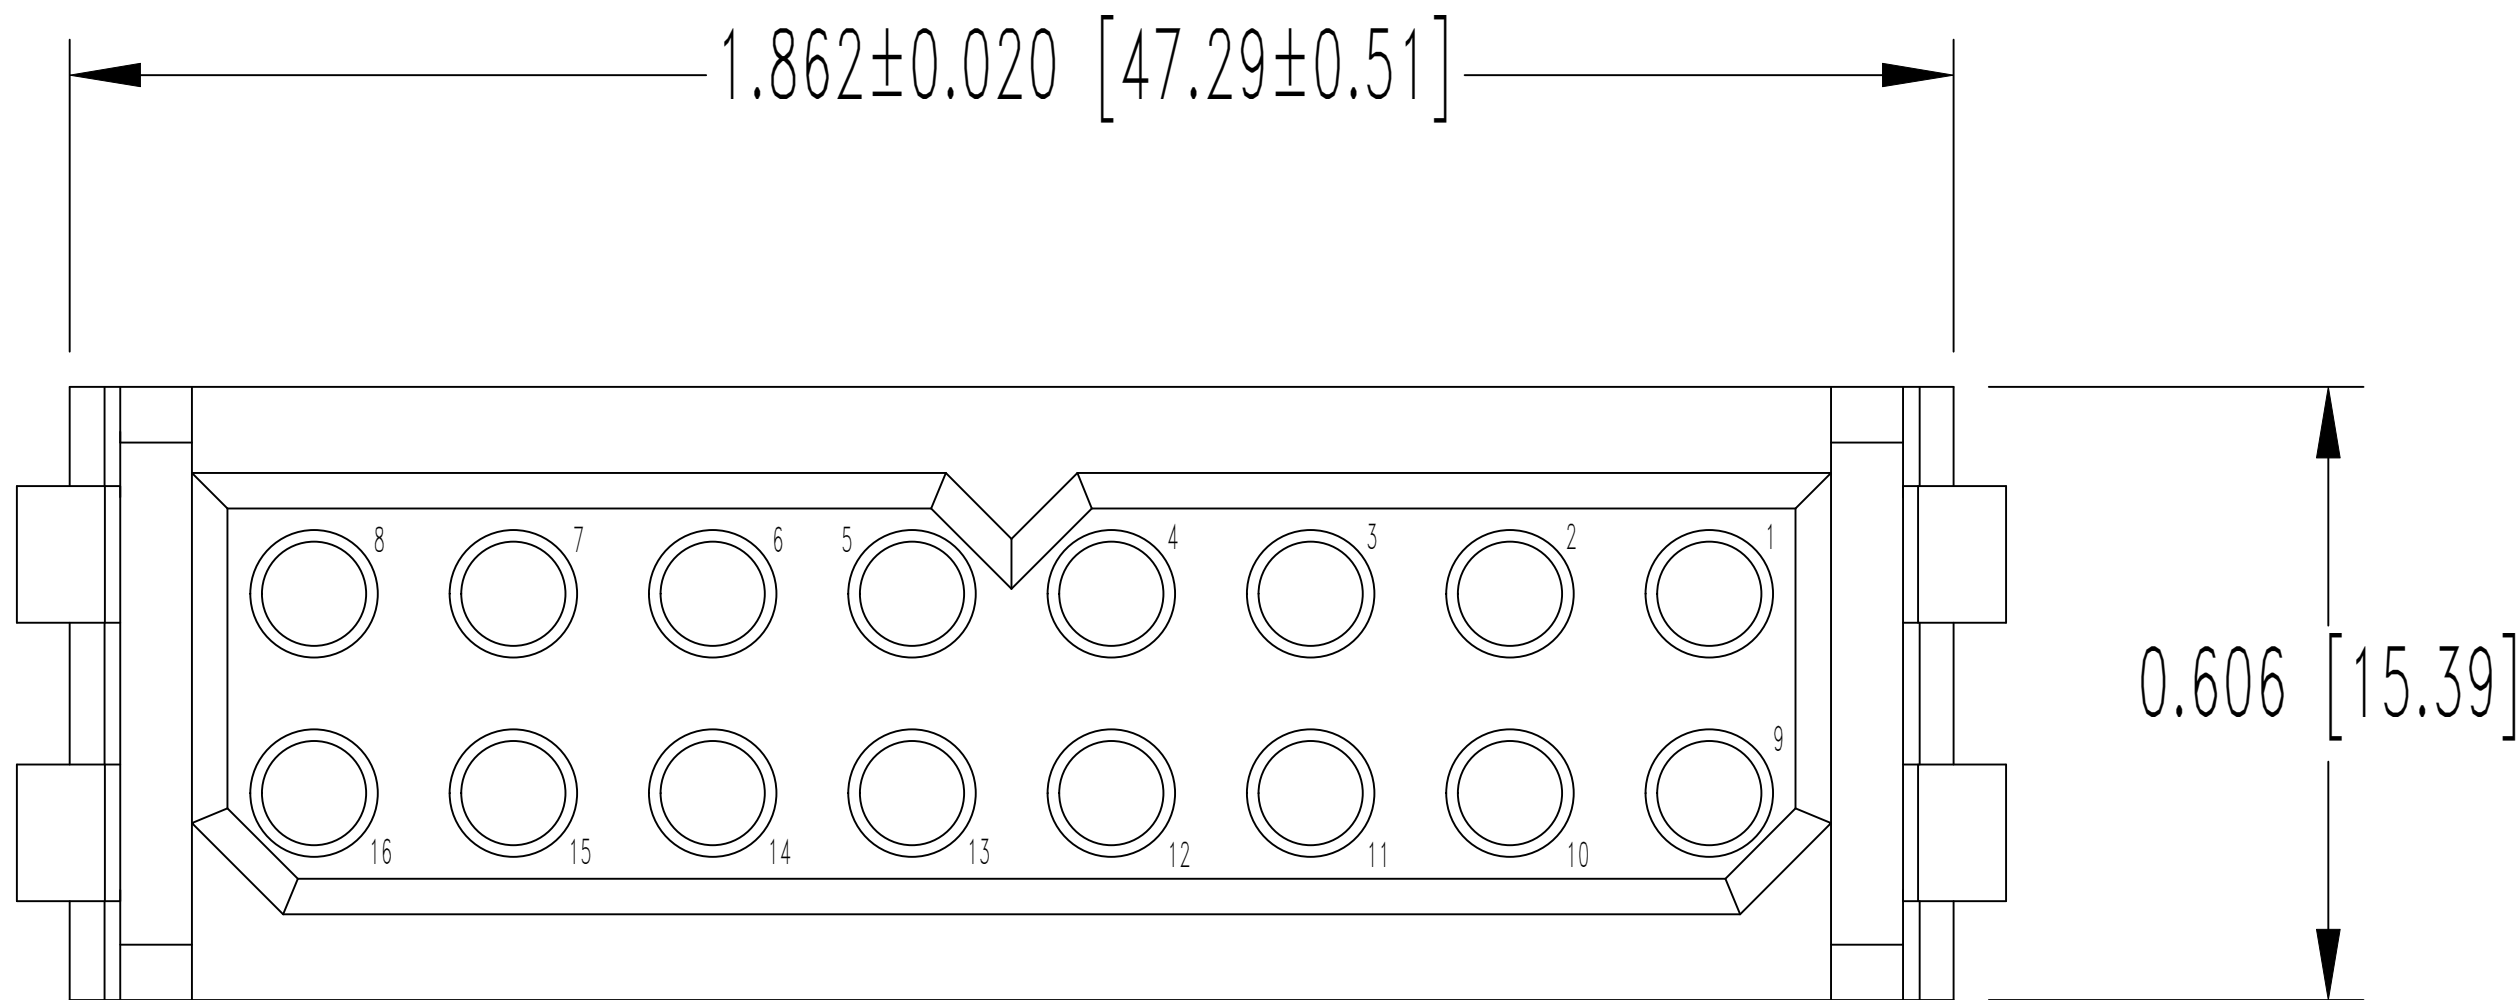


NOTES:

1. MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER, UL 94V-0, COLOR BLUE.
2. ELECTRICAL CHARACTERISTICS:
INSULATION RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 3a, METHOD A.
WORKING VOLTAGE: 600 VAC.
3. WORKING TEMPERATURE: -55°C TO +125°C.
4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

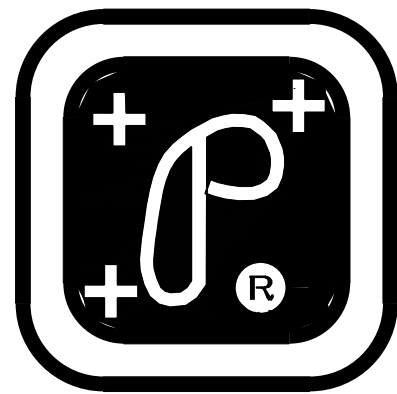

POSITRONIC
INDUSTRIES INC.

SPRINGFIELD, MISSOURI 65801

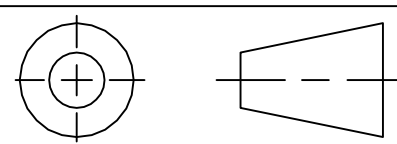

DECIMAL TOL.
± 0.015 [0.38]

ANGULAR TOL.
± 5°

PCS SERIES

TITLE

SCALE
N.T.S.

DRAWN BY Y. KELLEYBREW
APPROVED BY RCW

PLB16F0000

DATE
1-28-02

DRAWING NUMBER
SK4146

REV.
A