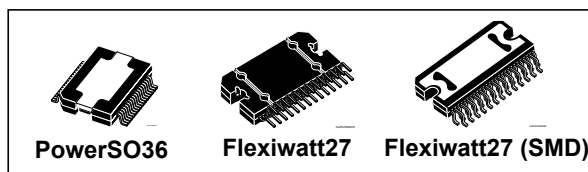




TDA7802

High efficiency digital input quad power amplifier with built-in diagnostics features, 'start stop' compatible

Datasheet – production data



Features

- 24-bit resolution
- 110 dB dynamic range (A-weighted)
- SB-I (SB - improved) high efficiency operation the highest 'non - class D' efficiency
- 1 Ohm driving capability (only in PowerSO36 package)
 - High output power capability: 4 x 28 W 4 Ω @ 14.4 V, 1 kHz, THD = 10 %
 - Max output power: 4 x 72 W 2 Ω
- Flexible mode control:
 - Full I²C bus driving 1.8 V/3.3 V) with four addresses selectable (only for PowerSO36 package option)
 - Independent front/rear play/ mute
 - Four selectable gains for very-low noise line-out function
 - Digital diagnostic with DC and AC load detections
- Optional H/W control (no I²C bus)
- Start-stop compatibility (operation down to 6 V)
- Sample rates: 44.1 kHz, 48 kHz, 96 kHz, 192 kHz
- Flexible serial data port (1.8 V / 3.3 V):
 - I²S standard, TDM 4Ch, TDM 8Ch, TDM 16Ch
- Offset detector (play or mute mode)
- Independent front/rear clipping detector
- Programmable diagnostic pin
- CMOS compatible enable pin
- Thermal protection
- Qualification in accordance to AEC Q100 rev. G standard

Description

The TDA7802 is a single chip quad bridge amplifier in advanced BCD technology integrating: a full D/A converter, digital input for direct connection to I²S (or TDM) and powerful MOSFET output stages.

The integrated D/A converter allows the performance to reach an outstanding 115 dB S/N ratio with more than 110 dB of dynamic range.

Moreover the TDA7802 integrates an innovative high efficiency concept, optimized also for uncorrelated music signals, that makes it the most suitable device to simplify the thermal management in high power sets.

Thanks to this concept, the dissipated output power under average listening conditions can be reduced up to 50% when compared to the conventional class AB solutions.

The TDA7802 integrates also a programmable PLL that is able to lock at the input frequencies of 64*Fs and 50*Fs for all the input configurations.

The device is equipped with a full diagnostics array that communicates the status of each speaker through the I²C bus. The same I²C bus allows to control several configurations of the device.

The TDA7802 is able to play music down to 6 V supply voltage - so it is compatible with the so called 'start stop' battery profile recently adopted by several car makers (thus reducing the fuel consumption and the impact over the environment).

Table 1. Device summary

Order code	Package	Packing
TDA7802	Flexiwatt27 (Vertical)	Tube
TDA7802SM	Flexiwatt27 (SMD)	Tube
TDA7802SMTR		Tape & reel
TDA7802PD	PowerSO36	Tube
TDA7802PDTR		Tape & reel

Contents

1	Block diagram and pins description	8
1.1	Block diagram	8
1.2	Pins description	8
2	Application diagrams	11
3	Electrical specification	13
3.1	Absolute maximum ratings	13
3.2	Thermal data	13
3.3	Electrical characteristics	14
3.4	Electrical characteristics typical curves	19
4	Operation mode	24
4.1	Standby	24
4.2	Low quiescent current	24
4.3	Legacy	24
4.4	I ² C amplifier	24
4.5	Diagnostic	25
4.6	Fault restart	25
5	Operation compatibility vs. battery	26
6	"PLLen" pin description	27
6.1	"PLLen" driving	27
7	Functional description	28
7.1	Voltage regulators timing	28
7.2	Turn-on diagnostic description	28
7.3	Permanent diagnostic	32
7.4	AC diagnostic	34
7.5	Output DC offset detection	34
7.6	Double faults	35
7.7	Legacy mode	35

7.8	Thermal protection	36
7.9	Mute management	37
7.9.1	Auto-mute threshold	37
7.10	SB-I Improved high efficiency principle	38
7.11	1 Ohm load driving configurations	38
7.12	Power on reset threshold	39
8	I²S and TDM bus interface	40
8.1	I ² S and TDM input data frame format	40
8.2	I ² S input data format	41
8.3	TDM input data format	41
8.4	Timings requirements	43
8.5	Group delay	44
9	I²C bus interface	45
9.1	Writing procedure	46
9.2	Reading procedure	46
9.3	Data validity	46
9.4	Start and stop conditions	46
9.5	Byte format	46
9.6	Acknowledge	46
9.7	I ² C bus timings	47
10	I²C registers	48
10.1	Instruction byte	48
10.1.1	IB0 - Subaddress "I0000000h" - default = "00000000"	48
10.1.2	IB1 - Subaddress "I0000001h" - default = "00000000"	49
10.1.3	IB2 - Subaddress "I0000010h" - default = "00000000"	50
10.1.4	IB3 - Subaddress "I0000011h" - default = "00000000"	51
10.1.5	IB4 - Subaddress "I0000100h" - default = "00000000"	52
10.1.6	IB5 - Subaddress "I0000101h" - default = "00000000"	53
10.2	Data byte	54
10.2.1	DB0 - Subaddress: "I0010000h"	54
10.2.2	DB1 - Subaddress: "I0010001h"	55
10.2.3	DB2 - Subaddress: "I0010010h"	56

10.2.4	DB3 - Subaddress: "I0010011h"	57
10.2.5	DB4 - Subaddress: "I0010100h"	58
10.2.6	DB5 - Subaddress: "I0010101h"	59
11	Package information	60
11.1	PowerSO-36 (slug up) package information	60
11.2	Flexiwatt 27(vertical) package package information	62
11.3	Flexiwatt 27(SMD) package information	64
Appendix A	I²C registers setting.....	66
A.1	Standard turn-on	66
A.2	Long diagnostic turn-on.....	67
A.3	Legacy mode turn-on	68
A.4	Legacy mode turn-off	68
A.5	Battery crank setting	68
Revision history		69

List of tables

Table 1.	Device summary	1
Table 2.	Flexiwatt27 pins description	9
Table 3.	PowerSO36 pins description.	10
Table 4.	Absolute maximum ratings	13
Table 5.	Thermal data.	13
Table 6.	Electrical characteristics	14
Table 7.	Start-up pulse typical timings ($F_s = 48$ kHz)	31
Table 8.	Double faults priority	35
Table 9.	Transition play to mute strategy	37
Table 10.	System input frequencies	40
Table 11.	I ² S interface timing	43
Table 12.	I ² C bus interface timing.	47
Table 13.	IB0 - Subaddress "I0000000h" - default = "00000000"	48
Table 14.	IB1 - Subaddress "I0000001h" - default = "00000000"	49
Table 15.	IB2 - Subaddress "I0000010h" - default = "00000000"	50
Table 16.	IB3 - Subaddress "I0000011h" - default = "00000000"	51
Table 17.	IB4 - Subaddress "I0000100h" - default = "00000000"	52
Table 18.	IB5 - Subaddress "I0000101h" - default = "00000000"	53
Table 19.	DB0 - Subaddress: "I0010000h"	54
Table 20.	DB1 - Subaddress: "I0010001h"	55
Table 21.	DB2 - Subaddress: "I0010010h"	56
Table 22.	DB3 - Subaddress: "I0010011h"	57
Table 23.	DB4 - Subaddress: "I0010100h"	58
Table 24.	DB5 - Subaddress: "I0010101h"	59
Table 25.	PowerSO-36 (slug up) package mechanical data.	60
Table 26.	Flexiwatt 27 (vertical) package mechanical data	62
Table 27.	Flexiwatt 27 (SMD) package mechanical data	64
Table 28.	Document revision history.	69

List of figures

Figure 1.	Block diagram (Flexiwatt27)	8
Figure 2.	Pins connection diagrams	8
Figure 3.	I ² C bus mode application diagram (TDA7802/TDA7802SM)	11
Figure 4.	I ² C bus mode application diagram (TDA7802PD)	11
Figure 5.	Legacy mode application diagram (TDA7802/TDA7802SM)	12
Figure 6.	Legacy mode application diagram (TDA7802PD)	12
Figure 7.	Quiescent current vs. supply voltage	19
Figure 8.	Output power vs. supply voltage (4 Ω)	19
Figure 9.	Output power vs. supply voltage (2 Ω)	20
Figure 10.	Distortion vs. output power (4 Ω , STD mode)	20
Figure 11.	Distortion vs. output power (4 Ω , HI-EFF mode)	20
Figure 12.	Distortion vs. output power (2 Ω , STD mode)	20
Figure 13.	Distortion vs. output power (2 Ω , HI-EFF mode)	20
Figure 14.	Distortion vs. frequency (4 Ω , STD mode)	20
Figure 15.	Distortion vs. frequency (2 Ω , STD mode)	21
Figure 16.	Distortion vs. output power (4 Ω , Vs = 6 V)	21
Figure 17.	Distortion vs. output power (4 Ω , Vs = 6 V)	21
Figure 18.	Vo vs. Vin (Gv1-2-3-4 settings)	21
Figure 19.	Vo vs. Vin (Gv1-2-3-4 settings + 6 dB dig. gain)	21
Figure 20.	Distortion vs. output voltage (LD-Gv2)	21
Figure 21.	Distortion vs. output voltage (LD-Gv3)	22
Figure 22.	Distortion vs. output voltage (LD-Gv4)	22
Figure 23.	Output attenuation vs. Vs (normal & start-stop mode)	22
Figure 24.	Crosstalk vs. frequency (STD mode)	22
Figure 25.	Crosstalk vs. frequency (HI-EFF mode)	22
Figure 26.	Supply voltage rejection vs. frequency	22
Figure 27.	Total power dissipation & efficiency vs. Po (4 W, STD, Sine)	23
Figure 28.	Total power dissipation & efficiency vs. Po (4 W, HE, Sine)	23
Figure 29.	Total power dissipation & efficiency vs. Po (2 W, HE, Sine)	23
Figure 30.	Power dissipation vs. average Po (audio program simulation, 4 Ω)	23
Figure 31.	Power dissipation vs. average Po (audio program simulation, 2 Ω)	23
Figure 32.	ITU R-ARM frequency response, weighting filter for transient pop	23
Figure 33.	State diagram	25
Figure 34.	Operation compatibility vs. battery	26
Figure 35.	Standby driving circuit	27
Figure 36.	Soft short diagnostic	29
Figure 37.	Short circuit and open load diagnostic	30
Figure 38.	Short to GND and short to Vs, threshold description	30
Figure 39.	Short across the speaker and open load threshold description, in speaker/amplifier mode	30
Figure 40.	Short across the speaker and open load threshold description, booster/line driver mode	30
Figure 41.	Permanent diagnostic flow-chart	33
Figure 42.	Thermal muting diagram	36
Figure 43.	Low voltage mute attenuation, supply voltage variation (Vs); result digital attenuation (At)	38
Figure 44.	Two channels configured to 1 Ohm and working in high efficiency	39
Figure 45.	I ² S format	41
Figure 46.	TDM 4-channel format	41
Figure 47.	TDM 8-channel format	42
Figure 48.	TDM 16-channel format	42


Figure 49.	Audio interface timing	43
Figure 50.	I ² C bus protocol description	45
Figure 51.	I ² C bus interface timing.	47
Figure 52.	PowerSO-36 (slug up) package outline	60
Figure 53.	Flexiwatt 27 (vertical) package outline	62
Figure 54.	Flexiwatt 27 (SMD) package outline	64

ST Restricted

1 Block diagram and pins description

1.1 Block diagram

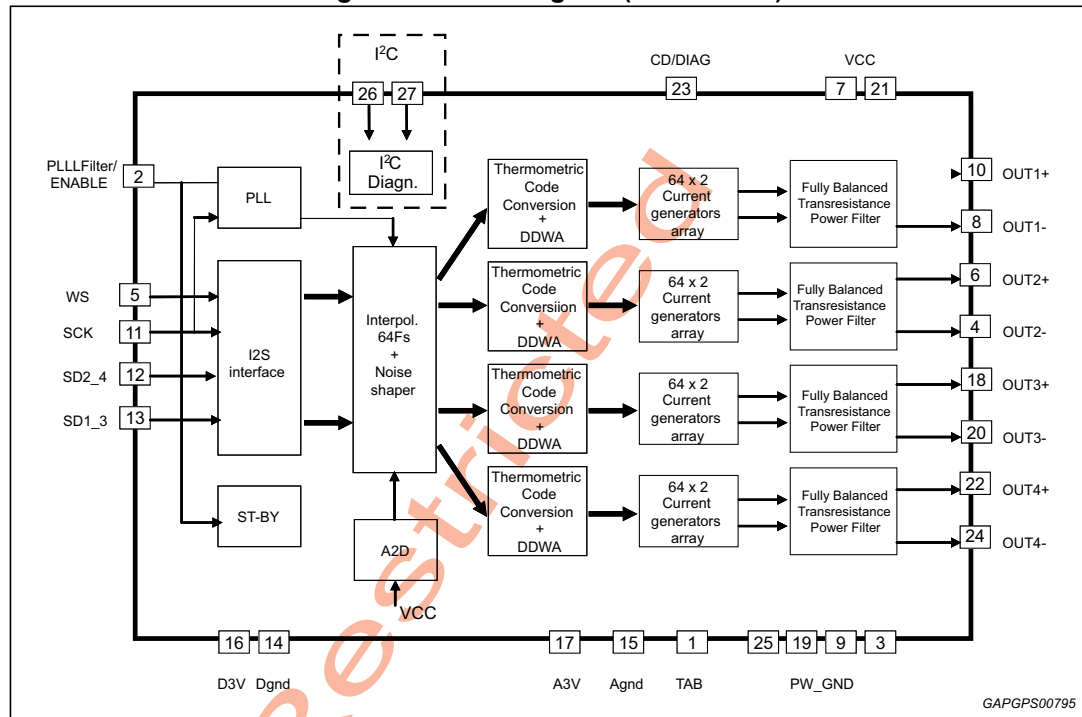Figure 1. Block diagram (Flexiwatt27)



1.2 Pins description

Figure 2. Pins connection diagrams

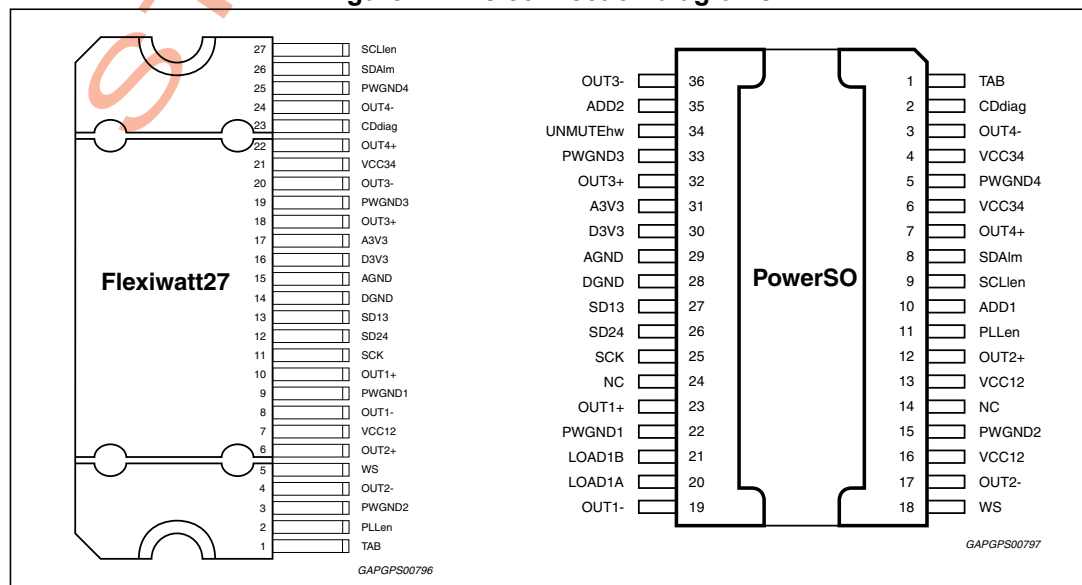


Table 2. Flexiwatt27 pins description

N°	Pin	Function	
1	TAB	TAB connection	Ground
2	PLLen	PLL loop filter / ENABLE	Input
3	PWGND2	Power ground channel 2	Power Ground
4	OUT 2-	Channel 2 (Left Rear) negative output	Power Output
5	WS	Word select (I2S bus)	Logic Input
6	OUT 2+	Channel 2 (Left Rear) positive output	Power Output
7	VCC12	Channel 1 and 2 positive supply	Battery
8	OUT 1-	Channel 1 (Left Front) negative output	Power Output
9	PWGND1	Power ground channel 1	Power Ground
10	OUT 1+	Channel 1 (Left Front) positive output	Power Output
11	SCK	Serial clock (I2S bus)	Logic Input
12	SD24	Serial data channels 2 and 4 (I2S bus)	Logic Input
13	SD13	Serial data channels 1 and 3 (I2S bus)	Logic Input
14	DGND	Digital ground	Signal Ground
15	AGND	Analog ground	Signal Ground
16	D3V3	Digital 3.3 V supply filter	Digital Regulator
17	A3V3	Analog 3.3 V supply filter	Analog Regulator
18	OUT3+	Channel 3 (right front) positive output	Power Output
19	PWGND3	Power ground channel 3	Power Ground
20	OUT3-	Channel 3 (right front) negative output	Power Output
21	VCC34	Channels 3 and 4 positive supply	Battery
22	OUT4+	Channel 4 (right rear) positive output	Power Output
23	CDdiag	Clip detector and diagnostic output: Overcurrent protection intervention Thermal warning POR Output DC offset Output short to VCC/GND	Open Drain Output
24	OUT4-	Channel 4 (right rear) negative output	Power Output
25	PWGND4	Power ground channel 4	Power Ground
26	SDAIm	I ² C data/legacy mode mute	Signal Input/Output
27	SCLlen	I ² C clock/enable legacy mode	Signal Input

Table 3. PowerSO36 pins description

N°	Pin	Function	
1	TAB	TAB connection	-
2	CDdiag	Clip detector and diagnostic output: Overcurrent protection intervention Thermal warning POR	Open Drain Output
3	OUT4-	Channel 4 (right rear) negative output	Power Output
4	VCC34	Channels 3 and 4 positive supply	Battery
5	PWGND4	Power ground channel 4	Power Ground
6	VCC34	Channels 3 and 4 positive supply	Battery
7	OUT4+	Channel 4 (right rear) positive output	Power Output
8	SDAIm	I ² C data/legacy mode mute	Signal Input/Output
9	SCLlen	I ² C clock/enable legacy mode	Signal Input
10	ADD1	I2C Address - First Pin	Logic Input
11	PLLen	PLL loop filter / ENABLE	Input
12	OUT 2+	Channel 2 (Left Rear) positive output	Power Output
13	VCC12	Channel 1 and 2 positive supply	Battery
14	NC	Not Connected	-
15	PWGND2	Power ground channel 2	Power Ground
16	VCC12	Channel 1 and 2 positive supply	Battery
17	OUT 2-	Channel 2 (Left Rear) negative output	Power Output
18	WS	Word select (I2S bus)	Logic Input
19	OUT 1-	Channel 1 (Left Front) negative output	Power Output
20	LOAD1A	Load Selection (channels 1 and 2)	Logic Input
21	LOAD1B	Load Selection (channels 3 and 4)	Logic Input
22	PWGND1	Power ground channel 1	Power Ground
23	OUT 1+	Channel 1 (Left Front) positive output	Power Output
24	NC	Not Connected	-
25	SCK	Serial clock (I2S bus)	Logic Input
26	SD24	Serial data channels 2 and 4 (I2S bus)	Logic Input
27	SD13	Serial data channels 1 and 3 (I2S bus)	Logic Input
28	DGND	Digital ground	Signal Ground
29	AGND	Analog ground	Signal Ground
30	D3V3	Digital 3.3 V supply filter	Digital Regulator
31	A3V3	Analog 3.3 V supply filter	Analog Regulator
32	OUT3+	Channel 3 (right front) positive output	Power Output
33	PWGND3	Power ground channel 3	Power Ground
34	UNMUTEhw	Unmute Hardware	Logic input
35	ADD2	I2C Address - Second Pin	Logic Input
36	OUT3-	Channel 3 (right front) negative output	Power Output

2 Application diagrams

Figure 3. I²C bus mode application diagram (TDA7802/TDA7802SM)

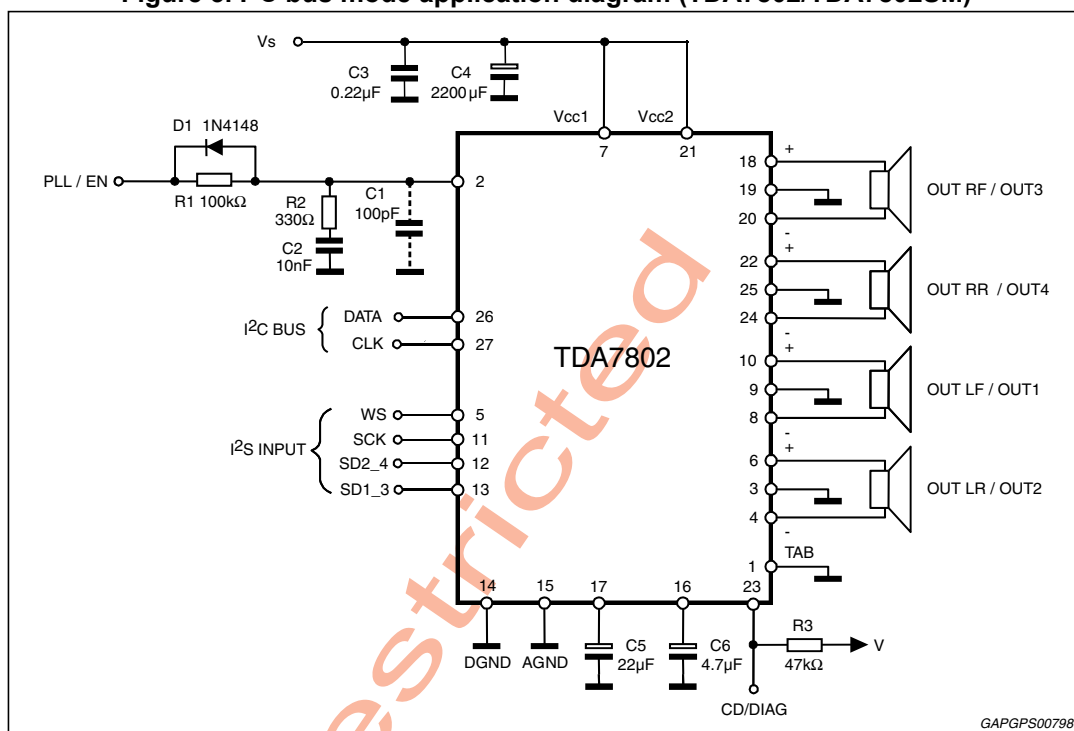


Figure 4. I²C bus mode application diagram (TDA7802PD)

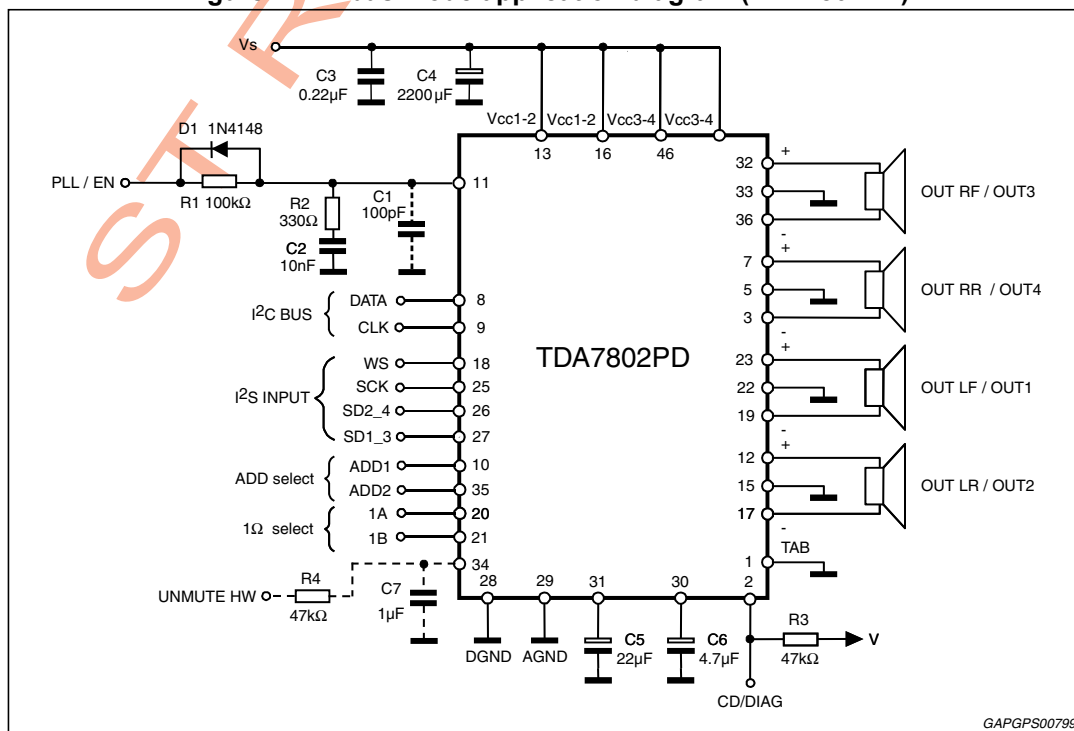


Figure 5. Legacy mode application diagram (TDA7802/TDA7802SM)


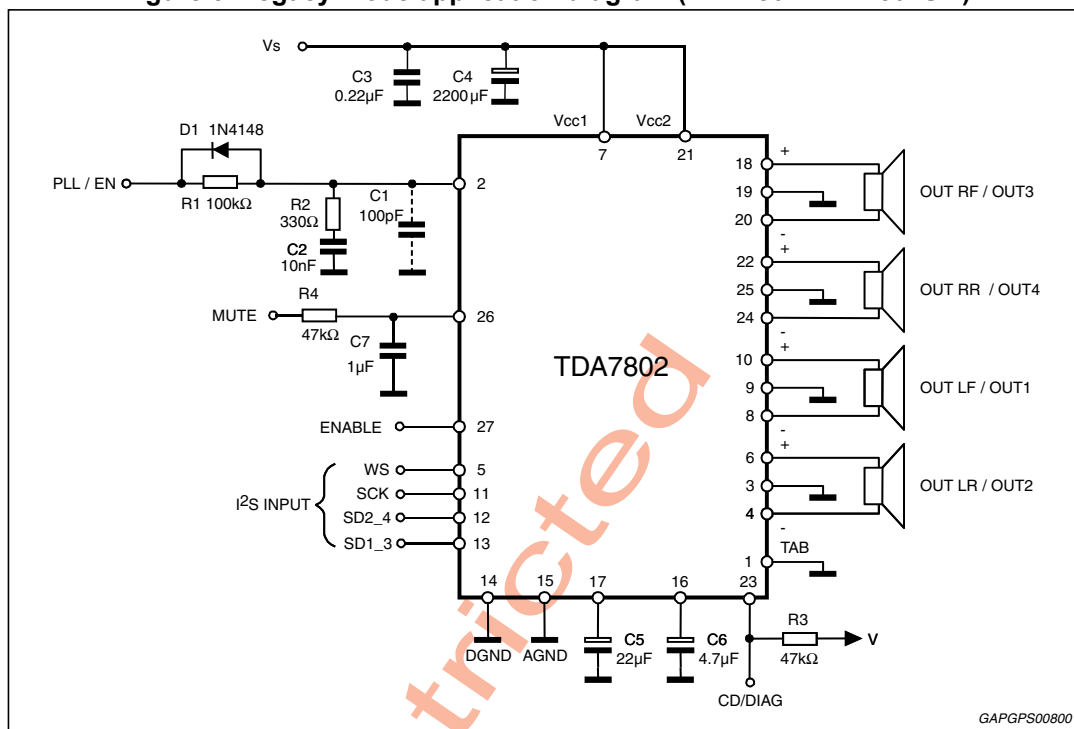


Figure 6. Legacy mode application diagram (TDA7802PD)

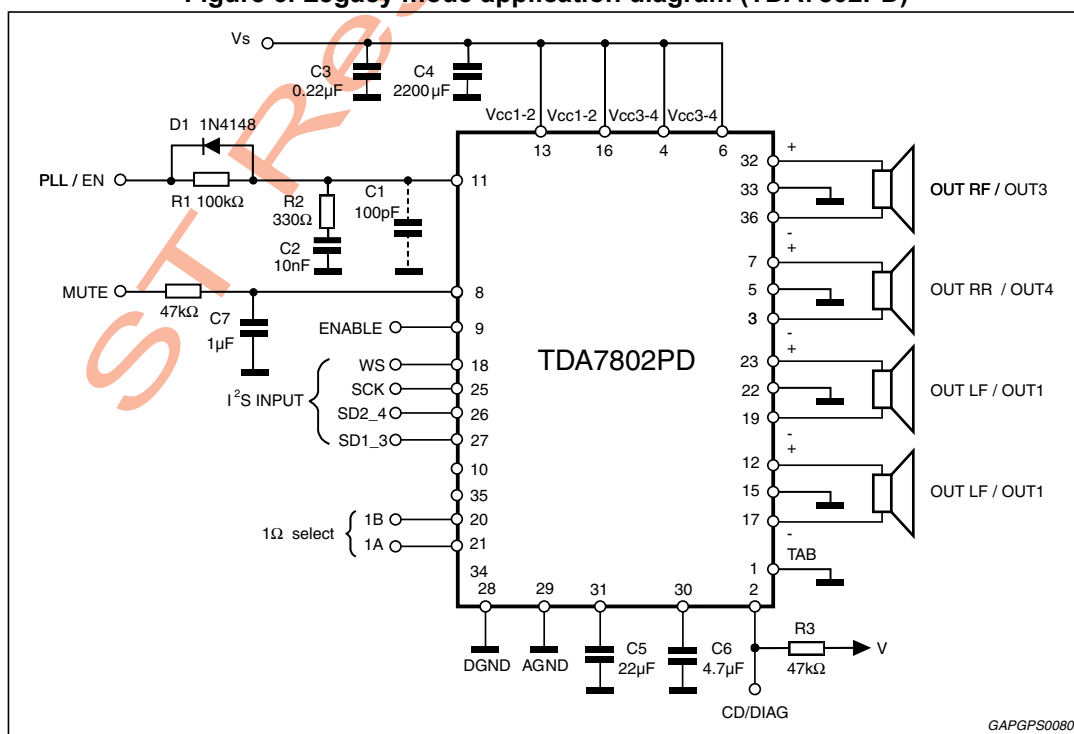

3 Electrical specification

3.1 Absolute maximum ratings

Absolute maximum rating for pin not specified in the table is 3.6 V.

Table 4. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_S	DC supply voltage	-0.3 to 28	V
V_{peak}	Transient supply voltage for $t = 100$ ms	-0.3 to 50	V
$V_{I2Cdata}$	I ² C bus pins voltage/legacy mode mute	-0.3 to 5.5	V
V_{I2Cclk}	I ² C bus pins voltage/enable legacy mode	-0.3 to Max (V_{CC} , 50V)	V
V_{I2S}	I ² S bus pins voltage	-0.3 to 3.6	V
V_{unmute}	Unmute hardware voltage (PSO36 only)	-0.3 to 3.6	V
V_{cd}	CD/Diag pin voltage	-0.3 to 20	V
V_{load12}	LOAD (Parallel mode) selection	-0.3 to 3.6	V
I_O	Output peak current (repetitive $f > 10$ Hz)	internally limited	A
P_{tot}	Power dissipation $T_{case} = 70$ °C	85	W
T_{stg}, T_j	Storage and junction temperature	-55 to 150	°C
T_{amb}	Operative temperature range ⁽¹⁾	-40 to 105	°C
C_{max}	Maximum capacitor vs. ground connected to the output	10	nF
ESD _{HBM}	ESD protection HBM ⁽²⁾	2000	V
ESD _{CDM}	ESD protection CDM ⁽²⁾	500	V

1. A suitable heatsink/dissipation system should be used to keep T_j inside the specified limits.

2. Conforming to ESD standards.

3.2 Thermal data

Table 5. Thermal data

Symbol	Parameter	PowerSO36	Flexiwatt 27	Unit
$R_{th\ j-case}$	Thermal resistance junction-to-case Max	1	1	°C/W

3.3 Electrical characteristics

Referred to the test setup $V_S = 14.4\text{ V}$; $R_L = 4\ \Omega$; $f = 1\text{ kHz}$; $T_{\text{amb}} = 25\text{ }^\circ\text{C}$, SB-I mode, unless otherwise specified.

Table 6. Electrical characteristics

Symbol	Parameter	Test condition	Min.	Typ.	Max.	Unit
V_S	Supply voltage range	-	6		18	V
I_{SB}	Standby current	-	-	-	4	μA
I_d	Total quiescent drain current in amplifier mode	Enable on amplifier mode muted	160	235	310	mA
I_t	Total quiescent drain current in tristate mode	Enable on tristate mode	45	60	75	mA
I_{ovcur}	Over current protection	$V_{\text{CC}} = 16\text{ V}$, no signal	-	4.8	-	A
P_O	Output power	$R_L = 4\ \Omega$; max power	42	45	-	W
		THD = 10 %	26	29	-	W
		THD = 1 %	21	23	-	W
		$R_L = 2\ \Omega$; THD 10%	46	50	-	W
		$R_L = 2\ \Omega$; THD 1%	36	40	-	W
		$R_L = 2\ \Omega$; max power	73	77	-	W
THD_{SB}	Total harmonic distortion (Standard bridge)	$P_O = 1\text{ W to }10\text{ W}$, $f = 1\text{ kHz}$, G_{V1}	-	0.02	0.05	%
		$P_O = 1\text{ W to }10\text{ W}$, $f = 10\text{ kHz}$, G_{V1}	-	0.2	0.5	%
		$R_L = 100\ \Omega$ input = -10 dBFS, $f = 1\text{ kHz}$, $G_{V1,2,3,4}$	-	0.01	0.02	%
		$R_L = 1\ \Omega$, $f = 1\text{ kHz}$, $P = 24\text{ W}$, G_{V1}	-	0.04	0.1	%
THD	Total harmonic distortion	$P_O = 1\ \Omega$ to 10 W , $f = 1\text{ kHz}$, G_{V1}	-	0.03	0.1	%
		$R_L = 1\ \Omega$, $f = 1\text{ kHz}$, $P = 24\text{ W}$, G_{V1}	-	0.05	0.15	%
C_T	Cross talk	$f = 1\text{ kHz to }10\text{ kHz}$	60	80	-	dB
G_{V1}	Voltage gain 1	Output voltage @ -10 dBFS	14.9	-	16.9	dB (V)
G_{V2}	Voltage gain 2		9.5	-	11.5	dB (V)
G_{V3}	Voltage gain 3		6.9	-	8.9	dB (V)
G_{V4}	Voltage gain 4		1.45	-	3.45	dB (V)
F_{SV1}	Full scale voltage G_{V1}	Output voltage @ 0 dBFS $V_S = 18\text{ V}$	12.7	-	-	Vrms
F_{SV2}	Full scale voltage G_{V2}	Output voltage @ 0 dBFS	6.7	-	8.4	Vrms
F_{SV3}	Full scale voltage G_{V3}	-	4.9	-	6.2	Vrms
F_{SV4}	Full scale voltage G_{V4}	-	2.65	-	3.35	Vrms
DG	Delta voltage gain 20 Hz – 20 kHz	$P_O = 1\text{ W}$	-0.5	-	0.5	dB

Table 6. Electrical characteristics (continued)

Symbol	Parameter	Test condition	Min.	Typ.	Max.	Unit
DR	Dynamic range $G_V = G_{V1}$ $G_V = G_{V2}$ $G_V = G_{V3}$ $G_V = G_{V4}$	Bw = 20 Hz to 20 kHz, unweighted	105 100 100 98	108 103 103 101	-	dB
E_{IN}	Output noise voltage $G_V = G_{V1}$ $G_V = G_{V2}$ $G_V = G_{V3}$ $G_V = G_{V4}$	Bw = 20 Hz to 20 kHz, unweighted	-	30 30 21 21	40 40 30 30	μV
SNR	Signal to noise ratio $G_V = G_{V1}$ $G_V = G_{V2}$ $G_V = G_{V3}$ $G_V = G_{V4}$	Bw = 20 Hz to 20 kHz, unweighted	110 104 104 100	113 107 107 103	-	dB
G_B	Gain balance	-	-1	-	4	dB
SVR	Supply voltage rejection	$f = 1 \text{ kHz}$; $V_r = 1 \text{ Vpk}$;	50	70	-	dB
A_M	Mute attenuation	-	80	-	-	dB
V_{OS}	Offset voltage	Mute and play	-50	-	50	mV
V_{AM}	Supply automute range	Above this voltage the device is in play	5.8	-	-	V
		Below this voltage the device is in mute	-	-	5	V
$V_{POWONRESET}$	Supply voltage of power-on reset	-	-	3.5	4.0	V
$V_{OVERVOLTAGE}$	Over voltage shut-down	-	18.5	-	22.5	V
V_{CDMOV}	CD/DIAG pin operative voltage	-	-	-	5	V
CD_{LK}	Clip det high leakage current	CD OFF	-	0	15	μA
CD_{SAT}	Clip det sat. voltage	CD on; $I_{CD} = 1 \text{ mA}$	-	150	300	mV
$CD1_{THD}$	Clip det THD level 1 %	-	-	1	2	%
$CD2_{THD}$	Clip det THD level 5 %	-	3	5	7	%
$CD3_{THD}$	Clip det THD level 10 %	-	8	10	13	%

Table 6. Electrical characteristics (continued)

Symbol	Parameter	Test condition	Min.	Typ.	Max.	Unit
T_{mute}	Mute and unmute commutation time	Programmable by I ² C bus register IB2(7:5) $F_s = 44.1 \text{ kHz}$	-	1.45	-	ms
			-	6	-	
			-	12	-	
			-	24	-	
			-	48	-	
			-	93	-	
			-	186	-	
			-	370	-	
N_{GL}	Noise gating input level	Under this level the device is in mute	-	-102	-	dB
N_{GT}	Noise gating time	$F_s = 44100$	-	92	-	ms
E_{IN2}	Output noise voltage	$B_w = 20 \text{ Hz to } 20 \text{ kHz}$, unweighted, noise gating off, No input signal	-	56	-	μV
	GV = GV1			53		
	GV = GV2			40		
	GV = GV3			30		
	GV = GV4					
Turn on diagnostics speaker mode						
P_{gnd}	Short to GND det. (below this limit, the output is considered in short circuit to GND)	-	-	-	1	V
P_{vs}	Short to V_s det. (above this limit, the output is considered in short circuit to V_s)	-	$V_s - 1$	-	-	V
P_{nop}	Normal operation thresholds. (within these limits, the output is considered without faults).	-	2	-	$V_s - 2$	V
L_{sc}	Shorted load det.	-	-	-	0.5	Ω
L_{op}	Normal load det.	-	1.5	-	25	Ω
L_{nop}	Open load det.	-	75	-	-	Ω
Turn-on diagnostic for 1 Ohm load configuration						
L_{sc}	Shorted load det.	-	-	-	0.25	Ω
L_{op}	Normal load det.	-	0.75	-	12.5	Ω
L_{nop}	Open load det.	-	37.5	-	-	Ω
T_d	Max diagnostic time ⁽¹⁾	-	-	260	-	ms

Table 6. Electrical characteristics (continued)

Symbol	Parameter	Test condition	Min.	Typ.	Max.	Unit
Rss	Soft short resistor	$R_L = 1.5 \Omega$ and $R_L=75 \Omega$ for soft short to battery $R_L = 0.5 \Omega$ and $R_L=25 \Omega$ for soft short to ground	500	-	-	Ω
Turn on diagnostics booster mode						
Pgnd	Short to GND det. (below this limit, the output is considered in short circuit to GND)	-	-	-	1	V
Pvs	Short to V_s det. (above this limit, the output is considered in short circuit to V_s)	-	$V_s - 1$	-	-	V
Pnop	Normal operation thresholds. (within these limits, the output is considered without faults).	-	2	-	$V_s - 2$	V
Lsc	Shorted load det.	-	-	-	20	Ω
Lop	Normal load det.	-	0.06	-	1	k Ω
Lnop	Open load det.	-	3	-	-	k Ω
Rss	Soft Short Resistor	$R_L = 60 \Omega$ and $R_L=1000 \Omega$	5.8 ⁽²⁾	-	-	k Ω
AC-diagnostic						
$I_{ACTRESH}$	AC diagnostic current threshold	IB4 – D4= '0'	250	375	500	mA
		IB4 – D4= '1'	125	187	250	mA
Permanent diagnostics						
Pgnd	Short to GND det. (below this limit, the output is considered in short circuit to GND)	Power amplifier in Mute or Play, one or more short circuits protection activated	-	-	1	V
Pvs	Short to V_s det. (above this limit, the Output is considered in short circuit to V_s)	-	$V_s - 1$	-	-	V
Pnop	Normal operation thresholds. (Within these limits, the output is considered without faults)	-	2	-	$V_s - 2$	V
L_{SC}	Shorted load det.	1 Ohm	-	-	0.25	Ω
		Speaker mode	-	-	0.5	
		Booster mode	-	-	20	

Table 6. Electrical characteristics (continued)

Symbol	Parameter	Test condition	Min.	Typ.	Max.	Unit
L _{OP}	Normal load det.	1 Ohm	0.75	-	-	Ω
		Speaker	1.5	-	-	
		Booster	60	-	-	
V _O	Offset detection	Absolute value	1.5	-	2.5	V
T _{ph}	Thermal protection junction temperature	Gain attenuation of 60 dB	-	165	-	°C
T _{pl}		Gain attenuation of 0.5 dB	-	155	-	°C
T _{w1}	Thermal warning junction temperature	-	-	Tpl-10	-	°C
T _{w2}		-	-	Tpl-20	-	°C
T _{w3}		-	-	Tpl-35	-	°C
T _{w4}		-	-	Tpl-55	-	°C
Legacy mode						
V _{LEGMUTEMOV}	Legacy mode mute pin operative voltage	-	-	-	3.3	V
V _{LM_MUTE}	Legacy mode mute threshold	Gain attenuation of 80 dB	-	-	1.2	V
		Gain attenuation of 0.1 dB	2.6	-	-	V
V _{LEGONMOV}	Legacy mode ON pin operative voltage	V _{CC} = 14.4 V	-	-	14.4	V
V _{LM_ON}	Legacy mode threshold	Device in legacy mode	Vs-2	-	Vs	V
I ² C bus interface						
V _{I2CMOV}	I2C pin operative voltage	-	-	-	3.3	V
f _{SCL}	Clock frequency	-	-	-	400	kHz
V _{IL}	Input low voltage	-	-	-	0.8	V
V _{IH}	Input high voltage	-	1.3	-	-	V
PII-filter /ENABLE pin						
V _{ILENB}	Input low voltage	-	-	-	1.5	V
V _{IHENB}	Input high voltage	-	2.3	-	-	V
I _{ILENB}	Logic '0' output current	V _{IN} = 0.45 V	-	-	2	μA
I _{IHENB}	Logic '1' input current	V _{IN} = 2.3 V (IB0 D4=0)	-	-	2	μA
I ² S pin						
V _{I2SMOV}	I2S pin operative voltage	-	-	-	3.3	V
V _{IL-I2S}	Input low voltage	-	-	-	0.8	V
V _{IH-I2S}	Input high voltage	-	1.3	-	-	V
I _{IH}	Input low current	@ V _I = 3.3 V	-	-	5	μA
I _{IL}	Input high current	@ V _I = 0 V	-	-	5	μA

Table 6. Electrical characteristics (continued)

Symbol	Parameter	Test condition	Min.	Typ.	Max.	Unit
Unmute hardware (pin 34)						
V_{HWMMOV}	HW mute pin operative voltage	-	-	-	3.3	V
$V_{\text{HW_UNMUTE}}$	Hardware unmute threshold (POSO36 only)	Gain attenuation of 80 dB	-	-	1.2	V
		Gain attenuation of 0.1 dB	2.6	-	-	V
I_{UNMUTE}	Input low current	absolute@ $V_I = 3.3$ V	-	-	5	μA
	Input high current	absolute@ $V_I = 0$ V	-	-	5	μA
Address and load selection pin (optional for PowerSO36 package only)						
V_{LOADMOV}	LOAD pins operative voltage	-	-	-	3.3	V
V_{LOAD}	Load 1 Ohm threshold	-	-	-	2	V
I_{LOAD}	Input LOAD current	absolute@ $V_I = 3.3$ V	-	-	50	μA
V_{ADD}	Add threshold	-	1	-	-	V
I_{ADD}	Input ADD current	absolute@ $V_I = 0$ V	-	-	50	μA

- For the diagnostic timings information refer to the [Table 7](#).
- The values are the ones that guarantee the correct working of the diagnostic. Since the value is strongly dependable from the loudspeaker, we decided to target the values for the limits of open load and short load diagnostic.

3.4 Electrical characteristics typical curves

Figure 7. Quiescent current vs. supply voltage

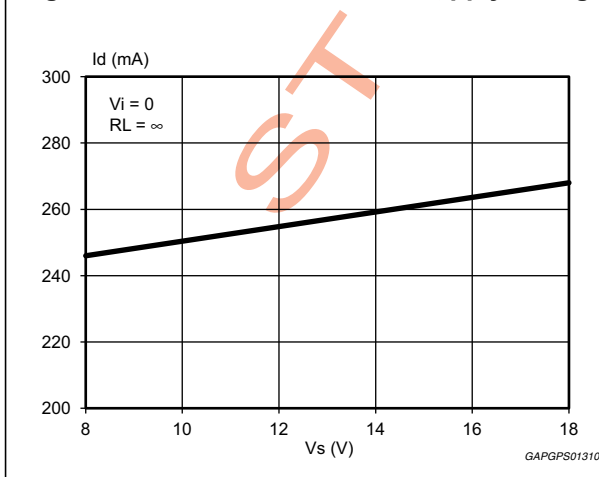
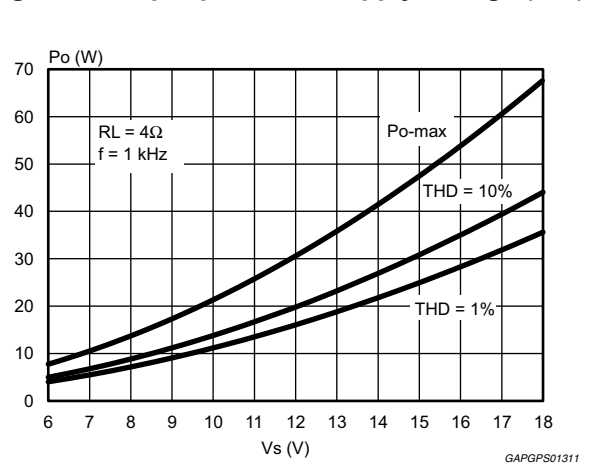
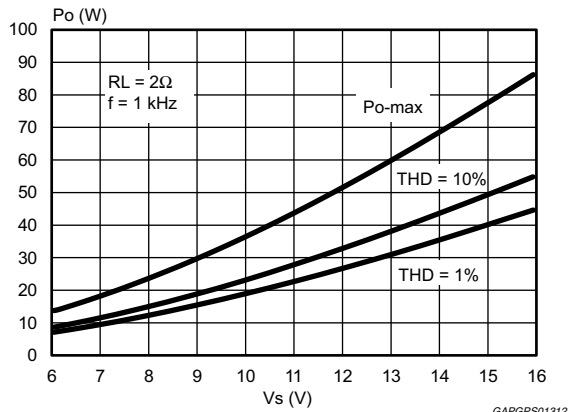
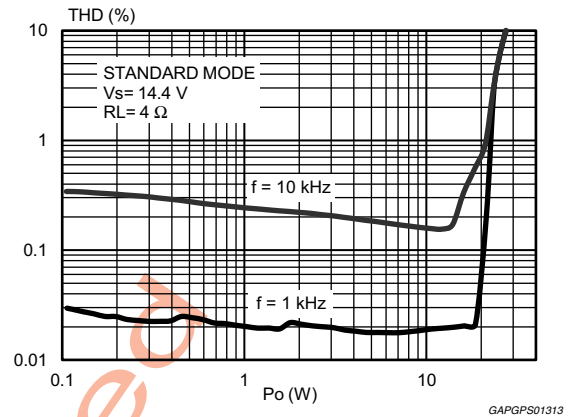
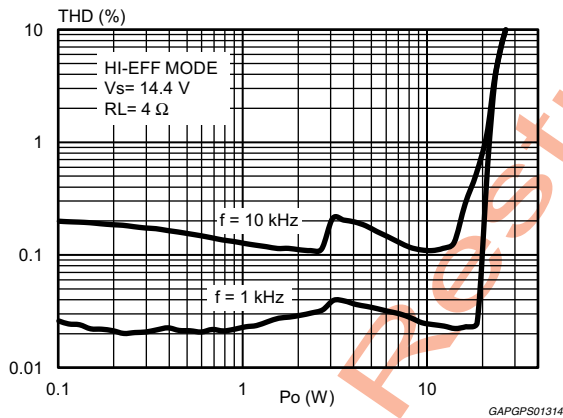
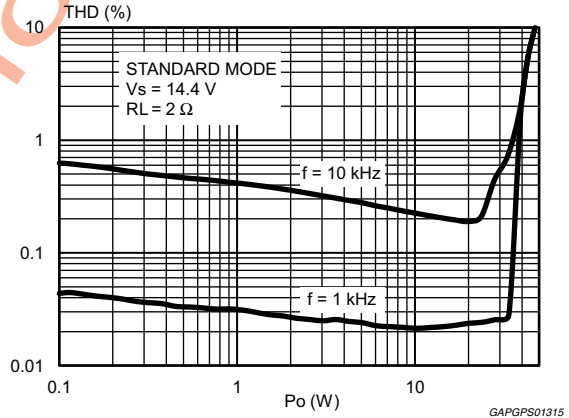
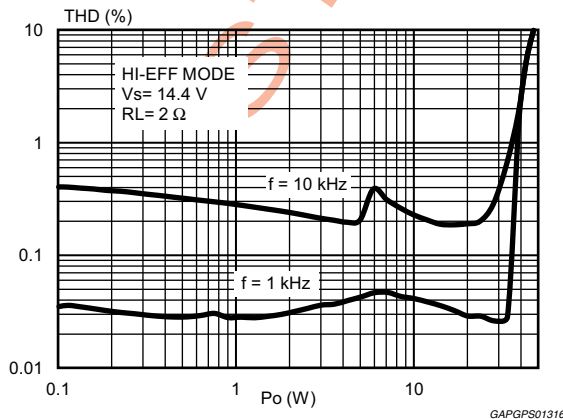
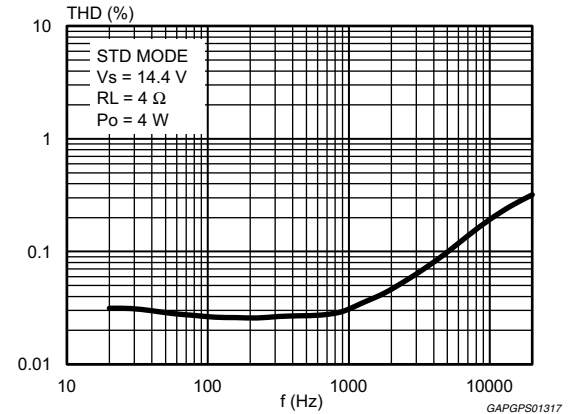
Figure 8. Output power vs. supply voltage (4 Ω)

Figure 9. Output power vs. supply voltage (2 Ω)Figure 10. Distortion vs. output power (4 Ω , STD mode)Figure 11. Distortion vs. output power (4 Ω , HI-EFF mode)Figure 12. Distortion vs. output power (2 Ω , STD mode)Figure 13. Distortion vs. output power (2 Ω , HI-EFF mode)Figure 14. Distortion vs. frequency (4 Ω , STD mode)

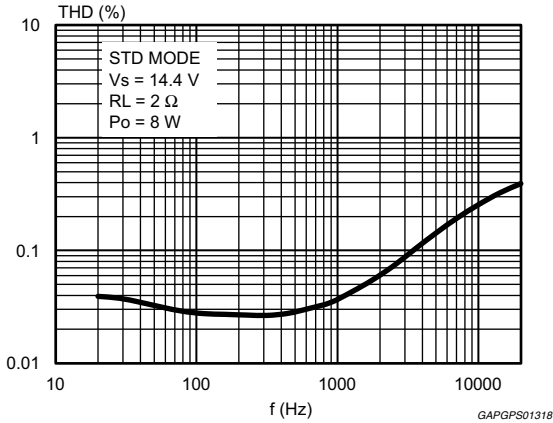
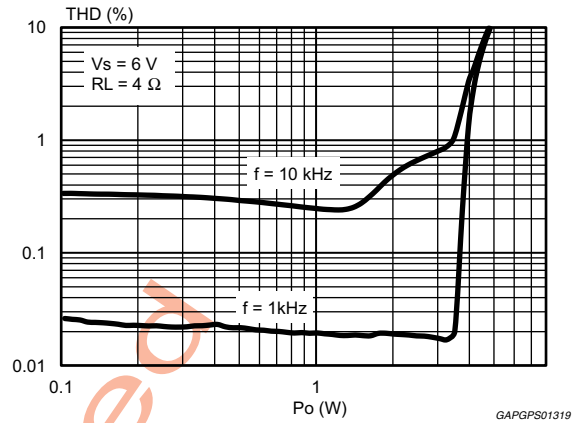
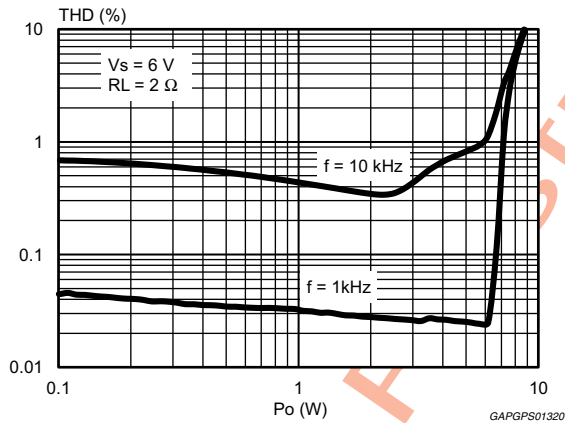
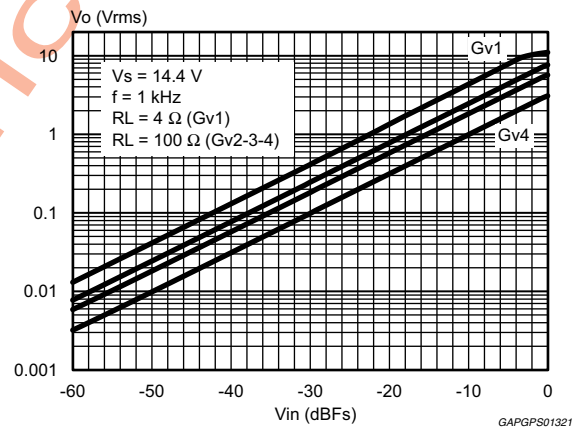
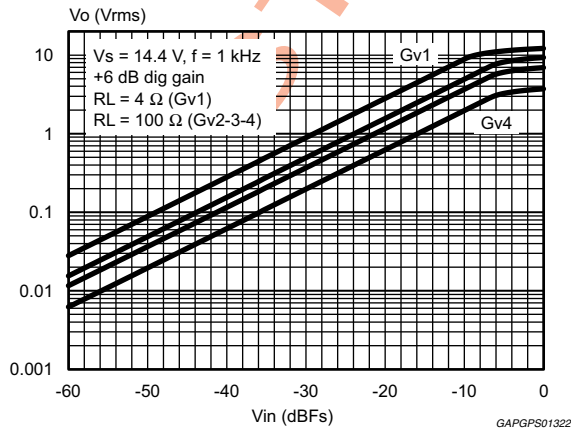
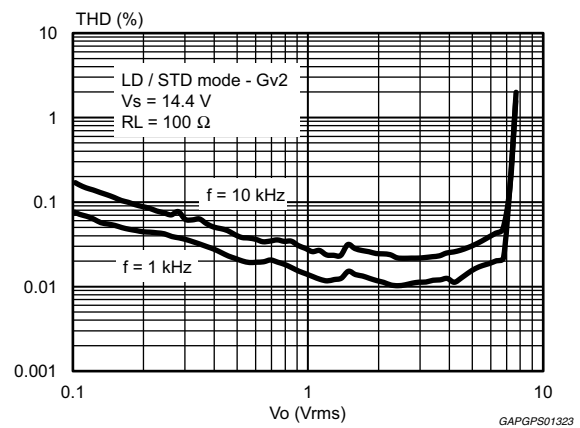
**Figure 15. Distortion vs. frequency
(2 Ω , STD mode)****Figure 16. Distortion vs. output power
(4 Ω , Vs = 6 V)****Figure 17. Distortion vs. output power
(4 Ω , Vs = 6 V)****Figure 18. Vo vs. Vin (Gv1-2-3-4 settings)****Figure 19. Vo vs. Vin (Gv1-2-3-4 settings + 6 dB dig. gain)****Figure 20. Distortion vs. output voltage (LD-Gv2)**

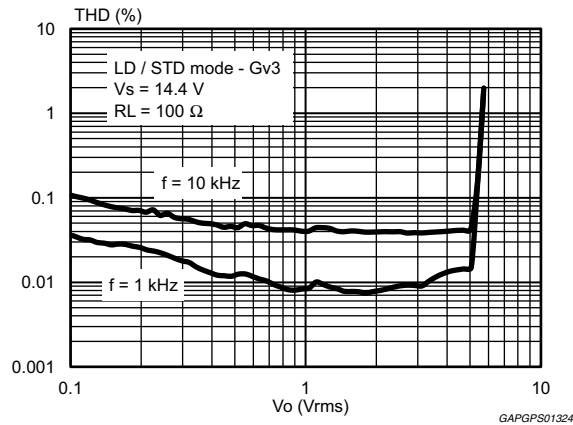
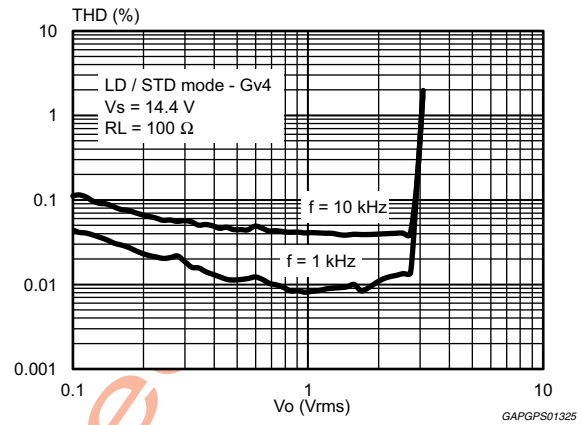
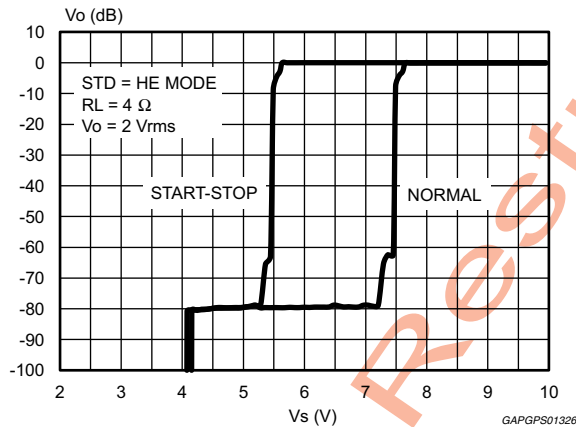
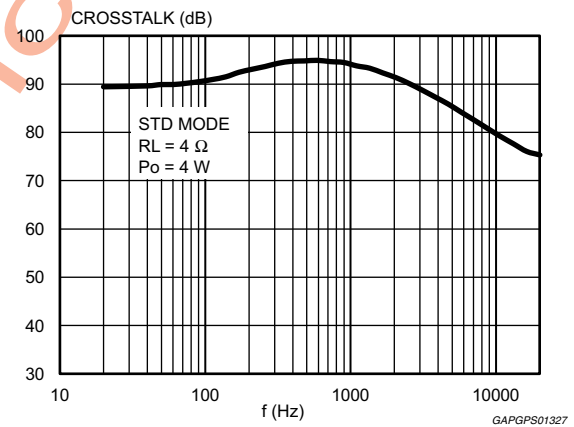
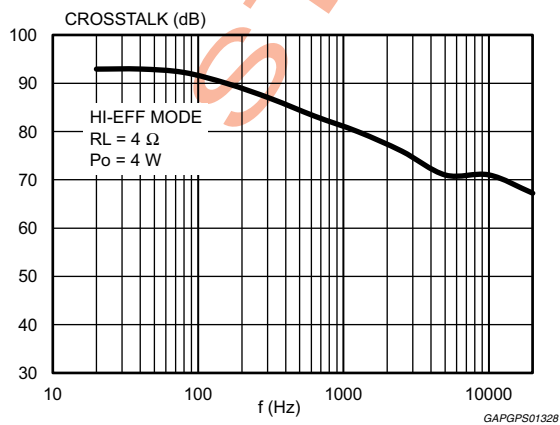
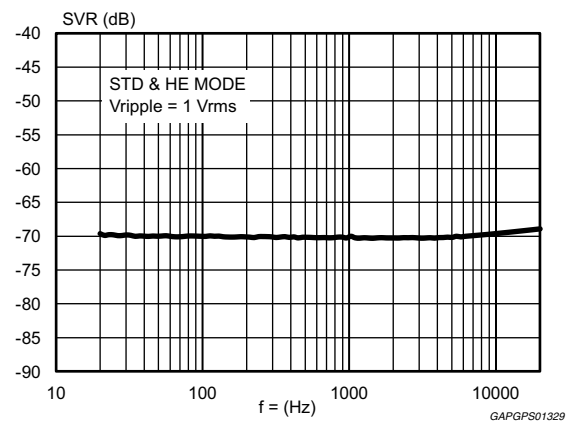
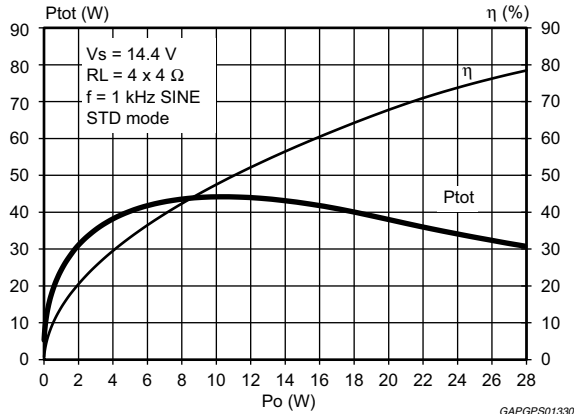
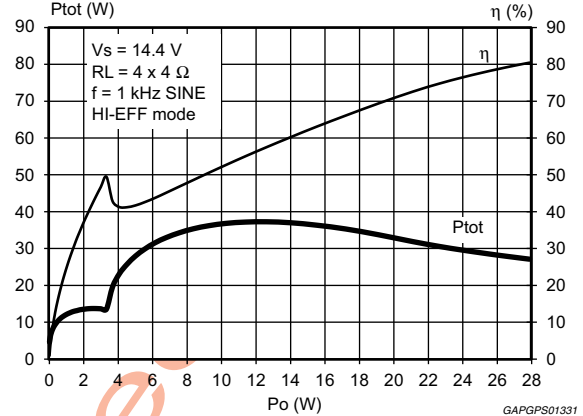
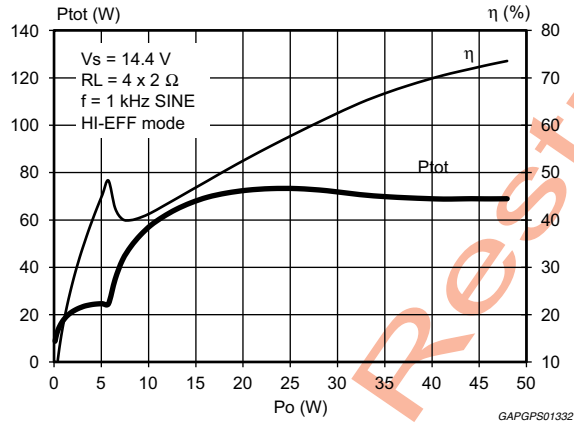
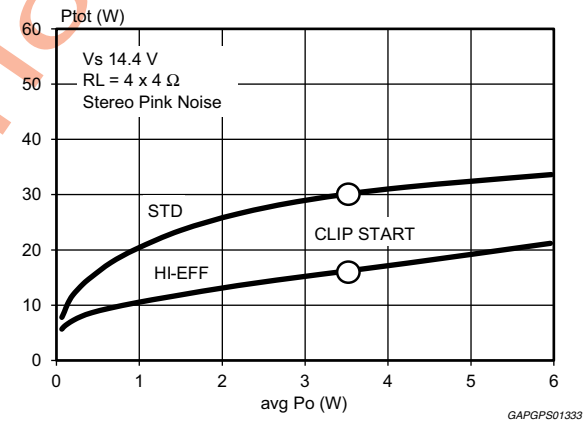
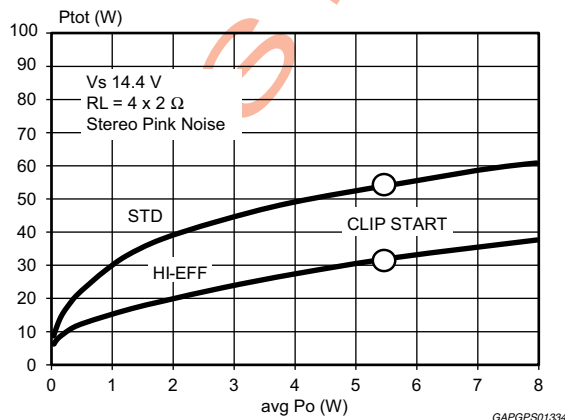
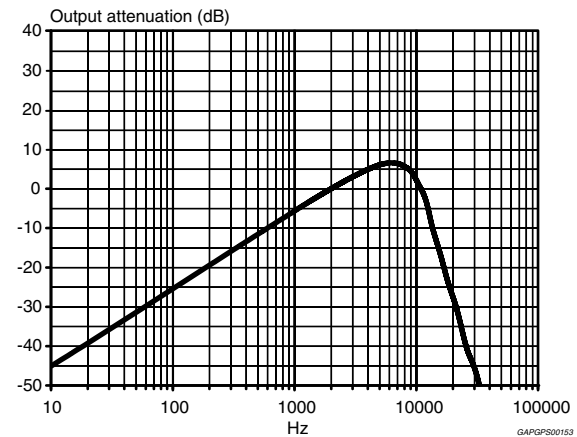
Figure 21. Distortion vs. output voltage (LD-Gv3)**Figure 22. Distortion vs. output voltage (LD-Gv4)****Figure 23. Output attenuation vs. Vs (normal & start-stop mode)****Figure 24. Crosstalk vs. frequency (STD mode)****Figure 25. Crosstalk vs. frequency (HI-EFF mode)****Figure 26. Supply voltage rejection vs. frequency**

Figure 27. Total power dissipation & efficiency vs. P_o (4 W, STD, Sine)**Figure 28. Total power dissipation & efficiency vs. P_o (4 W, HE, Sine)****Figure 29. Total power dissipation & efficiency vs. P_o (2 W, HE, Sine)****Figure 30. Power dissipation vs. average P_o (audio program simulation, 4 Ω)****Figure 31. Power dissipation vs. average P_o (audio program simulation, 2 Ω)****Figure 32. ITU R-ARM frequency response, weighting filter for transient pop**

4 Operation mode

There are six main operation modes:

- Standby
- Low quiescent current
- Legacy
- I²C amplifier
- Diagnostic
- Fault restart

The [Figure 33](#) in the next page shows state's diagram of TDA7802.

4.1 Standby

When the PLLen pin is below VILENB the amplifier is in standby mode and the current consumption is ISB.

4.2 Low quiescent current

When PLLen pin is above the VILENB and SCL is below VLM_ON (Legacy Mode threshold), only some internal circuitries is turned on, the "Short Circuit Protection" is on, the digital core is ready to work, the PLL is toggling.

Under these conditions, the amplifier is ready to receive instructions from the microcontroller or the legacy mode can be set.

4.3 Legacy

When PLLen pin is above the VILENB and the SCLlen pin is raised above VLM_ON, legacy mode is activated. The I²C bus is no longer accessible, and the I²C bytes will be set to default value. Pin SDAIm acts as hardware unmute pin in legacy mode.

4.4 I²C amplifier

When PLLen pin is above the VILENB and the IB5 D0 = '1', the device is ready to play. This means that the final power stage is on and the output is raised to Vs/2 Volt. The consumption is ID when still muted. Please remember the amplifier is muted by default, and then mute disable instructions (IB2-D4, D3) need to be sent. A hardware unmute pin is available in PSO36 only (pin 34).

4.5 Diagnostic

A single channel can be in diagnostic mode when IB4-D0 is '1' and PLLen pin is above the VILENB. When the diagnostic bit is activated before the I²C Amplifier Mode is active (IB5 D0 = '1'), the turn-on diagnostic is performed for all channels. Otherwise, when the bit is activated after the amplifier mode command, and an over current is detected, the run-time diagnostic will occur for the channel where the over current has been detected.


In both cases the output power stages are switched off and only parts of them are kept on, in order either to detect the possible misconnections correctly or to make the amplifier restarts in case of false detection. The I²C registers data are updated and can be read (see [Section 7.2](#) and [7.3](#) for more details).

4.6 Fault restart

The amplifier can be in this state after an over current is detected while is in I²C Amplifier mode (a) or in Legacy mode (b):

- If IB4-D0 is '0' at the over current event, the amplifier's states will follow the sequence: I2C Amplifier Mode -> Fault Restart Mode. If IB4-D0 is '1' the states will follow this sequence: I2C Amplifier Mode -> Fault Restart Mode -> (if the fault is still present) Diagnostic Mode -> (if the fault is still present) Fault Restart Mode. In both cases, part of the output power is switched off according with IB4-D2/D1.
- The amplifier state will change from Legacy Mode to Fault Restart Mode. Also in this case part of the output power will be switched off.

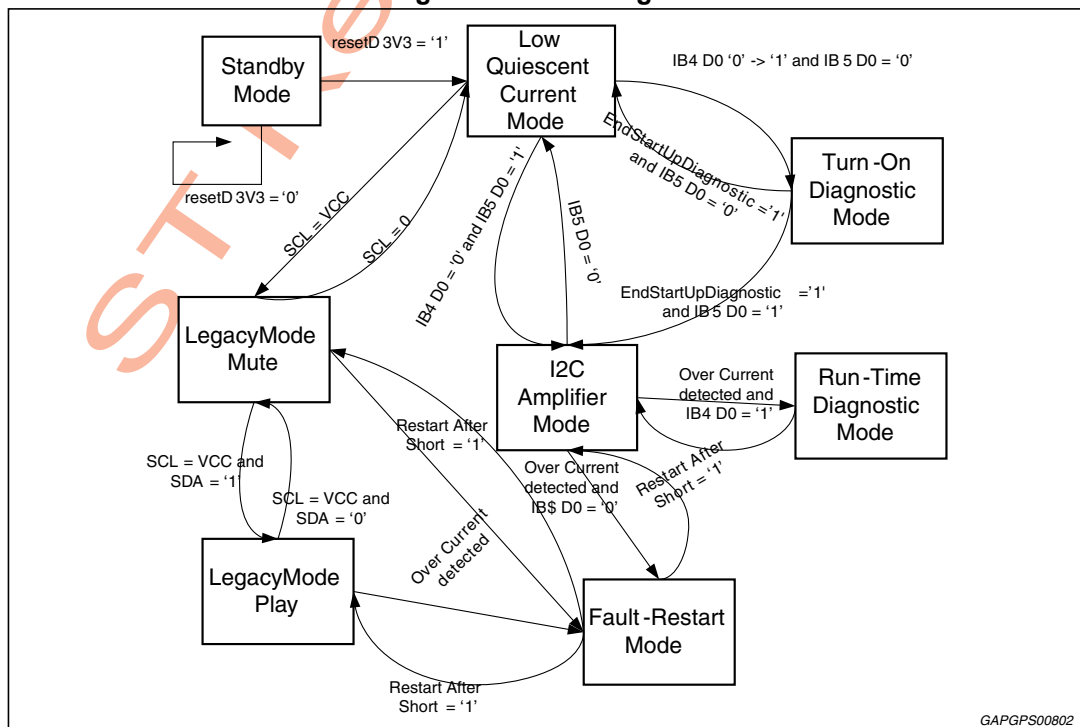Figure 33. State diagram




GAPGPS00802

5 Operation compatibility vs. battery

Here below the operation compatibility vs. the battery value is shown. For each battery voltage range, only a limited number of functions are available as it is shown below:

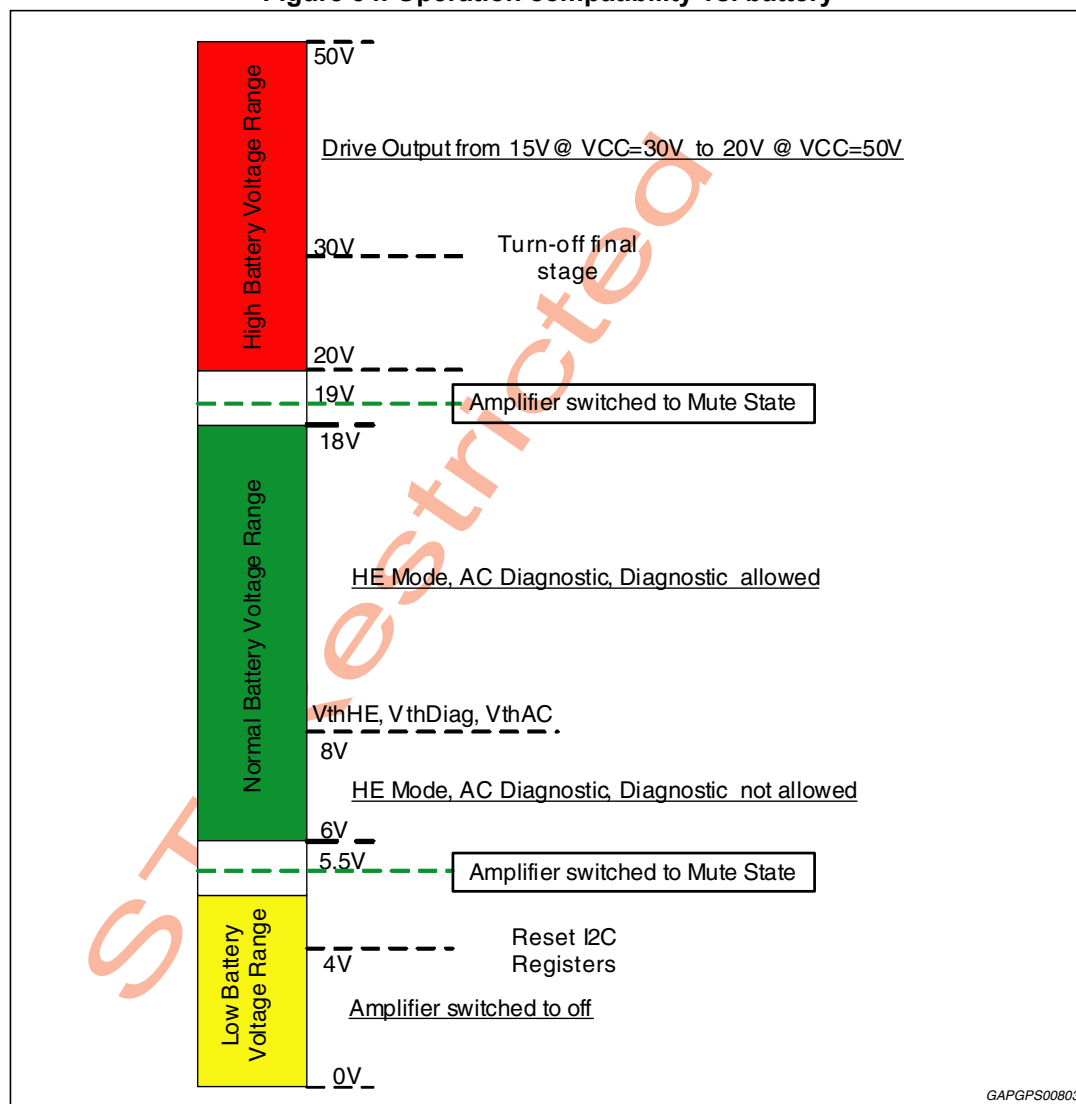Figure 34. Operation compatibility vs. battery



6 "PLLen" pin description

The PLLen pin has the two shared functions:

- Enable
- PLL filter

PLLen pin works as ENABLE when it has the logic level "low": in this case the IC is in standby mode and the current consumption is the lowest possible (ISB).

The amplifier is waken-up once PLLen is raised to the logic level "high" and it goes in the low quiescent mode. The information that the transition from standby mode to low quiescent current mode happened is written in DB0 D7. This is possible because the power on reset of the digital part is triggered and the TDA7802 is able to receive any instructions.

At this point PLLen, unless it is externally pulled down below 1.75 V, works as PLL filter and then it is forced from the TDA7802 to have a precise value between 2 and 3 Volt. This value is the one that allows the VCO toggling at the system frequency, and it is reached in a time depending from the PLL loop filter (about 100-150 μ s in the suggested configuration).


To avoid interfering with the PLL's functionality when IB3 D2 is set to '1', (therefore with I²S of 50 bit), after DB0 D7 = "1" the output of the microcontroller or microprocessor that drives the PLLen pin must be set in tristate. This last information is also available on CDdiag until the TDA7802 moves into a different state (I²C Amplifier mode or Legacy mode play).

During IC amplifier mode or legacy mode, it is possible to force the PLLen pin to low level. Before the device is back to the standby mode there is a fast-mute transition due to the PLL unlock (~ 2ms). The PLL will try to force the voltage of the pin PLLen by sourcing a current ILENB.

6.1 "PLLen" driving

The [Figure 3](#) shows the applicative schematic to drive correctly the PLLen pin. TDA7802 is supposed to be driven from a C or DSP.

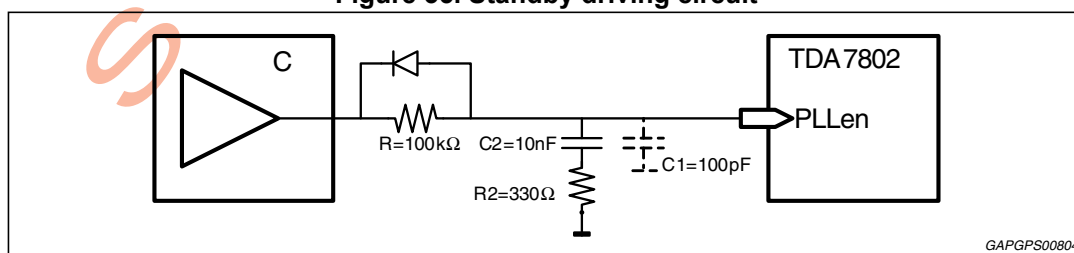Figure 35. Standby driving circuit



C2, C1 and R2 the external components of the PLL's loop filter; further filtering is internally integrated. The diode 1N4848 permits to force the PLLen pin to logic level low and allows the TDA7802 to force the pin voltage level when it is in low quiescent current mode. During the transition amplifier/legacy mode -> standby mode, TDA7802 tries to force the voltage on PLLen pin by sourcing a current. The former current will forward bias the diode. The buffer input resistance has to be as small as the pin is carried below V_{ILENB} .

When I²S with 50 bit is used, IB3-D2 set to '1', the C1 capacitor of 100 pF should be added. Otherwise it should not be connected.

7 Functional description

7.1 Voltage regulators timing

Pins D3V3 and A3V3 are respectively the digital and analog internal regulators. The D3V3 rises right after the PLLen pin is at the logical value "1" and its rising time depends on the filter capacitor; the value suggested for this filter is of min 4.7 μ F.

The A3V3 rises after any command that moves the amplifier from low quiescent current mode; the rising time depends on the combined effect of the external capacitor on the pin and of an internal 2 ms ramp: if the capacitor value is 22 μ F or lower, the internal ramp effect is dominant and the rising time will be about 2 ms. On the other hand, when the capacitor has a higher value, the rise time will be higher as well. The suggested value for this capacitor is 22 μ F (47 μ F) at least.

7.2 Turn-on diagnostic description

The turn-on diagnostic is triggered on the rising edge of bit IB4 D0 when IB5 D0 is "0". This happens when the amplifier is in low quiescent current mode and the Legacy mode is not active. It is possible to run one or more turn-on diagnostic sequences according to the following procedure:

1. wait the previous cycle is over
2. read the data bytes DB1, DB2, DB3 and DB4

Please note that all these instructions must be sent while the amplifier is still in low quiescent current (IB5 D0 = "0"), otherwise they won't be executed.

Turn-on diagnostic does not start if V_{CC} is below 8 V or one of the muting condition is present, (low battery mute, high voltage mute, PLL-unlock mute, thermal mute, hardware pin mute).

Note: The diagnostic enable bit (IB4 D0) must be set before the amplifier mode bit (IB5 D0). DB1, DB2, DB3 must be read before DB4 (after DB4 is read the DB1-2-3-4 are reset).

The detected faults are here described:

Soft Short to GND: it detects the presence of a resistor (see [Table 6](#) in "Turn-on diagnostic" section) connected between an output and ground, whose effect could give a wrong open load or short across load diagnostic's result (causing an anomalous current consumption in some cases).

Soft Short to VS: it detects the presence of a resistor (see [Table 6](#) in "Turn-on diagnostic" section) connected between an output and battery, whose effect could give a wrong open load or short across load diagnostic's result (causing an anomalous current consumption in some cases).

Short to GND: it detects the hard connection between an output and ground. The value of the short is able to pull the output between 1.5 V and ground.

Short to VS: it detects the hard connection between an output and battery. The value of the short is able to pull the output between (battery - 1.5 V) and battery.

Short across the speaker: it detects the hard connection across the speaker that is below a certain value. This value guarantees that the IC is able to drive the lowest speaker written in this data sheet.


Open Load: it detects the missing of the speaker's connection.

The diagnostic's results are updated into the data bytes DB1, DB2, DB3 and DB4 (one for each channel) after the diagnostic is over.

The flow of the diagnostic includes some steps as described below.

- During the first part, the soft-short evaluation is performed. The outputs and an internal reference line are pulled up to a voltage of $2/5 \cdot V_{\text{battery}}$ in a time T_{STR} and then compared for a time T_{PLS} . During the plateau time, the comparator outputs are read from the digital part. The outputs are then pulled down to zero (see Figure 36). The A3V3 supply is 0V and the output stage is in tri-state during this phase.

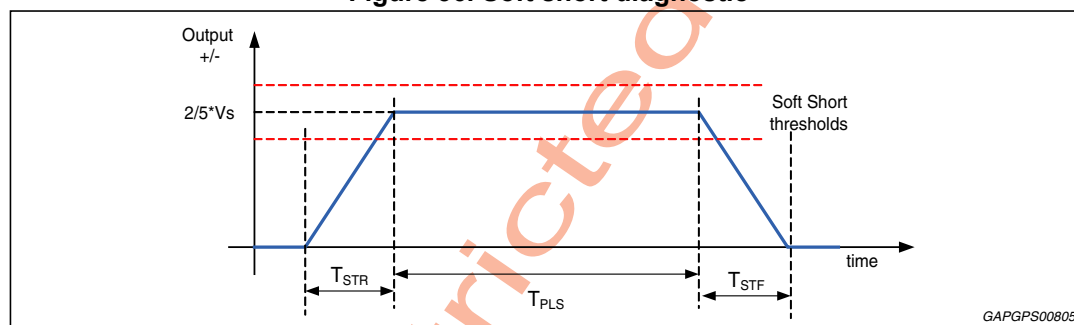Figure 36. Soft short diagnostic



- If a soft short is detected, the short to GND/VCC evaluation follows. Pin A3V3 goes up as the amplifier stage is turned on; the power and the outputs are risen up to $1/2 \cdot V_{\text{battery}}$ and then compared to $(V_{\text{battery}} - 1.5 \text{ V})$ and 1.5 V for a time T_{PLS} . At the end of the plateau (T_{PLS}) output and A3V3 go back to 0V and the results obtained are written into the I²C Bus registers once the diagnostic is over.


In case the short to VCC or GND is detected during this phase a '1' is written in DBx-D1/D0 (VCC/GND) but not in DBx-D6. In case the hard short is not detected a '1' is written all DBx-D1/D0 and DBx-D6.

The turn-on diagnostic is then completed and the amplifier goes back to the low quiescent current mode.

- However, if a soft short is not detected, it means that no Short to VS/GND are present as well, and don't need to be checked. In this case, short across the speaker and the open load evaluation can be performed. Pin A3V3 goes up as the amplifier stage is turned on and the outputs are risen up to $1/2 \cdot V_{\text{battery}}$. A first pulse for "Short load detection" is done: exploiting the presence of a D/A converter, a subsonic (inaudible) voltage pulse is digitally and internally generated and converted. The pulse amplitude increasing is stopped when the current flowing through the speaker I_{speaker} is the same of a prefixed one I_{high} (high current) or because it reaches the maximum value permitted. Since the differential output voltage V_o is well known, it is possible to keep monitored the value of the connected speaker during the transition and plateau. If I_{speaker} reaches high then, when $V_o < V_{\text{short}}$ (short circuit threshold) the result is short load (DBx - D3 = '1'), otherwise it is normal load (DBx - D3 = '0'); when I_{speaker} does not reach I_{high} the turn-on diagnostic is not completed yet because the result could be still normal or open load.
- This is called "Open load detection". If IB4 D1/D2 = 1 the power DMOS need to be changed again: the outputs are pulled down to zero, the DMOS are switched and then the outputs raised up to $1/2 \cdot V_{\text{battery}}$ again. This sequence is done in order to avoid any pop noise during the power set. The procedure is the same of the previous case

afterwords or in case of IB4 (D1/D2) = 0. The pulse amplitude is stopped when the current flowing through the speaker I_{speaker} is the same of prefixed one I_{low} (low current) or because it reaches the maximum value permitted. When I_{speaker} reaches the value I_{low} and $V_o < V_{\text{open}}$ (open load threshold) it's mean that the speaker is a normal load (DBx-D2='0'). In all other case the result will be open load (DBx-D2='1') (see [Figure 37](#)).

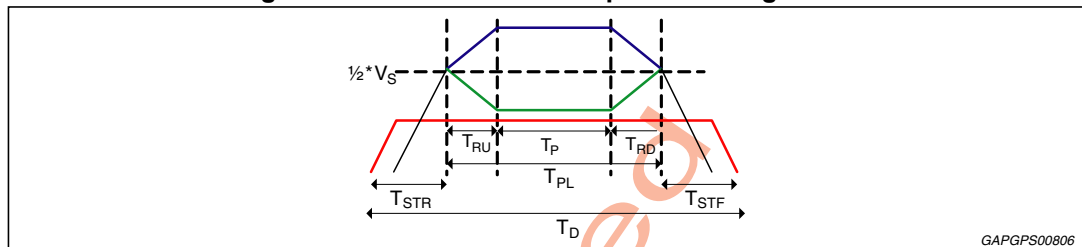Figure 37. Short circuit and open load diagnostic




The whole diagnostic time depends on the number of pulses that are done. At least two pulses are done, but they could be three in case of open load. The values inserted into the [Table 7](#), are calculated basing on $F_s = 48000$ Hz.

In all cases the fault is sent out to the registers only if it is stable throughout the whole plateau's period. If this does not happen any misconnection (Soft-short, Short to VCC/GND, Short Across or Open Load) are not reported. The faults for the turn-on diagnostic are written in DB (1, 2, 3, 4) (D1, D2, D3, D4) (a byte for each channel and a bit for each fault). They are consistent if DB0 D6 = "1". After a reading the data byte are reset.

The fault-detection thresholds for short to GND/ V_s remain unchanged independently from the gain setting. They are as in [Figure 38](#).

Figure 38. Short to GND and short to V_s , threshold description



Concerning the short across the speaker / open speaker, the threshold changes from booster mode and speaker mode diagnostic setting, as load expected are pretty different (either normal speaker's impedance or high impedance). Speaker or booster mode are selectable from IB4 D2 for channels 1 and 3 and IB4 D1 for channel 2 and 4. The values in case of speaker mode are as in [Figure 39](#). The same thresholds will change as in [Figure 40](#), if booster mode diagnostic is selected.

Figure 39. Short across the speaker and open load threshold description, in speaker/amplifier mode




Figure 40. Short across the speaker and open load threshold description, booster/line driver mode

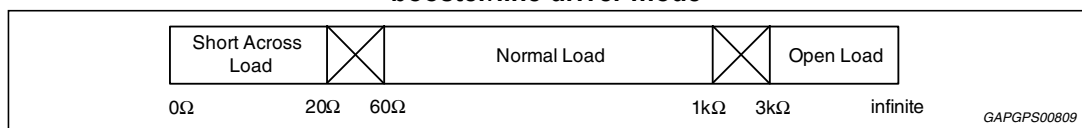


Table 7. Start-up pulse typical timings ($F_s = 48$ kHz)

Symbol	Parameter	Min	Typ	Max	Unit	Note
T_{STR}	Time to rise the outputs from 0V to a certain battery's percentage	-	10 (+ 10)	-	ms	When A3V3 goes up, the number in the bracket has to be added
T_{STF}	Time to rise the outputs from a certain battery's percentage to 0V	-	10 (+ 10)	-	ms	When A3V3 goes down, the number in the bracket has to be added
T_{PLS}	Plateau time for soft-short and short to VCC/GND diagnostic	-	80	-	ms	This time does not depend from the load and is not stretchable setting bits IB1-D6/D5
T_P	Plateau time for short circuit or open load diagnostic detection phase	-	80 ⁽¹⁾	-	ms	$T_P = 86 \text{ ms} \cdot X$ when $140 \text{ ms} - 2 \cdot T_{RU} > 80 \text{ ms}$
						$T_P = (140 \text{ ms} - 2 \cdot T_{RU}) \cdot X$ when $140 \text{ ms} - 2 \cdot T_{RU} < 80 \text{ ms}$
T_{PL}	Pulse time for short circuit or open load diagnostic detection phase	-	120	122.4 ⁽²⁾	ms	$T_P = (2 \cdot T_{RU} + T_P) \cdot X$
X	Multiplier factor in case of diagnostic active	-	1,2,4,8	-	-	IB1-D6/D5 settings
$T_{RU}=T_{RD}$	Ramp-up and ramp-down diagnostic pulse's time	-	14 ⁽³⁾	-	ms	2 ohm case
		-	20 ⁽³⁾	-	ms	4 ohm case
T_{SS}	Soft-short diagnostic time	-	100	-	ms	Output rising time + Output falling time + plateau time (no A3V3)
T_{HS}	Short to VCC and GND diagnostic time	-	120	-	ms	A3V3 rising and falling time (10 ms x2) + Output rising and falling time + plateau time
T_D	Short load and open load diagnostic time	-	148	-	ms	2 ohm case ($X=1$)
		-	160	-	ms	4 ohm case ($X=1$)
T_{tot}	Total diagnostic time	-	260	-	ms	4 ohm load and no faults ($T_{tot} = T_{SS} + T_D$)
		-	220	-	ms	Hard or soft short to supplies ($T_{tot} = T_{SS} + T_{HS}$)
		-	420	-	ms	Open load ($X = 1$, IB4 (D1/D2) = 0) $T_{tot} = T_{SS} + T_{D1} + T_{D2}$
I_{high}	Test current for the short load pulse	-	200 40	-	mA	For speaker mode For booster mode
I_{low}	Test current for the open load pulse	-	40 2	-	mA	For speaker mode For booster mode

- For typical loudspeaker of 2 and 4 ohm.
- These numbers are obtained from simulations.
- Typical values for 4 Ω and 2 Ω and zero offset. These numbers depend on the loudspeaker and also from the intrinsic offset of the amplifier. For 2 Ω loudspeaker, -30 mV offset and $F_s = 48$ kHz $T_{RU} = 21.2$ ms; for 4 Ω and same surrounding conditions $T_{RU} = 22.1$ ms. Under these conditions $T_{PL} = 122.4$ ms for 2 Ω and 124.4 for 4 Ω . For higher values the number are not reported here.

When the amplifier is biased and the IB4 D0 = "1", the permanent diagnostic is enabled. The turn-on diagnostic state is held until an over current event is triggered. When this happens, a new diagnostic cycle can start.

7.3 Permanent diagnostic

The detectable faults are (see [Table 6](#) for definitions):

- Short to GND
- Short to Vs
- Short across the speaker

Then following additional features are also provided:

- Output offset detection
- AC diagnostic

When an over current occurs, TDA7802 has two different cycles that could react with:


- Restart cycle: it is a 2 ms pulse. During this period a check of the output is performed.
- Plateau cycle: it is an 80 ms cycle. During this period a check of the outputs is performed and the results of diagnostic analysis are written into the I²C bus.

TDA7802 has two different operating behaviors when an over current is detected:

- Restart mode, (IB4 D0 = "0"). The diagnostic is not enabled. Each audio channel operates independently from each other. If any of the above mentioned faults occurs, only the channel(s) where the fault happened is shut down. The diagnostic performs restart cycles every 2 ms until the fault condition is present. The amplifier restarts in play only once the overload is removed. In Restart mode reporting diagnostic results is turned off and the corresponding bits in the channels' data byte registers will not be set accordingly.
- Diagnostic mode, (IB4 D0 = "1"). It is enabled via I²C and self activated if an output overload occurs to the speaker outputs. If any of the above mentioned faults occurs, only the channel(s) where the fault happened is shut down. Once activated, the diagnostic procedure develops as below:
 - The diagnostic performs one restart cycle in order to avoid momentary re-circulation spikes which could give erroneous results. If a normal state (no overloads) is detected, the channel returns back active.
 - Instead, if after the restart cycle, the overload is still detected, then the diagnostic performs a plateau cycle.
 - After the plateau cycle, a restart cycle is going to be performed every 2 ms until the fault condition is not removed. The data acquired from the plateau cycle are stored and can be read from the microprocessor. If the fault condition persists, a new plateau cycle can be programmed from I²C simply by reading. This ensures continuous diagnostic throughout the car-radio operating time.

For a more immediate understanding, the permanent diagnostic's flowchart is as in [Figure 41](#).

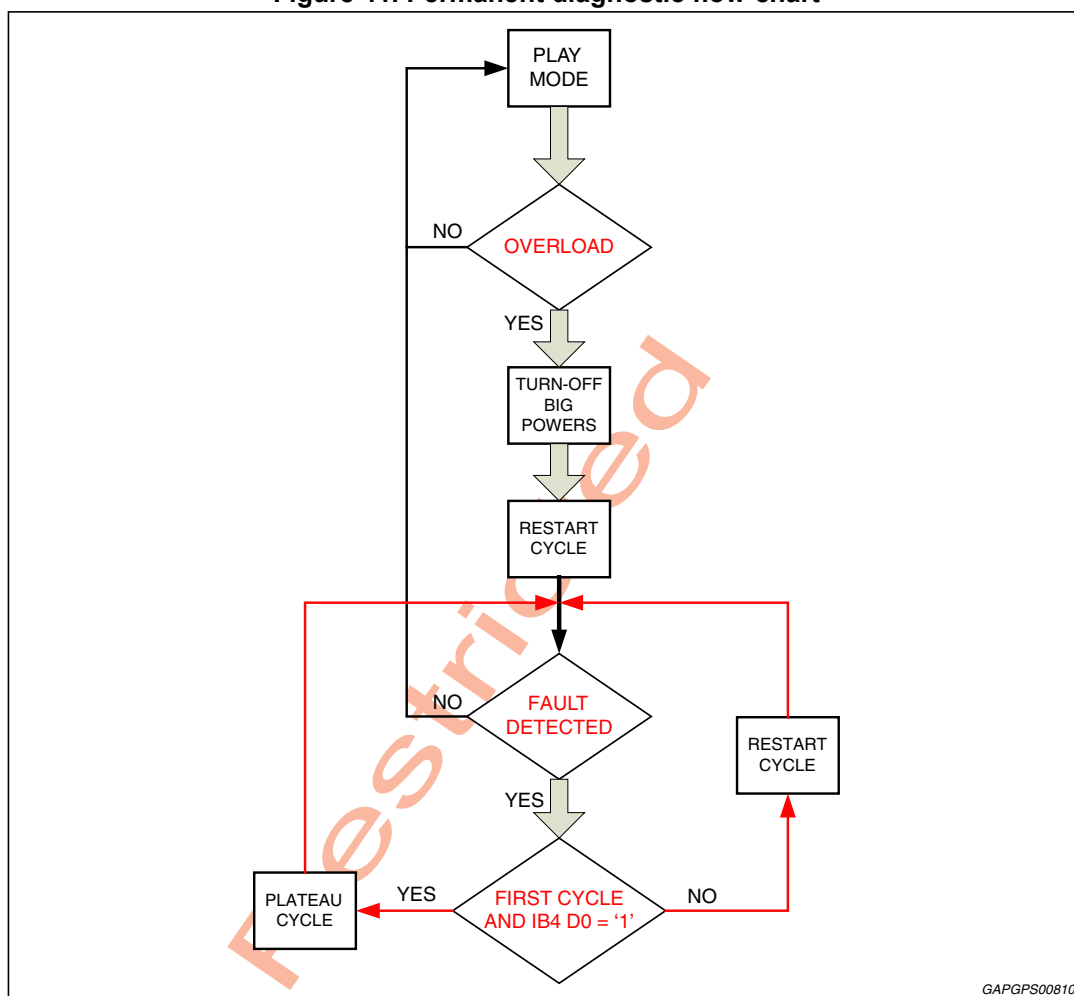Figure 41. Permanent diagnostic flow-chart



When a plateau cycle is done during the permanent diagnostic the bit D5 of byte connected to the channel where the overload occurred is set to "1". If all the bits related to the diagnostic are "0", it means that the fault has been removed or has not been detected or it occurred an over current on a loudspeaker with a very high inductance and it took more than 2 ms to get the current reduced.

A plateau cycle can be recalled by means of a reading procedure of bytes DB1/2/3/4 when the amplifier is performing the restart cycle. As for the turn-on diagnostic, when DB4 is read DB1/2/3/4 are reset, therefore the incremental reading is suggested in order not to miss any data.

Please note that if the over-current cause was removed before the reading the plateau cycle cannot restart.

7.4 AC diagnostic

The goal of this feature is to detect accidental disconnection of tweeters in 2-way speaker and, more in general, the presence of capacitive (AC) coupled load. This diagnostic is based on the notion that the overall speaker's impedance (woofer + parallel tweeter) tends to increase towards high frequencies if the tweeter gets disconnected. This happens because the remaining speaker (woofer) would be out of its operating frequency's range (high impedance).

To determine the load impedance, a sine wave tone of a suitable frequency should be provided to the output pins and the AC diagnostic is able to determine if a the tweeter is connected or not. The tweeter is not connected if for four consecutive sine waves the current threshold on the load is not crossed.

AC diagnostic is managed by I²C commands. When IB4 D3 ="1", the AC diagnostic is enabled; IB4 D4 is used to choose the current level threshold that is compared during the test.

The results of the AC diagnostic test are stored in DB5 D3..6. It is written "1" if the tweeter for that channel is present.

The AC diagnostic is able to give the correct results only if the input signal $V_{out} < V_s - 4V$. User knows that this condition is verified by reading "0" in DB5 D7. When DB5 D7 = "0", it mean that the test's signal was too high.

7.5 Output DC offset detection

Any DC output offset detection exceeding $\pm V_o$ are signalled out. This inconvenient might occur as a consequence of improper dc input signal. The offset detection is done at the end of the digital chain by a low pass digital filter. The offset detection is permanent, and then it works also in play mode. Results can be read in DB1, DB2, DB3 and DB4-D5. These bits are continuously refreshed.

7.6 Double faults

Faults can occur simultaneously. When this happens, faults are read out in accordance with the priority table ([Table 8](#)).

Please note that a "short to GND" and a "short to Vs" can be simultaneously read only when an open load is present; however it would mean three faults at the same time, which is not covered by TDA7802.

Table 8. Double faults priority

-	Soft short to GND ⁽¹⁾	Soft short to Vs ⁽¹⁾	Short to GND	Short to Vs	Short across load	Open load ⁽¹⁾
Soft short to GND	Soft Short to GND	/	Short to GND	/	Soft Short to GND	Soft Short to GND
Soft short to Vs	/	Soft Short to Vs	/	Short to Vs	Soft Short to Vs	Soft Short to Vs
Short to GND	Short to GND	/	Short to GND	/	Short to GND	Short to GND
Short to Vs	/	Short to Vs	/	Short to Vs	Short to Vs	Short to Vs
Short across load	/	/	/	/	Short across load	N.A.
Open load	/	/	/	/	/	Open Load

1. Open load, soft short to GND and soft short to Vs are only available for the turn-on diagnostic; in fact the permanent diagnostic can be triggered from an over current event, and none of these events can be the cause of an over current.

7.7 Legacy mode

In case of application without I²C bus, the TDA7802 can be turned on in legacy mode.

In order to put the device in legacy mode it is enough to tie the pin SCLlen to Vs. The amplifier is still turned-on by the pin PLLen and then it goes straight from low quiescent current mode to amplifier mode. The mute-play condition is managed from the pin SDAIm: the user can decide whether to use this pin or not:

- When it is used, the unmute will occur only after SDAIm is raised above the higher VLM_MUTE threshold and it is performed internally by a digital ramp (note: the internal digital ramp is by default set to the fastest play/mute transition). The hardware unmute can be received only after the filter is configured and ready to go in play mode (note: "ready to go in play mode" means that the outputs have reached Vcc/2 level and the RAM is cleaned), otherwise it is ignored. When SDAIm is pulled below the lower VLM_MUTE threshold, the amplifier goes in mute mode. A RC of about 2 ms is suggested for this pin, especially when it is used for mute the amplifier before PLLen is pulled down to zero.
- SDAIm must be set at 3.3V (5V). The unmute is performed internally by a digital ramp, after the filter is configured. Instead, the mute is done after PLLen is pulled down to zero, because the PLL's lock lost. The PLL unlock muting has a time constant of about 2 ms.

The I²C instruction bytes are set to a default value, and some of the selectable features are no longer available.


The default is set to “0” for all bits, except IB2 (D4/D3) = 11. This choice is needed to set the amplifier in “play mode”.

7.8 Thermal protection

The TDA7802 has four thermal warning (Tw1, Tw2, Tw3, Tw4) which are stored in I²C data bytes. Only one of the thermal warnings can be sent to the pin CDdiag and it is selectable via I²C bus.

A temperature dependent mute function is implemented in order to protect the junction from the over temperature and prevent the IC from sound quality degradation. Over the temperature T_{pl} the device is gradually carried in mute. When the temperature is T_{pl} the output signal is attenuated of 0.5 dB, while at the T_{ph} the attenuation is of 60 dB. The distortion is kept low throughout the whole muting transition. The thermal protection's behaviour is shown in [Figure 42](#).

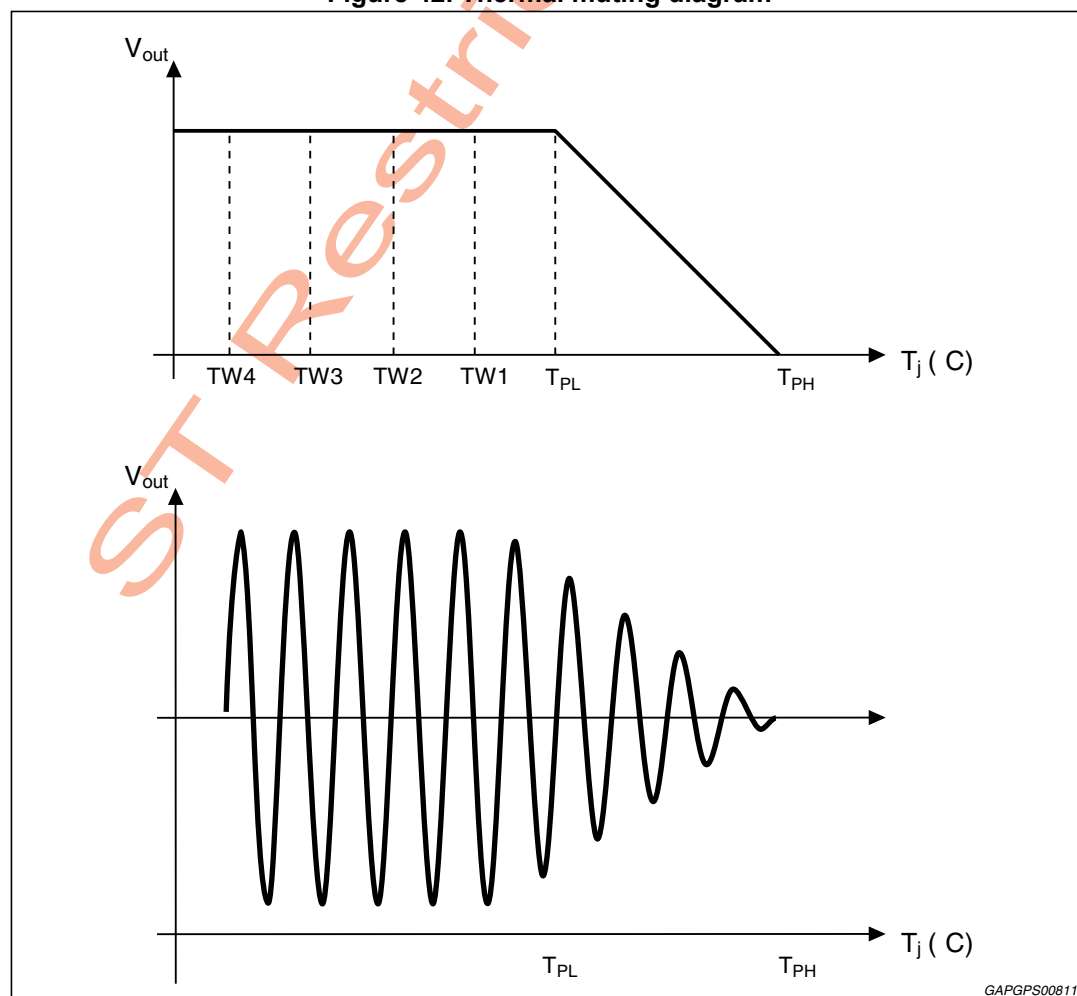Figure 42. Thermal muting diagram



7.9 Mute management

The transition Mute → Play can happen once the device is in amplifier mode and IB2-D3/D4 = "1" or after it has been put in mute for one of the causes listed in [Table 9](#). It is done by means of a digital ramp whose time constant is programmable by IB2 D7, D6 and D5 bits. The digital un-mute works in this way: all the D2A converter's elements, which at the beginning are off, are progressively turned on until they reach the steady value that is present at the input of the converter.

The transition Play → Mute occurs when certain conditions are verified and it can be Digital or Analog. An over view of all the events that might happen are reported in the [Table 9](#).

Table 9. Transition play to mute strategy

Cause of transition Play → Mute	When it happens	Analog	Digital
I ² C instruction	When bit IB2 D4,D3 = "0" (Mute command)	No	Yes Timing for transition are fixed by IB2 D7, D6, D5
Hardware mute in legacy mode	SDAIm is pulled below the mute threshold	Yes	Disabled
Low battery mute	When there is a battery dip and the Vs goes below the auto mute threshold (selectable by IB2 D1)	Yes	IB2-D2 = 0: Yes IB2-D2 = 1: Disable If digital mute is enabled, timing for transition are fixed by IB2 D7-D6-D5
High battery mute	When Vs ramp up above 19V	Yes	No
PLL un-lock	The PLL lock detector goes down for some reason	Yes	Not possible because in case of un-lock, digital core is reset so not working
Thermal mute	When Tw1 is "1"	Yes	Disabled
Tristate command	No	Yes	Timing for transition are fixed by IB2-D7, D6, D5


7.9.1 Auto-mute threshold

The device in play mode is put in mute when the supply voltage gets below the V_{AM} threshold.

The muting strategy for this kind of event is reported in [Figure 43](#). Both analog and digital mute start when the supply voltage is below V_{AM_HIGH} . The digital mute transition lasts a period T_{MUTE} . The analog mute attenuation is proportional to V_s ; when V_s is at V_{AM_LOW} the mute attenuation is A_M .

Note that, once it is engaged, the digital mute procedure is carried up the A_M attenuation. It is not possible to stop it and move the device to play mode in advance. The concept of this procedure is to avoid that fast oscillation on V_s can generate fast oscillation on the output.

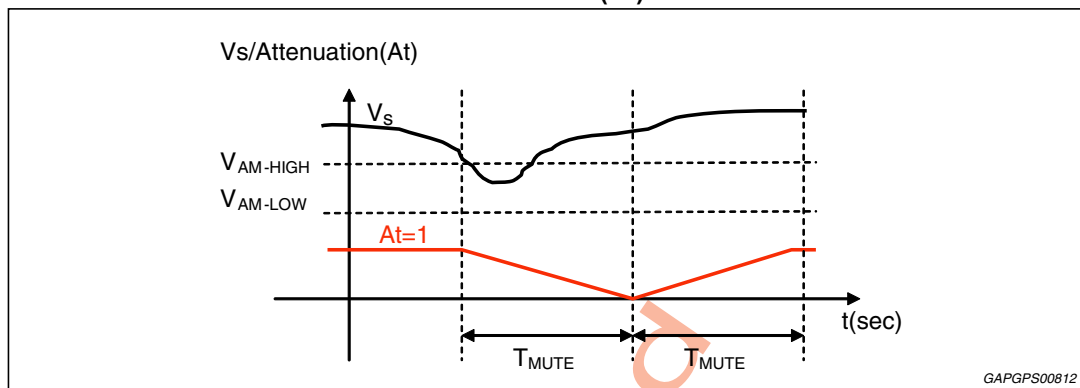Figure 43. Low voltage mute attenuation, supply voltage variation (V_s); result digital attenuation (A_t)



When the battery goes below the auto-mute low threshold, it is possible to disable the digital muting if IB2 D2 = "1". In this case the mute will be only analog.

The digital mute is also disabled during the turn-on diagnostic.

7.10 SB-I Improved high efficiency principle

The TDA7802 has an improved high efficiency that minimizes the power dissipated through the heat sink thanks to the musical signal characteristic. All bridges are connected to a common bar by means of four power switches. When an input signal goes under a threshold that depends on the V_s level, the switch will short the corresponding output to the common bar in such a way that it can exchange current with the other channel. The dissipation reduction can be up to 50% compared to standard AB class.

The TDA7802 sets the high efficiency mode by default, but it can be changed through the bits IB0 D3, D2, D1 and D0.

7.11 1 Ohm load driving configurations

The TDA7802 has the possibility to drive 1 ohm loads. The functionality is possible since the two output powers gates (master and slave) are shorted together and only one of the two drivers is effectively working (the master). At the same time the outputs are shorted on the application in such a way to minimize the resistive path.

The pins 20 and 21 are dedicated for this function, as it follows:


Pin 21 & pin 20:

- "00" 2 ohm for all channels
- "01" (ch1 and ch2): 1 ohm, (ch3 and ch4): 2 ohm
- "10" (ch1 and ch2): 2 ohm, (ch3 and ch4): 1 ohm;
- "11" all channels are set to 1 ohm.

The master channels are channel 1 (when ch1 and ch2 are configured to 1 ohm), and channel 3 (when ch3 and ch4 are configured to 1 ohm).

The TDA7802 is able to work in high efficiency mode also when two channels are configured in 1 ohm (see [Figure 44](#)).

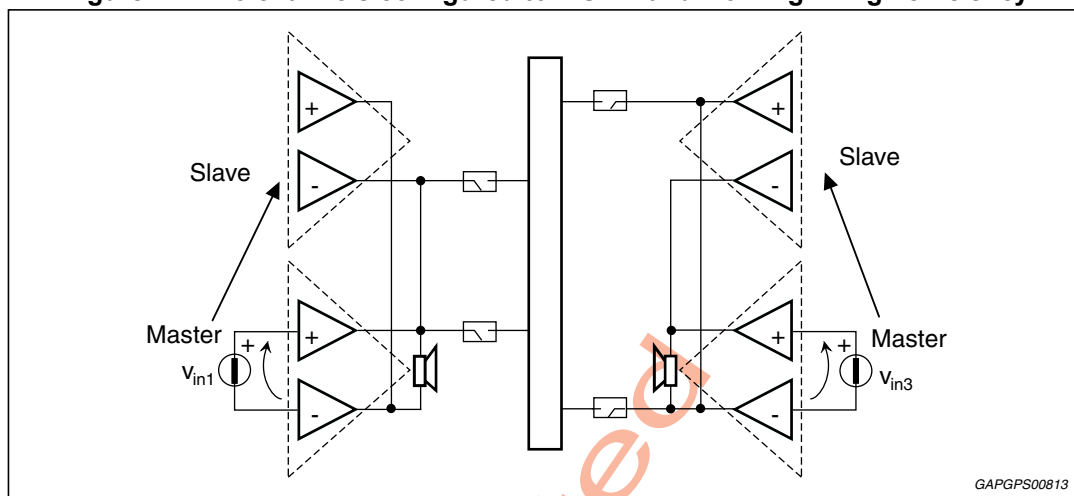Figure 44. Two channels configured to 1 Ohm and working in high efficiency



7.12 Power on reset threshold

When the PLLen is low of the supply voltage value does not guarantee the integrity of I²C registers ($V_s = 4\text{ V}$), the TDA7802 is put in low quiescent current and the bytes are initialized. This event is signalled writing "0" on DB0 D7 bit.

8 I²S and TDM bus interface

The audio input port is a three/four-wire synchronous serial interface that can operate only as Slave. Pins SD13 and SD24 are the serial data inputs. The audio data format accepted from TDA7802 is the I²S standard.

Input data can also be sent in time division multiplexed (TDM). Pins SCK (bit clock) and WS (frame select) complete the I²S interface.

Important note on I2S-clock: when I2S-clk is lost during amplifier operations a protection circuit acts and puts the amplifier in a safe condition: amplifier short circuit protections are guaranteed, dump protection is guaranteed, signal is muted and outputs bias is under control.

For avoiding other side effects user should put the amplifier in standby moving PLL/en pin to 0 V.

8.1 I²S and TDM input data frame format

The audio data word length for each channel may be up to 24 bit. Either for I²S or TDM mode, the frame for each channel can be 25 bit or 32 bit. The selection of the frame's length is done via I²C: when IB3 D2 = "0", the I²S interface expects to receive 32 samples for each channel; while when IB3 D2 = "1", the I²S interface expects only 25 samples.

The following table summarizes the frequencies configurations.


Table 10. System input frequencies

Frequency sampling (Fs)	System clock frequency (f _{SCK}), (MHz)			Channel frame length (bit)
	I ² S standard	TDM 4ch	TDM 8ch/16ch)	
44.1 (kHz)	2.8224	5.6448	11.2896	32
	2.205	4.41	8.82	25
48 (kHz)	3.072	6.144	12.288	32
	2.4	4.8	9.6	25
96 (kHz)	6.144	12.288	24.576	32
	4.8	9.6	19.2	25
192 (kHz)	12.288	24.576	49.152	32
	9.6	19.2	38.4	25

8.2 I²S input data format

The TDA7802 accepts I²S standard interface format as in [Figure 45](#) and the I²C bit configuration is IB3 [D5,D4,D3] = "000".

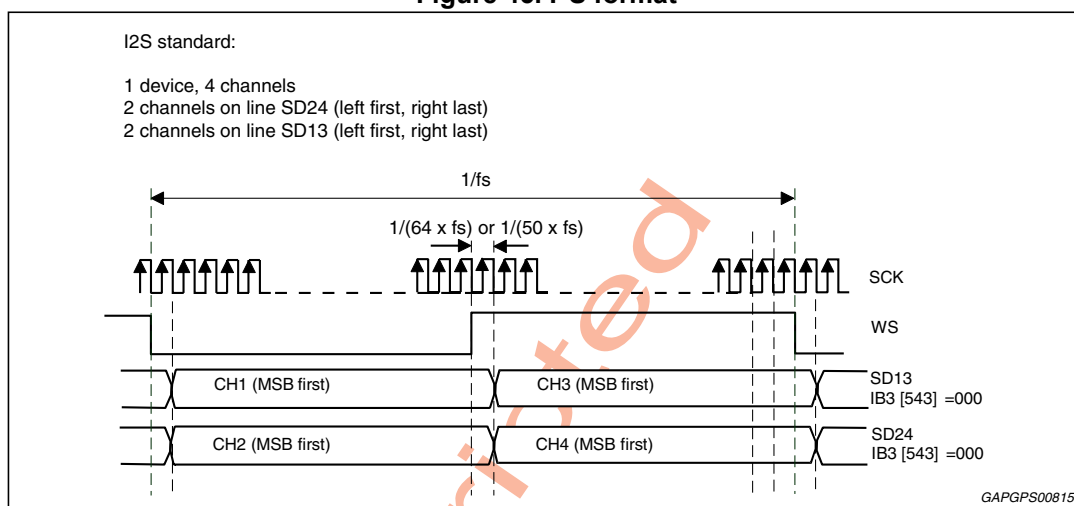
Figure 45. I²S format



8.3 TDM input data format


TDM 4-channel is allowed for TDA7802 and it is as in [Figure 46](#). All the channels are sent on the audio data line SD24. The channel's order is 1, 2, 3 and 4. The I²C bit configuration is IB3 [D5, D4, D3] = "001".

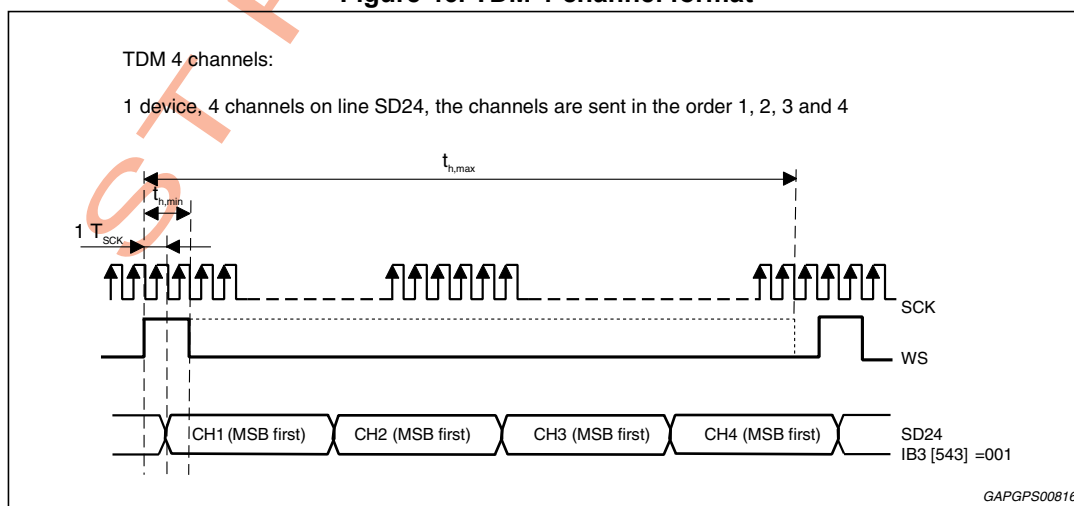Figure 46. TDM 4-channel format




TDM 8-channel is also allowed and two devices (device 1 and device 2) can be driven by using just one serial data line SD24. There are two selectable options
When IB3 [D5,D4,D3] = "010" device 1 is first sent; when IB3 [D5,D4,D3] = "011" device 2 is first sent. In [Figure 47](#) TDM 8-channel format is showed.

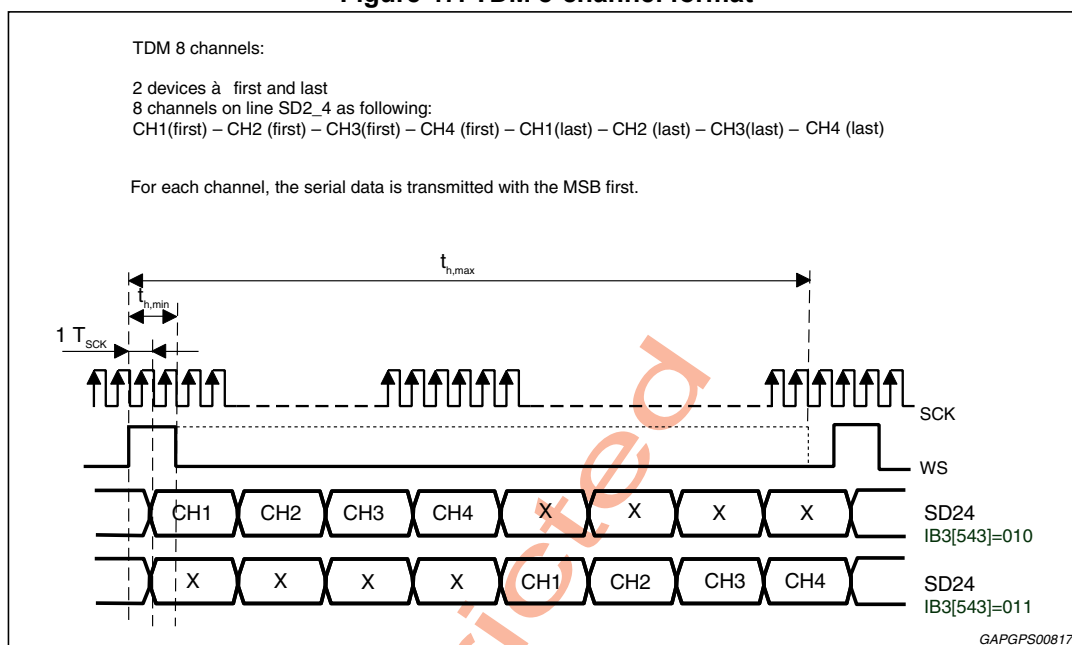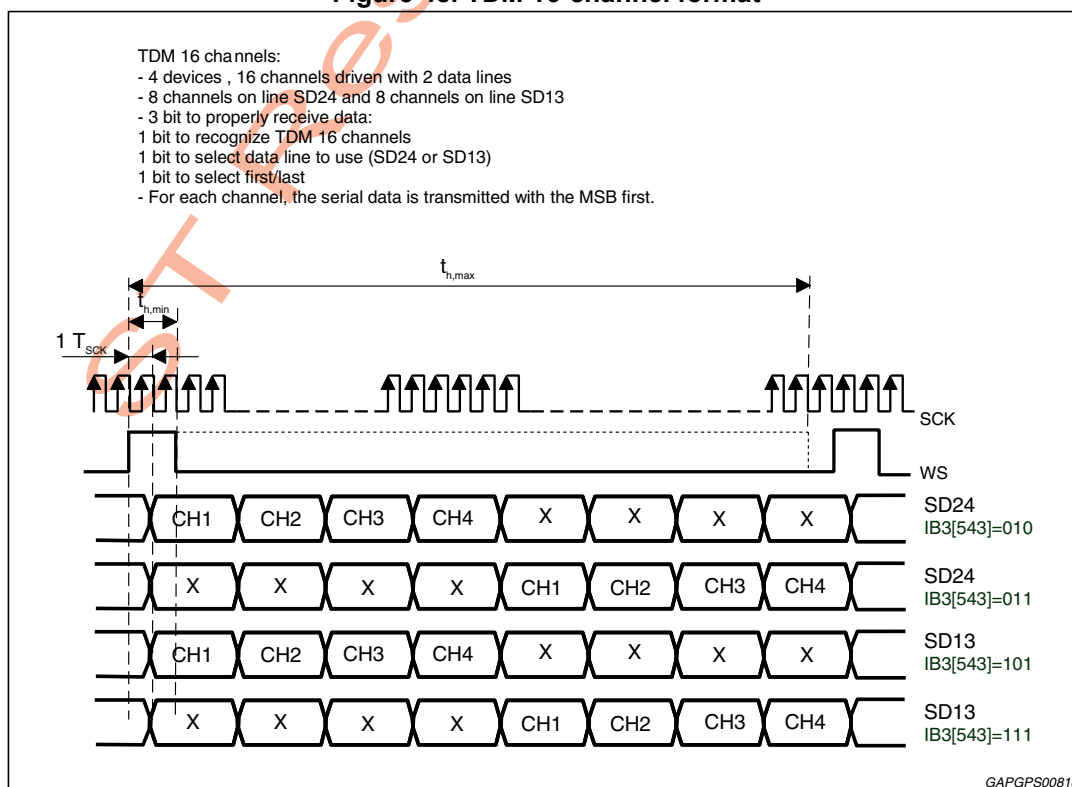Figure 47. TDM 8-channel format



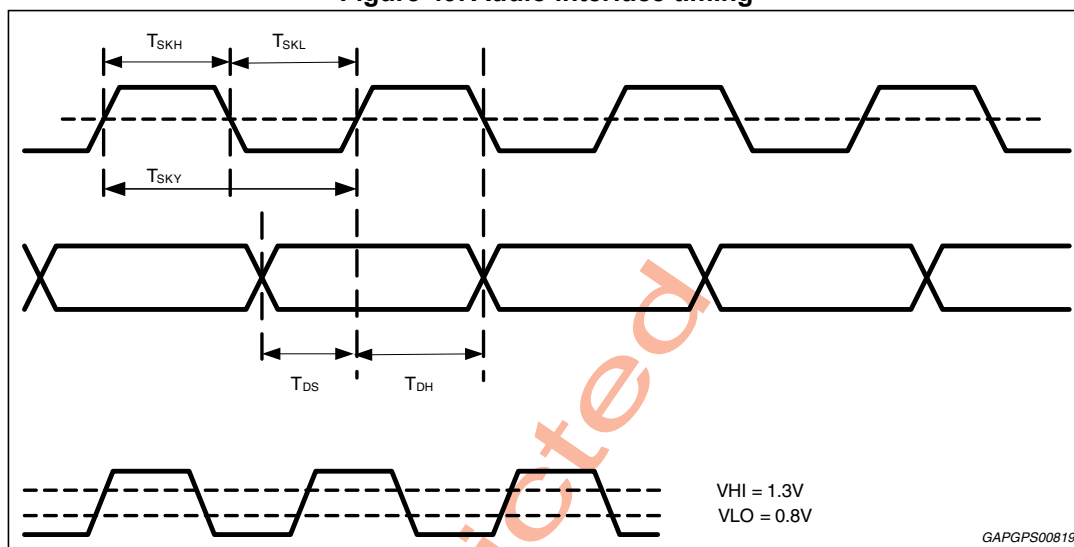
The TDM 8 channel is expansible to TDM 16 channel (Figure 48) where both SD24 and SD13 data lines are used. All the configurations are selectable via I²C.

Figure 48. TDM 16-channel format



8.4 Timings requirements

Figure 49. Audio interface timing

Table 11. I²S interface timing

Symbol	Parameter	note	min	max	unit
Fsck0	SCK (bit clock) frequency	-	-	49.152	MHz
-	SCK (bit clock) frequency tolerance	-	0.9Fsck0	1.1Fsck0	MHz
Tsck	SCK period	-	20	-	ns
-	SCK duty cycle	-	40	60	%
Tsckh	SCK high time	-	6	-	ns
Tsckl	SCK low time	-	6	-	ns
-	SCK transition time	-	-	4	ns
-	WS (word select) frequency	-	-	192	KHz
Twsh	WS high time	I2S standard	25 or 32 Tsck (duty cycle=50%)		ns
Twsh	WS high time	TDM 4-channel	1 Tsck	127 Tsck	ns
Twsh	WS high time	TDM 8-16-channel	1 Tsck	255 Tsck	ns
Tws	WS setup time	-	5	-	ns
Twh	WS hold time	-	6	-	ns
Tds	SD13 SD24 (data inputs) setup time before SCK rising edge	-	5	-	ns
Tdh	SD13 SD24 (data inputs) hold time after SCK rising edge	-	6	-	ns

For TDM mode:

- WS changes at SCK falling edge, on clock period before the MSB is transmitted
- WS does not need to be symmetrical. It need to stay high for at least 2 SCK period clock. The maximum duration is:
 - $T_{h_max} = 127 T_{SCK}$ in TDM 4-channel
 - $T_{h_max} = 255 T_{SCK}$ in TDM 8-channel and TDM 16-channel
- The other timings are like in [Table 11](#).

8.5 Group delay

The group delay is due to the FIR filter of first interpolator and it is $T_{delay} = 32/F_s$.

9 I²C bus interface


Data transmission from microprocessor to the TDA7802 and viceversa takes place through the 2 wires I²C bus interface, consisting of the two lines SDA and SCL (pull-up resistors to positive supply voltage must be connected).

When I²C bus is active, the user can select the IC's operating mode. He can perform the diagnostic cycle whose results are stored into the data byte, and read the instruction and data bytes back.

The protocol used for the bus is depicted in *Figure 50* and comprises:

- a start condition (S)
- a chip Address byte (the LSB bit determines read/write transmission)
- a Subaddress byte
- a sequence of Data (N-bytes + acknowledge)
- a stop condition (P)

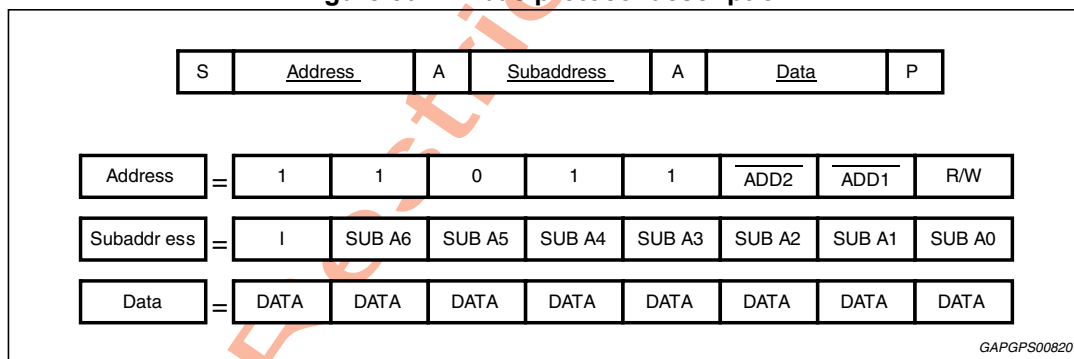Figure 50. I²C bus protocol description



Description:

- S = Start
- R/W = '0' => Receive-Mode (Chip could be programmed by uP)
- I = Auto increment; when 1, the address is automatically incremented for each byte transferred
- A = Acknowledge
- P = Stop
- MAX CLOCK SPEED 400kbit/sec

There are four I²C addresses (for PowerSO36 package): 1101100, 1101101, 1101110, 1101111.

For Flexiwatt package only the 1101100 is available (if no bonding options are considered).

9.1 Writing procedure

There are two possible procedures:

1. without increment: the I bit is set to 0 and the register to be written is addressed by the subaddress SUB A. Only this register is written by the DATA byte following the subaddress byte.
2. with increment: the I bit is set to 1 and the first register to be written is the one addressed by subaddress SUB A. Then all the registers from SUB A up to stop bit or the reaching of last register are written.

9.2 Reading procedure

There are two possible procedures:

1. without increment: the I bit is set to 0 and the only register to be read is addressed by the subaddress sent in the previous write procedure.
2. with increment: the I bit is set to 1 and the first register to be read is the one addressed by subaddress sent in the previous write procedure. Then all the registers from this subaddress up to stop bit or the reaching of last register are read.

9.3 Data validity

The data on the SDA line must be stable during the high period of the clock. The HIGH and LOW state of the data line can only change when the clock signal on the SCL line is LOW.

9.4 Start and stop conditions

A start condition is a HIGH to LOW transition of the SDA line while SCL is HIGH.

The stop condition is a LOW to HIGH transition of the SDA line while SCL is HIGH.

9.5 Byte format

Every byte transferred to the SDA line must contain 8 bits. Each byte must be followed by an acknowledge bit. The MSB is transferred first.

9.6 Acknowledge

The transmitter* puts a resistive HIGH level on the SDA line during the acknowledge clock pulse. The receiver** has to pull-down (LOW) the SDA line during the acknowledge clock pulse, so that the SDA line is stable LOW during this clock pulse.

* Transmitter

- = master (μP) when it writes an address or instruction byte to the TDA7802
- = slave (TDA7802) when the μP reads a data byte from TDA7802

** Receiver

- = slave (TDA7802) when the μP writes an address or instruction byte to the TDA7802
- = master (μP) when it reads a data byte from TDA7802

9.7 I²C bus timings

This paragraph describes more in detail the I²C bus protocol used and its timings. [Figure 51](#) and [Table 12](#) include the timing that need to be respected in order to correctly write into/ read from the I²C registers.

Figure 51. I²C bus interface timing

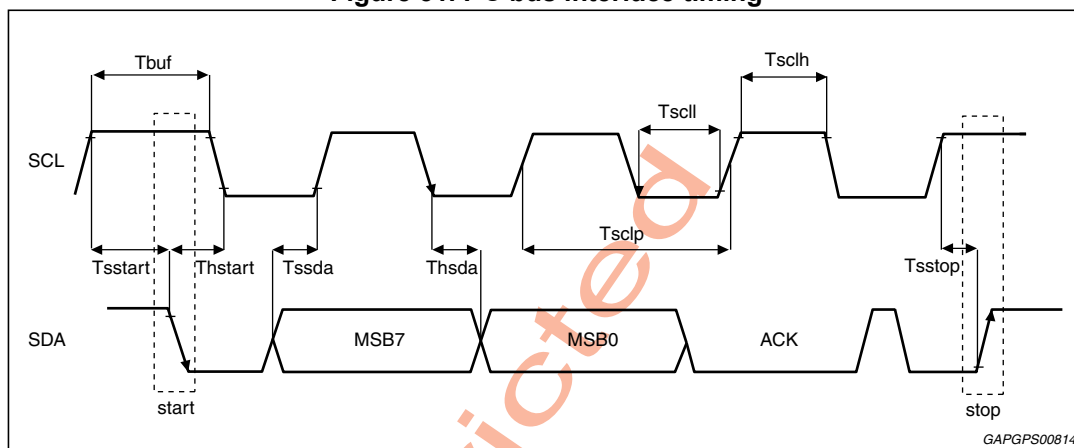


Table 12. I²C bus interface timing

Symbol	Parameter	Min	Max	Unit
Fscl	SCL (clock line) frequency	-	400	kHz
Tscl	SCL period	2500	-	ns
Tsclh	SCL high time	0.6	-	µs
Tscll	SCL low time	1.3	-	µs
Tsstart	Setup time for start condition	0.6	-	µs
Thstart	Hold time for start condition	0.6	-	µs
Tsstop	Setup time for stop condition	0.6	-	µs
Tbuf	Bus free time between a stop and a start condition	1.3	-	µs
Tssda	Setup time for data line	100	-	ns
Thsda	Hold time for data line(1)	500	-	ns
Tf	Fall time for SCL and SDA	-	300	ns

10 I²C registers

10.1 Instruction byte

10.1.1 IB0 - Subaddress "I0000000h" - default = "00000000"

Table 13. IB0 - Subaddress "I0000000h" - default = "00000000"

Bit	Instruction decoding bit
D7	Channel 4 Tristate Mode 0: off 1: on
D6	Channel 3 Tristate Mode 0: off 1 on
D5	Channel 2 Tristate Mode 0: off 1: on
D4	Channel 1 Tristate Mode 0: off 1: on
D3	Channel 4 Amplifier Mode 0: High Efficiency Mode 1: Standard Class AB Mode
D2	Channel 3 Amplifier Mode 0: High Efficiency Mode 1: Standard Class AB Mode
D1	Channel 2 Amplifier Mode 0: High Efficiency Mode 1: Standard Class AB Mode
D0	Channel 1 Amplifier Mode 0: High Efficiency Mode 1: Standard Class AB Mode

10.1.2 IB1 - Subaddress "I0000001h" - default = "00000000"

Table 14. IB1 - Subaddress "I0000001h" - default = "00000000"

Bit	Instruction decoding bit
D7	Impedance efficiency optimizer (rear channels) 0: Efficiency optimized for 2 ohm 1: Efficiency optimized for 4 ohm
D6	Long diagnostic configuration timing <u>D6 D5 timing configuration</u>
D5	0 0 default 0 1 stretched x 2 1 0 stretched x 4 1 1 stretched x 8
D4	Gain Channel 1 & 3 <u>D4 D3 Gain</u>
D3	0 0 GV1 0 1 GV2 1 0 GV3 1 1 GV4
D2	Gain Channel 2 & 4 <u>D2 D1 Gain</u>
D1	0 0 GV1 0 1 GV2 1 0 GV3 1 1 GV4
D0	Digital Gain Increase 0: No digital gain increase 1: +6dB digital gain increase

10.1.3 IB2 - Subaddress "I0000010h" - default = "00000000"

Table 15. IB2 - Subaddress "I0000010h" - default = "00000000"

Bit	Instruction decoding bit
D7	Mute Time Setting
	D7 D6 D5 mute timing(Fs=44.1kHz)
D6	0 0 0 1.45 ms
	0 0 1 5.8 ms
	0 1 0 11.6 ms
	0 1 1 23.2 ms
D5	1 0 0 46.4 ms
	1 0 1 92.8 ms
	1 1 0 185.6 ms
	1 1 1 371.2 ms
D4	Mute 1&3 0: Channels 1&3 Muted 1: Channels 1&3 un-Muted
D3	Mute 2&4 0: Channels 2&4 Muted 1: Channels 2&4 un-Muted
D2	Digital mute enabling 0: digital mute enable 1: digital mute disable
D1	Automute threshold 0: 5.3V (guaranteed play down to 6V) 1: 7.3V (guaranteed play down to 8V)
D0	Impedance efficiency optimizer (front channels) 0: Efficiency optimized for 2 ohm 1: Efficiency optimized for 4 ohm

10.1.4 IB3 - Subaddress "I0000011h" - default = "00000000"

Table 16. IB3 - Subaddress "I0000011h" - default = "00000000"

Bit	Instruction decoding bit
D7	Sample frequency range ⁽¹⁾
	<u>D7 D6</u> <u>Sample frequency</u>
	0 0 44.1 kHz
	0 1 48 kHz
D6	1 0 96 kHz
	1 1 192 kHz
D5	Digital Input Format ⁽¹⁾
	<u>D5 D4 D3</u>
D4	0 0 0 I2S standard
	0 0 1 TDM – 4ch
	0 1 0 TDM – 8ch (SD2_4 input, device 1)
	0 1 1 TDM – 8ch (SD2_4 input device 2)
D3	1 0 0 TDM – 16ch (SD2_4 input - device 1)
	1 0 1 TDM – 16ch (SD2_4 input - device 2)
	1 1 0 TDM – 16ch (SD1_3 input - device 3)
	1 1 1 TDM – 16ch (SD1_3 input - device 4)
D2	I2S Frame Period length ⁽¹⁾
	0: 64 bits (Fs=44.1kHz, 48kHz,96kHz,192kHz)
	1: 50 bits (Fs=48kHz,96kHz,192kHz)
D1	PLL Clock Dither enable/disable ⁽¹⁾
	0: disable
	1: enable
D0	High pass filter enable/disable ⁽¹⁾
	0: disable
	1: enable

1. Byte IB3 settings can be changed only if the amplifier is in low quiescent current state, otherwise the command is ignored.

10.1.5 IB4 - Subaddress "I0000100h - default = "00000000"

Table 17. IB4 - Subaddress "I0000100h - default = "00000000"

Bit	Instruction decoding bit
D7	Noise Gating Function enable/disable 0: enable 1: disable
D6	Short Fault information on CDdiag pin 0: yes 1: no
D5	Offset information on CDdiag pin 0: yes (if IB3 < 0 >='1') 1: no
D4	AC diagnostic current threshold 0: high 1: low
D3	AC Diagnostic Enable/Disable 0: disable 1: enable
D2	Channel 1&3 Diagnostic Mode 0: Speaker mode 1: Booster mode
D1	Channel 2&4 Diagnostic Mode 0: Speaker mode 1: Booster mode
D0	Diagnostic Mode Enable/Disable 0: disable 1: enable

10.1.6 IB5 - Subaddress "I0000101h" - default = "00000000"

Table 18. IB5 - Subaddress "I0000101h" - default = "00000000"

Bit	Instruction decoding bit
D7	Temperature warning information on CDdiag pin
	<u>D7 D6 D5</u> <u>Temperature</u>
D6	0 0 0 TW1
	0 0 1 TW2
	0 1 0 TW3
D5	0 1 1 TW4
	1 x x no thermal warning information on diag pin
D4	Clipping detection level for front channels
	<u>D4 D3</u>
	0 0 1% for all channel 1 and 3
D3	0 1 5% for all channel 1 and 3
	1 0 10% for all channel 1 and 3
	1 1 no clipping for channel 1 and 3
D2	Clipping detection level for rear channels
	<u>D2 D1</u>
	0 0 1% for all channel 2 and 4
D1	0 1 5% for all channel 2 and 4
	1 0 10% for all channel 2 and 4
	1 1 no clipping for channel 2 and 4
D0	Amplifier on/off
	0: off
	1: on

10.2 Data byte

10.2.1 DB0 - Subaddress: "I0010000h"

Table 19. DB0 - Subaddress: "I0010000h"

Bit	Instruction decoding bit
D7	Power on reset (POR) 0: the start-up phase to move from 'standby' state to 'low quiescent current' state is running 1: the device is 'out of standby'.
D6	Start-up Diagnostic status 0: Turn-on Diag. cycle not activated or not terminated 1: Turn-on Diag. cycle terminated
D5	TW1 0: TW1 threshold not trespassed 1: TW1 threshold trespassed
D4	TW2 0: TW2 threshold not trespassed 1: TW2 threshold trespassed
D3	TW3 0: TW3 threshold not trespassed 1: TW3 threshold trespassed
D2	TW4 0: TW4 threshold not trespassed 1: TW4 threshold trespassed
D1	Channel 2 & 4 in mute/play 0: Channel 2 & 4 in play 1: Channel 2 & 4 in mute
D0	Channel 1 & 3 in mute/play 0: Channel 1 & 3 in play 1: Channel 1 & 3 in mute

10.2.2 DB1 - Subaddress: "I0010001h"

Table 20. DB1 - Subaddress: "I0010001h"

Bit	Instruction decoding bit
D7	Diagnostic Data Valid 0: diagnostic data not valid 1: diagnostic data valid
D6	Channel 1 Soft Short present 0: No Soft short 1: Soft Short (only during turn-on diagnostic)
D5	Channel 1 offset detection 0: No output offset 1: Output offset detected
D4	Channel 1 Permanent Diagnostic status 0: Permanent diagnostic cycle not activated or not terminated 1: Permanent diagnostic cycle terminated
D3	Channel 1 Normal/Short Load 0: Normal load 1: Short load
D2	Channel 1 Open load 0: No open load 1: Open load detection (only during turn-on diagnostic)
D1	Channel 1 Short to VCC 0: No Hard short to Vcc 1: Hard short to Vcc
D0	Channel 1 Short to GND 0: No short to GND 1: Short to GND

10.2.3 DB2 - Subaddress: "I0010010h"

Table 21. DB2 - Subaddress: "I0010010h"

Bit	Instruction decoding bit
D7	Reserved
D6	Channel 2 Soft Short present 0: No Soft short 1: Soft Short (only during turn-on diagnostic)
D5	Channel 2 offset detection 0: No output offset 1: Output offset detected
D4	Channel 2 Permanent Diagnostic status 0: Permanent diagnostic cycle not activated or not terminated 1: Permanent diagnostic cycle terminated
D3	Channel 2 Normal/Short Load 0: Normal load 1: Short load
D2	Channel 2 Open load 0: No open load 1: Open load detection (only during turn-on diagnostic)
D1	Channel 2 Short to VCC 0: No Hard short to Vcc 1: Hard short to Vcc
D0	Channel 2 Short to GND 0: No short to GND 1: Short to GND

10.2.4 DB3 - Subaddress: "I0010011h"

Table 22. DB3 - Subaddress: "I0010011h"

Bit	Instruction decoding bit
D7	Reserved
D6	Channel 3 Soft Short present 0: No Soft short 1: Soft Short (only during turn-on diagnostic)
D5	Channel 3 offset detection 0: No output offset 1: Output offset detected
D4	Channel 3 Permanent Diagnostic status 0: Permanent diagnostic cycle not activated or not terminated 1: Permanent diagnostic cycle terminated
D3	Channel 3 Normal/Short Load 0: Normal load 1: Short load
D2	Channel 3 Open load 0: No open load 1: Open load detection (only during turn-on diagnostic)
D1	Channel 3 Short to VCC 0: No Hard short to Vcc 1: Hard short to Vcc
D0	Channel 3 Short to GND 0: No short to GND 1: Short to GND

10.2.5 DB4 - Subaddress: "I0010100h"

Table 23. DB4 - Subaddress: "I0010100h"

Bit	Instruction decoding bit
D7	Not used
D6	Channel 4 Soft Short present 0: No Soft short 1: Soft Short (only during turn-on diagnostic)
D5	Channel 4 offset detection 0: No output offset 1: Output offset detected
D4	Channel 4 Permanent Diagnostic status 0: Permanent diagnostic cycle not activated or not terminated 1: Permanent diagnostic cycle terminated
D3	Channel 4 Normal/Short Load 0: Normal load 1: Short load
D2	Channel 4 Open load 0: No open load 1: Open load detection (only during turn-on diagnostic)
D1	Channel 4 Short to VCC 0: No Hard short to Vcc 1: Hard short to Vcc
D0	Channel 4 Short to GND 0: No short to GND 1: Short to GND

10.2.6 DB5 - Subaddress: "I0010101h"

Table 24. DB5 - Subaddress: "I0010101h"

Bit	Instruction decoding bit
D7	0: Signal ok 1: Signal too high
D6	Channel 4 tweether detection 0: Ch4 tweeter not present 1: Ch4 tweeter present
D5	Channel 3 tweether detection 0: Ch3 tweeter not present 1: Ch3 tweeter present
D4	Channel 2 tweether detection 0: Ch2 tweeter not present 1: Ch2 tweeter present
D3	Channel 1 tweether detection 0: Ch1 tweeter not present 1: Ch1 tweeter present
D2	Front channel clip detection 0: No clipping on front channel 1: Clipping on front channel
D1	Rear channel clip detection 0: No clipping on rear channel 1: Clipping on rear channel
D0	PLL lock detector 0: PLL not locked 1: PLL locked

11 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com.

ECOPACK® is an ST trademark.

11.1 PowerSO-36 (slug up) package information

Figure 52. PowerSO-36 (slug up) package outline

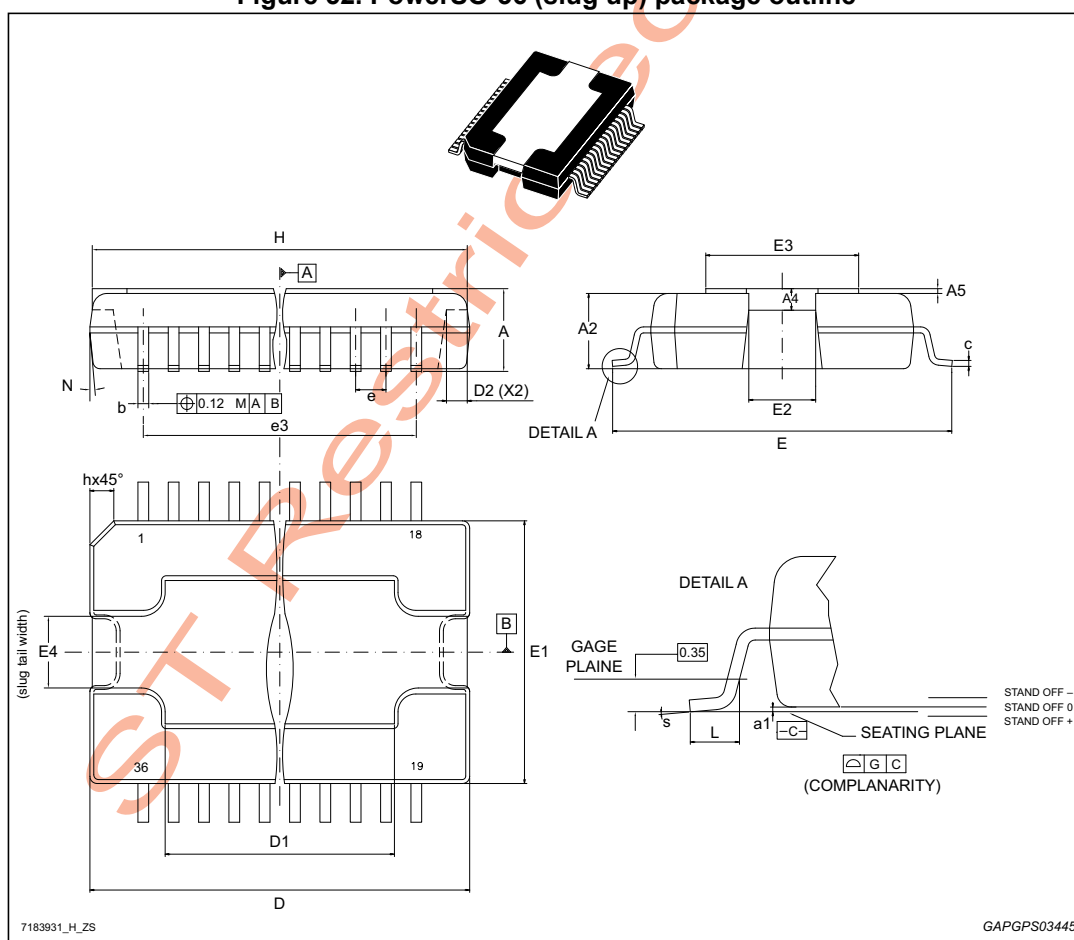


Table 25. PowerSO-36 (slug up) package mechanical data

Ref	Dimensions					
	Millimeters			Inches ⁽¹⁾		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	3.27	-	3.41	0.1287	-	0.1343
A2	3.1	-	3.18	0.1220	-	0.1252

Table 25. PowerSO-36 (slug up) package mechanical data (continued)

Ref	Dimensions					
	Millimeters			Inches ⁽¹⁾		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A4	0.8	-	1.0	0.0315	-	0.0394
A5	-	0.2	-	-	0.0079	-
a1	0.03	-	-0.04	0.0012	-	-0.0016
b	0.22	-	0.38	0.0087	-	0.0150
c	0.23	-	0.32	0.0091	-	0.0126
D ⁽²⁾	15.8	-	16.0	0.6220	-	0.6299
D1	9.4	-	9.8	0.3701	-	0.3858
D2	-	1.0	-	-	0.0394	-
E	13.9	-	14.5	0.5472	-	0.5709
E1 ⁽²⁾	10.9	-	11.1	0.4291	-	0.4370
E2	-	-	2.9	-	-	0.1142
E3	5.8	-	6.2	0.2283	-	0.2441
E4	2.9	-	3.2	0.1142	-	0.1260
e	-	0.65	-	-	0.0256	-
e3	-	11.05	-	-	0.4350	-
G	0	-	0.075	0	-	0.0031
H	15.5	-	15.900	0.6102	-	0.6260
h	-	-	1.1	-	-	0.0433
L	0.8	-	1.1	0.0315	-	0.0433
N	-	-	10°	-	-	10°
s	-	-	8°	-	-	8°

1. Values in inches are converted from mm and rounded to 4 decimal digits.

2. 'D' and 'E1' do not include mold flash or protusions.
Mold flash or protusions shall not exceed 0.15mm (0.006").

11.2 Flexiwatt 27(vertical) package package information

Figure 53. Flexiwatt 27 (vertical) package outline

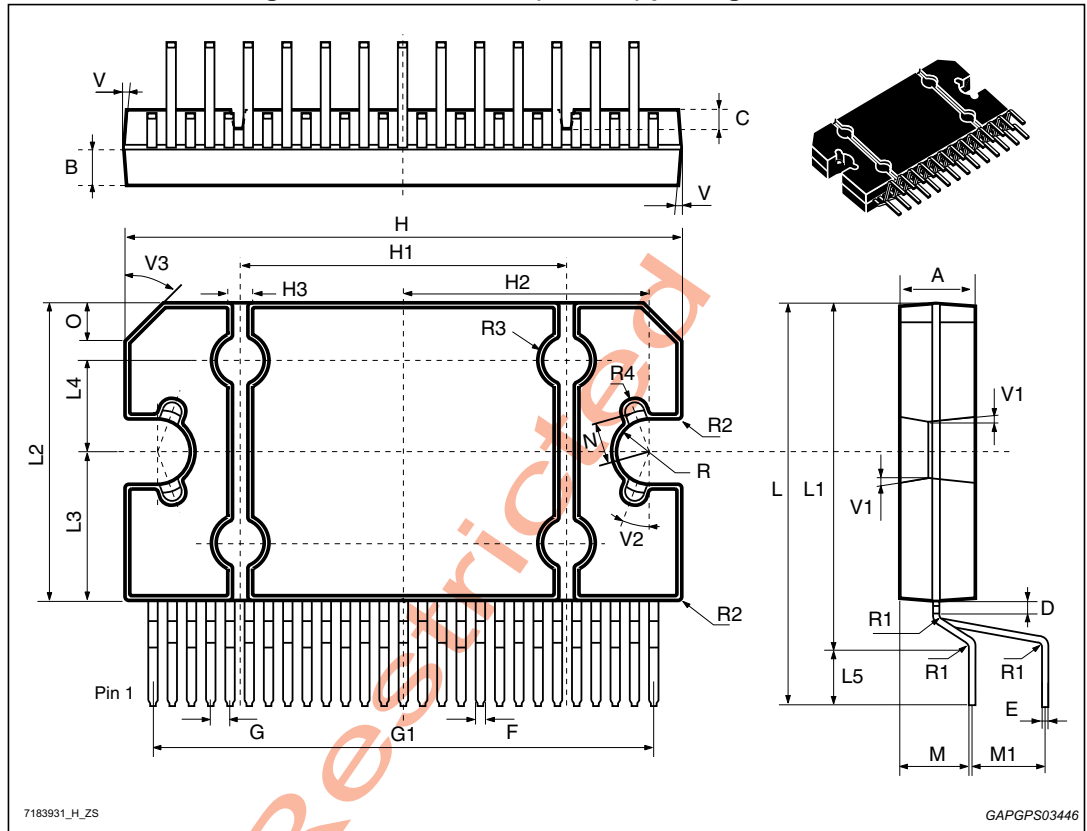


Table 26. Flexiwatt 27 (vertical) package mechanical data

Ref	Dimensions					
	Millimeters			Inches ⁽¹⁾		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.45	4.50	4.65	0.1752	0.1772	0.1831
B	1.80	1.90	2.00	0.0709	0.0748	0.0787
C	-	1.40	-	-	0.0551	-
D	0.75	0.90	1.05	0.0295	0.0354	0.0413
E	0.37	0.39	0.42	0.0146	0.0154	0.0165
F ⁽²⁾	-	-	0.57	-	-	0.0224
G	0.80	1.00	1.20	0.0315	0.0394	0.0472
G1	25.75	26.00	26.25	1.0138	1.0236	1.0335
H ⁽³⁾	28.90	29.23	29.30	1.1378	1.1508	1.1535
H1	-	17.00	-	-	0.6693	-
H2	-	12.80	-	-	0.5039	-

Table 26. Flexiwatt 27 (vertical) package mechanical data (continued)

Ref	Dimensions					
	Millimeters			Inches ⁽¹⁾		
	Min.	Typ.	Max.	Min.	Typ.	Max.
H3	-	0.80	-	-	0.0315	-
L ⁽³⁾	22.07	22.47	22.87	0.8689	0.8846	0.9004
L1	18.57	18.97	19.37	0.7311	0.7469	0.7626
L2 ⁽³⁾	15.50	15.70	15.90	0.6102	0.6181	0.6260
L3	7.70	7.85	7.95	0.3031	0.3091	0.3130
L4	-	5	-	-	0.1969	-
L5	3.35	3.5	3.65	0.1319	0.1378	0.1437
M	3.70	4.00	4.30	0.1457	0.1575	0.1693
M1	3.60	4.00	4.40	0.1417	0.1575	0.1732
N	-	2.20	-	-	0.0866	-
O	-	2	-	-	0.0787	-
R	-	1.70	-	-	0.0669	-
R1	-	0.5	-	-	0.0197	-
R2	-	0.3	-	-	0.0118	-
R3	-	1.25	-	-	0.0492	-
R4	-	0.50	-	-	0.0197	-
V	5°			5°		
V1	3°			3°		
V2	20°			20°		
V3	45°			45°		

1. Values in inches are converted from mm and rounded to 4 decimal digits.
2. dam-bar protusion not included.
3. molding protusion included.

11.3 Flexiwatt 27(SMD) package information

Figure 54. Flexiwatt 27 (SMD) package outline

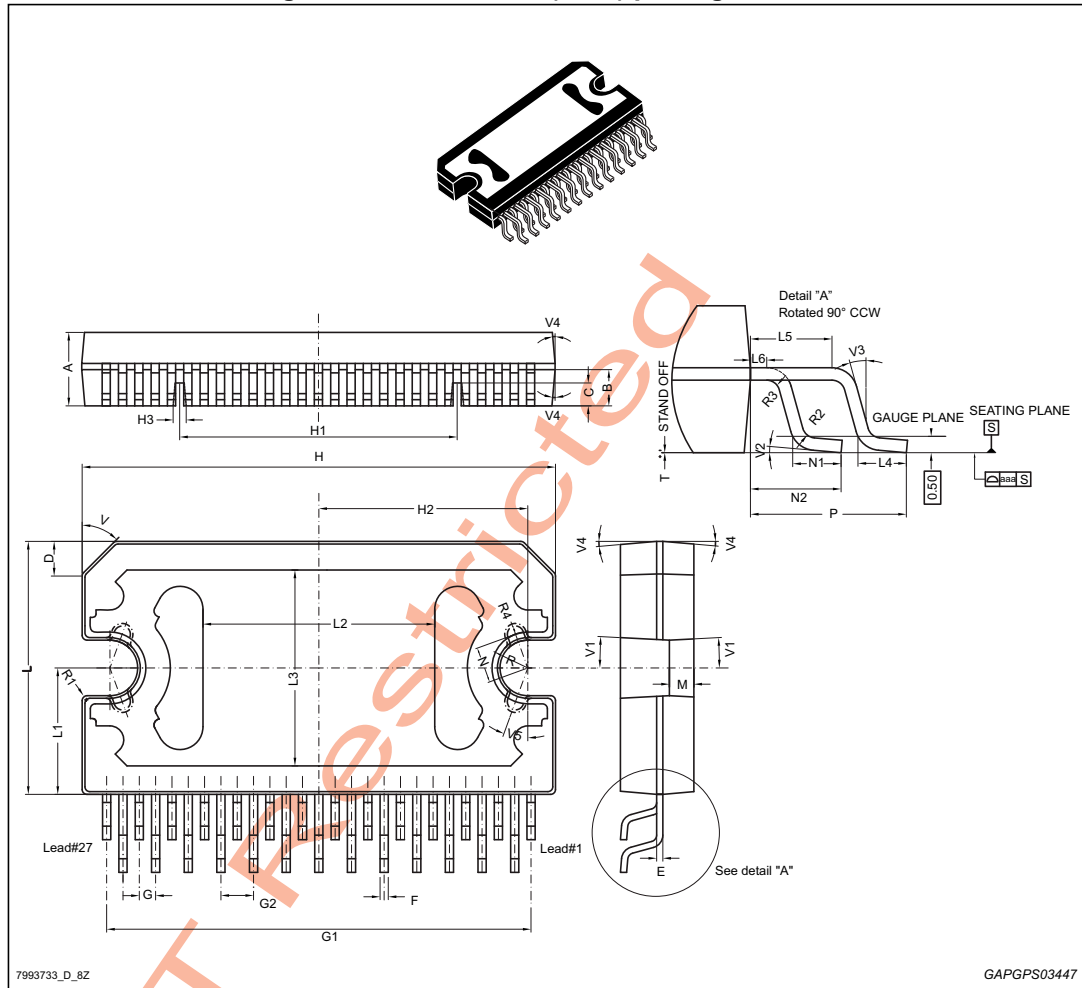


Table 27. Flexiwatt 27 (SMD) package mechanical data

Ref	Dimensions					
	Millimeters			Inches ⁽¹⁾		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.45	4.50	4.65	0.1752	0.1772	0.1831
B	2.12	2.22	2.32	0.0835	0.0874	0.0913
C	-	1.40	-	-	0.0551	-
D	-	2.00	-	-	0.0787	-
E	0.36	0.40	0.44	0.0142	0.0157	0.0173
F ⁽²⁾	0.47	0.51	0.57	0.0185	0.0201	0.0224
G ⁽³⁾	0.75	1.00	1.25	0.0295	0.0394	0.0492

Table 27. Flexiwatt 27 (SMD) package mechanical data (continued)

Ref	Dimensions					
	Millimeters			Inches ⁽¹⁾		
	Min.	Typ.	Max.	Min.	Typ.	Max.
G1	25.70	26.00	26.30	1.0118	1.0236	1.0354
G2 ⁽³⁾	1.75	2.00	2.25	0.0689	0.0787	0.0886
H ⁽²⁾	28.85	29.23	29.40	1.1358	1.1508	1.1575
H1	-	17.00	-	-	0.6693	-
H2	-	12.80	-	-	0.5039	-
H3	-	0.80	-	-	0.0315	-
L ⁽²⁾	15.50	15.70	15.90	0.6102	0.6181	0.6260
L1	7.70	7.85	7.95	0.3031	0.3091	0.3130
L2	14.00	14.20	14.40	0.5512	0.5591	0.5669
L3	11.80	12.00	12.20	0.4646	0.4724	0.4803
L4	1.30	1.48	1.66	0.0512	0.0583	0.0654
L5	2.42	2.50	2.58	0.0953	0.0984	0.1016
L6	0.42	0.50	0.58	0.0165	0.0197	0.0228
M	-	1.50	-	-	0.0591	-
N	-	2.20	-	-	0.0866	-
N1	1.30	1.48	1.66	0.0512	0.0583	0.0654
N2 ⁽³⁾	2.73 ⁽³⁾	2.83	2.93	0.1075	0.1114	0.1154
P ⁽³⁾	4.73	4.83	4.93	0.1862	0.1902	0.1941
R	-	1.70	-	-	0.0669	-
R1	-	0.30	-	-	0.0118	-
R2	0.35	0.40	0.45	0.0138	0.0157	0.0177
R3	0.35	0.40	0.45	0.0138	0.0157	0.0177
R4	-	0.50	-	-	0.0197	-
T ⁽³⁾	-0.08	-	0.10	-0.0031	-	0.0039
aaa ⁽³⁾	-	0.1	-	-	0.0039	-
V	-	45°	-	-	45°	-

1. Values in inches are converted from mm and rounded to 4 decimal digits.

2. Dimension "F" doesn't include dam-bar protrusion.
Dimensions "H" and "L" include mold flash or protrusions.

3. Golden parameters.

Appendix A I²C registers setting

This chapter includes some suggestions of how the I²C registers should be programmed.

A.1 Standard turn-on

- STANDBY OFF + MUTE PLAY TRANSITION (pop free transition)
 PLLen PIN '0' TO '1' (ABOVE VILENB) +
 WAIT 10 ms (PLL locking) +
 I2C WRITE D8 80 00 00 18 00 00 01 (auto increment active + default setting + unmute + amplifier on).
- STANDBY OFF + TURN-ON DIAGNOSTIC + MUTE PLAY TRANSITION (mute -> play done whatever is the diagnostic result)
 PLLen PIN '0' TO '1' +
 WAIT 10 ms +
 I2C WRITE D8 80 00 00 18 00 01 01 (default setting + unmute + diagnostic + amplifier on) + WAIT 500 ms +
 I2C READ D9 10
- In case you want to read diagnostic result first and then set the play the sequence becomes:
 PLLen PIN '0' TO '1' (ABOVE VILENB) + WAIT 10 ms (PLL locking) +
 I2C WRITE D8 80 00 00 18 00 01 00 (default setting + unmute + diagnostic) +
 WAIT 500 ms +
 I2C READ D9 10 +
 WAIT READING TIME +
 I2C WRITE D8 80 00 00 18 00 01 01.
 When this sequence is sent as above, an additional diagnostic cycle will start after the reading and then the amplifier starts to play. In order to avoid a second diagnostic pulse it is important to set IB4 D0 = '0'. Here below the writing procedure suggested:
 PLLen PIN '0' TO '1' +
 WAIT 10 ms +
 I2C WRITE D8 80 00 00 18 00 01 00 (default setting + unmute + diagnostic) +
 WAIT 50 ms +
 I2C WRITE D8 80 00 00 18 00 00 00 (default setting + unmute + diagnostic disable) +
 WAIT 450 ms +
 I2C READ D9 10 +
 WAIT READING TIME +
 I2C WRITE D8 80 00 00 18 00 01 01.

IMPORTANT every time a reading procedure is done, make sure DB0 = C0. This means the turn-on diagnostic is completed and the results valid.

A.2 Long diagnostic turn-on

The diagnostic pulse's duration can be programmed by bits IB1 D6 and IB1 D5. Let's consider the "x2" case in this section; all the other options are easily extendable with the help in the table 5. Please remember the "x2" factor has effect just on the short load pulse (See [Section 7.2](#)).

- STANDBY OFF + TURN-ON DIAGNOSTIC + MUTE PLAY TRANSITION (mute -> play done whatever is the diagnostic result)

PLLen PIN '0' TO '1' +

WAIT 10 ms +

I2C WRITE D8 80 00 20 18 00 01 01 (default setting + long diagnostic x2 + unmute + diagnostic + amplifier on) +

WAIT 500 ms +

I2C READ D9 10 +

Case 4 Ohm loudspeaker or 2 Ohm (and not misconnections)

The diagnostic has been completed and the results are valid. Not further reading procedures are needed.

Case 4 Ohm loudspeaker or 2 Ohm (and open load on at least 1 channel)

The diagnostic is likely not finished (check the byte DB0)

WAIT 200 ms +

I2C READ D9 10

Note that the reading might happen when the amplifier has already started to play. This does not change the effectiveness of the action; after the reading the data bytes are reset.

- In case you want to read diagnostic result first and then set the play the sequence becomes:

PLLen PIN '0' TO '1' +

WAIT 10 ms +

I2C WRITE D8 80 00 20 18 00 01 00 (default setting + long diagnostic x2 + unmute + diagnostic + amplifier on) +

WAIT 500 ms +

I2C READ D9 10 +

WAIT READING TIME +

If DB0 = C0

I2C WRITE D8 80 (auto increment active) 00 20 18 00 01 01.

If DB0 = 80 (DB0 D6 = '0')

WAIT 200 ms +
I2C READ D9 10 (UNTIL DB0 = C0) +
I2C WRITE D8 80 (auto increment active) 00 20 18 00 01 01

A.3 Legacy mode turn-on

- STANDBY OFF + MUTE PLAY TRANSITION
PLLEN PIN '0' TO '1' +
WAIT 100 ms +
SDALM PIN '0' to '1' (LEGACY UNMUTE)

A.4 Legacy mode turn-off

- PLAY MUTE TRANSITION STANDBY ON
SDALM PIN '1' to '0' (LEGACY MUTE)
WAIT 100 ms (It depends from the RC time constant in the application)
PLLEN PIN '1' TO '0' (STANDBY ON)

A.5 Battery crank setting

When the battery goes below 4V the I2C settings are not longer guaranteed. In order to re-set the amplifier it is important to follow the below sequence:

WAIT UNTIL DB0-D7 = '1'
I2C WRITE D8 03 XX (PLL SETTING IF DIFFERENT FROM DEFAULT)
WAIT 500 μ s (PLL LOCKING)
I2C WRITE D8 80 00 00 18 00 00 01 (unmute + amplifier on)

Note that this sequence it's very important when the CODEC is set different from the I2S standard format and $F_s = 48$ kHz.

Revision history

Table 28. Document revision history

Date	Revision	Changes
10-May-2013	1	Initial release.
23-Jul-2013	2	Updated in cover page : <i>Description</i> and <i>Table 1: Device summary</i> . Added <i>Figure 54: Flexiwatt 27 (SMD) package outline on page 64</i> . Added "ST Restricted" watermark.
27-Sep-2013	3	Updated disclaimer.
25-Nov-2013	4	Updated <i>Section 7.3: Permanent diagnostic on page 32</i> .
26-Mar-2014	5	Updated <i>Figure 44: Two channels configured to 1 Ohm and working in high efficiency on page 39</i> .
27-Oct-2014	6	Added in <i>Features</i> list of the cover page 'Qualification in accordance to AEC Q100 rev. G standard'.
12-Nov-2014	7	Updated bit D7 in <i>Table 20: DB1 - Subaddress: "10010001h" on page 55</i> .
01-Dec-2014	8	Updated 'C4' value on <i>Figure 3</i> , <i>Figure 4</i> , <i>Figure 5</i> and <i>Figure 6</i> .
31-Mar-2015	9	Updated <i>Table 18: IB5 - Subaddress "10000101h" - default = "00000000" on page 53</i> and <i>Section 11: Package information</i> .

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2015 STMicroelectronics – All rights reserved