


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	P6	REVISED PER ECR-18-011787	10SEP2018	JB	DZ
	P7	REVISED PER ECN-23-210752	05MAY2023	WLS	VS

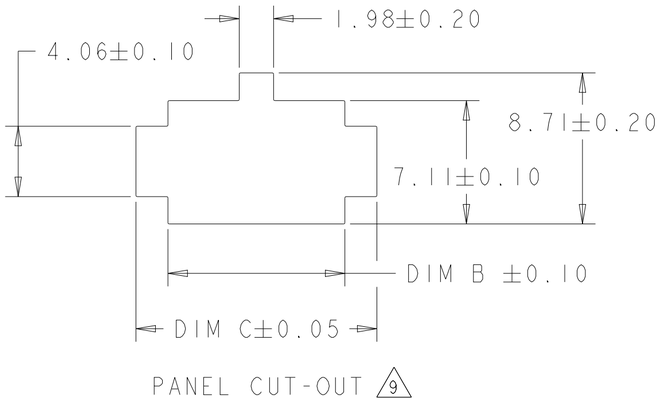



PANEL CUT-OUT (9)

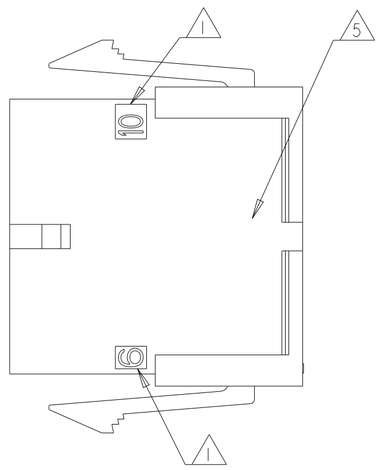

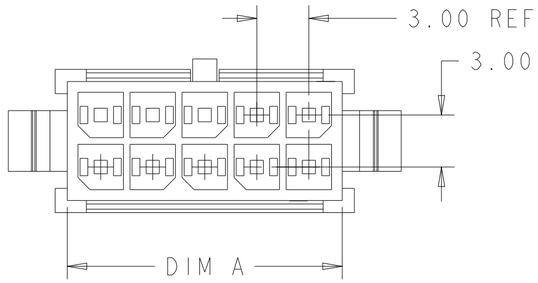

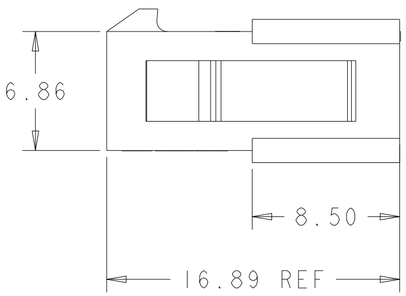

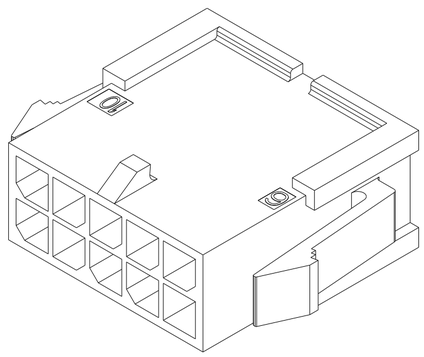

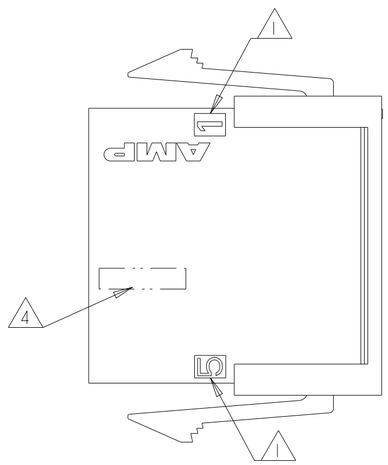

(1) CIRCUIT IDENTIFIERS LOCATED APPROXIMATELY AS SHOWN.

(2) MATERIAL PA66/6 UL94-V0.

(3) MATERIAL PA66 UL94-V0, GWEPT 750°C AND GWFI 850°C, NO FLAME ACC. TO IEC 60335-1.

(4) MATERIAL ID ">PA<" LOCATED IN APPROX AREA SHOWN, APPROX 0.01 HIGH.

(5) CAVITY NUMBER IDENTIFICATION.

6 COUNTERPART RECOMMENDED IS PN 794617 (DASH ACC. TO NUMBER OF POSITION).

7 TERMINAL USED WITH THIS CONNECTOR CAN BE 794608 OR 794609 OR LOOSE PIECE TERMINALS MAKE FROM THEM OR OTHER APPROVED BY PRODUCT ENGINEERING (TERMINAL PN DEFINED ACC. TO WIRE SIZE AND DASH NUMBER ACC. TO FINISHING).

8 PANEL MUST BE PUNCHED SO THAT HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.

(9) RECOMMENDED PANEL THICKNESS 1.57-2.3.

COLOR	MATERIAL	DIM C	DIM B	DIM A	NO. OF POS.	PART NUMBER
NATURAL	(3)	19.88	16.20	15.85	10	3-794615-0
		16.88	13.20	12.85	8	3-794615-8
		13.88	10.20	9.85	6	3-794615-6
BLACK	(2)	40.88	37.20	36.85	24	2-794615-4
		37.88	34.20	33.85	22	2-794615-2
		34.88	31.20	30.85	20	2-794615-0
		31.88	28.20	27.85	18	1-794615-8
		28.88	25.20	24.85	16	1-794615-6
		25.88	22.20	21.85	14	1-794615-4
		22.88	19.20	18.85	12	1-794615-2
		19.88	16.20	15.85	10	1-794615-0
		16.88	13.20	12.85	8	794615-8
		13.88	10.20	9.85	6	794615-6
		10.88	7.20	6.85	4	794615-4
		7.88	4.20	3.85	2	794615-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±0.26
3 PLC ±-
4 PLC ±-
ANGLES ±1°

MATERIAL SEE TABLE

FINISH -

DWN W J RUDY 29AUG2000
CHK W DAVIS 29AUG2000
APVD W DAVIS 29AUG2000
PRODUCT SPEC 108-1836
APPLICATION SPEC 114-13000
WEIGHT -

TE Connectivity

NAME PLUG HOUSING, 2 to 24 POSITION DUAL ROW, PANEL MOUNT MICRO MATE-N-LOK(TM)

SIZE A2 | CAGE CODE 00779 | DRAWING NO C-794615 | RESTRICTED TO

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 2 | REV P7


1471-9 (3/13)

Downloaded from Arrow.com.


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-


2 POS.




4 POS.




6 POS.




8 POS.

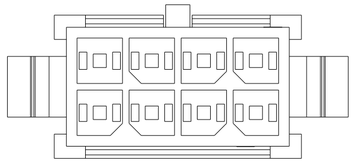


10 POS.

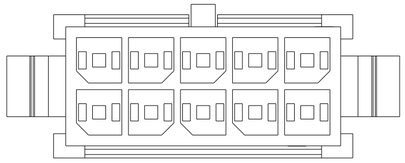


12 POS.

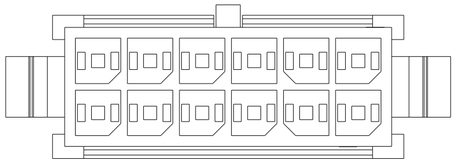


14 POS.

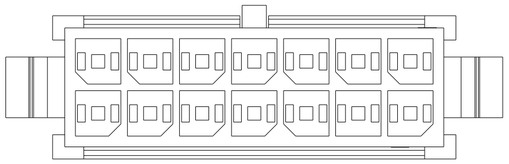


16 POS.

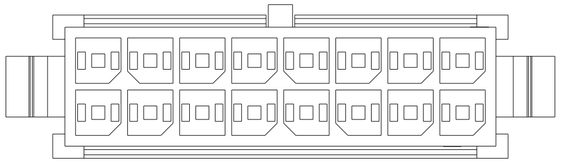


18 POS.

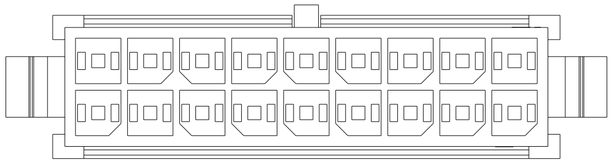


20 POS.

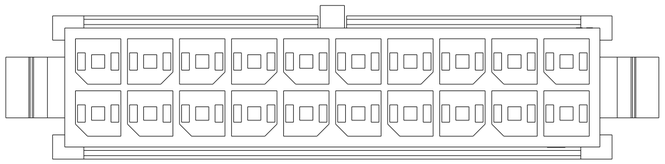

22 POS.

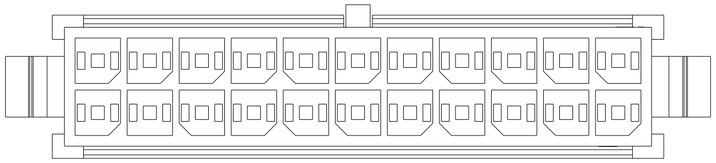

24 POS.

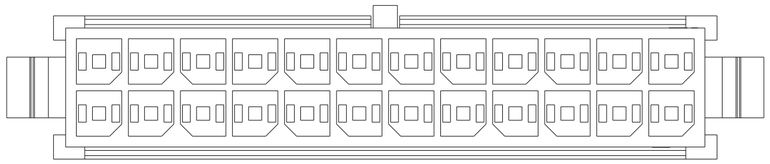

KEYING BY POSITION SIZE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±0.26
3 PLC ±-
4 PLC ±-
ANGLES ±1°

MATERIAL -
-

FINISH -
-

DWN W J RUDY 29AUG2000
CHK W DAVIS 29AUG2000
APVD W DAVIS 29AUG2000
PRODUCT SPEC 108-1836
APPLICATION SPEC 114-13000
WEIGHT -

TE Connectivity

NAME PLUG HOUSING, 2 to 24 POSITION DUAL ROW, PANEL MOUNT MICRO MATE-N-LOK(TM)

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-794615	

CUSTOMER DRAWING | SCALE 4:1 | SHEET 2 OF 2 | REV P7

1471-9 (3/13)

Downloaded from Arrow.com.