


		1	
Part Number:		DRAWN	
TEOOS	2705-1	CJ	5/20/2019
IEU92		CHECKED	5/21/2019
		C.H.	
Description:		APPROVED	E/21/2010
Electro-Mechar	nical Transducer	C.E.	5/21/2019


This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com


Top View

Side View

Bottom View

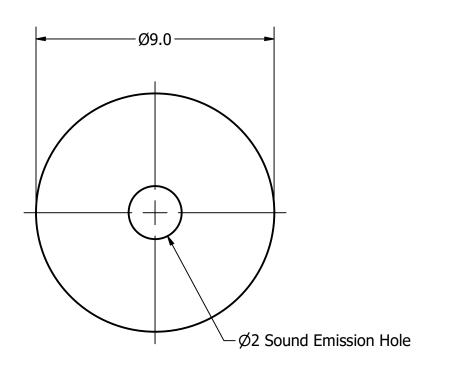

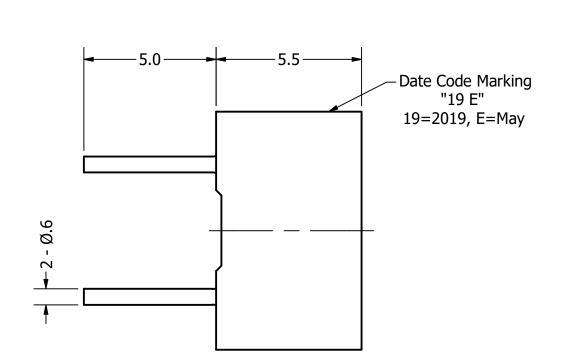

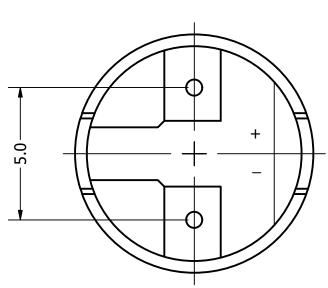

Items	Specifications	Conditions						
Min. Sound Pressure Level	85	dB (@ 10cm)						
Resonant Frequency	2,731	Hz						
Rated Voltage	5	V		REVISION HISTORY				
Voltage Range	3 ~ 7	V	REV	DESCRIPTION	DATE	APPROVED		
Coil Resistance	40	Ω		Released from Engineering	10/21/2013	J.S.		
Max. Rated Current	60	mA	4	Updated drawing template, pin length, current, weight,	5/21/2019	C.E.		
Storage Temperature	-40 ~ +90	°C	1	voltage range				
Operating Temperature	-40 ~ +85	°C		NOTES				
Connection Method	PC Pins			1) All dimensions are in mm unless otherwise noted				
Mount Type	Thru Hole			2) All tolerances are ± 0.5 mm unless otherwise noted				
Housing Material	PPO			3) All parts meet RoHS				
Weight	0.6	g		4) Subject to change or redrawn without notice				
4		3	Δ	2		1		

Downloaded from Arrow.com.