S-19212BxxA Series

FOR AUTOMOTIVE 125°C OPERATION HIGH-WITHSTAND VOLTAGE LOW DROPOUT CMOS VOLTAGE REGULATOR

www.sii-ic.com

© SII Semiconductor Corporation, 2015-2016

Rev.4.0_00

The S-19212BxxA Series, developed by using high-withstand voltage CMOS process technology, is a positive voltage regulator with a high-withstand voltage, low current consumption and high-accuracy output voltage, and has a built-in ON / OFF circuit.
The S-19212BxxA Series operates at the maximum operation voltage of 36 V and a low current consumption of 6.5 μA typ., and has a built-in low on-resistance output transistor which provides a very small dropout voltage and a large output current.
Also, a built-in overcurrent protection circuit to limit overcurrent of the output transistor and a built-in thermal shutdown circuit to limit heat are included.

Caution This product can be used in vehicle equipment and in-vehicle equipment. Before using the product in the purpose, contact to SII Semiconductor Corporation is indispensable.

■ Features

- Output voltage: 2.5 V to 16.0 V, selectable in 0.1 V step
- Input voltage: 3.0 V to 36 V
- Output voltage accuracy: ±2.0% (T_j = −40°C to +125°C)
- Current consumption: During operation: 6.5 μA typ., 8.5 μA max. (T_j = −40°C to +125°C)
  During power-off: 0.1 μA typ., 3.5 μA max. (T_j = −40°C to +125°C)
- Output current: Possible to output 250 mA (at $V_{IN} \geq V_{OUT(S)}$ + 2.0 V)*1
- Input capacitor: A ceramic capacitor can be used. (1.0 μF or more)
- Output capacitor: A ceramic capacitor can be used. (1.0 μF to 100 μF)
- Built-in overcurrent protection circuit: Limits overcurrent of output transistor.
- Built-in thermal shutdown circuit: Detection temperature 165°C typ.
- Built-in ON / OFF circuit: Ensures long battery life.
- Built-in discharge shunt circuit: Discharges the electric charge of the output capacitor during power-off. (R_{LOW} = 70 kΩ typ.)
- Operation temperature range: Ta = −40°C to +125°C
- Lead-free (Sn 100%), halogen-free
- Withstand 45 V load dump
- AEC-Q100 qualified*2: HSOP-8A, HSOP-6, SOT-89-5, SOT-23-5 package products

***1.** Please make sure that the loss of the IC will not exceed the power dissipation when the output current is large.
***2.** TO-252-5S(A) package product is in the process of AEC-Q100.
Contact our sales office for details.

■ Applications


- Constant-voltage power supply for electrical application for vehicle interior
- Constant-voltage power supply for home electric appliance
- For automotive use (engine, transmission, suspension, ABS, related-devices for EV / HEV / PHEV, etc.)

■ Packages

- TO-252-5S(A)
- HSOP-8A
- HSOP-6
- SOT-89-5
- SOT-23-5

Downloaded from Arrow.com.

■ Block Diagram

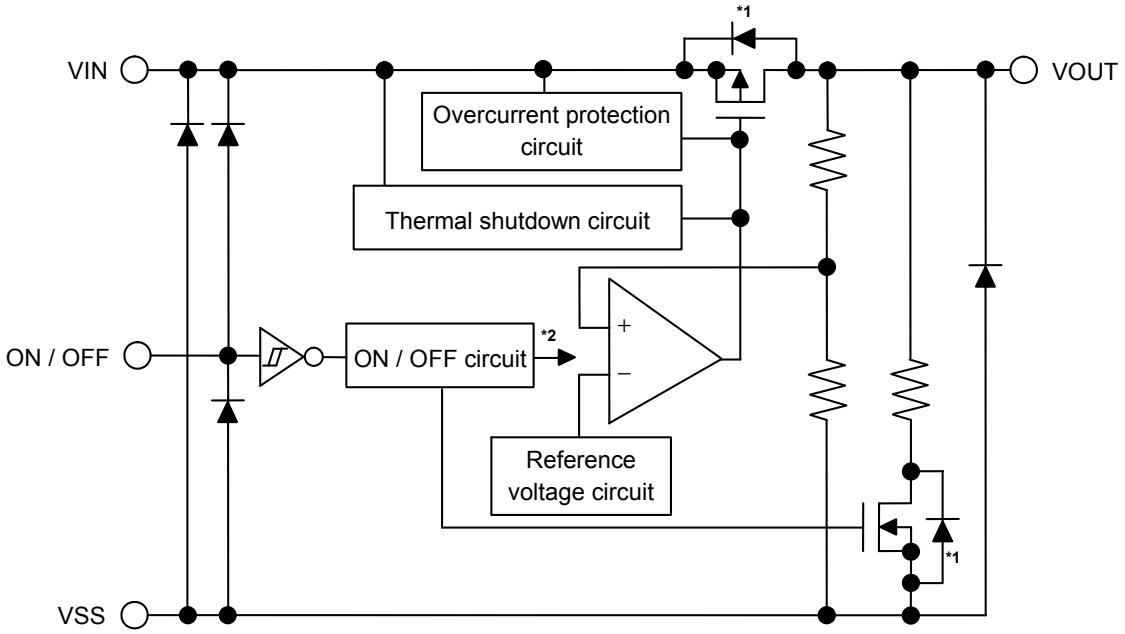

***1.** Parasitic diode
***2.** The ON / OFF circuit controls the internal circuit and the output transistor.

Figure 1

Downloaded from Arrow.com.

■ AEC-Q100 Qualified*1


This IC supports AEC-Q100 for operation temperature grade 1.
Contact our sales office for details of AEC-Q100 reliability specification.

***1.** TO-252-5S(A) package product is in the process of AEC-Q100.
Contact our sales office for details.

■ Product Name Structure

Users can select the output voltage and package type for the S-19212BxxA Series. Refer to "**1. Product name**" regarding the contents of product name, "**2. Packages**" regarding the package drawings and "**3. Product name list**" for details of product names.

1. Product name

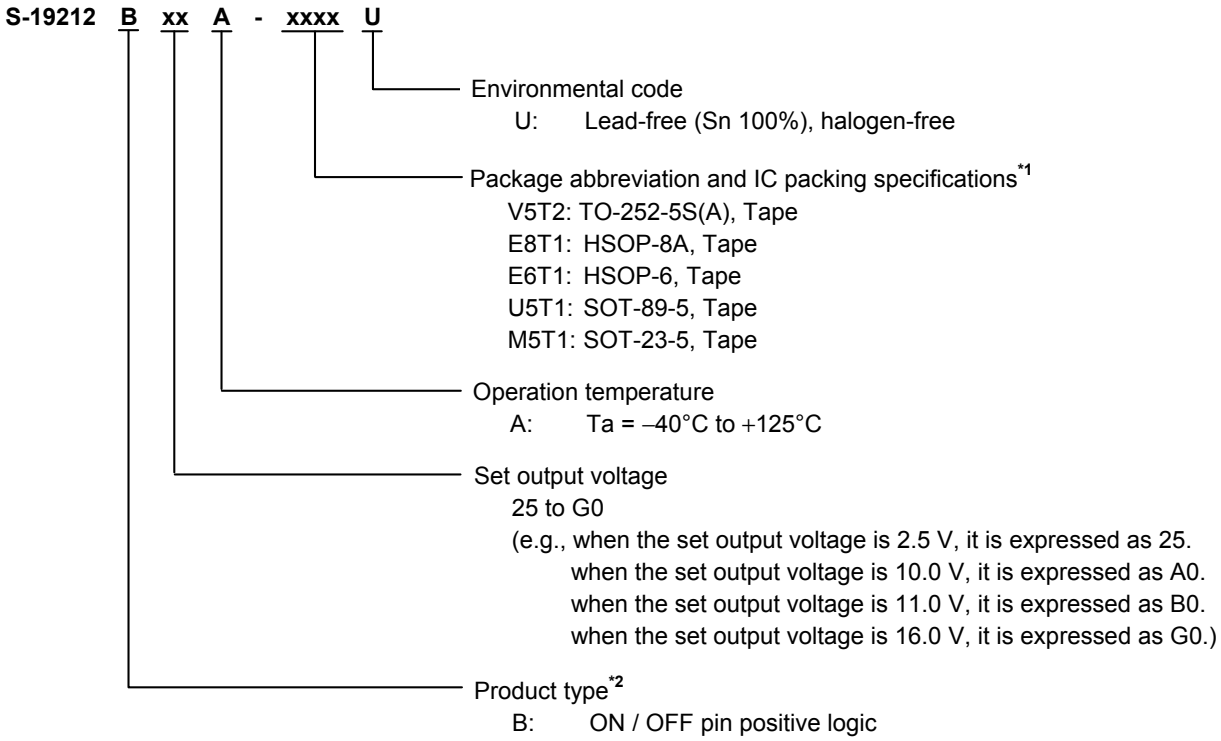

***1.** Refer to the tape drawing.
***2.** Refer to "**3. ON / OFF pin**" in "**■ Operation**".

2. Packages

Table 1 Package Drawing Codes

Package Name	Dimension	Tape	Reel	Land
TO-252-5S(A)	VA005-A-P-SD	VA005-A-C-SD	VA005-A-R-SD	VA005-A-L-SD
HSOP-8A	FH008-A-P-SD	FH008-A-C-SD	FH008-A-R-SD	FH008-A-L-SD
HSOP-6	FH006-A-P-SD	FH006-A-C-SD	FH006-A-R-S1	–
SOT-89-5	UP005-A-P-SD	UP005-A-C-SD	UP005-A-R-SD	–
SOT-23-5	MP005-A-P-SD	MP005-A-C-SD	MP005-A-R-SD	–

Downloaded from Arrow.com.

3. Product name list

Table 2

Output Voltage	TO-252-5S(A)	HSOP-8A	HSOP-6	SOT-89-5	SOT-23-5
2.5 V ± 2.0%	S-19212B25A-V5T2U	S-19212B25A-E8T1U	S-19212B25A-E6T1U	S-19212B25A-U5T1U	S-19212B25A-M5T1U
3.0 V ± 2.0%	S-19212B30A-V5T2U	S-19212B30A-E8T1U	S-19212B30A-E6T1U	S-19212B30A-U5T1U	S-19212B30A-M5T1U
3.3 V ± 2.0%	S-19212B33A-V5T2U	S-19212B33A-E8T1U	S-19212B33A-E6T1U	S-19212B33A-U5T1U	S-19212B33A-M5T1U
5.0 V ± 2.0%	S-19212B50A-V5T2U	S-19212B50A-E8T1U	S-19212B50A-E6T1U	S-19212B50A-U5T1U	S-19212B50A-M5T1U
5.5 V ± 2.0%	S-19212B55A-V5T2U	S-19212B55A-E8T1U	S-19212B55A-E6T1U	S-19212B55A-U5T1U	S-19212B55A-M5T1U
6.0 V ± 2.0%	S-19212B60A-V5T2U	S-19212B60A-E8T1U	S-19212B60A-E6T1U	S-19212B60A-U5T1U	S-19212B60A-M5T1U
7.0 V ± 2.0%	S-19212B70A-V5T2U	S-19212B70A-E8T1U	S-19212B70A-E6T1U	S-19212B70A-U5T1U	S-19212B70A-M5T1U
8.0 V ± 2.0%	S-19212B80A-V5T2U	S-19212B80A-E8T1U	S-19212B80A-E6T1U	S-19212B80A-U5T1U	S-19212B80A-M5T1U
9.0 V ± 2.0%	S-19212B90A-V5T2U	S-19212B90A-E8T1U	S-19212B90A-E6T1U	S-19212B90A-U5T1U	S-19212B90A-M5T1U
10.5 V ± 2.0%	S-19212BA5A-V5T2U	S-19212BA5A-E8T1U	S-19212BA5A-E6T1U	S-19212BA5A-U5T1U	S-19212BA5A-M5T1U
12.0 V ± 2.0%	S-19212BC0A-V5T2U	S-19212BC0A-E8T1U	S-19212BC0A-E6T1U	S-19212BC0A-U5T1U	S-19212BC0A-M5T1U
12.5 V ± 2.0%	S-19212BC5A-V5T2U	S-19212BC5A-E8T1U	S-19212BC5A-E6T1U	S-19212BC5A-U5T1U	S-19212BC5A-M5T1U
15.0 V ± 2.0%	S-19212BF0A-V5T2U	S-19212BF0A-E8T1U	S-19212BF0A-E6T1U	S-19212BF0A-U5T1U	S-19212BF0A-M5T1U

Remark Please contact our sales office for products with specifications other than the above output voltage.

Downloaded from Arrow.com.

■ Pin Configurations

1. TO-252-5S(A)

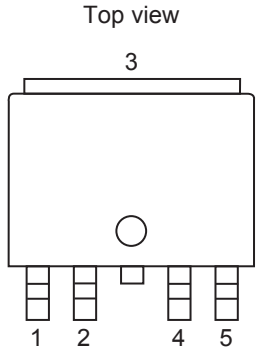


Figure 2

Table 3

Pin No.	Symbol	Description
1	VOUT	Output voltage pin
2	ON / OFF	ON / OFF pin
3	VSS	GND pin
4	NC*1	No connection
5	VIN	Input voltage pin

***1.** The NC pin is electrically open.
The NC pin can be connected to the VIN pin or the VSS pin.

2. HSOP-8A

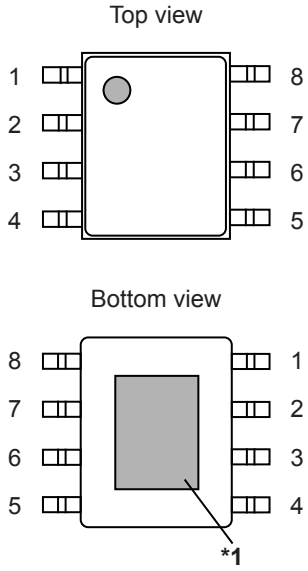


Figure 3

Table 4

Pin No.	Symbol	Description
1	VOUT	Output voltage pin
2	NC*2	No connection
3	NC*2	No connection
4	ON / OFF	ON / OFF pin
5	VSS	GND pin
6	NC*2	No connection
7	NC*2	No connection
8	VIN	Input voltage pin

***1.** Connect the heat sink of backside at shadowed area to the board, and set electric potential GND.
However, do not use it as the function of electrode.
***2.** The NC pin is electrically open. The NC pin can be connected to the VIN pin or the VSS pin.

Downloaded from Arrow.com.

3. HSOP-6




Figure 4

Table 5

Pin No.	Symbol	Description
1	VOUT	Output voltage pin
2	VSS	GND pin
3	ON / OFF	ON / OFF pin
4	NC*1	No connection
5	VSS	GND pin
6	VIN	Input voltage pin

***1.** The NC pin is electrically open. The NC pin can be connected to the VIN pin or the VSS pin.

4. SOT-89-5




Figure 5

Table 6

Pin No.	Symbol	Description
1	NC*1	No connection
2	VSS	GND pin
3	VIN	Input voltage pin
4	VOUT	Output voltage pin
5	ON / OFF	ON / OFF pin

***1.** The NC pin is electrically open. The NC pin can be connected to the VIN pin or the VSS pin.

5. SOT-23-5




Figure 6

Table 7

Pin No.	Symbol	Description
1	VIN	Input voltage pin
2	VSS	GND pin
3	NC*1	No connection
4	ON / OFF	ON / OFF pin
5	VOUT	Output voltage pin

***1.** The NC pin is electrically open. The NC pin can be connected to the VIN pin or the VSS pin.

Downloaded from Arrow.com.

■ Absolute Maximum Ratings

Table 8

(Ta = +25°C unless otherwise specified)

Item	Symbol	Absolute Maximum Rating	Unit
Input voltage	V_{IN}	V_{SS} – 0.3 to V_{SS} + 45	V
	$V_{ON / OFF}$	V_{SS} – 0.3 to V_{IN} + 0.3 ≤ V_{SS} + 45	V
Output voltage	V_{OUT}	V_{SS} – 0.3 to V_{IN} + 0.3 ≤ V_{SS} + 45	V
Output current	I_{OUT}	280	mA
Junction temperature	T_j	–40 to +150	°C
Operation ambient temperature	T_{opr}	–40 to +125	°C
Storage temperature	T_{stg}	–40 to +150	°C

Caution The absolute maximum ratings are rated values exceeding which the product could suffer physical damage. These values must therefore not be exceeded under any conditions.

■ Thermal Resistance Value

Table 9

Item	Symbol	Condition		Min.	Typ.	Max.	Unit
Junction-to-ambient thermal resistance*1	θ_{ja}	TO-252-5S(A)	Board 1	–	90	–	°C/W
			Board 2	–	58	–	°C/W
			Board 3	–	38	–	°C/W
			Board 4	–	30	–	°C/W
			Board 5	–	29	–	°C/W
		HSOP-8A	Board 1	–	115	–	°C/W
			Board 2	–	82	–	°C/W
			Board 3	–	42	–	°C/W
			Board 4	–	43	–	°C/W
			Board 5	–	35	–	°C/W
		HSOP-6	Board 1	–	106	–	°C/W
			Board 2	–	82	–	°C/W
			Board 3	–	51	–	°C/W
			Board 4	–	48	–	°C/W
		SOT-89-5	Board 1	–	123	–	°C/W
			Board 2	–	90	–	°C/W
			Board 3	–	53	–	°C/W
			Board 4	–	41	–	°C/W
		SOT-23-5	Board 1	–	180	–	°C/W
			Board 2	–	143	–	°C/W

***1.** Test environment: compliance with JEDEC STANDARD JESD51-2A

Remark Refer to "**■ Thermal Characteristics**" for details of power dissipation and test board.

Downloaded from Arrow.com.

■ Electrical Characteristics

Table 10

(T_j = –40°C to +125°C unless otherwise specified)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Test Circuit
Output voltage*1	$V_{OUT(E)}$	$V_{IN} = V_{OUT(S)} + 2.0$ V, I_{OUT} = 10 mA	$V_{OUT(S)} \times 0.980$	$V_{OUT(S)}$	$V_{OUT(S)} \times 1.020$	V	1
Output current*2	I_{OUT}	$V_{IN} \geq V_{OUT(S)} + 2.0$ V	250*4	–	–	mA	3
Dropout voltage*3	V_{drop}	I_{OUT} = 125 mA, Ta = +25°C	–	0.35	–	V	1
		I_{OUT} = 250 mA, Ta = +25°C	–	0.80	–	V	1
Line regulation	$\frac{\Delta V_{OUT1}}{\Delta V_{IN} \bullet V_{OUT}}$	$V_{OUT(S)} + 0.5$ V ≤ V_{IN} ≤ 36 V, I_{OUT} = 10 mA	–	0.01	0.03	%/V	1
Load regulation	ΔV_{OUT2}	$V_{IN} = V_{OUT(S)} + 2.0$ V, 2.5 V ≤ $V_{OUT(S)}$ < 5.1 V, 0.1 mA ≤ I_{OUT} ≤ 40 mA	–	16	30	mV	1
		$V_{IN} = V_{OUT(S)} + 2.0$ V, 5.1 V ≤ $V_{OUT(S)}$ < 12.1 V, 0.1 mA ≤ I_{OUT} ≤ 40 mA	–	16	35	mV	1
		$V_{IN} = V_{OUT(S)} + 2.0$ V, 12.1 V ≤ $V_{OUT(S)}$ ≤ 16.0 V, 0.1 mA ≤ I_{OUT} ≤ 40 mA	–	16	40	mV	1
Current consumption during operation	I_{SS1}	V_{IN} = 18.0 V, $V_{ON / OFF} = V_{IN}$, I_{OUT} = 0.01 mA	–	6.5	8.5	μA	2
Current consumption during power-off	I_{SS2}	V_{IN} = 18.0 V, $V_{ON / OFF}$ = 0 V, no load	–	0.1	3.5	μA	2
Input voltage	V_{IN}	–	3.0	–	36	V	–
ON / OFF pin input voltage "H"	V_{SH}	V_{IN} = 18.0 V, R_L = 1.0 kΩ, determined by V_{OUT} output level	1.5	–	–	V	4
ON / OFF pin input voltage "L"	V_{SL}	V_{IN} = 18.0 V, R_L = 1.0 kΩ, determined by V_{OUT} output level	–	–	0.25	V	4
ON / OFF pin input current "H"	I_{SH}	V_{IN} = 18.0 V, $V_{ON / OFF} = V_{IN}$	–0.1	–	0.1	μA	4
ON / OFF pin input current "L"	I_{SL}	V_{IN} = 18.0 V, $V_{ON / OFF}$ = 0 V	–0.1	–	0.1	μA	4
Ripple rejection	|RR|	$V_{IN} = V_{OUT(S)} + 2.0$ V, f = 100 Hz, ΔV_{rip} = 0.5 Vrms, I_{OUT} = 10 mA, Ta = +25°C; 2.5 V ≤ $V_{OUT(S)}$ < 3.6 V	–	45	–	dB	5
		3.6 V ≤ $V_{OUT(S)}$ < 6.1 V	–	40	–	dB	5
		6.1 V ≤ $V_{OUT(S)}$ < 10.1 V	–	35	–	dB	5
		10.1 V ≤ $V_{OUT(S)}$ ≤ 16.0 V	–	30	–	dB	5
Short-circuit current	I_{short}	$V_{IN} = V_{OUT(S)} + 2.0$ V, $V_{ON / OFF} = V_{IN}$, V_{OUT} = 0 V, Ta = +25°C	–	120	–	mA	3
Thermal shutdown detection temperature	T_{SD}	Junction temperature	–	165	–	°C	–
Thermal shutdown release temperature	T_{SR}	Junction temperature	–	140	–	°C	–
Discharge shunt resistance during power-off	R_{LOW}	V_{IN} = 18.0 V, $V_{ON / OFF}$ = 0 V, V_{OUT} = 2.0 V	–	70	–	kΩ	6

***1.** $V_{OUT(S)}$: Set output voltage
$V_{OUT(E)}$: Actual output voltage
The output voltage when $V_{IN} = V_{OUT(S)} + 2.0$ V, I_{OUT} = 10 mA

***2.** The output current at which the output voltage becomes 95% of $V_{OUT(E)}$ after gradually increasing the output current.

***3.** $V_{drop} = V_{IN1} - (V_{OUT3} \times 0.98)$
V_{IN1} is the input voltage at which the output voltage becomes 98% of V_{OUT3} after gradually decreasing the input voltage.
V_{OUT3} is the output voltage when $V_{IN} = V_{OUT(S)} + 2.0$ V, and I_{OUT} = 125 mA or 250 mA.

***4.** Due to limitation of the power dissipation, this value may not be satisfied. Attention should be paid to the power dissipation when the output current is large.
This specification is guaranteed by design.

Downloaded from Arrow.com.

■ Test Circuits

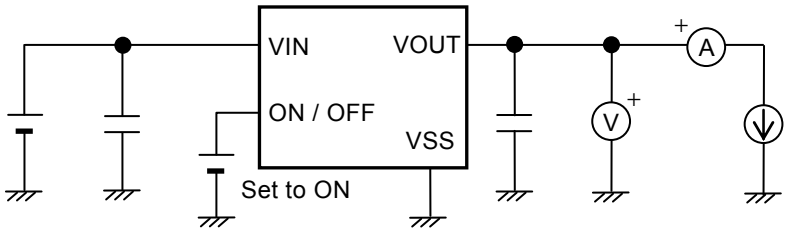


Figure 7 Test Circuit 1

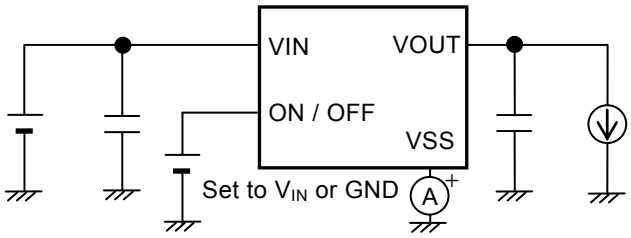


Figure 8 Test Circuit 2

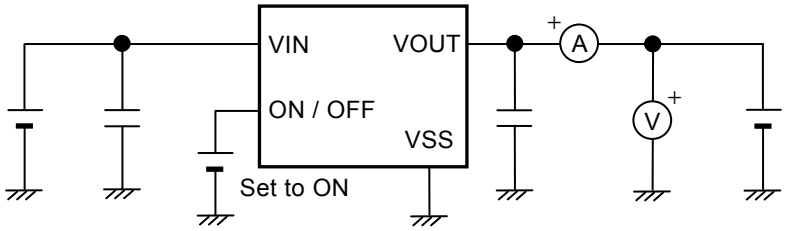


Figure 9 Test Circuit 3

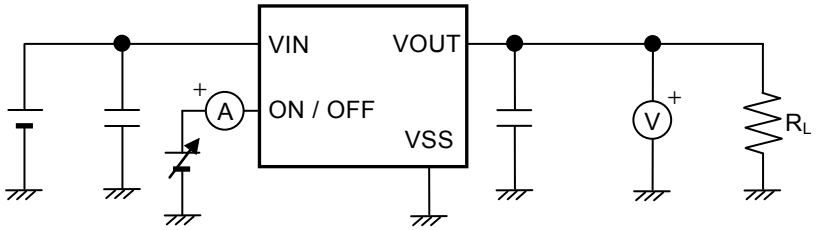


Figure 10 Test Circuit 4

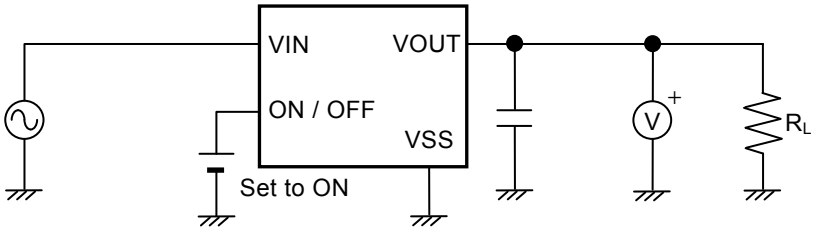


Figure 11 Test Circuit 5

Downloaded from Arrow.com.


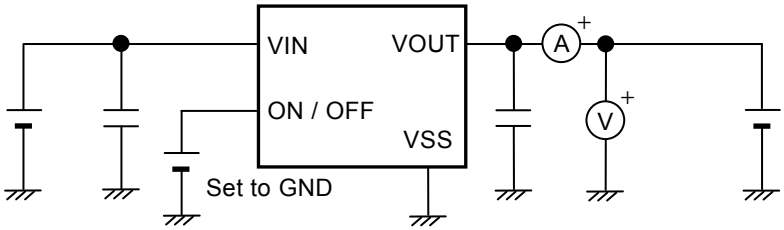


Figure 12 Test Circuit 6

Downloaded from Arrow.com.

■ Standard Circuit

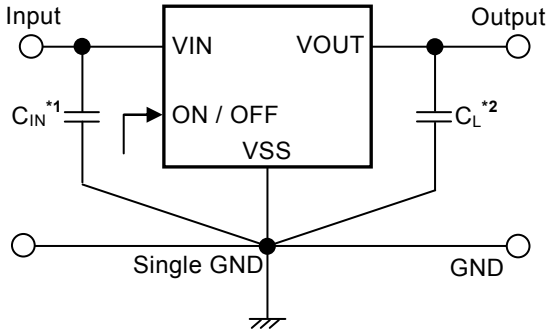

***1.** C_{IN} is a capacitor for stabilizing the input.
***2.** C_L is a capacitor for stabilizing the output.

Figure 13

Caution The above connection diagram and constants will not guarantee successful operation. Perform thorough evaluation using an actual application to set the constants.

■ Condition of Application

Input capacitor (C_{IN}): A ceramic capacitor with capacitance of 1.0 µF or more is recommended.
Output capacitor (C_L): A ceramic capacitor with capacitance of 1.0 µF to 100 µF is recommended.

Caution Generally, in a voltage regulator, an oscillation may occur depending on the selection of the external parts. Perform thorough evaluation including the temperature characteristics with an actual application using the above capacitors to confirm no oscillation occurs.

■ Selection of Input Capacitor (C_{IN}) and Output Capacitor (C_L)

The S-19212BxxA Series requires C_L between the VOUT pin and the VSS pin for phase compensation. The operation is stabilized by a ceramic capacitor with capacitance of 1.0 µF to 100 µF. When using an OS capacitor, a tantalum capacitor or an aluminum electrolytic capacitor, the capacitance also must be 1.0 µF to 100 µF. However, an oscillation may occur depending on the equivalent series resistance (ESR).
Moreover, the S-19212BxxA Series requires C_{IN} between the VIN pin and the VSS pin for a stable operation.
Generally, an oscillaiton may occur when a voltage regulator is used under the conditon that the impedance of the power supply is high.
Note that the output voltage transient characteristics varies depending on the capacitance of C_{IN} and C_L and the value of ESR.

Caution Perform thorough evaluation including the temperature characteristics with an actual application to select C_{IN} and C_L.

Downloaded from Arrow.com.

■ Explanation of Terms

1. Low dropout voltage regulator

This is a voltage regulator which made dropout voltage small by its built-in low on-resistance output transistor.

2. Output voltage (V_{OUT})

This voltage is output at an accuracy of ±2.0% when the input voltage, the output current and the temperature are in a certain condition*1.

***1.** Differs depending on the product.

Caution **If the certain condition is not satisfied, the output voltage may exceed the accuracy range of ±2.0%. Refer to "■ Electrical Characteristics" and "■ Characteristics (Typical Data)" for details.**

3. Line regulation $\left(\frac{\Delta V_{OUT1}}{\Delta V_{IN} \bullet V_{OUT}}\right)$

Indicates the dependency of the output voltage against the input voltage. That is, the value shows how much the output voltage changes due to a change in the input voltage after fixing output current constant.

4. Load regulation (ΔV_{OUT2})

Indicates the dependency of the output voltage against the output current. That is, the value shows how much the output voltage changes due to a change in the output current after fixing input voltage constant.

5. Dropout voltage (V_{drop})

Indicates the difference between input voltage (V_{IN1}) and the output voltage when the output voltage becomes 98% of the output voltage value (V_{OUT3}) at $V_{IN} = V_{OUT(S)} + 2.0$ V after the input voltage (V_{IN}) is decreased gradually.


$V_{drop} = V_{IN1} - (V_{OUT3} \times 0.98)$

Downloaded from Arrow.com.

■ Operation

1. Basic operation

Figure 14 shows the block diagram of the S-19212BxxA Series to describe the basic operation.
The error amplifier compares the feedback voltage (V_{fb}) whose output voltage (V_{OUT}) is divided by the feedback resistors (R_s and R_f) with the reference voltage (V_{ref}). The error amplifier controls the output transistor, consequently, the regulator starts the operation that holds V_{OUT} constant without the influence of the input voltage (V_{IN}).

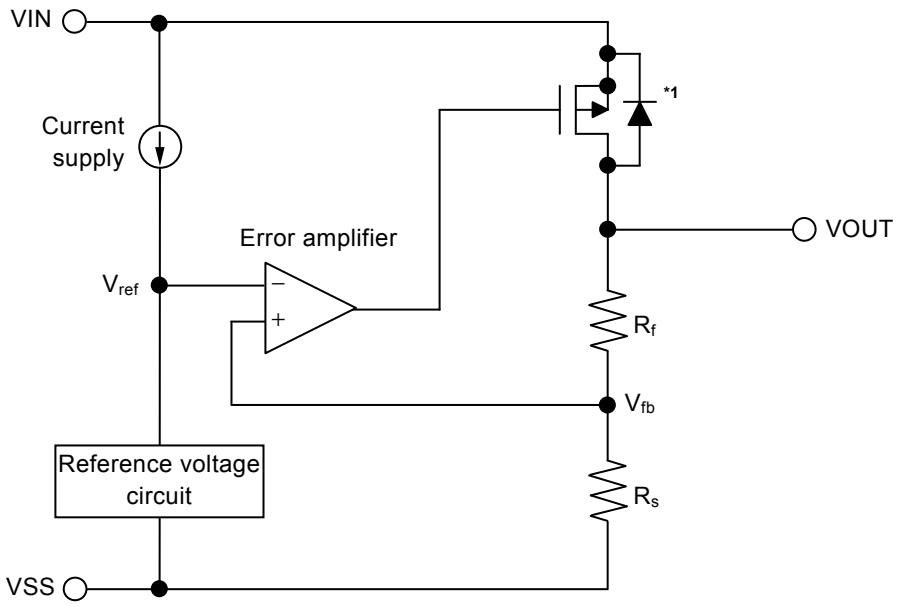

***1.** Parasitic diode

Figure 14

2. Output transistor

In the S-19212BxxA Series, a low on-resistance P-channel MOS FET is used between the VIN pin and the VOUT pin as the output transistor. In order to hold V_{OUT} constant, the on-resistance of the output transistor varies appropriately according to the output current (I_{OUT}).

Caution Since a parasitic diode exists between the VIN pin and the VOUT pin due to the structure of the transistor, the IC may be damaged by a reverse current if V_{OUT} becomes higher than V_{IN}. Therefore, be sure that V_{OUT} does not exceed V_{IN} + 0.3 V.

Downloaded from Arrow.com.

3. ON / OFF pin

The ON / OFF pin controls the internal circuit and the output transistor in order to start and stop the regulator. When the ON / OFF pin is set to OFF, the internal circuit stops operating and the output transistor between the VIN pin and the VOUT pin is turned off, reducing current consumption significantly.
The internal equivalent circuit related to the ON / OFF pin is configured as shown in **Figure 15**. Since the ON / OFF pin is neither pulled down nor pulled up, do not use it in the floating status. When not using the ON / OFF pin, connect it to the VIN pin. Note that the current consumption increases when a voltage of 0.25 V to V_{IN} – 0.3 V is applied to the ON / OFF pin.

Table 11

Product Type	ON / OFF Pin	Internal Circuit	VOUT Pin Voltage	Current Consumption
B	"H": ON	Operate	Constant value*1	I_{SS1}
B	"L": OFF	Stop	Pulled down to V_{SS}*2	I_{SS2}

***1.** The constant value is output due to the regulating based on the set output voltage value.
***2.** The VOUT pin voltage is pulled down to V_{SS} due to the discharge shunt circuit (R_{LOW} = 70 kΩ typ.), the feedback resistors (R_s and R_f) and a load.

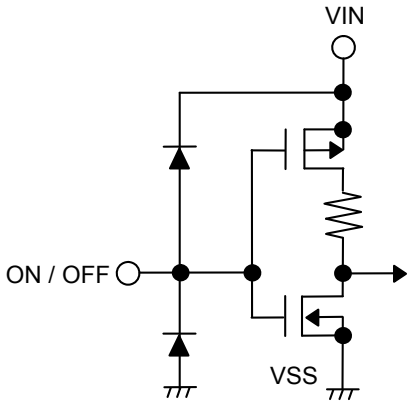


Figure 15

4. Overcurrent protection circuit

The S-19212BxxA Series has a built-in overcurrent protection circuit to limit the overcurrent of the output transistor. When the VOUT pin is shorted with the VSS pin, that is, at the time of the output short-circuit, the output current is limited to 120 mA typ. due to the overcurrent protection circuit operation. The S-19212BxxA Series restarts regulating when the output transistor is released from the overcurrent status.

Caution 1. This overcurrent protection circuit does not work as for thermal protection. For example, when the output transistor keeps the overcurrent status long at the time of output short-circuit or due to other reasons, pay attention to the conditions of the input voltage and the load current so as not to exceed the power dissipation.
2. Note that any interference may be caused in the output voltage start-up when a load heavier than $\frac{V_{OUT(S)}}{100\ mA}$ is connected.

Downloaded from Arrow.com.

5. Thermal shutdown circuit

The S-19212BxxA Series has a built-in thermal shutdown circuit to limit overheating. When the junction temperature increases to 165°C typ., the thermal shutdown circuit becomes the detection status, and the regulating is stopped. When the junction temperature decreases to 140°C typ., the thermal shutdown circuit becomes the release status, and the regulator is restarted.
If the thermal shutdown circuit becomes the detection status due to self-heating, the regulating is stopped and V_{OUT} decreases. For this reason, the self-heating is limited and the temperature of the IC decreases. The thermal shutdown circuit becomes release status when the temperature of the IC decreases, and the regulating is restarted, thus the self-heating is generated again. Repeating this procedure makes the waveform of V_{OUT} into a pulse-like form. This phenomenon continues unless decreasing either or both of the input voltage and the output current in order to reduce the internal power consumption, or decreasing the ambient temperature. Note that the product may suffer physical damage such as deterioration if the above phenomenon occurs continuously.

Caution 1. When the heat radiation of the application is not in a good condition, the self-heating cannot be limited immediately, and the IC may suffer physical damage. Perform thorough evaluation including the temperature characteristics with an actual application to confirm no problems happen.

2. If a large load current flows during the restart process of regulating after the thermal shutdown circuit changes to the release status from the detection status, the thermal shutdown circuit becomes the detection status again due to self-heating, and a problem may happen in the restart of regulating. A large load current, for example, occurs when charging to the C_L whose capacitance is large.
Perform thorough evaluation including the temperature characteristics with an actual application to select C_L.

Table 12

Thermal Shutdown Circuit	VOUT Pin Voltage
Release: 140°C typ.*1	Constant value*2
Detection: 165°C typ.*1	Pulled down to V_{SS}*3

***1.** Junction temperature
***2.** The constant value is output due to the regulating based on the set output voltage value.
***3.** The VOUT pin voltage is pulled down to V_{SS} due to the feedback resistors (R_s and R_f) and a load.

Downloaded from Arrow.com.

■ Precautions

- Generally, when a voltage regulator is used under the condition that the load current value is small (0.1 mA or less), the output voltage may increase due to the leakage current of an output transistor.
- Generally, when a voltage regulator is used under the condition that the temperature is high, the output voltage may increase due to the leakage current of an output transistor.
- Generally, when the ON / OFF pin is used under the condition of OFF, the output voltage may increase due to the leakage current of an output transistor.
- Generally, when a voltage regulator is used under the condition that the impedance of the power supply is high, an oscillation may occur. Perform thorough evaluation including the temperature characteristics with an actual application to select C_{IN}.
- Generally, in a voltage regulator, an oscillation may occur depending on the selection of the external parts. The following use conditions are recommended in the S-19212BxxA Series, however, perform thorough evaluation including the temperature characteristics with an actual application to select C_{IN} and C_L.

  Input capacitor (C_{IN}): A ceramic capacitor with capacitance of 1.0 μF or more is recommended.
  Output capacitor (C_L): A ceramic capacitor with capacitance of 1.0 μF to 100 μF is recommended.


- Generally, in a voltage regulator, the values of an overshoot and an undershoot in the output voltage vary depending on the variation factors of input voltage start-up, input voltage fluctuation and load fluctuation etc., or the capacitance of C_{IN} or C_L and the value of the equivalent series resistance (ESR), which may cause a problem to the stable operation. Perform thorough evaluation including the temperature characteristics with an actual application to select C_{IN} and C_L.
- Generally, in a voltage regulator, an overshoot may occur in the output voltage momentarily if the input voltage steeply changes when the input voltage is started up or the input voltage fluctuates etc. Perform thorough evaluation including the temperature characteristics with an actual application to confirm no problems happen.
- Generally, in a voltage regulator, if the VOUT pin is steeply shorted with GND, a negative voltage exceeding the absolute maximum ratings may occur in the VOUT pin due to resonance phenomenon of the inductance and the capacitance including C_L on the application. The resonance phenomenon is expected to be weakened by inserting a series resistor into the resonance path, and the negative voltage is expected to be limited by inserting a protection diode between the VOUT pin and the VSS pin.
- If the input voltage is started up steeply under the condition that the capacitance of C_L is large, the thermal shutdown circuit may be in the detection status by self-heating due to the charge current to C_L.
- Make sure of the conditions for the input voltage, output voltage and the load current so that the internal loss does not exceed the power dissipation.
- Do not apply an electrostatic discharge to this IC that exceeds the performance ratings of the built-in electrostatic protection circuit.
- When considering the output current value that the IC is able to output, make sure of the output current value specified in **Table 10** in "**■ Electrical Characteristics**" and footnote ***4** of the table.
- Wiring patterns on the application related to the VIN pin, the VOUT pin and the VSS pin should be designed so that the impedance is low. When mounting C_{IN} between the VIN pin and the VSS pin and C_L between the VOUT pin and the VSS pin, connect the capacitors as close as possible to the respective destination pins of the IC.
- In the package equipped with heat sink of backside, mount the heat sink firmly. Since the heat radiation differs according to the condition of the application, perform thorough evaluation with an actual application to confirm no problems happen.
- SII Semiconductor Corporation claims no responsibility for any disputes arising out of or in connection with any infringement by products including this IC of patents owned by a third party.

Downloaded from Arrow.com.


■ Characteristics (Typical Data)

1. Output voltage vs. Output current (When load current increases) (Ta = +25°C)

1. 1 V_{OUT} = 2.5 V

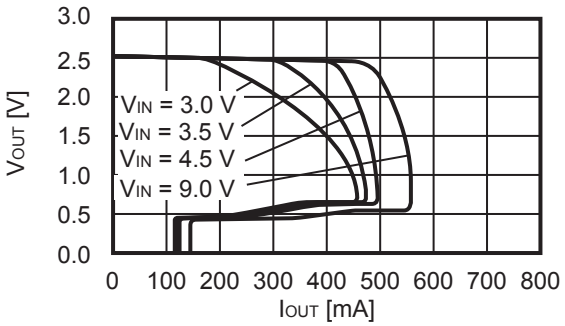

1. 2 V_{OUT} = 5.0 V

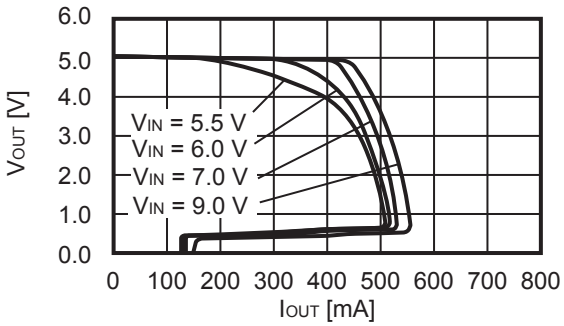


Remark In determining the output current, attention should be paid to the following.


1. The minimum output current value and footnote ***4** of **Table 10** in "■ **Electrical Characteristics**"
2. Power dissipation

2. Output voltage vs. Input voltage (Ta = +25°C)


2. 1 V_{OUT} = 2.5 V

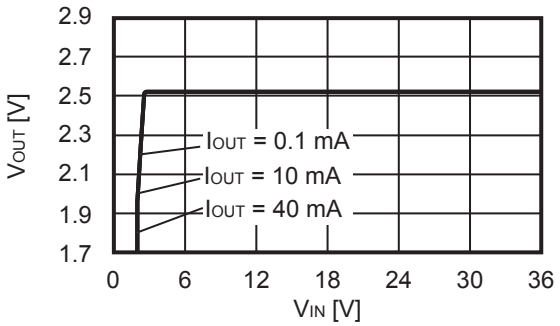

2. 2 V_{OUT} = 5.0 V

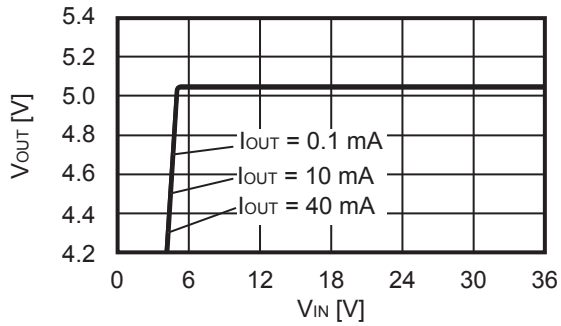


2. 3 V_{OUT} = 16.0 V

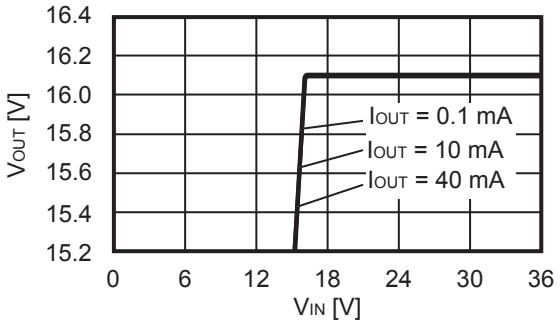


Downloaded from Arrow.com.

3. Dropout voltage vs. Output current


3. 1 V_{OUT} = 2.5 V

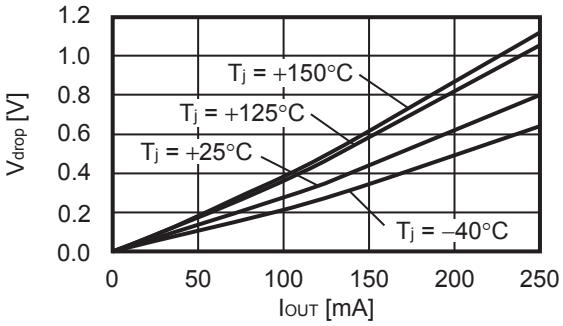

3. 2 V_{OUT} = 5.0 V

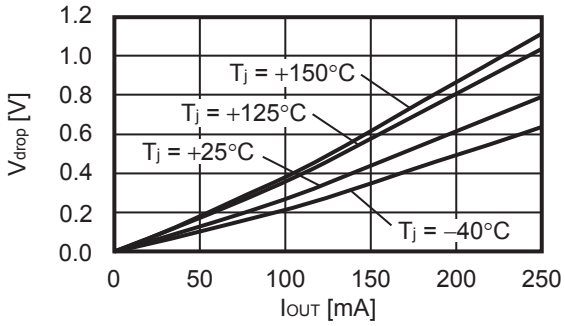


3. 3 V_{OUT} = 16.0 V

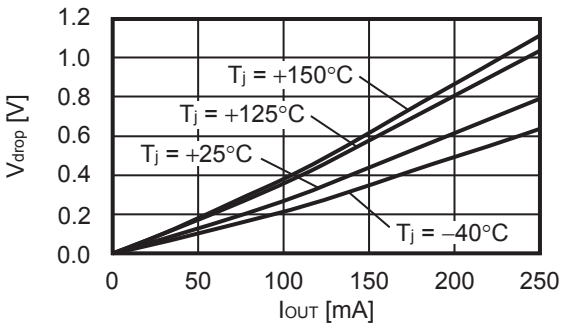


4. Dropout voltage vs. Junction temperature


4. 1 V_{OUT} = 2.5 V

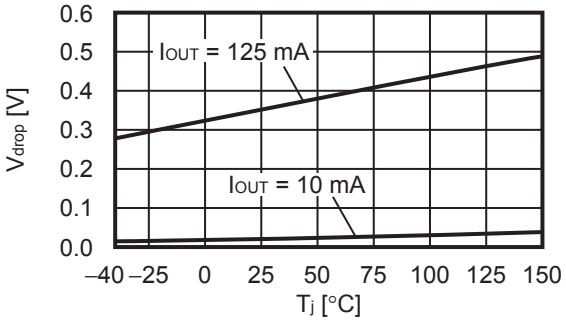

4. 2 V_{OUT} = 5.0 V

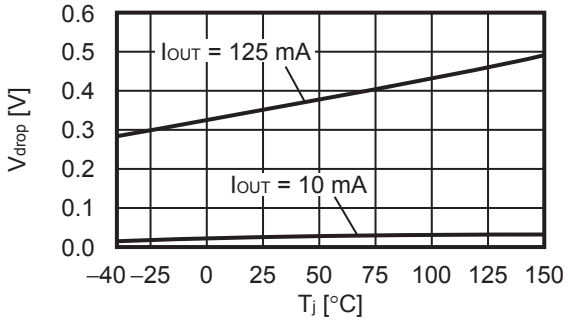


4. 3 V_{OUT} = 16.0 V

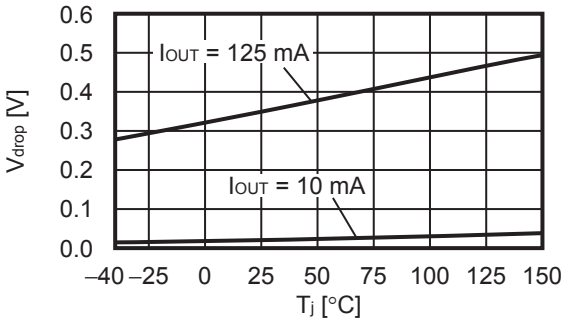


Downloaded from Arrow.com.

5. Dropout voltage vs. Set output voltage (Ta = +25°C)

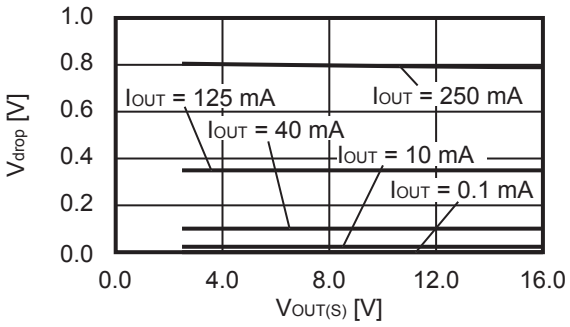


6. Output voltage vs. Junction temperature


6. 1 V_{OUT} = 2.5 V

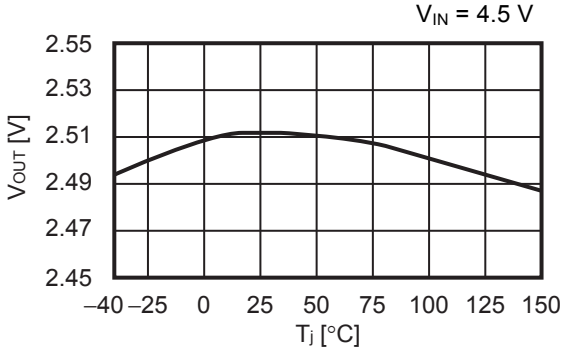

6. 2 V_{OUT} = 5.0 V

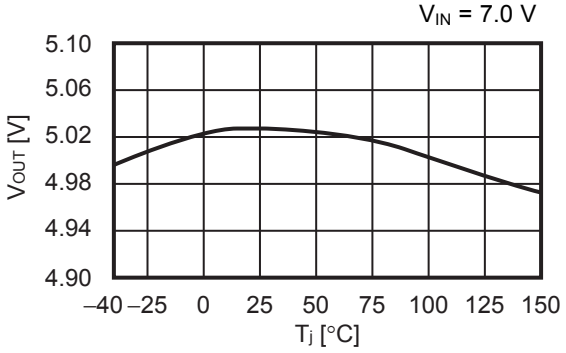


6. 3 V_{OUT} = 16.0 V

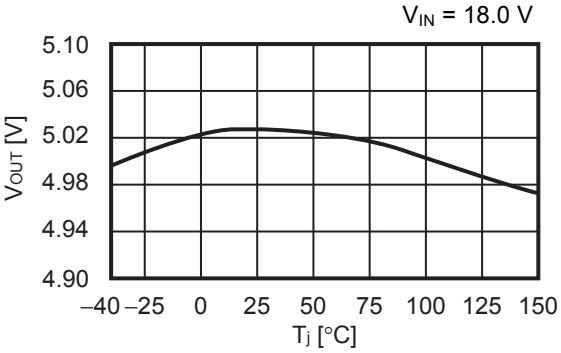


Downloaded from Arrow.com.

7. Current consumption during operation vs. Input voltage (When ON / OFF pin is ON, no load)


7. 1 V_{OUT} = 2.5 V

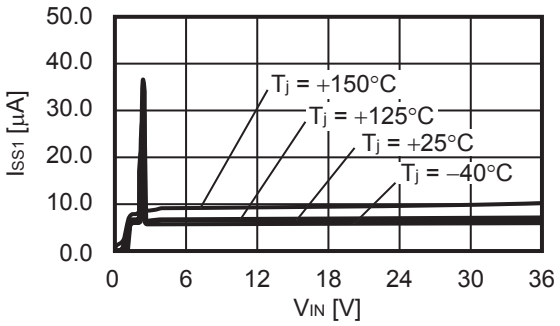

7. 2 V_{OUT} = 5.0 V

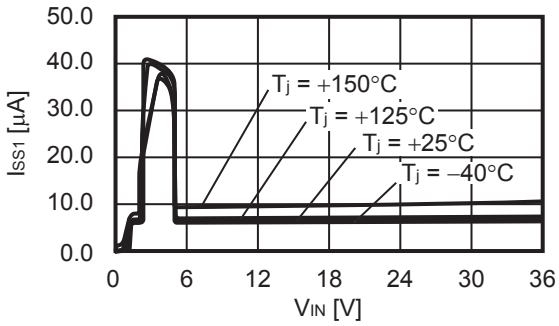


7. 3 V_{OUT} = 16.0 V

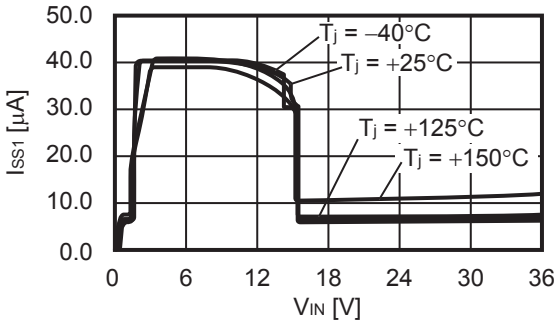


8. Current consumption during operation vs. Junction temperature


8. 1 V_{OUT} = 2.5 V

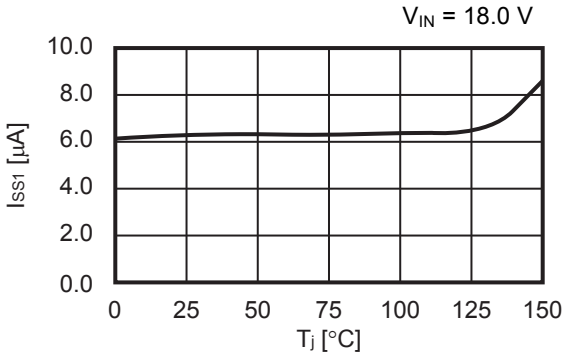

8. 2 V_{OUT} = 5.0 V

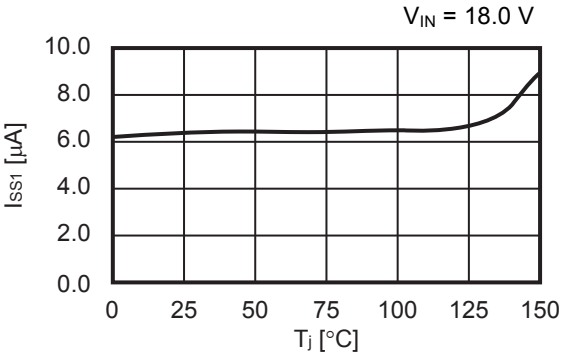


8. 3 V_{OUT} = 16.0 V

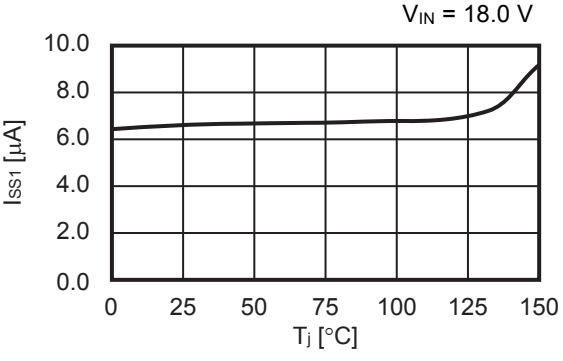


Downloaded from Arrow.com.

9. Current consumption during operation vs. Output current (Ta = +25°C)


9. 1 V_{OUT} = 2.5 V

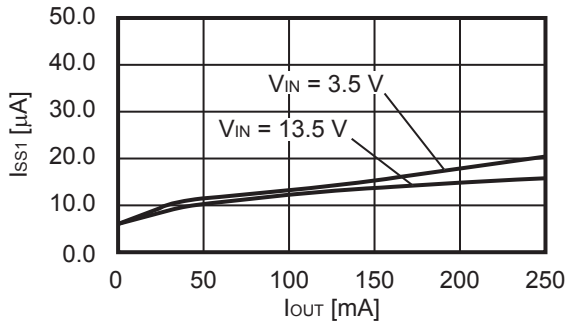

9. 2 V_{OUT} = 5.0 V

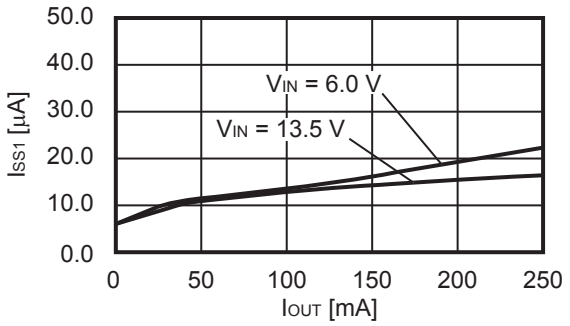


9. 3 V_{OUT} = 16.0 V

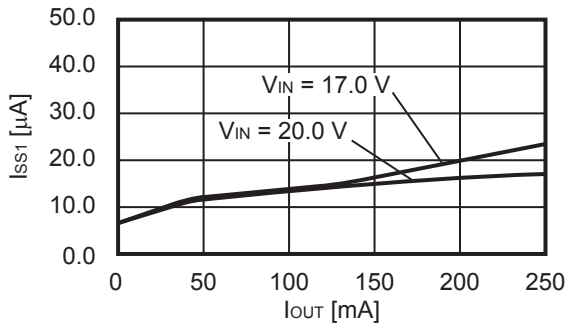


10. Ripple rejection (Ta = +25°C)


10. 1 V_{OUT} = 2.5 V

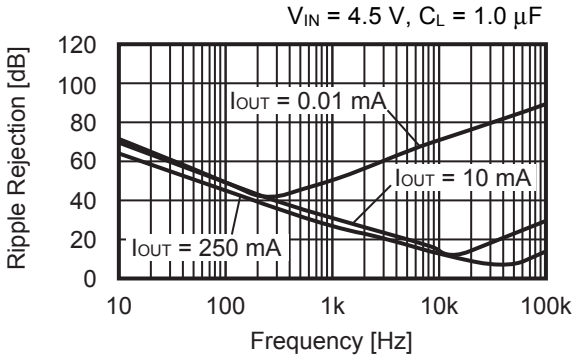

10. 2 V_{OUT} = 5.0 V

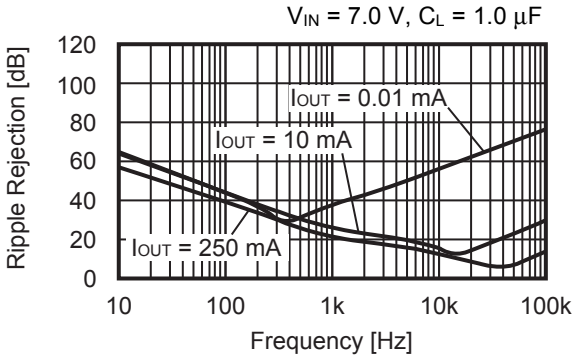

10. 3 V_{OUT} = 16.0 V

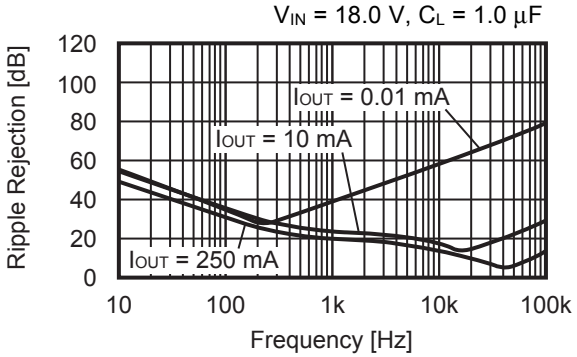


Downloaded from Arrow.com.

■ Reference Data

1. Characteristics of input transient response (Ta = +25°C)


1. 1 V_{OUT} = 2.5 V

I_{OUT} = 40 mA, C_{IN} = 1.0 µF, V_{IN} = 11.5 V ↔ 13.5 V, t_r = t_f = 5.0 µs

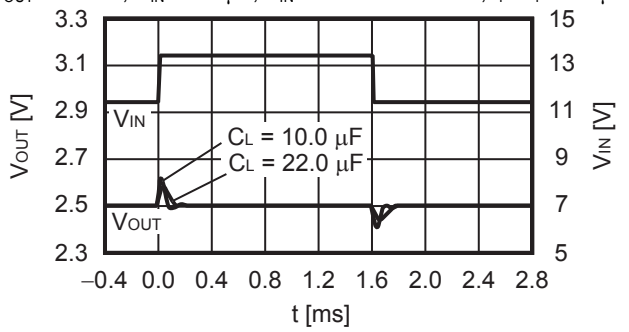


1. 2 V_{OUT} = 5.0 V

I_{OUT} = 40 mA, C_{IN} = 1.0 µF, V_{IN} = 11.5 V ↔ 13.5 V, t_r = t_f = 5.0 µs

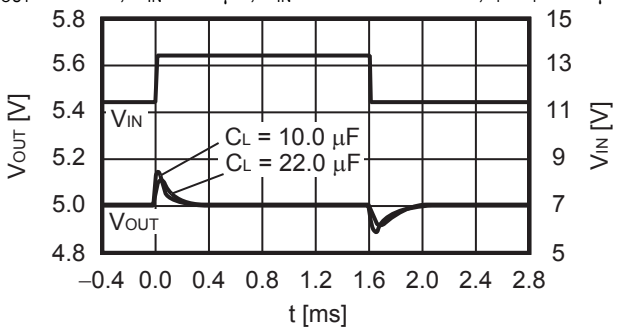

1. 3 V_{OUT} = 16.0 V


I_{OUT} = 40 mA, C_{IN} = 1.0 µF, V_{IN} = 18.0 V ↔ 19.5 V, t_r = t_f = 5.0 µs

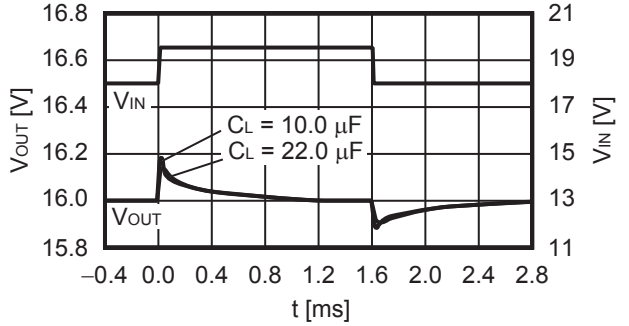

2. Characteristics of load transient response (Ta = +25°C)


2. 1 V_{OUT} = 2.5 V

V_{IN} = 13.5 V, C_{IN} = 1.0 µF, I_{OUT} = 50 mA ↔ 100 mA

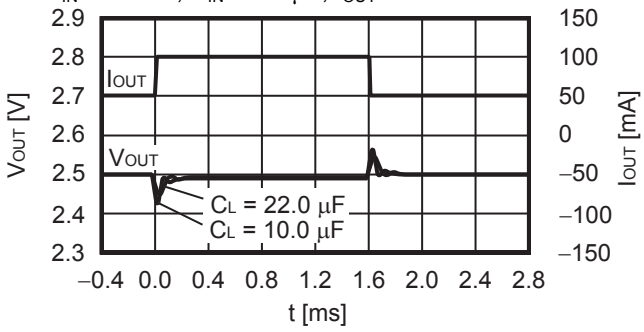


2. 2 V_{OUT} = 5.0 V

V_{IN} = 13.5 V, C_{IN} = 1.0 µF, I_{OUT} = 50 mA ↔ 100 mA

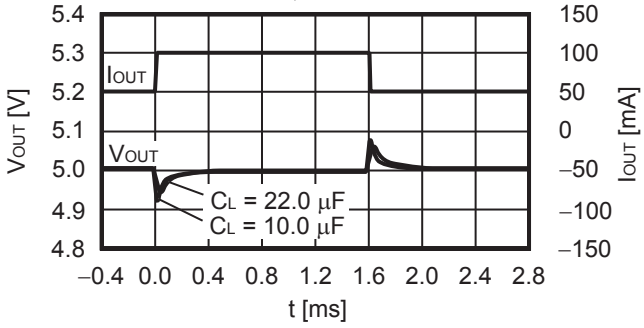

2. 3 V_{OUT} = 16.0 V

V_{IN} = 18.0 V, C_{IN} = 1.0 µF, I_{OUT} = 50 mA ↔ 100 mA

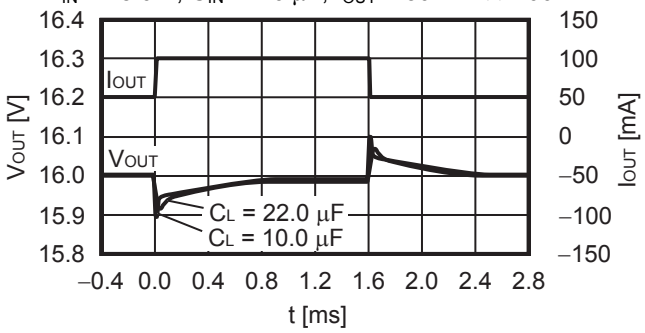


Downloaded from Arrow.com.

3. Transient response characteristics of ON / OFF pin (Ta = +25°C)


3. 1 V_{OUT} = 2.5 V

V_{IN} = 13.5 V, C_L = 10.0 µF, C_{IN} = 1.0 µF,
I_{OUT} = 125 mA, $V_{ON / OFF}$ = 0 V → 13.5 V

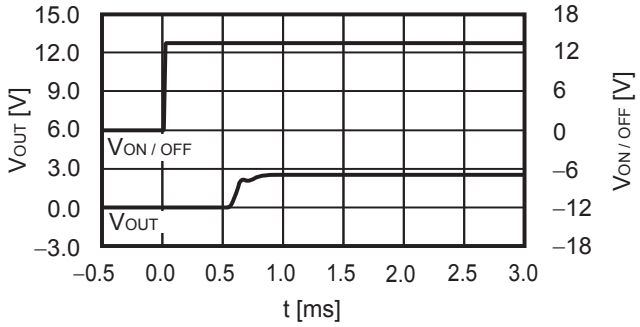

3. 2 V_{OUT} = 5.0 V


V_{IN} = 13.5 V, C_L = 10.0 µF, C_{IN} = 1.0 µF,
I_{OUT} = 125 mA, $V_{ON / OFF}$ = 0 V → 13.5 V

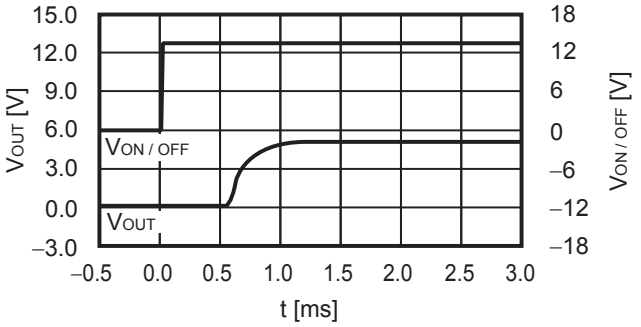


4. Load transient response characteristics dependent on capacitance (Ta = +25°C)

4. 1 V_{OUT} = 5.0 V

V_{IN} = 13.5 V, C_{IN} = 1.0 µF, I_{OUT} = 50 mA → 100 mA

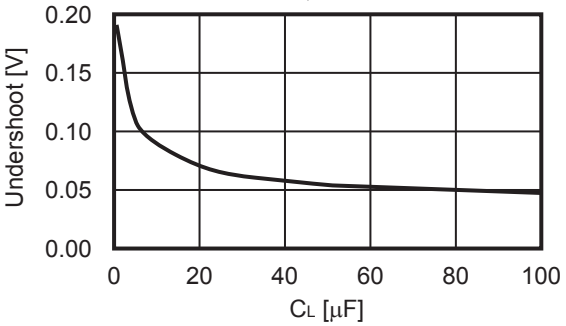


V_{IN} = 13.5 V, C_{IN} = 1.0 µF, I_{OUT} = 100 mA → 50 mA

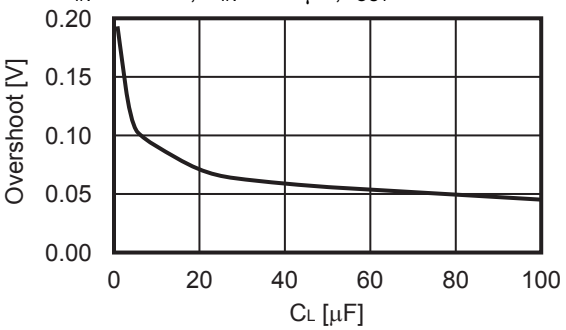


5. Input transient response characteristics dependent on capacitance (Ta = +25°C)

5. 1 V_{OUT} = 5.0 V

V_{IN} = 7.0 V → 12.0 V, t_r = 5.0 µs,
C_{IN} = 1.0 µF, I_{OUT} = 40 mA

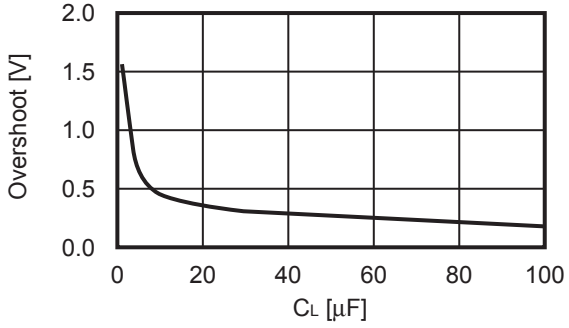

V_{IN} = 12.0 V → 7.0 V, t_r = 5.0 µs,
C_{IN} = 1.0 µF, I_{OUT} = 40 mA

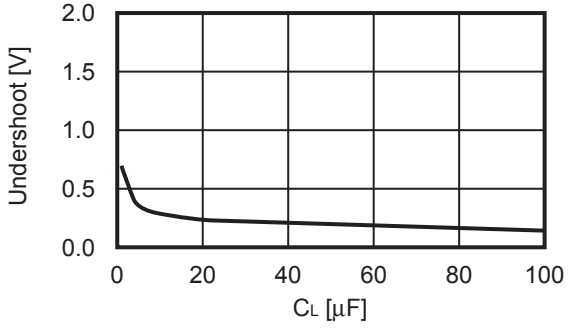


Downloaded from Arrow.com.

6. Load dump characteristics (Ta = +25°C)

6. 1 V_{OUT} = 3.3 V

I_{OUT} = 0.1 mA, V_{IN} = 13.5 V ↔ 45.0 V, C_{IN} = C_L = 1.0 µF

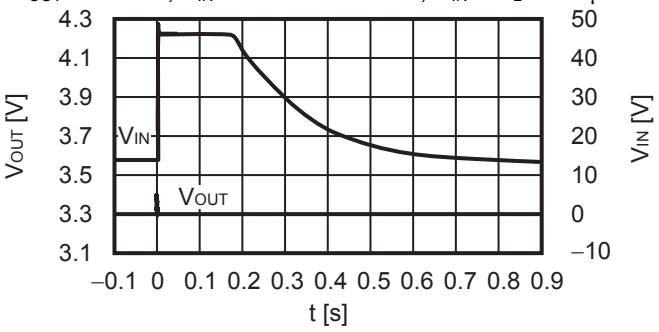

7. Example of equivalent series resistance vs. Output current characteristics (Ta = +25°C)


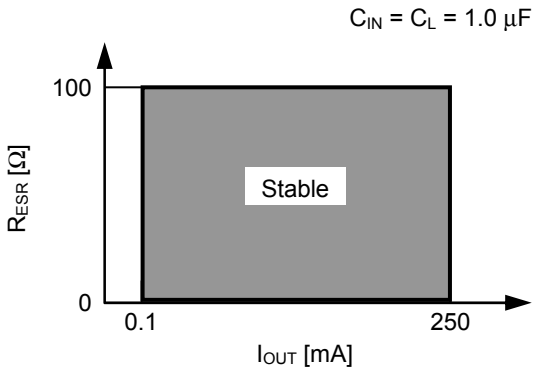


Figure 16

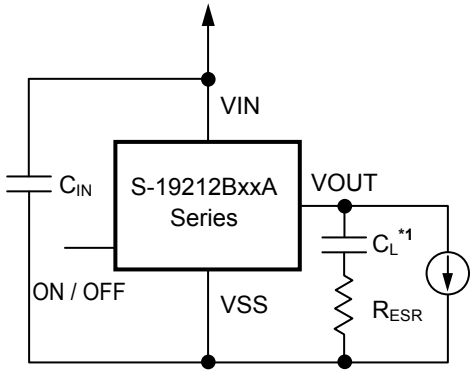

***1.** C_L: TDK Corporation CGA5L3X8R1H105M (1.0 µF)

Figure 17

Downloaded from Arrow.com.

■ Thermal Characteristics

1. TO-252-5S(A)

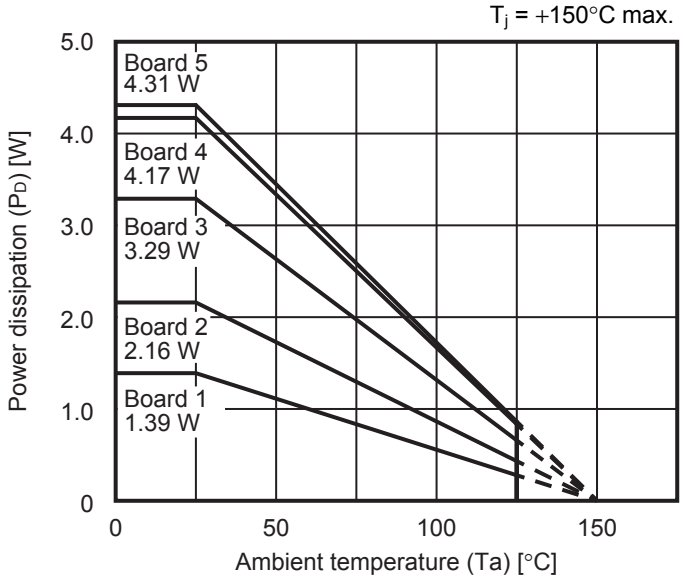


Figure 18 Power Dissipation of Package (When Mounted on Board)

1. 1 Board 1

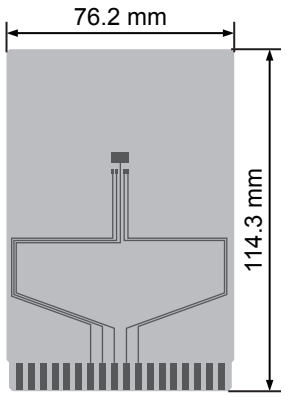


Figure 19

Table 13

Item		Specification
Thermal resistance value (θ_{ja})		90°C/W
Size		114.3 mm × 76.2 mm × t1.6 mm
Material		FR-4
Number of copper foil layer		2
Copper foil layer	1	Land pattern and wiring for testing: t0.070 mm
	2	–
	3	–
	4	74.2 mm × 74.2 mm × t0.070 mm
Thermal via		–

1. 2 Board 2

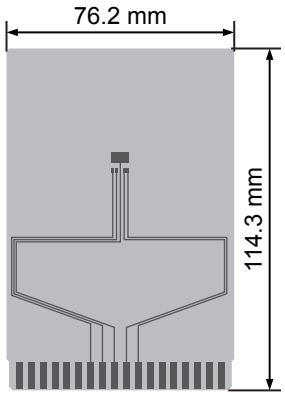


Figure 20

Table 14

Item		Specification
Thermal resistance value (θ_{ja})		58°C/W
Size		114.3 mm × 76.2 mm × t1.6 mm
Material		FR-4
Number of copper foil layer		4
Copper foil layer	1	Land pattern and wiring for testing: t0.070 mm
	2	74.2 mm × 74.2 mm × t0.035 mm
	3	74.2 mm × 74.2 mm × t0.035 mm
	4	74.2 mm × 74.2 mm × t0.070 mm
Thermal via		–

Downloaded from Arrow.com.

1. 3 Board 3

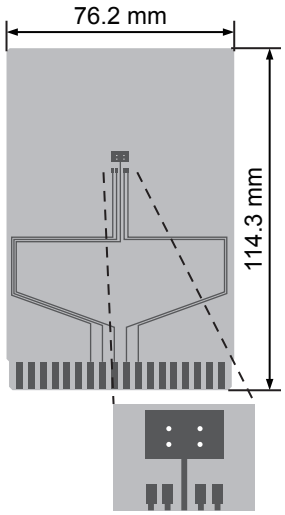


Figure 21

Table 15

Item		Specification
Thermal resistance value (θ_{ja})		38°C/W
Size		114.3 mm × 76.2 mm × t1.6 mm
Material		FR-4
Number of copper foil layer		4
Copper foil layer	1	Land pattern and wiring for testing: t0.070 mm
	2	74.2 mm × 74.2 mm × t0.035 mm
	3	74.2 mm × 74.2 mm × t0.035 mm
	4	74.2 mm × 74.2 mm × t0.070 mm
Thermal via		Number: 4 Diameter: 0.3 mm

1. 4 Board 4

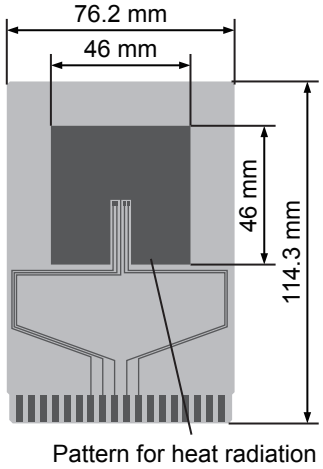


Figure 22

Table 16

Item		Specification
Thermal resistance value (θ_{ja})		30°C/W
Size		114.3 mm × 76.2 mm × t1.6 mm
Material		FR-4
Number of copper foil layer		4
Copper foil layer	1	Pattern for heat radiation: 46 mm × 46 mm × t0.070 mm
	2	74.2 mm × 74.2 mm × t0.035 mm
	3	74.2 mm × 74.2 mm × t0.035 mm
	4	74.2 mm × 74.2 mm × t0.070 mm
Thermal via		–

1. 5 Board 5

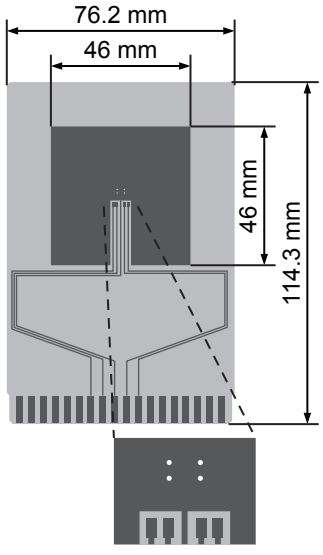


Figure 23

Table 17

Item		Specification
Thermal resistance value (θ_{ja})		29°C/W
Size		114.3 mm × 76.2 mm × t1.6 mm
Material		FR-4
Number of copper foil layer		4
Copper foil layer	1	Pattern for heat radiation: 46 mm × 46 mm × t0.070 mm
	2	74.2 mm × 74.2 mm × t0.035 mm
	3	74.2 mm × 74.2 mm × t0.035 mm
	4	74.2 mm × 74.2 mm × t0.070 mm
Thermal via		Number: 4 Diameter: 0.3 mm

Downloaded from Arrow.com.

2. HSOP-8A

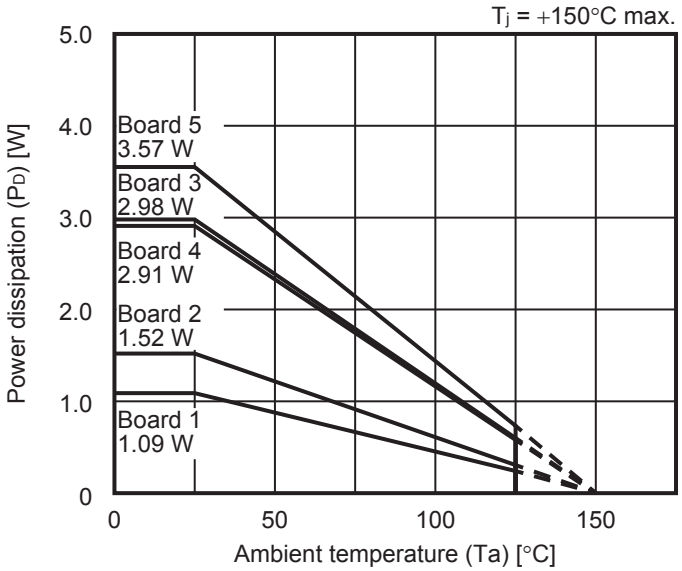


Figure 24 Power Dissipation of Package (When Mounted on Board)

2. 1 Board 1

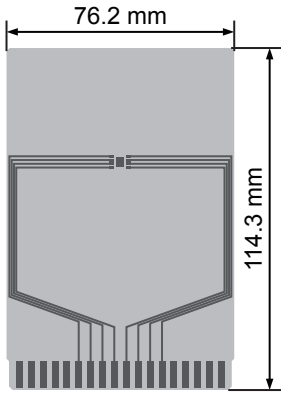


Figure 25

Table 18

Item		Specification
Thermal resistance value (θ_{ja})		115°C/W
Size		114.3 mm × 76.2 mm × t1.6 mm
Material		FR-4
Number of copper foil layer		2
Copper foil layer	1	Land pattern and wiring for testing: t0.070 mm
	2	–
	3	–
	4	74.2 mm × 74.2 mm × t0.070 mm
Thermal via		–

2. 2 Board 2

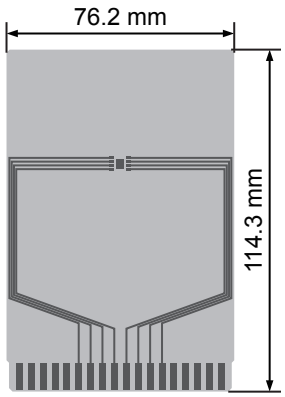


Figure 26

Table 19

Item		Specification
Thermal resistance value (θ_{ja})		82°C/W
Size		114.3 mm × 76.2 mm × t1.6 mm
Material		FR-4
Number of copper foil layer		4
Copper foil layer	1	Land pattern and wiring for testing: t0.070 mm
	2	74.2 mm × 74.2 mm × t0.035 mm
	3	74.2 mm × 74.2 mm × t0.035 mm
	4	74.2 mm × 74.2 mm × t0.070 mm
Thermal via		–

Downloaded from Arrow.com.

2. 3 Board 3

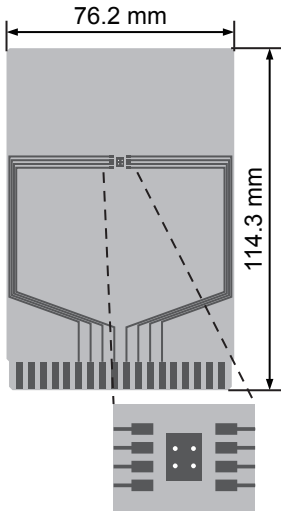


Figure 27

Table 20

Item		Specification
Thermal resistance value (θ_{ja})		42°C/W
Size		114.3 mm × 76.2 mm × t1.6 mm
Material		FR-4
Number of copper foil layer		4
Copper foil layer	1	Land pattern and wiring for testing: t0.070 mm
	2	74.2 mm × 74.2 mm × t0.035 mm
	3	74.2 mm × 74.2 mm × t0.035 mm
	4	74.2 mm × 74.2 mm × t0.070 mm
Thermal via		Number: 4 Diameter: 0.3 mm

2. 4 Board 4

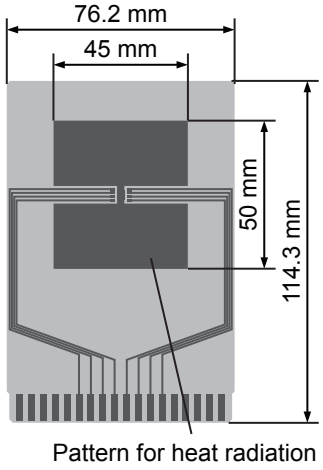


Figure 28

Table 21

Item		Specification
Thermal resistance value (θ_{ja})		43°C/W
Size		114.3 mm × 76.2 mm × t1.6 mm
Material		FR-4
Number of copper foil layer		4
Copper foil layer	1	Pattern for heat radiation: 45 mm × 50 mm × t0.070 mm
	2	74.2 mm × 74.2 mm × t0.035 mm
	3	74.2 mm × 74.2 mm × t0.035 mm
	4	74.2 mm × 74.2 mm × t0.070 mm
Thermal via		–

2. 5 Board 5

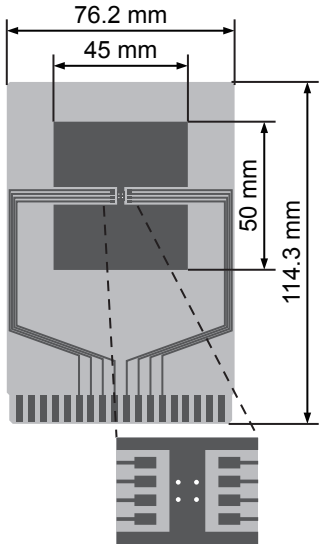


Figure 29

Table 22

Item		Specification
Thermal resistance value (θ_{ja})		35°C/W
Size		114.3 mm × 76.2 mm × t1.6 mm
Material		FR-4
Number of copper foil layer		4
Copper foil layer	1	Pattern for heat radiation: 45 mm × 50 mm × t0.070 mm
	2	74.2 mm × 74.2 mm × t0.035 mm
	3	74.2 mm × 74.2 mm × t0.035 mm
	4	74.2 mm × 74.2 mm × t0.070 mm
Thermal via		Number: 4 Diameter: 0.3 mm

Downloaded from Arrow.com.

3. HSOP-6

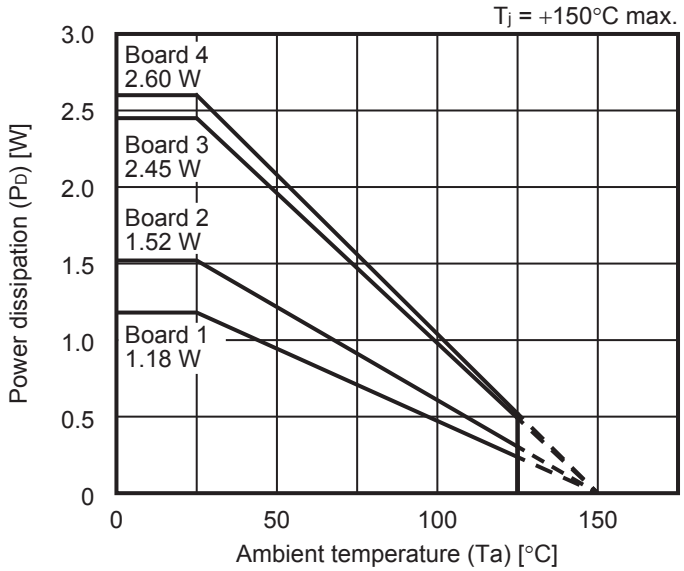


Figure 30 Power Dissipation of Package (When Mounted on Board)

3. 1 Board 1

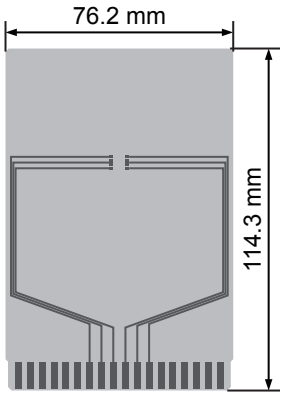


Figure 31

Table 23

Item		Specification
Thermal resistance value (θ_{ja})		106°C/W
Size		114.3 mm × 76.2 mm × t1.6 mm
Material		FR-4
Number of copper foil layer		2
Copper foil layer	1	Land pattern and wiring for testing: t0.070 mm
	2	–
	3	–
	4	74.2 mm × 74.2 mm × t0.070 mm
Thermal via		–

3. 2 Board 2

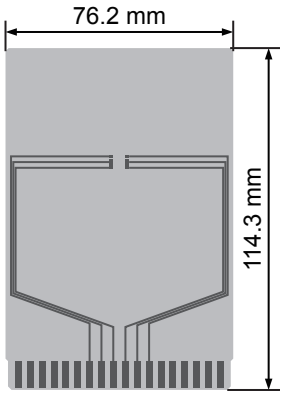


Figure 32

Table 24

Item		Specification
Thermal resistance value (θ_{ja})		82°C/W
Size		114.3 mm × 76.2 mm × t1.6 mm
Material		FR-4
Number of copper foil layer		4
Copper foil layer	1	Land pattern and wiring for testing: t0.070 mm
	2	74.2 mm × 74.2 mm × t0.035 mm
	3	74.2 mm × 74.2 mm × t0.035 mm
	4	74.2 mm × 74.2 mm × t0.070 mm
Thermal via		–

Downloaded from Arrow.com.

3. 3 Board 3

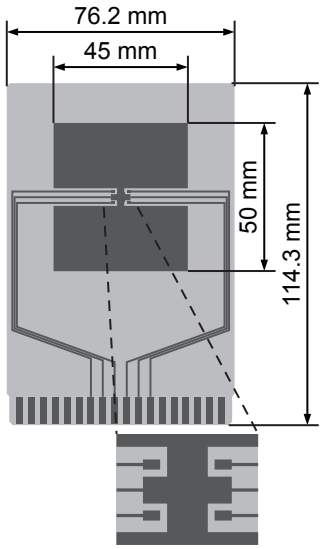


Figure 33

Table 25

Item		Specification
Thermal resistance value (θ_{ja})		51°C/W
Size		114.3 mm × 76.2 mm × t1.6 mm
Material		FR-4
Number of copper foil layer		4
Copper foil layer	1	Pattern for heat radiation: 45 mm × 50 mm × t0.070 mm
	2	74.2 mm × 74.2 mm × t0.035 mm
	3	74.2 mm × 74.2 mm × t0.035 mm
	4	74.2 mm × 74.2 mm × t0.070 mm
Thermal via		–

3. 4 Board 4

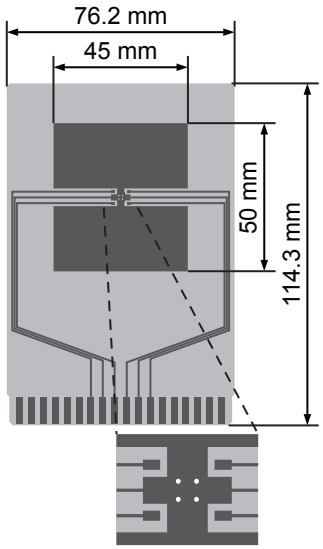


Figure 34

Table 26

Item		Specification
Thermal resistance value (θ_{ja})		48°C/W
Size		114.3 mm × 76.2 mm × t1.6 mm
Material		FR-4
Number of copper foil layer		4
Copper foil layer	1	Pattern for heat radiation: 45 mm × 50 mm × t0.070 mm
	2	74.2 mm × 74.2 mm × t0.035 mm
	3	74.2 mm × 74.2 mm × t0.035 mm
	4	74.2 mm × 74.2 mm × t0.070 mm
Thermal via		Number: 4 Diameter: 0.3 mm

Downloaded from Arrow.com.

4. SOT-89-5

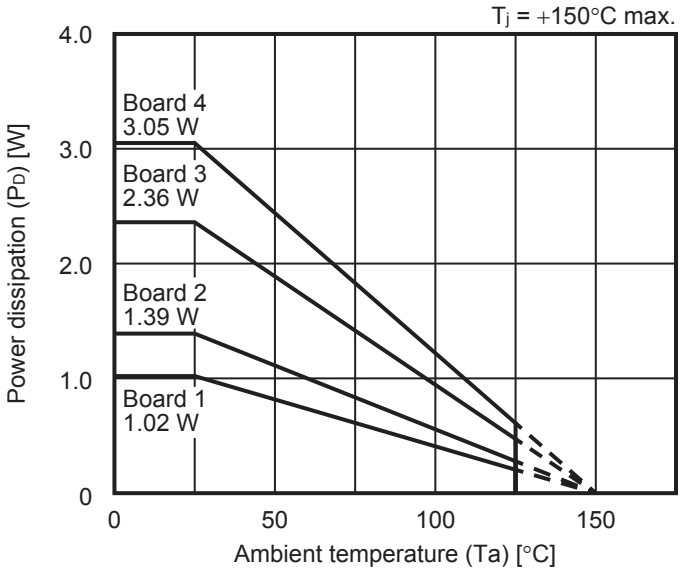


Figure 35 Power Dissipation of Package (When Mounted on Board)

4. 1 Board 1

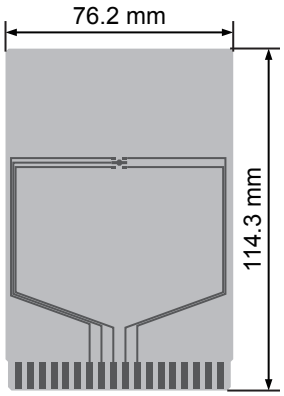


Figure 36

Table 27

Item		Specification
Thermal resistance value (θ_{ja})		123°C/W
Size		114.3 mm × 76.2 mm × t1.6 mm
Material		FR-4
Number of copper foil layer		2
Copper foil layer	1	Land pattern and wiring for testing: t0.070 mm
	2	–
	3	–
	4	74.2 mm × 74.2 mm × t0.070 mm
Thermal via		–

4. 2 Board 2

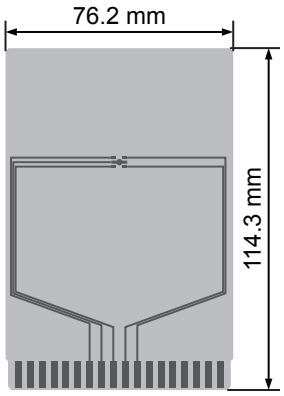


Figure 37

Table 28

Item		Specification
Thermal resistance value (θ_{ja})		90°C/W
Size		114.3 mm × 76.2 mm × t1.6 mm
Material		FR-4
Number of copper foil layer		4
Copper foil layer	1	Land pattern and wiring for testing: t0.070 mm
	2	74.2 mm × 74.2 mm × t0.035 mm
	3	74.2 mm × 74.2 mm × t0.035 mm
	4	74.2 mm × 74.2 mm × t0.070 mm
Thermal via		–

Downloaded from Arrow.com.

4. 3 Board 3

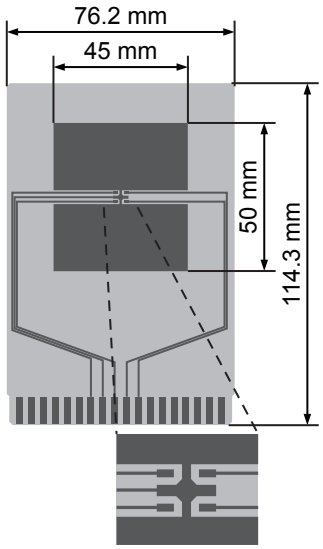


Figure 38

Table 29

Item		Specification
Thermal resistance value (θ_{ja})		53°C/W
Size		114.3 mm × 76.2 mm × t1.6 mm
Material		FR-4
Number of copper foil layer		4
Copper foil layer	1	Pattern for heat radiation: 45 mm × 50 mm × t0.070 mm
	2	74.2 mm × 74.2 mm × t0.035 mm
	3	74.2 mm × 74.2 mm × t0.035 mm
	4	74.2 mm × 74.2 mm × t0.070 mm
Thermal via		–

4. 4 Board 4

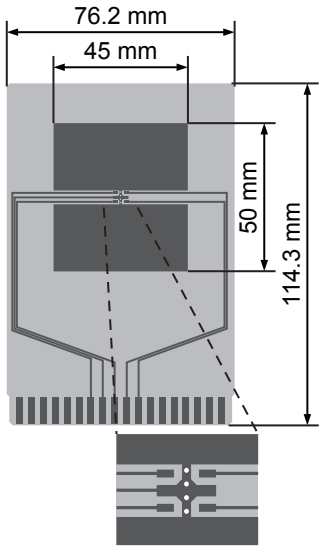


Figure 39

Table 30

Item		Specification
Thermal resistance value (θ_{ja})		41°C/W
Size		114.3 mm × 76.2 mm × t1.6 mm
Material		FR-4
Number of copper foil layer		4
Copper foil layer	1	Pattern for heat radiation: 45 mm × 50 mm × t0.070 mm
	2	74.2 mm × 74.2 mm × t0.035 mm
	3	74.2 mm × 74.2 mm × t0.035 mm
	4	74.2 mm × 74.2 mm × t0.070 mm
Thermal via		Number: 4 Diameter: 0.3 mm

Downloaded from Arrow.com.

5. SOT-23-5

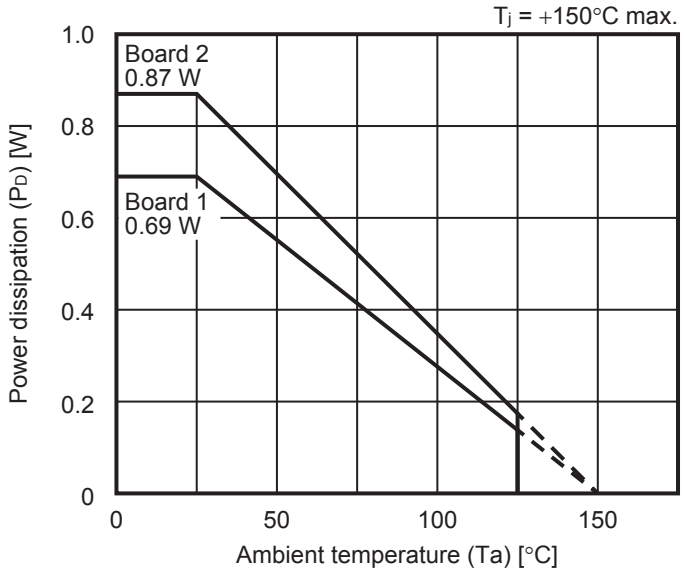


Figure 40 Power Dissipation of Package (When Mounted on Board)

5. 1 Board 1*1

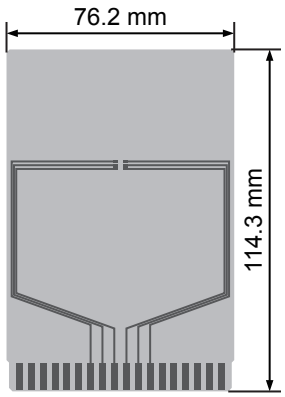


Figure 41

Table 31

Item		Specification
Thermal resistance value (θ_{ja})		180°C/W
Size		114.3 mm × 76.2 mm × t1.6 mm
Material		FR-4
Number of copper foil layer		2
Copper foil layer	1	Land pattern and wiring for testing: t0.070 mm
	2	–
	3	–
	4	74.2 mm × 74.2 mm × t0.070 mm
Thermal via		–

5. 2 Board 2*1

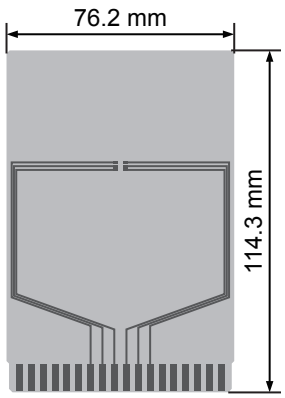



Figure 42

Table 32

Item		Specification
Thermal resistance value (θ_{ja})		143°C/W
Size		114.3 mm × 76.2 mm × t1.6 mm
Material		FR-4
Number of copper foil layer		4
Copper foil layer	1	Land pattern and wiring for testing: t0.070 mm
	2	74.2 mm × 74.2 mm × t0.035 mm
	3	74.2 mm × 74.2 mm × t0.035 mm
	4	74.2 mm × 74.2 mm × t0.070 mm
Thermal via		–

***1.** The board is same in SOT-23-3, SOT-23-5 and SOT-23-6.


Downloaded from Arrow.com.

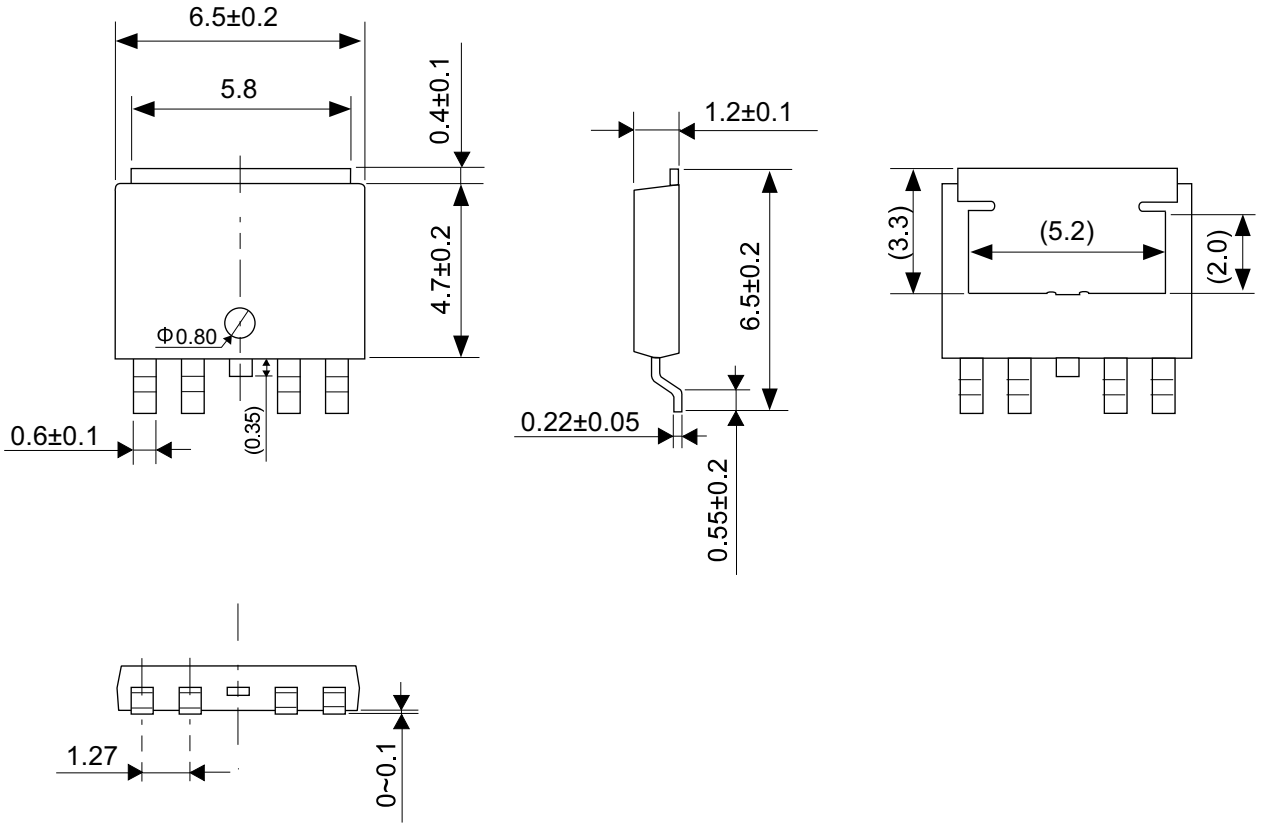

No. VA005-A-P-SD-2.0

TITLE	TO-252-5S-A-PKG Dimensions
No.	VA005-A-P-SD-2.0
ANGLE	
UNIT	mm
SII Semiconductor Corporation	


Downloaded from Arrow.com.

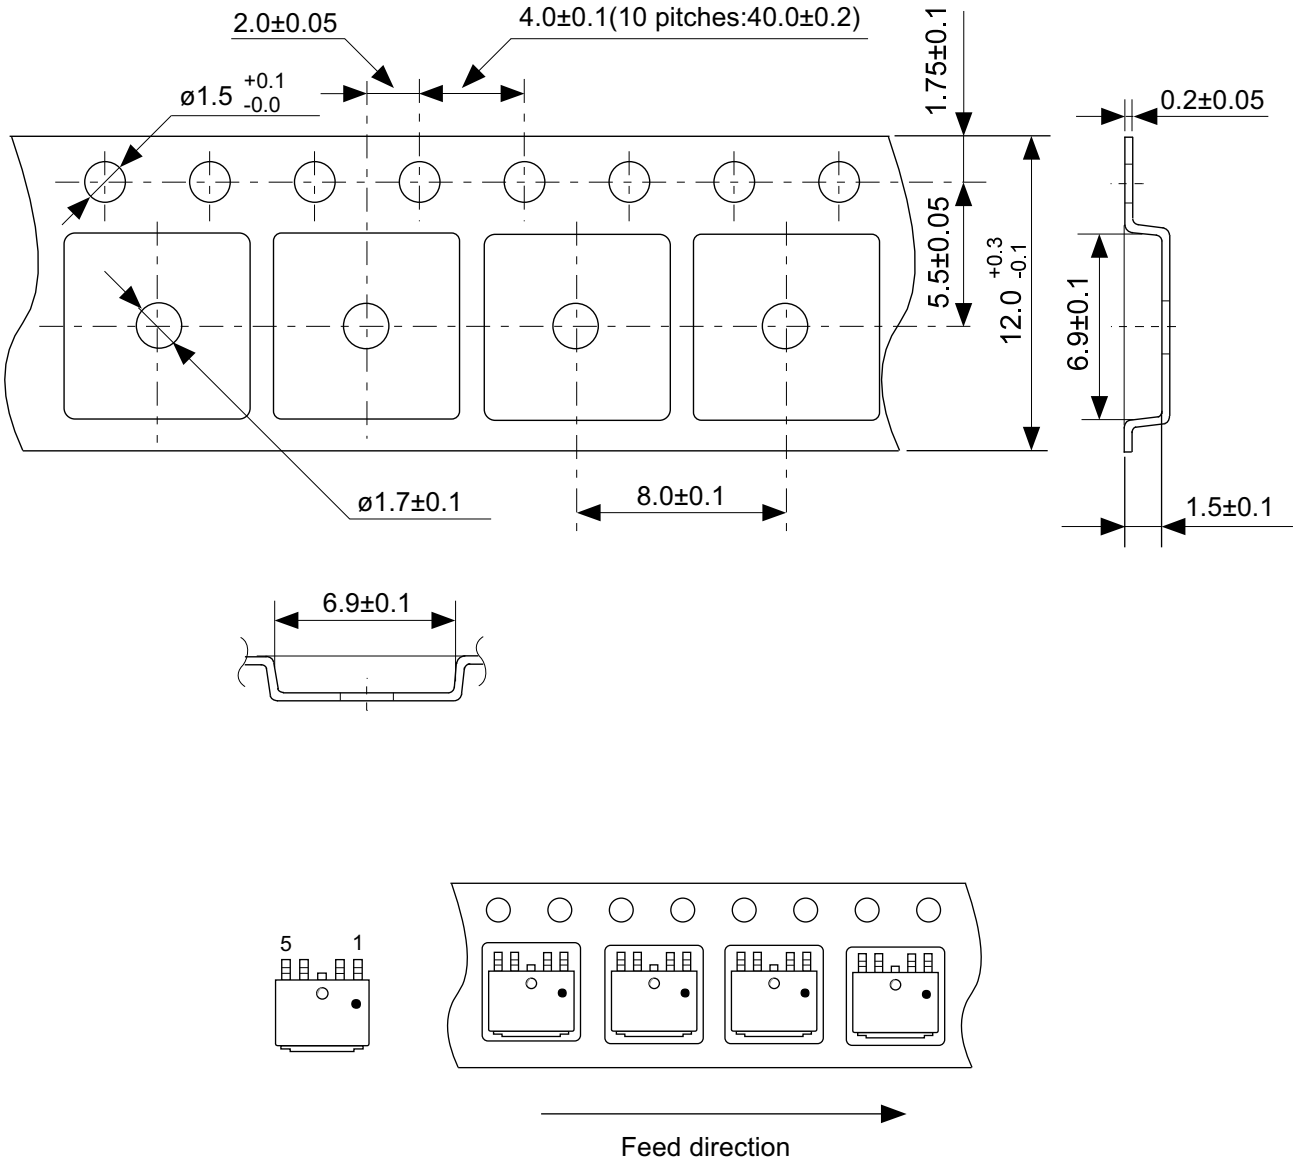


No. VA005-A-C-SD-1.0

TITLE	TO-252-5S-A-Carrier Tape
No.	VA005-A-C-SD-1.0
ANGLE	
UNIT	mm
SII Semiconductor Corporation	

Downloaded from Arrow.com.

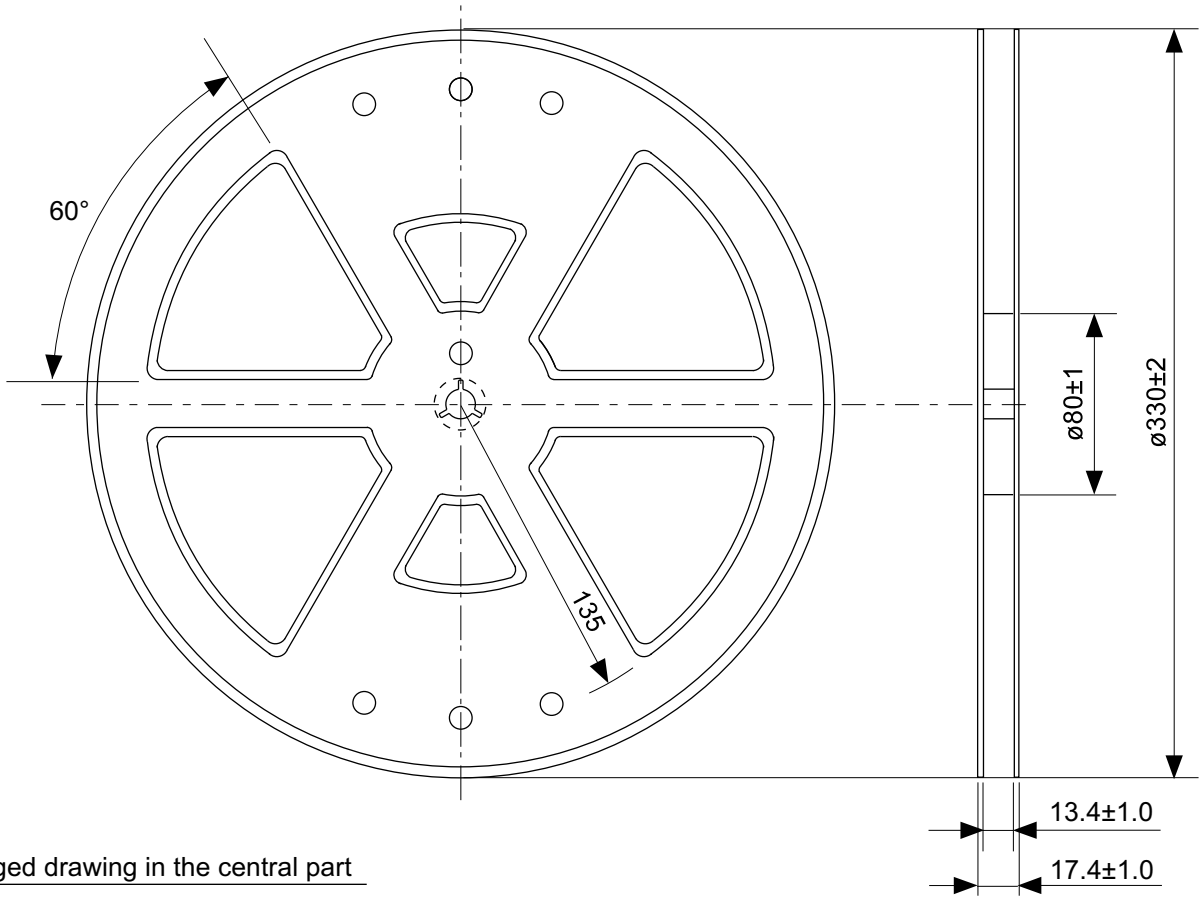


Enlarged drawing in the central part

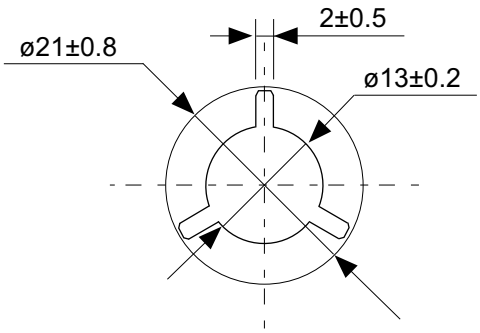

No. VA005-A-R-SD-1.0

TITLE	TO-252-5S-A-Reel		
No.	VA005-A-R-SD-1.0		
ANGLE		QTY.	4,000
UNIT	mm		
SII Semiconductor Corporation			

Downloaded from Arrow.com.

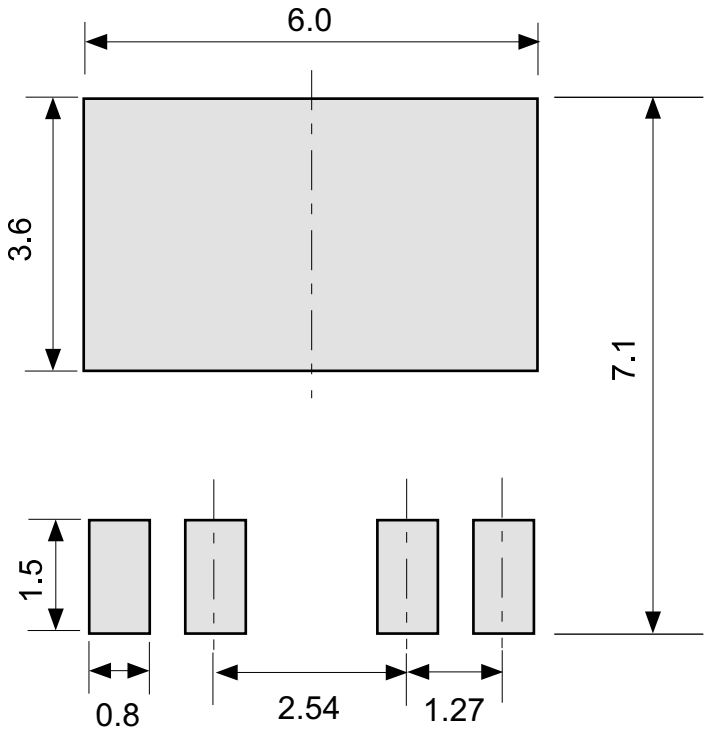


No. VA005-A-L-SD-1.0

TITLE	TO-252-5S-A -Land Recommendation
No.	VA005-A-L-SD-1.0
ANGLE	
UNIT	mm

SII Semiconductor Corporation


Downloaded from Arrow.com.

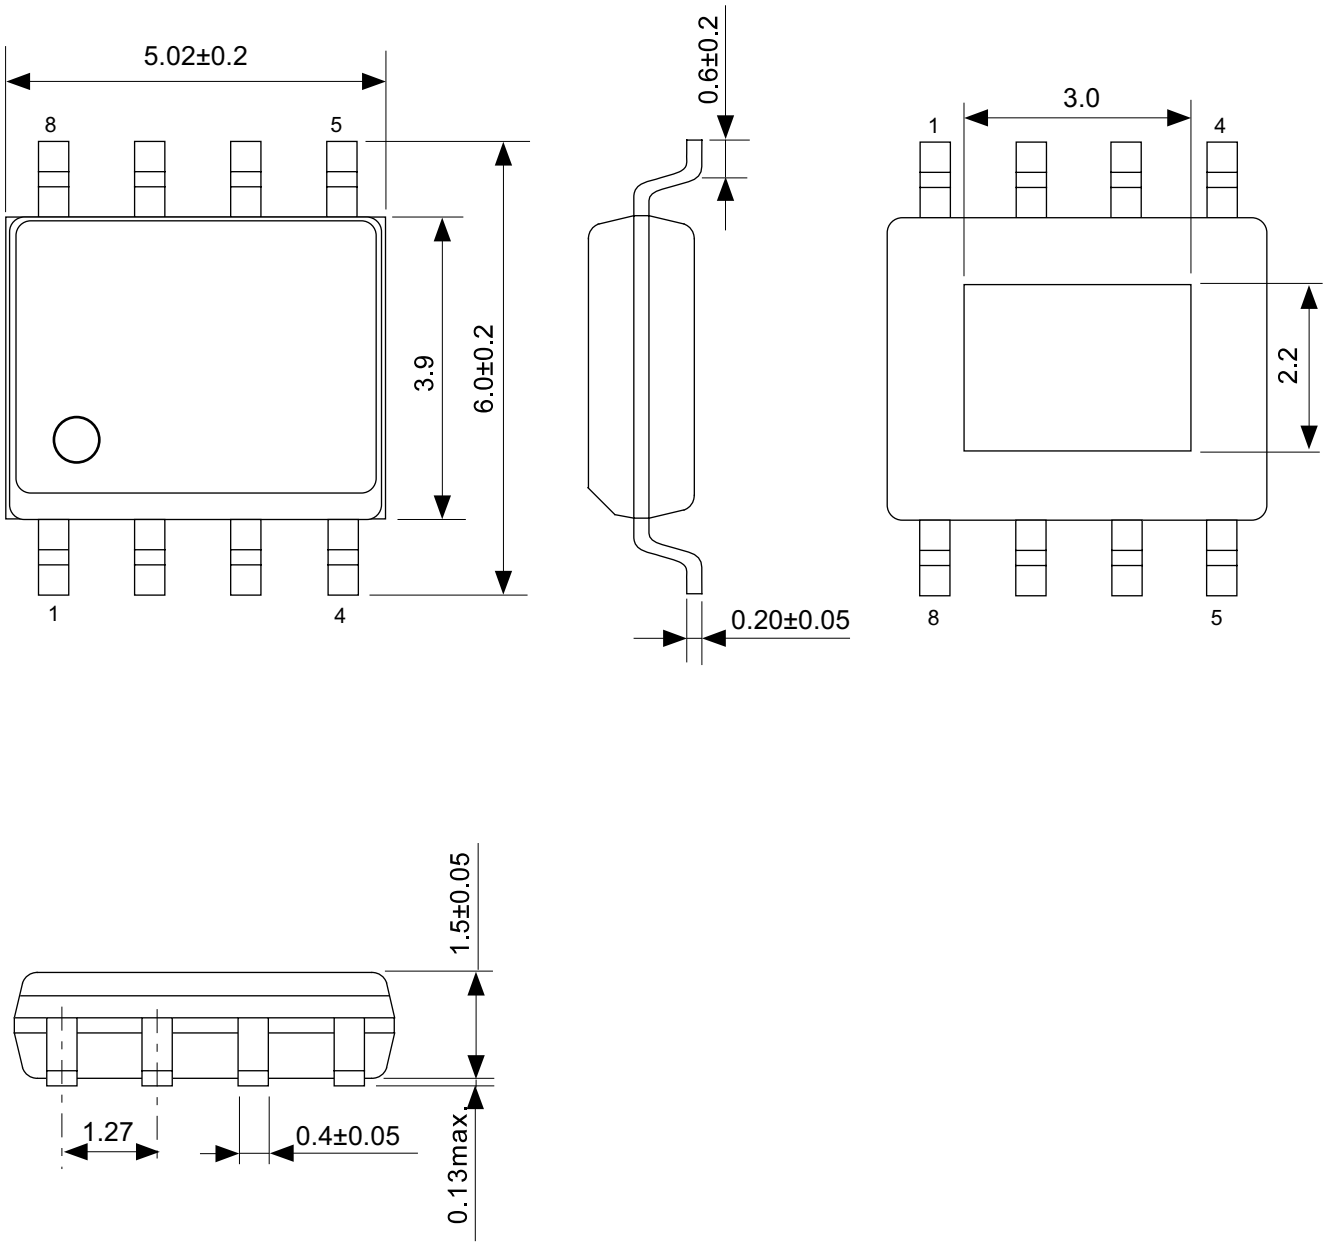


No. FH008-A-P-SD-2.0

TITLE	HSOP8A-A-PKG Dimensions
No.	FH008-A-P-SD-2.0
ANGLE	
UNIT	mm
SII Semiconductor Corporation	

Downloaded from Arrow.com.

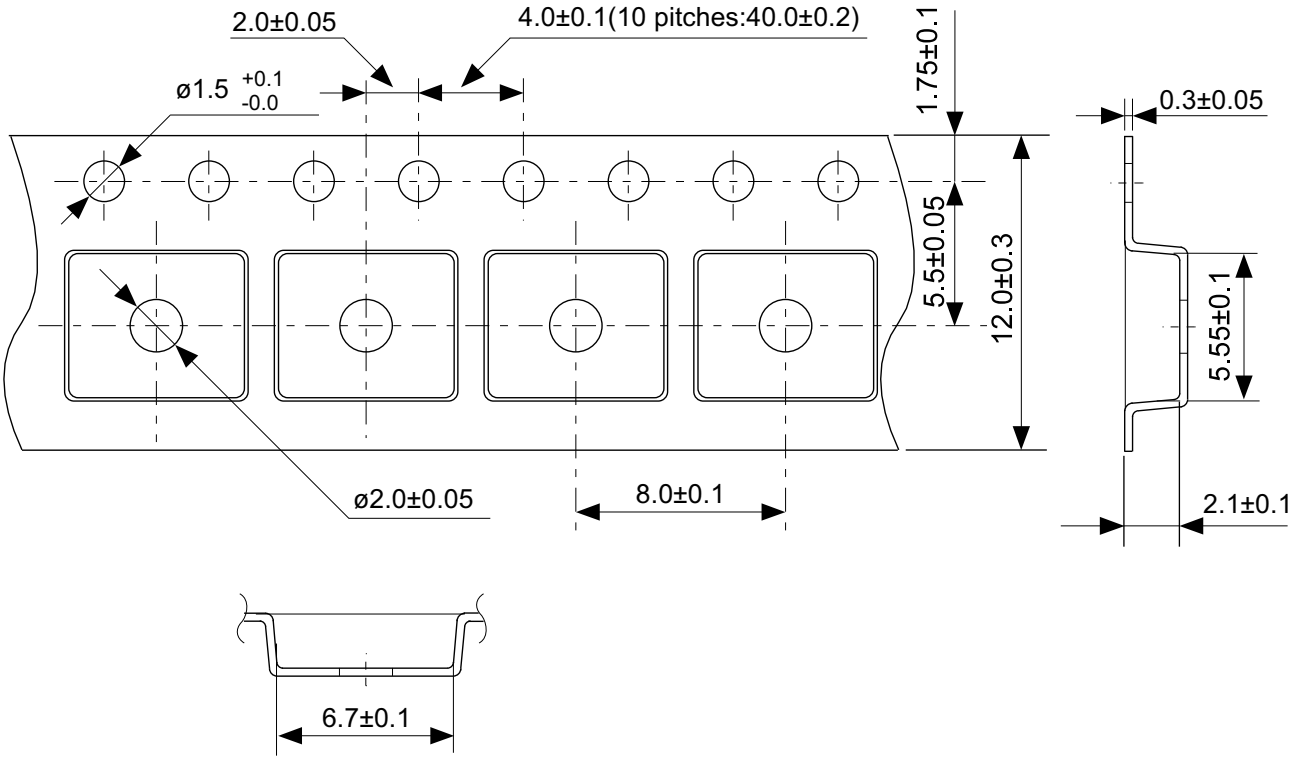

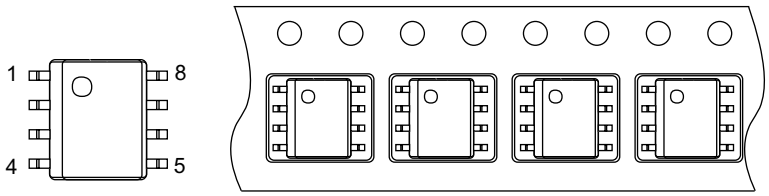


Feed direction


No. FH008-A-C-SD-1.0

TITLE	HSOP8A-A-Carrier Tape
No.	FH008-A-C-SD-1.0
ANGLE	
UNIT	mm
SII Semiconductor Corporation	

Downloaded from Arrow.com.

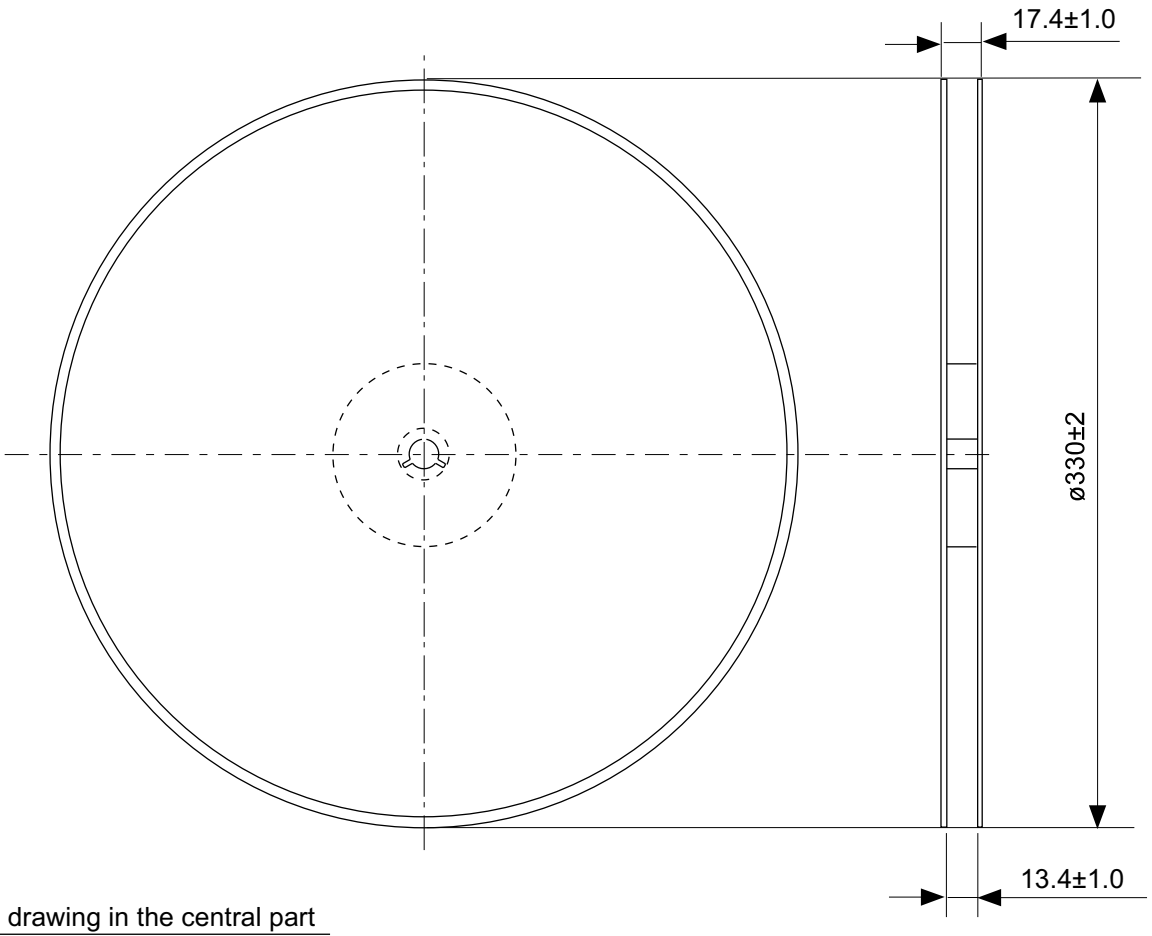


Enlarged drawing in the central part

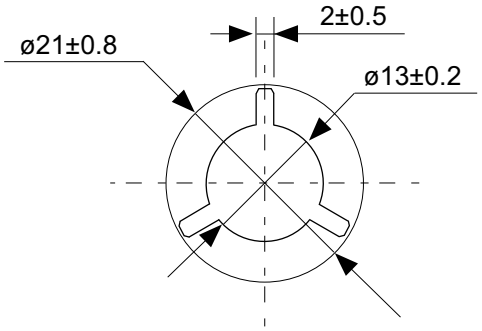

No. FH008A-R-SD-1.0

TITLE	HSOP8A-A-Reel		
No.	FH008-A-R-SD-1.0		
ANGLE		QTY.	4,000
UNIT	mm		
SII Semiconductor Corporation			


Downloaded from Arrow.com.

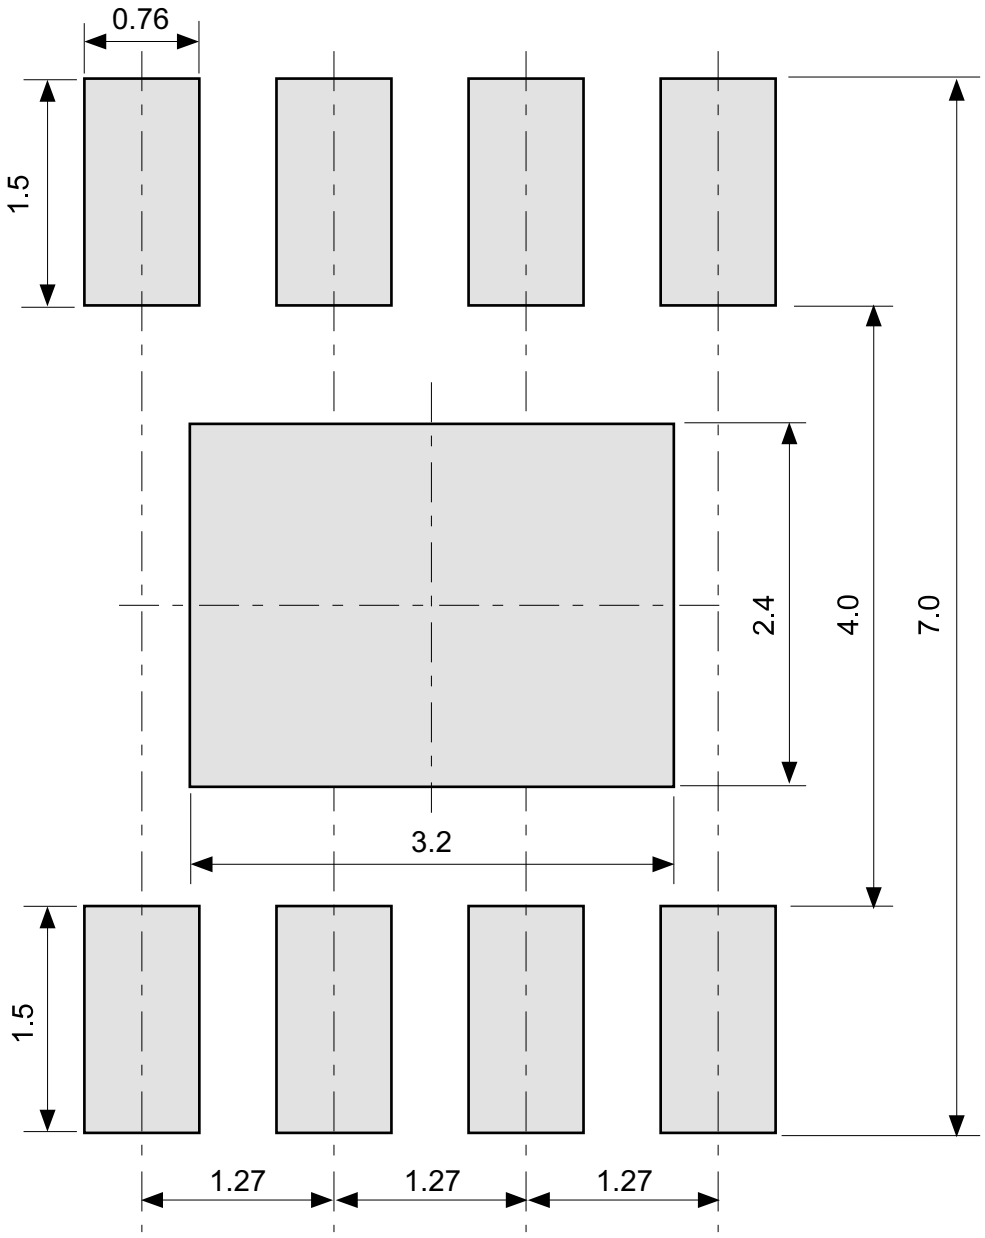

No. FH008-A-L-SD-1.0

TITLE	HSOP8A-A -Land Recommendation
No.	FH008-A-L-SD-1.0
ANGLE	
UNIT	mm
SII Semiconductor Corporation	


Downloaded from Arrow.com.

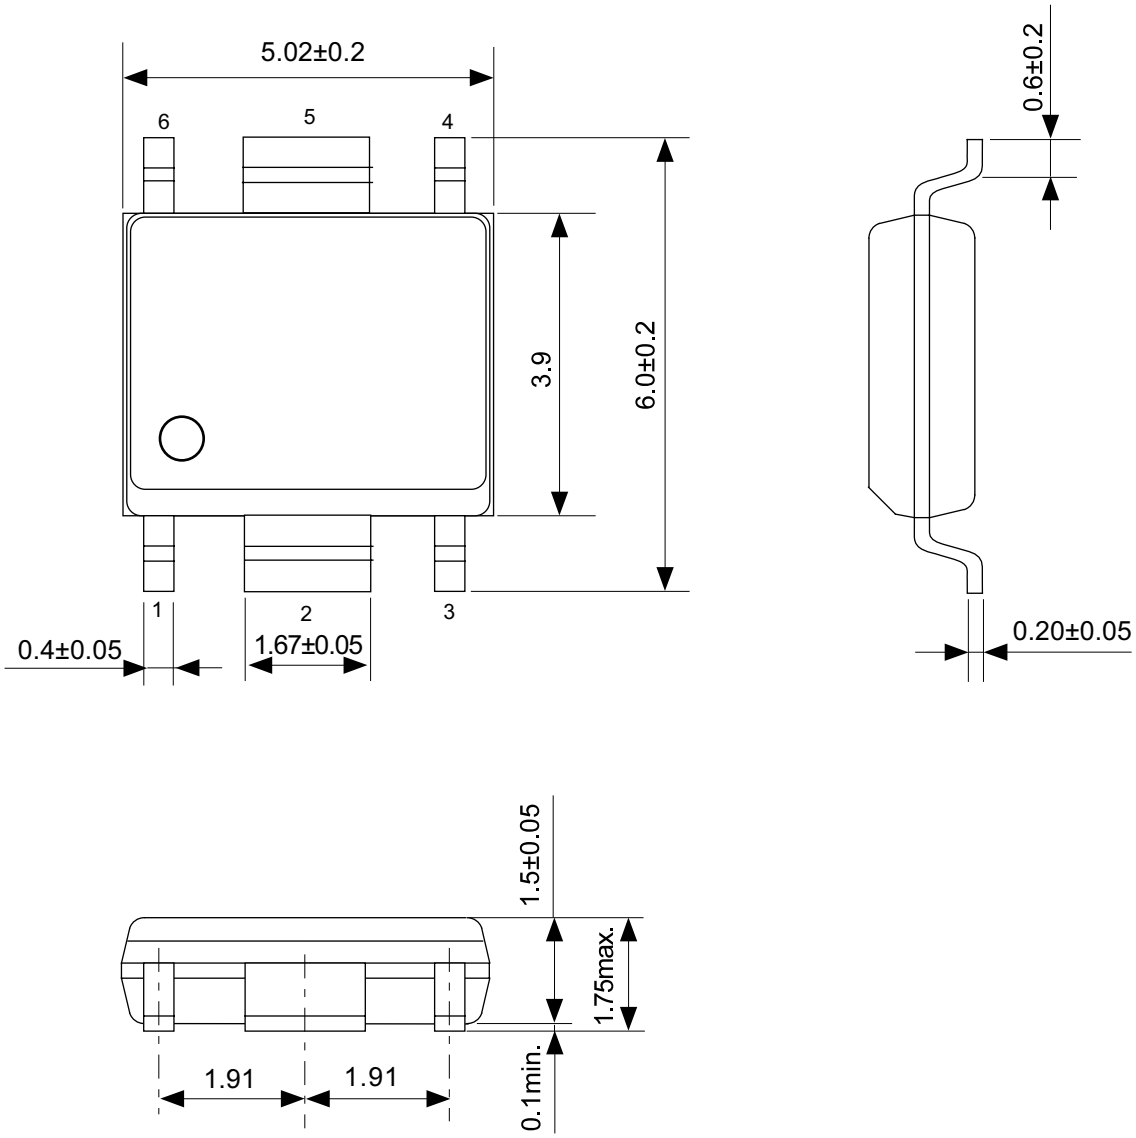


No. FH006-A-P-SD-2.1

TITLE	HSOP6-A-PKG Dimensions
No.	FH006-A-P-SD-2.1
ANGLE	
UNIT	mm
SII Semiconductor Corporation	

Downloaded from Arrow.com.

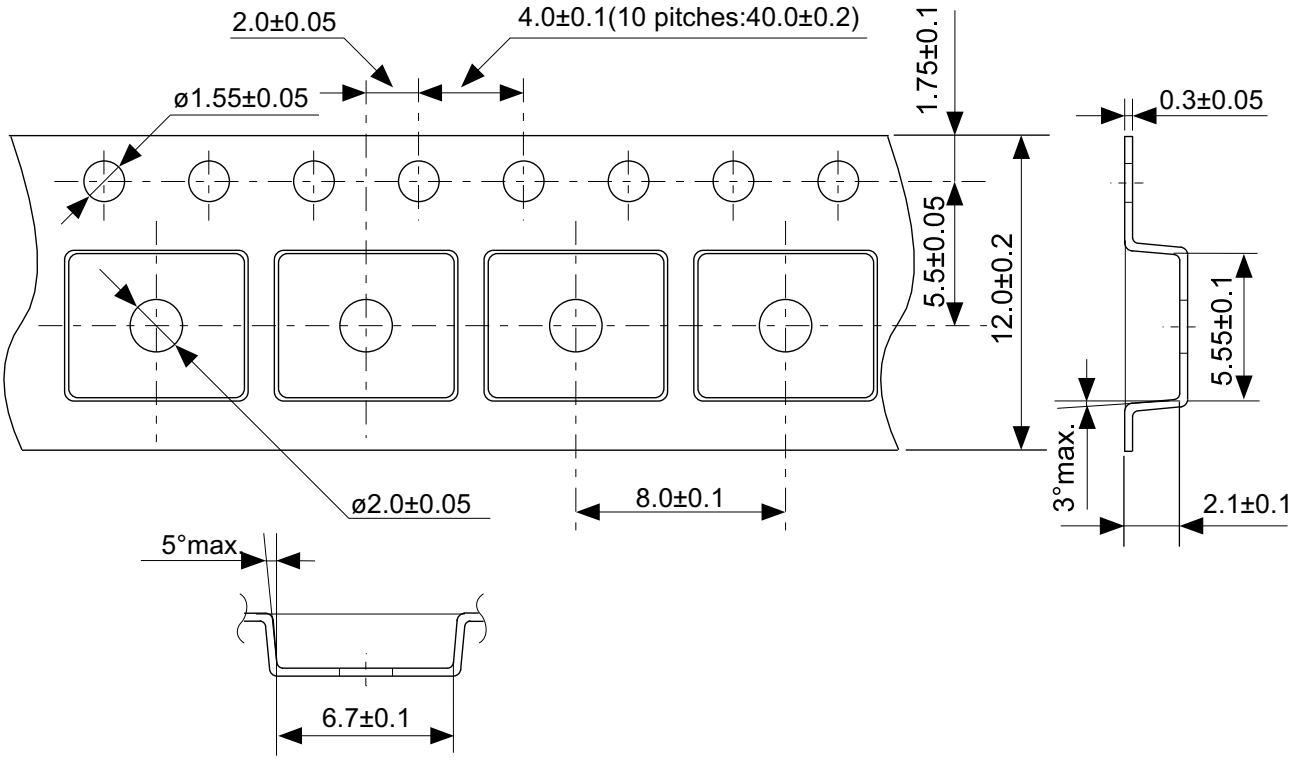

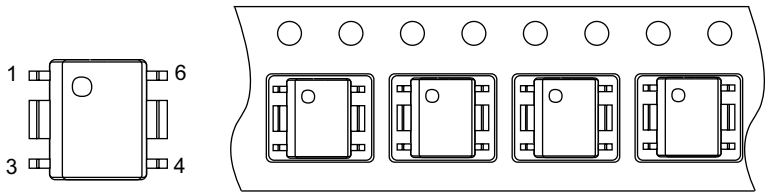


Feed direction


No. FH006-A-C-SD-1.0

TITLE	HSOP6-A-Carrier Tape
No.	FH006-A-C-SD-1.0
ANGLE	
UNIT	mm
SII Semiconductor Corporation	

Downloaded from Arrow.com.

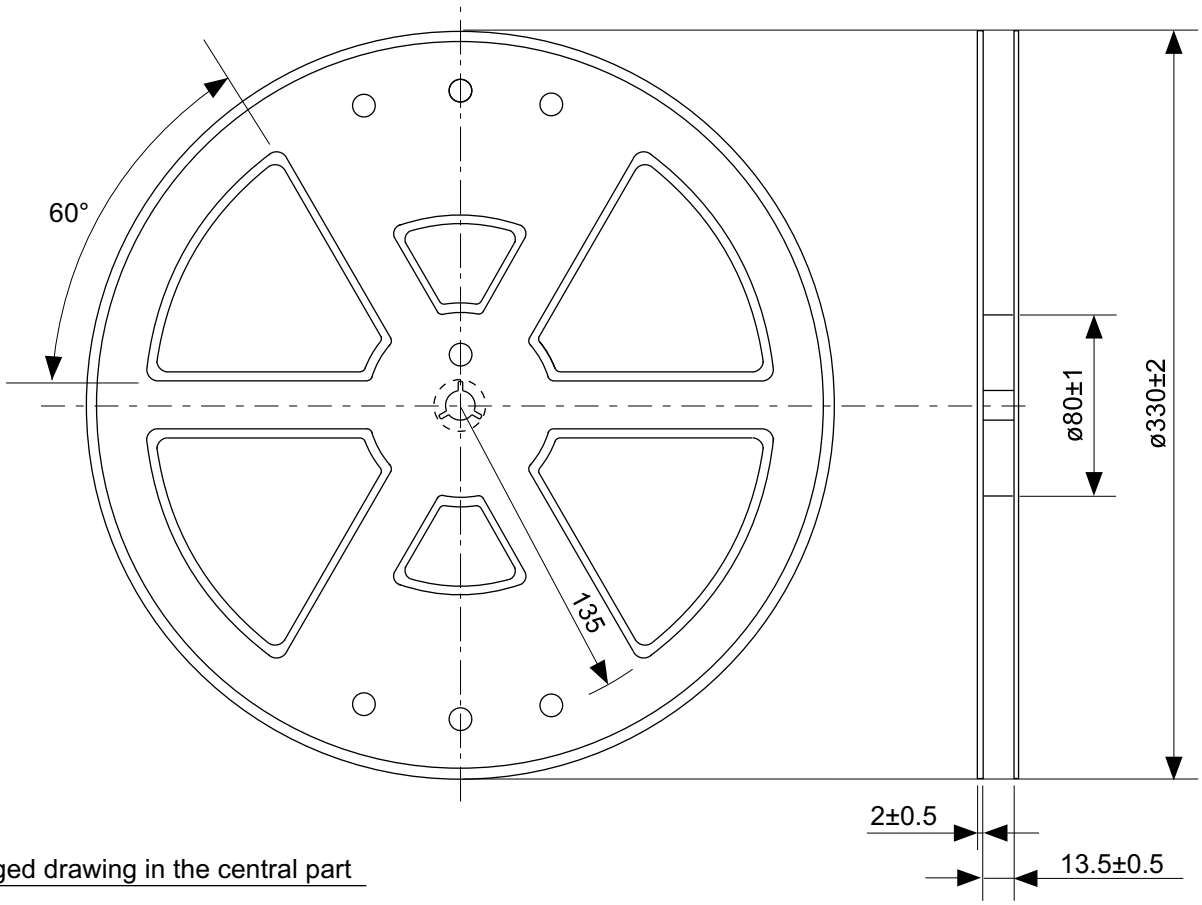


Enlarged drawing in the central part

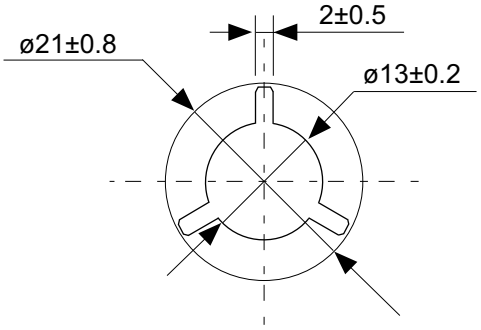

No. FH006-A-R-S1-1.0

TITLE	HSOP6-A-Reel		
No.	FH006-A-R-S1-1.0		
ANGLE		QTY.	4,000
UNIT	mm		
SII Semiconductor Corporation			


Downloaded from Arrow.com.

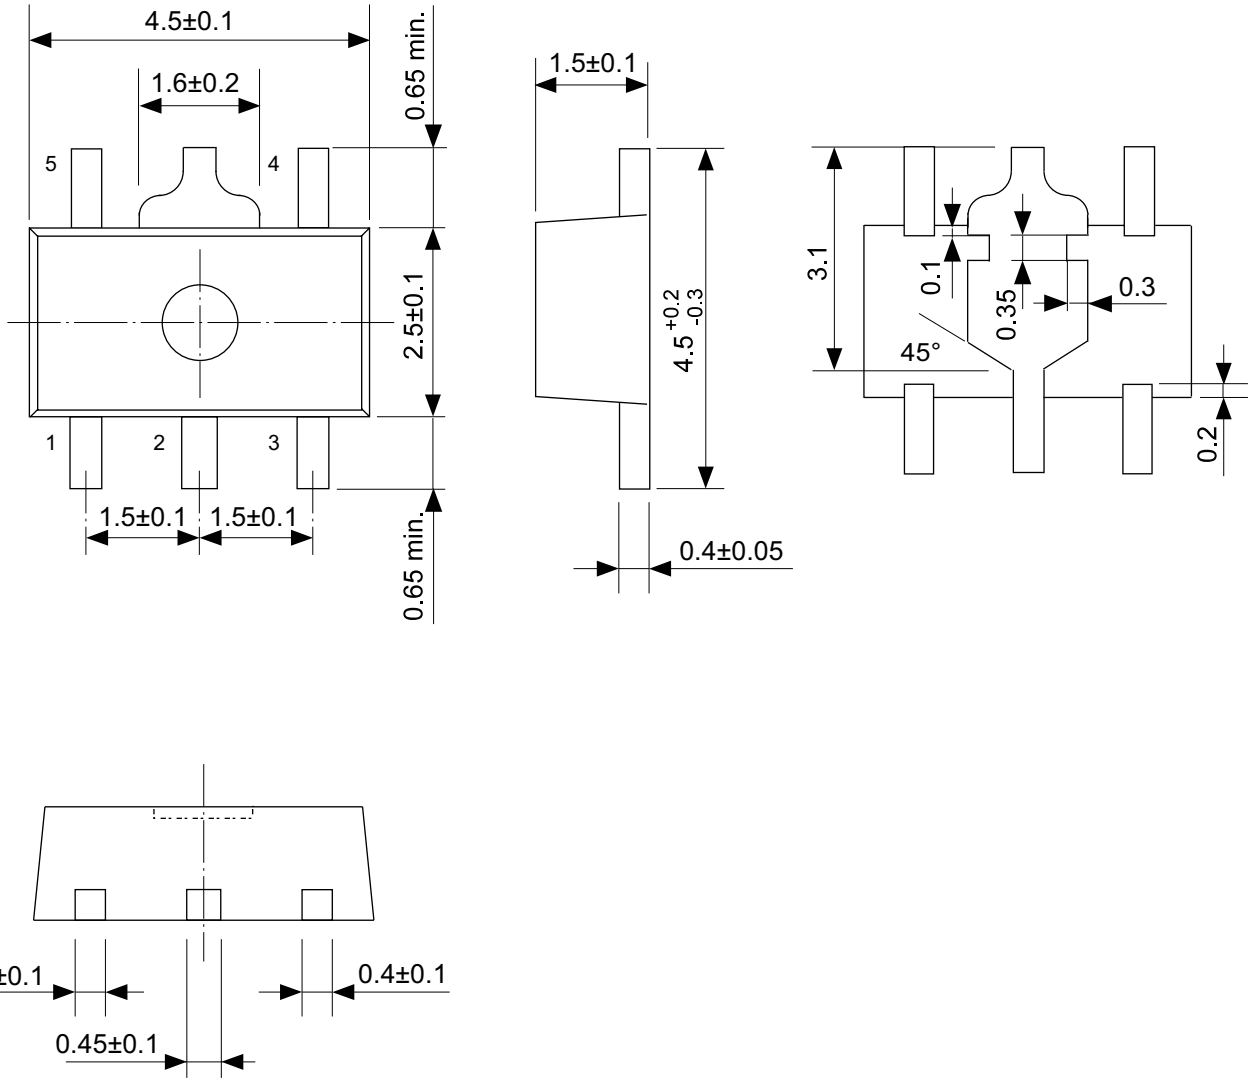


No. UP005-A-P-SD-2.0

TITLE	SOT895-A-PKG Dimensions
No.	UP005-A-P-SD-2.0
ANGLE	
UNIT	mm
SII Semiconductor Corporation	

Downloaded from Arrow.com.

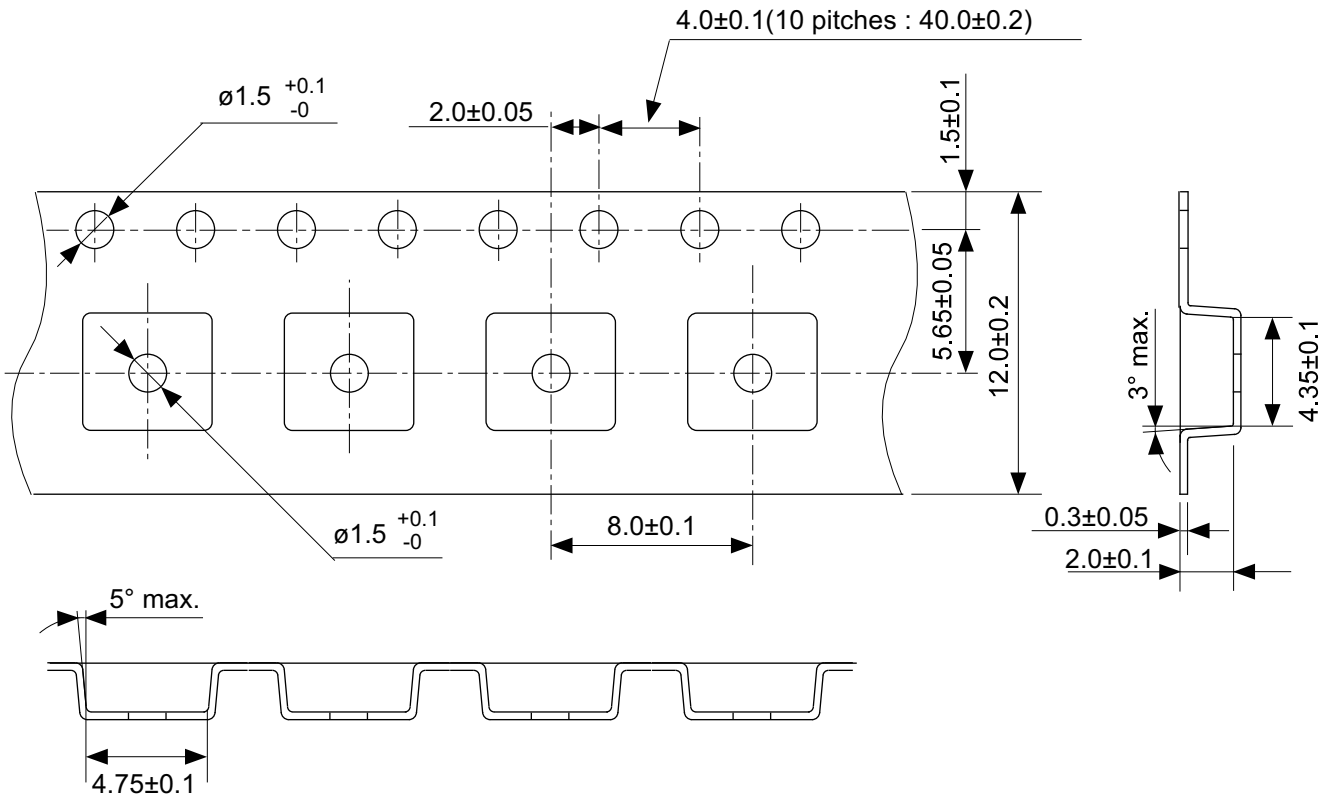

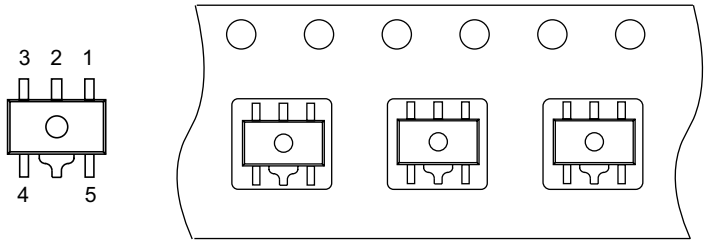


Feed direction


No. UP005-A-C-SD-1.1

TITLE	SOT895-A-Carrier Tape
No.	UP005-A-C-SD-1.1
ANGLE	
UNIT	mm
SII Semiconductor Corporation	

Downloaded from Arrow.com.

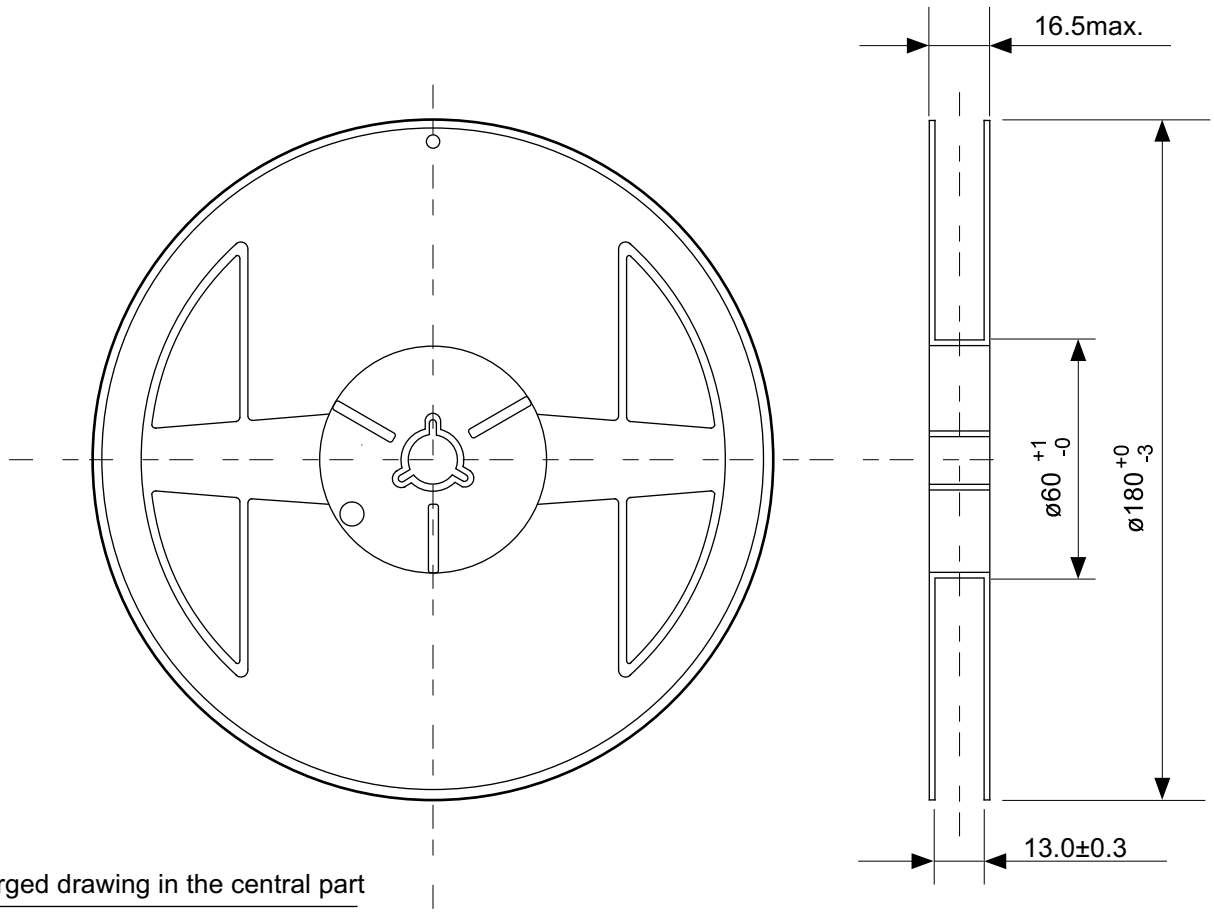


Enlarged drawing in the central part

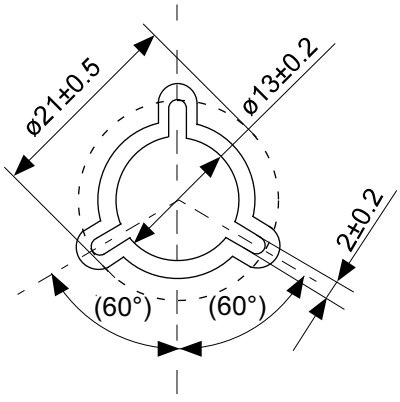

No. UP005-A-R-SD-1.1

TITLE	SOT895-A-Reel		
No.	UP005-A-R-SD-1.1		
ANGLE		QTY.	1,000
UNIT	mm		
SII Semiconductor Corporation			


Downloaded from Arrow.com.

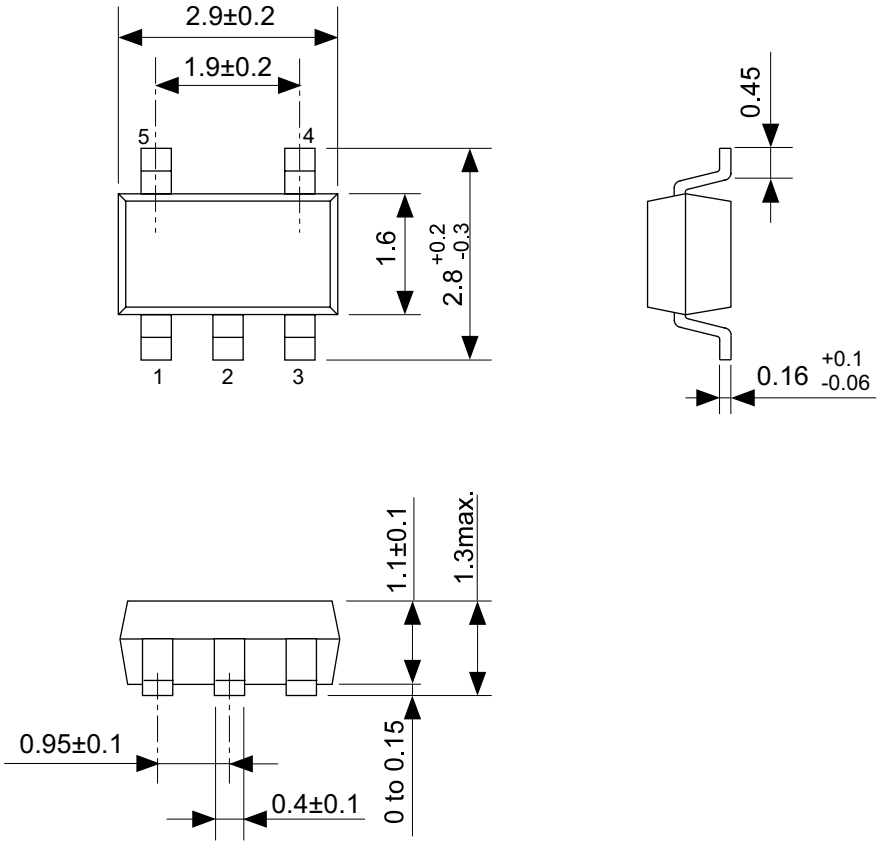

No. MP005-A-P-SD-1.3

TITLE	SOT235-A-PKG Dimensions
No.	MP005-A-P-SD-1.3
ANGLE	
UNIT	mm
SII Semiconductor Corporation	


Downloaded from Arrow.com.

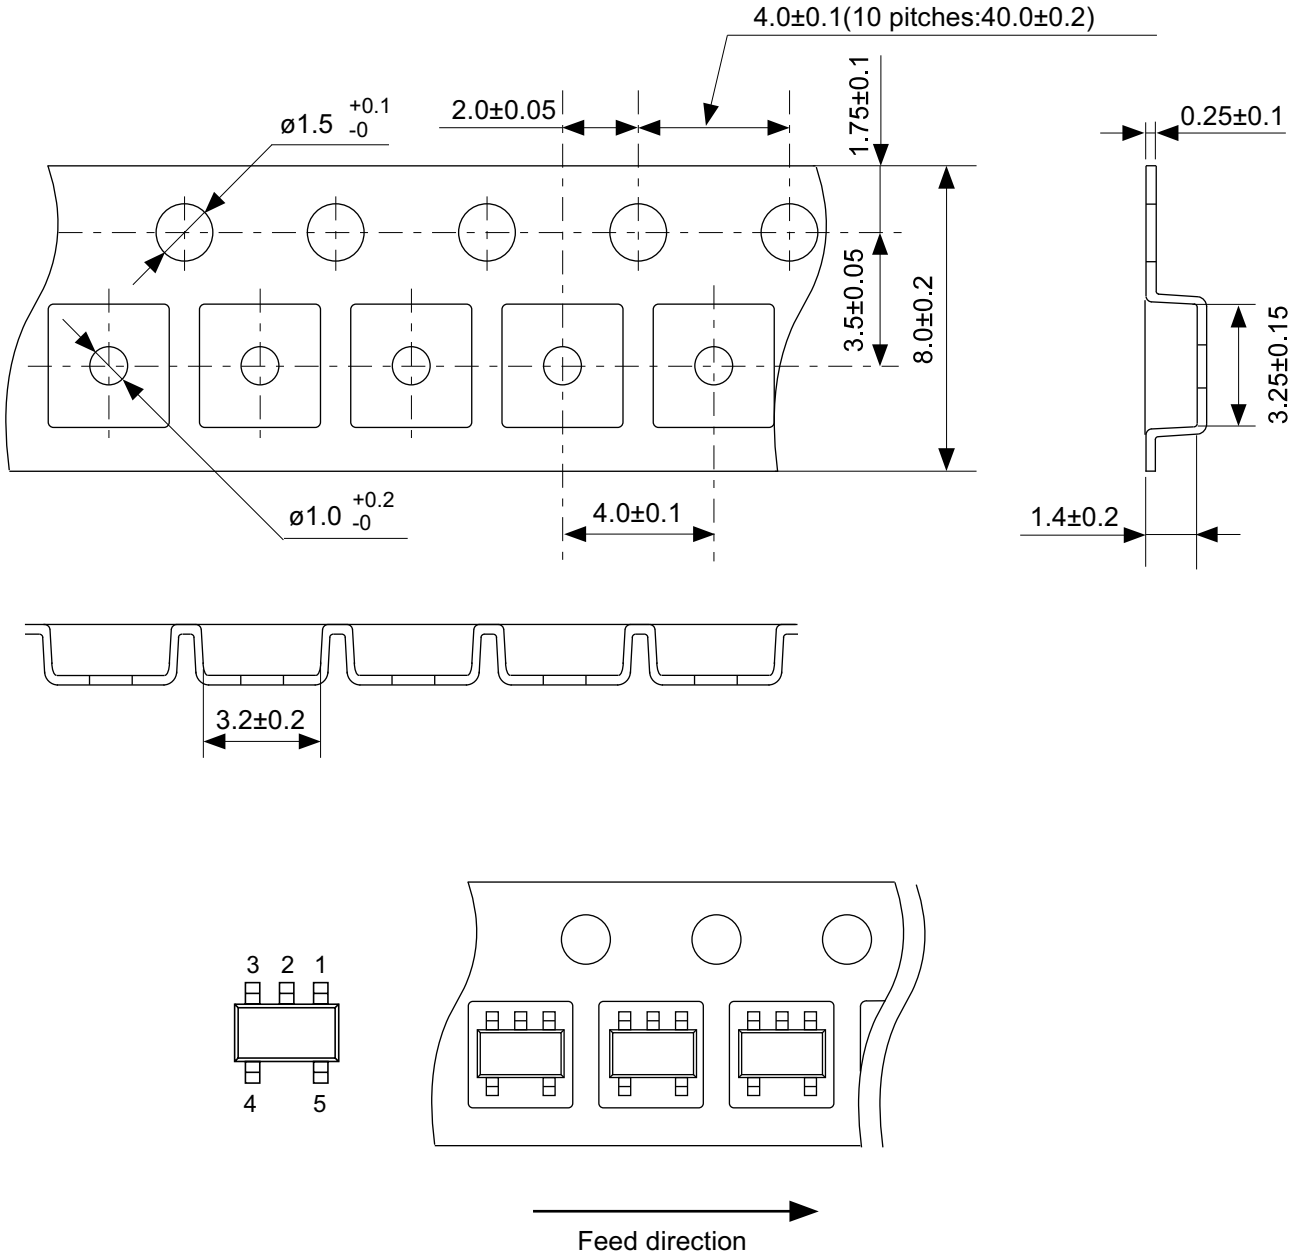


No. MP005-A-C-SD-2.1

TITLE	SOT235-A-Carrier Tape
No.	MP005-A-C-SD-2.1
ANGLE	
UNIT	mm
SII Semiconductor Corporation	

Downloaded from Arrow.com.

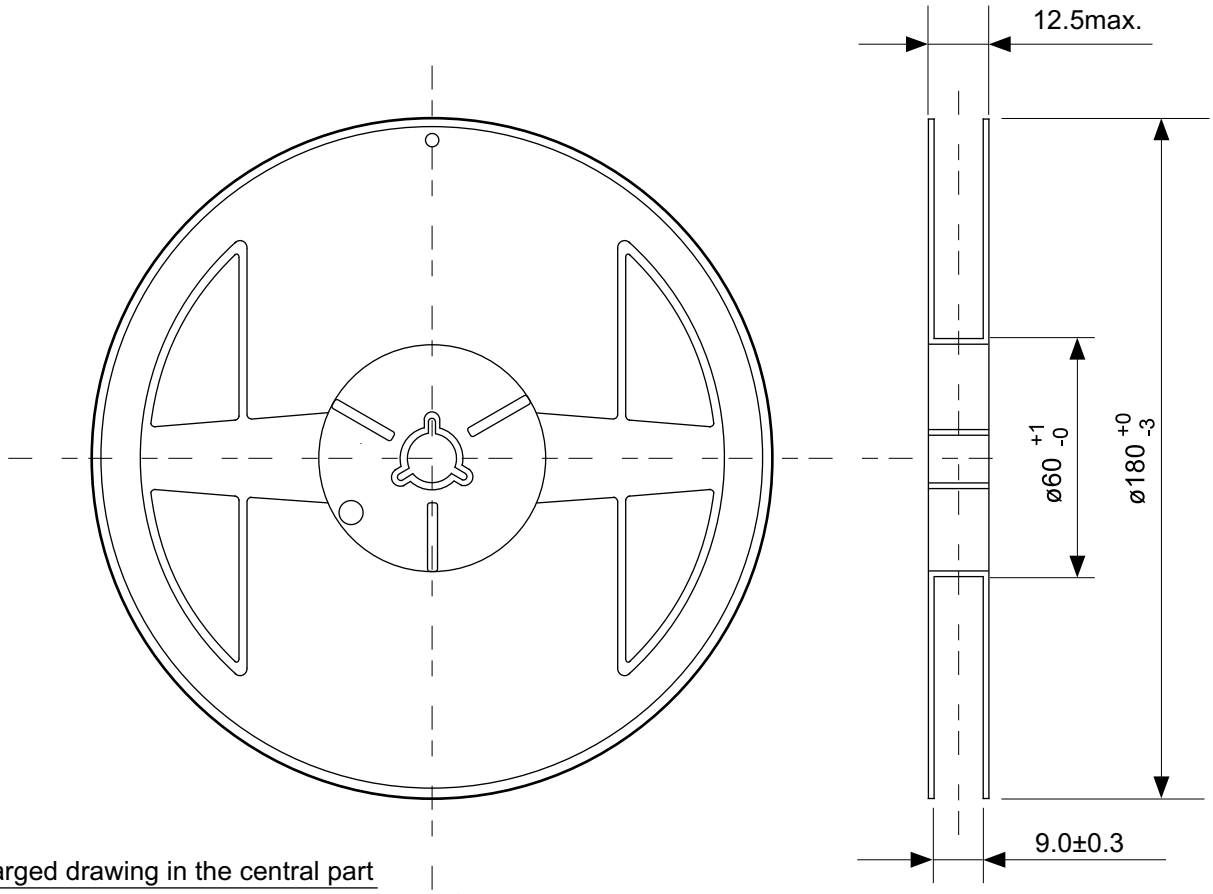

Enlarged drawing in the central part

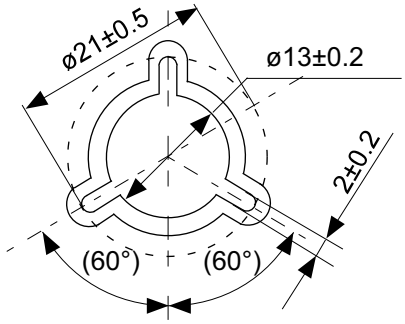

No. MP005-A-R-SD-1.1

TITLE	SOT235-A-Reel		
No.	MP005-A-R-SD-1.1		
ANGLE		QTY.	3,000
UNIT	mm		
SII Semiconductor Corporation			

Downloaded from Arrow.com.

Disclaimers (Handling Precautions)

1. All the information described herein (product data, specifications, figures, tables, programs, algorithms and application circuit examples, etc.) is current as of publishing date of this document and is subject to change without notice.
2. The circuit examples and the usages described herein are for reference only, and do not guarantee the success of any specific mass-production design.
   SII Semiconductor Corporation is not responsible for damages caused by the reasons other than the products or infringement of third-party intellectual property rights and any other rights due to the use of the information described herein.
3. SII Semiconductor Corporation is not responsible for damages caused by the incorrect information described herein.
4. Take care to use the products described herein within their specified ranges. Pay special attention to the absolute maximum ratings, operation voltage range and electrical characteristics, etc.
   SII Semiconductor Corporation is not responsible for damages caused by failures and/or accidents, etc. that occur due to the use of products outside their specified ranges.
5. When using the products described herein, confirm their applications, and the laws and regulations of the region or country where they are used and verify suitability, safety and other factors for the intended use.
6. When exporting the products described herein, comply with the Foreign Exchange and Foreign Trade Act and all other export-related laws, and follow the required procedures.
7. The products described herein must not be used or provided (exported) for the purposes of the development of weapons of mass destruction or military use. SII Semiconductor Corporation is not responsible for any provision (export) to those whose purpose is to develop, manufacture, use or store nuclear, biological or chemical weapons, missiles, or other military use.
8. The products described herein are not designed to be used as part of any device or equipment that may affect the human body, human life, or assets (such as medical equipment, disaster prevention systems, security systems, combustion control systems, infrastructure control systems, vehicle equipment, traffic systems, in-vehicle equipment, aviation equipment, aerospace equipment, and nuclear-related equipment), excluding when specified for in-vehicle use or other uses. Do not use those products without the prior written permission of SII Semiconductor Corporation.
   Especially, the products described herein cannot be used for life support devices, devices implanted in the human body and devices that directly affect human life, etc.
   Prior consultation with our sales office is required when considering the above uses.
   SII Semiconductor Corporation is not responsible for damages caused by unauthorized or unspecified use of our products.
9. Semiconductor products may fail or malfunction with some probability.
   The user of these products should therefore take responsibility to give thorough consideration to safety design including redundancy, fire spread prevention measures, and malfunction prevention to prevent accidents causing injury or death, fires and social damage, etc. that may ensue from the products' failure or malfunction.
   The entire system must be sufficiently evaluated and applied on customer's own responsibility.
10. The products described herein are not designed to be radiation-proof. The necessary radiation measures should be taken in the product design by the customer depending on the intended use.
11. The products described herein do not affect human health under normal use. However, they contain chemical substances and heavy metals and should therefore not be put in the mouth. The fracture surfaces of wafers and chips may be sharp. Take care when handling these with the bare hands to prevent injuries, etc.
12. When disposing of the products described herein, comply with the laws and ordinances of the country or region where they are used.
13. The information described herein contains copyright information and know-how of SII Semiconductor Corporation.
    The information described herein does not convey any license under any intellectual property rights or any other rights belonging to SII Semiconductor Corporation or a third party. Reproduction or copying of the information described herein for the purpose of disclosing it to a third-party without the express permission of SII Semiconductor Corporation is strictly prohibited.
14. For more details on the information described herein, contact our sales office.

1.0-2016.01

Downloaded from Arrow.com.