
Data Sheet | Item Number: 770-513/023-000

Strain relief housing; 3-pole; for 2 cables; 4.5 ... 8.0 mm; 55 mm; white



https://www.wago.com/770-513/023-000



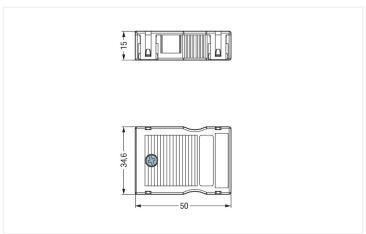

Dimensions in mm

Strain relief housing WINSTA® MIDI 3-pole

The strain relief housing from the WINSTA® MIDI product line is the sophisticated solution for reliable installation. A comprehensive range of accessories rounds out the WINSTA® product line from WAGO. The WINSTA® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates safe electrification. Thanks to the built-in test slot, connections can be checked even when they are plugged in. That saves time and reduces installation labor and costs. The strip length is 55 mm.

WINSTA® MIDI solutions for your electrical installation - maintenance-free

WINSTA® is the pluggable connection system that is perfectly tailored to the strict requirements of electrical installation. It allows error-free installation of cables and components, quickly and reliably. Choose quality and durability – the WINSTA® MIDI accessory from WAGO makes the installation of electrical components noticeably easier.

- pre-assembled versions
- · fast, secure installation

| Connection data | |
|-------------------------------------|----------|
| Connection 1 | |
| Pole number | 3 |
| Connectable sheathed cable diameter | 4.5 8 mm |
| Strip length (outer insulation) | 55 mm |

| Physical data | |
|---------------|------------------------|
| Width | 34.6 mm / 1.362 inches |
| Height | 15.2 mm / 0.598 inches |
| Depth | 50 mm / 1.969 inches |

Data Sheet | Item Number: 770-513/023-000

https://www.wago.com/770-513/023-000



| Material Data | |
|-----------------------------|---|
| Note (material data) | |
| | <u>Information on material specifications can be found here</u> |
| Color | white |
| Material group | III/3 |
| Insulation material | Polyamide (PA66) |
| Flammability class per UL94 | V0 |
| Fire load | 0.272 MJ |
| Weight | 10.3 g |

| Environmental requirements | |
|--|--|
| Processing temperature | -5 +40 °C |
| Continuous operating temperature | -35 +85 °C |
| Note on continuous operating temperature | Insulating parts for temperatures ≤ 105 °C |

| Commercial data | |
|-----------------------|---------------|
| Product Group | 20 (Winsta) |
| eCl@ss 10.0 | 27-44-06-92 |
| eCl@ss 9.0 | 27-44-06-92 |
| ETIM 8.0 | EC002863 |
| ETIM 7.0 | EC002863 |
| PU (SPU) | 50 pcs |
| Packaging type | Box |
| Country of origin | DE |
| GTIN | 4044918057523 |
| Customs tariff number | 39269097900 |

Approvals / Certificates

General approvals

Approvals for marine applications



| Approval | Standard | Certificate Name |
|--|----------|------------------|
| cURus Underwriters Laboratories Inc. | UL 1977 | E45171 |

| Approval | Standard | Certificate Name |
|---|----------|------------------|
| DNV GL Det Norske Veritas, Ger- manischer Lloyd | - | TAE00001Z6 |

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product

Compliance 770-513/023-000


 $\underline{\downarrow}$


Documentation

Data Sheet | Item Number: 770-513/023-000

https://www.wago.com/770-513/023-000



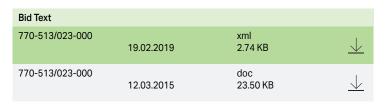

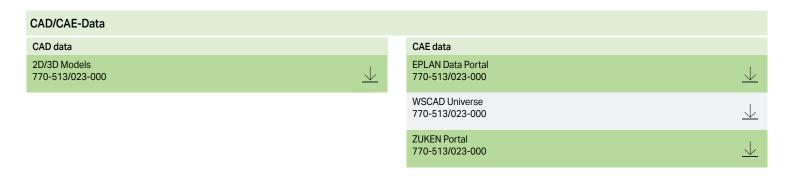

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip



Item No.: 210-333

Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white

1.1.2 Shield termination

1.1.2.1 Shield termination



Item No.: 770-523

Shield connecting plate; 3-pole; for sockets and plugs; silver-colored

Subject to changes. Please also observe the further product documentation!