

LTM4668A

Tiny Quad 1.2A Output Step-Down
μModule® Regulator

DESCRIPTION

Demonstration circuit 2785A-B features the **LTM®4668A** μModule® regulator, a Quad 1.2A high efficiency step-down regulator. DC2785A-B has an operating input voltage range of 2.7V to 17V and can provide an output current of up to 1.2A. The output voltage can be programmed from 1.8V up to 5V. The LTM4668A is a complete DC/DC point of load regulator in a thermally enhanced 6.25mm × 6.25mm × 2.1mm BGA package requiring only a few input and output capacitors.

External clock synchronization is available through the CLKIN turret. The LTM4668A data sheet must be read in conjunction with this demo manual for working on or modifying demo circuit 2785A-B.

Design files for this circuit board are available.


All registered trademarks and trademarks are the property of their respective owners.

PERFORMANCE SUMMARY

Specifications are at $T_A = 25^\circ\text{C}$

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Input Voltage Range		2.7		17	V
Output Voltage V_{OUT}		1.8			V_{DC}
		2.5			V_{DC}
		3.3			V_{DC}
		5			V_{DC}
Maximum Continuous Output Current	De-rating is necessary for certain operating conditions. See data sheet for details.	1.2			A_{DC}
Default Operating Frequency		2.25			MHz
Efficiency	$V_{IN} = 12\text{V}$, $V_{OUT} = 5\text{V}$, $I_{OUT} = 1.2\text{A}$	89.2			%
		See Figure 2			

BOARD PHOTO

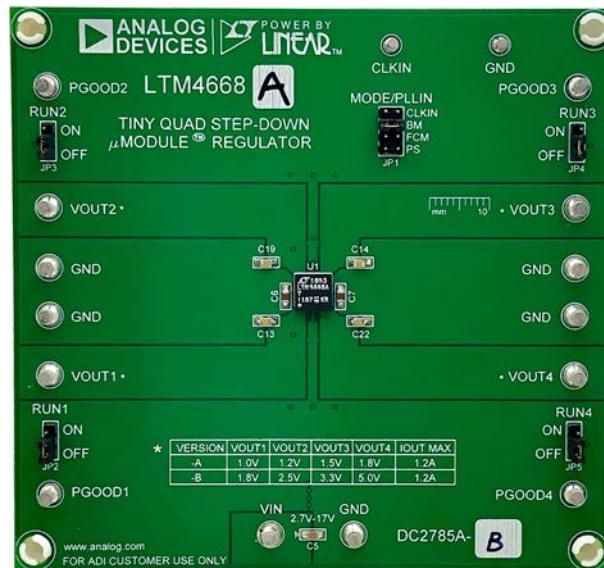

Rev 0

DEMO MANUAL DC2785A-B

QUICK START PROCEDURE

Demonstration circuit 2785A-B is an easy way to evaluate the performance of the LTM4668A. Please refer to Figure 1 for test setup connections and follow the procedure below.

1. With power off, place the jumpers in the following positions:

JP1	JP2	JP3	JP4	JP5
MODE	RUN1	RUN2	RUN3	RUN4
FCM	ON	ON	ON	ON

2. Before connecting input supply, load and meters, preset the input voltage supply to be between 2.7V to 17V. Preset the load current to 0A.
3. With power off, connect the loads, input voltage supply and meters as shown in Figure 1.

4. Turn on input power supply. The output voltage meter should display the selected output voltage $\pm 2\%$.
5. Once the proper output voltage is established, adjust the load current within the 0A to 1.2A range and observe the load regulation, efficiency, and other parameters.
6. To observe light load efficiency, place the Mode pin jumper (JP1) in the BM/PS position.
7. An external clock can be added to the CLKIN terminal when the CLKIN function is used (JP1 on the CLKIN position). Please ensure the chosen sync switching frequency is $\pm 50\%$ of the default switching frequency.

QUICK START PROCEDURE

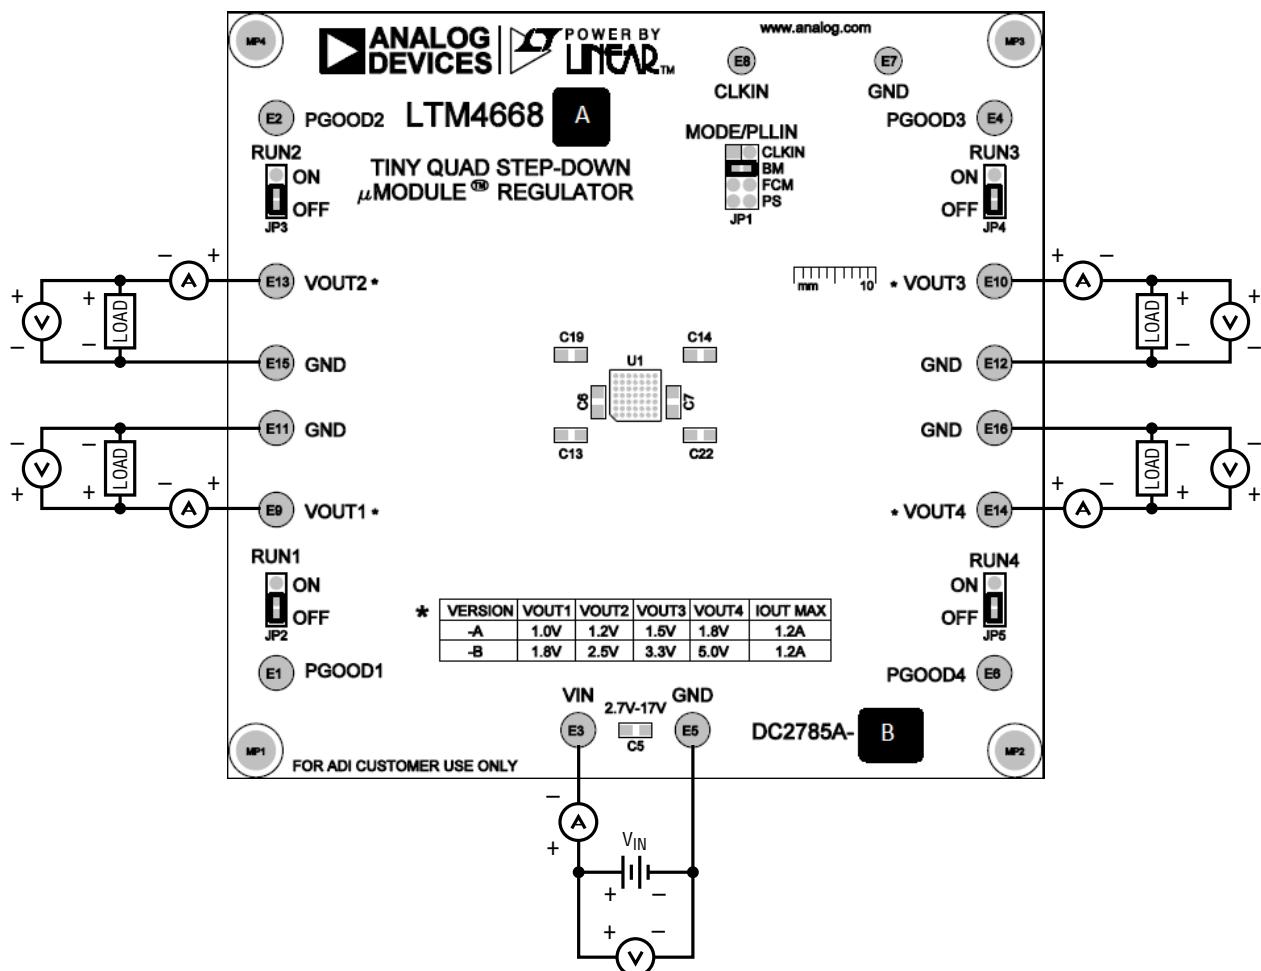


Figure 1. Test Setup

DEMO MANUAL DC2785A-B

QUICK START PROCEDURE



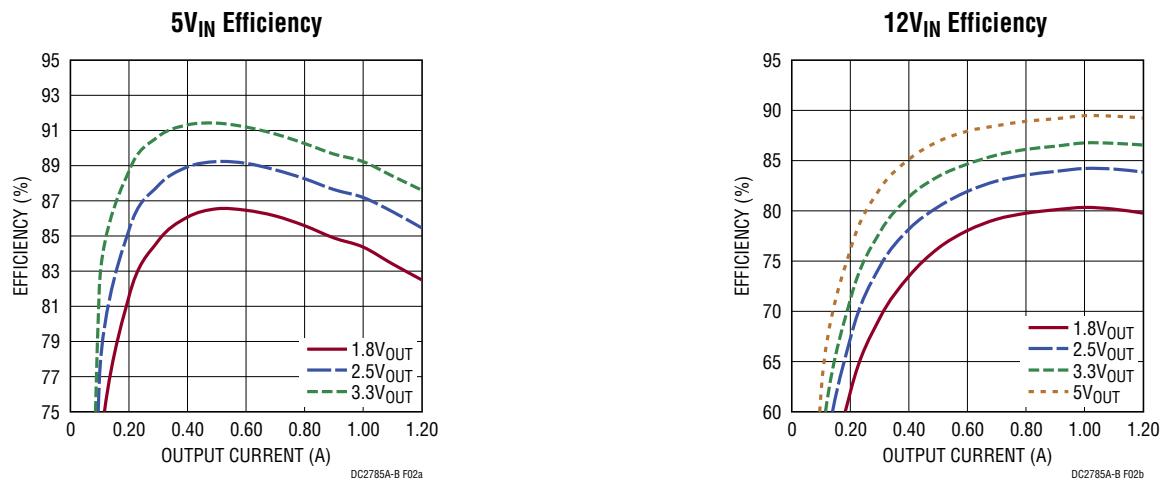


Figure 2. Measured Supply Efficiency at 5V_{IN} and 12V_{IN}

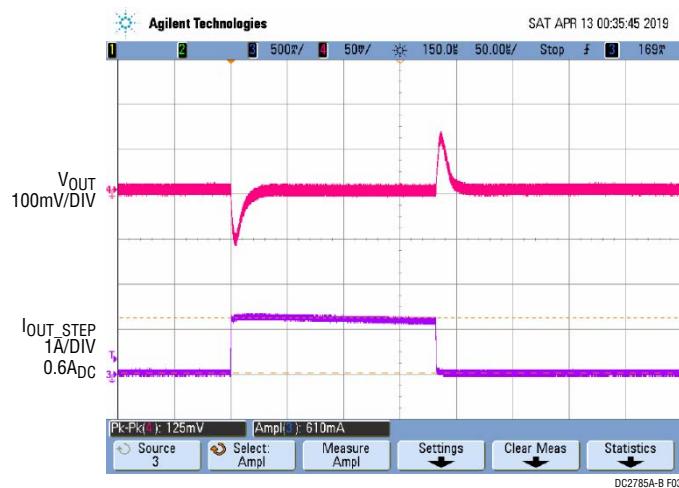

V _{IN} (V)	V _{OUT} (V)	C _{OUT}
12	1.8	1 • 47 μ F/16V


Figure 3. Measured Load Transient Responses for V_{OUT1} = 1.8V (0A to 0.6A Load Step)

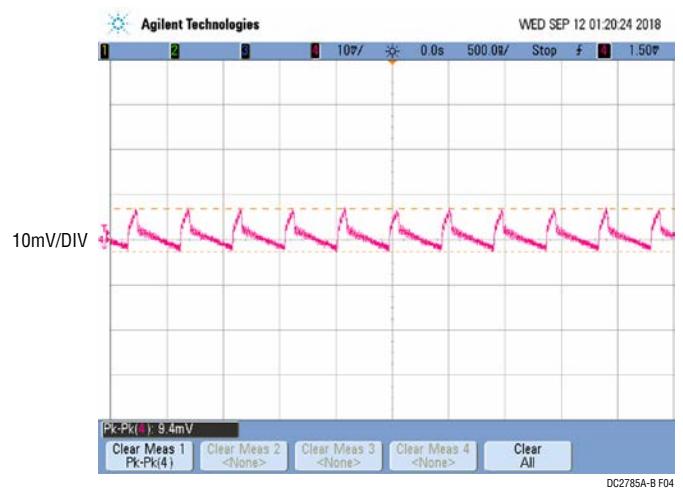

V _{IN} (V)	V _{OUT} (V)	C _{OUT}
12	1.8	1 • 47 μ F/16V

Figure 4. Output Voltage Ripple for V_{OUT1} = 1.8V at 1.2A Full Load

QUICK START PROCEDURE

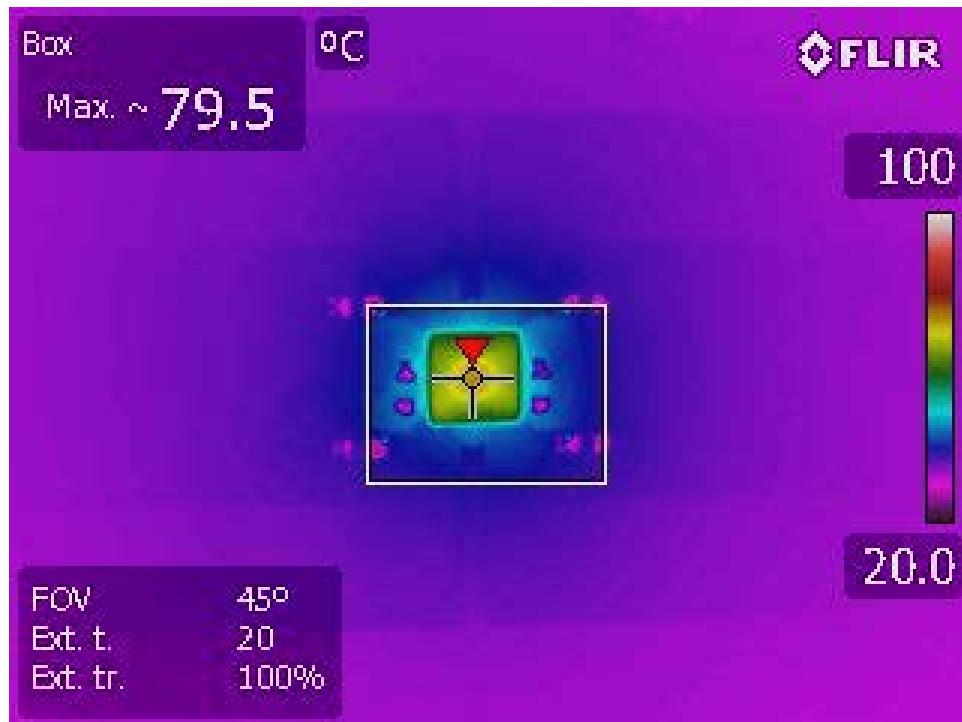

V_{IN} (V)	V_{OUT1} (V)	V_{OUT2} (V)	V_{OUT3} (V)	V_{OUT4} (V)	$T_{AMBIENT}$ (°C)	FORCED AIRFLOW (LFM)
12	1.8	2.5	3.3	5	25	0


Figure 5. Measured Thermal Capture with All Phase at Full Load (1.2A Each)

DEMO MANUAL DC2785A-B

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	2	C6, C7	CAP, 22µF, X5R, 25V, 20%, 0805	MURATA, GRM21BR61E226ME44L
2	4	C13, C14, C19, C22	CAP, 47µF, X5R, 16V, 20%, 1206	TDK, C3216X5R1C476M160AB
3	1	R7	RES., AEC-Q200, 30.1k, 1%, 1/10W, 0603	VISHAY, CRCW060330K1FKEA
4	1	R8	RES., AEC-Q200, 13.3k, 1%, 1/10W, 0603	VISHAY, CRCW060313K3FKEA
5	1	R9	RES., AEC-Q200, 19.1k, 1%, 1/10W, 0603	PANASONIC, ERJ3EKF1912V
6	1	R10	RES., AEC-Q200, 8.25k, 1%, 1/10W, 0603	VISHAY, CRCW06038K25FKEA
7	1	U1	IC, QUAD DC/DC 1.2A µMODULE REG., 49-PINS BGA	ANALOG DEVICES, LTM4668AEY#PBF
Additional Demo Board Circuit Components				
1	1	C1	CAP, 22µF, TANT., 35V, 20%, 7343, TPSE	AVX, TPSE226M035R0125
2	1	C4	CAP, 4.7µF, X7R, 25V, 10%, 0805	TDK, C2012X7R1E475K125AB
3	1	C5	CAP, 10µF, X5R, 25V, 10%, 0805	MURATA, GRM219R61E106KA12D
4	3	C9, C10, C20	CAP, 150pF, NPO, 50V, 5%, 0603	AVX, 06035A151JAT2A
5	1	C21	CAP, 100pF, COG, 50V, 5%, 0603, AEC-Q200	TDK, CGA3E2C0G1H101J080AA
6	6	R5, R6, R15-R18	RES., 100k, 1%, 1/10W, 0603	VISHAY, CRCW0603100KFKEA
7	4	R11-R14	RES., AEC-Q200, 10k, 1%, 1/10W, 0603	VISHAY, CRCW060310K0FKEA
8	4	R1-R4	RES., 100k, 5%, 1/10W, 0603	PANASONIC, ERJ3GEYJ104V
9	1	C8	CAP, 4.7µF, X5R, 25V, 20%, 0603	TDK, C1608X5R1E475M080AC
Hardware: For Demo Board Only				
1	14	E1-E6, E9-E16	TEST POINT, TURRET, 0.094", MTG. HOLE	MILL-MAX, 2501-2-00-80-00-00-07-0
2	2	E7, E8	TEST POINT, TURRET, 0.064", MTG. HOLE	MILL-MAX, 2308-2-00-80-00-00-07-0
3	5	XJP1-XJP5	CONN., SHUNT, FEMALE, 2 POS, 2mm	WURTH ELEKTRONIK, 60800213421
4	4	STAND-OFFS	STANDOFF, NYLON, SNAP-ON, 0.250"	KEYSTONE, 8831

SCHEMATIC DIAGRAM

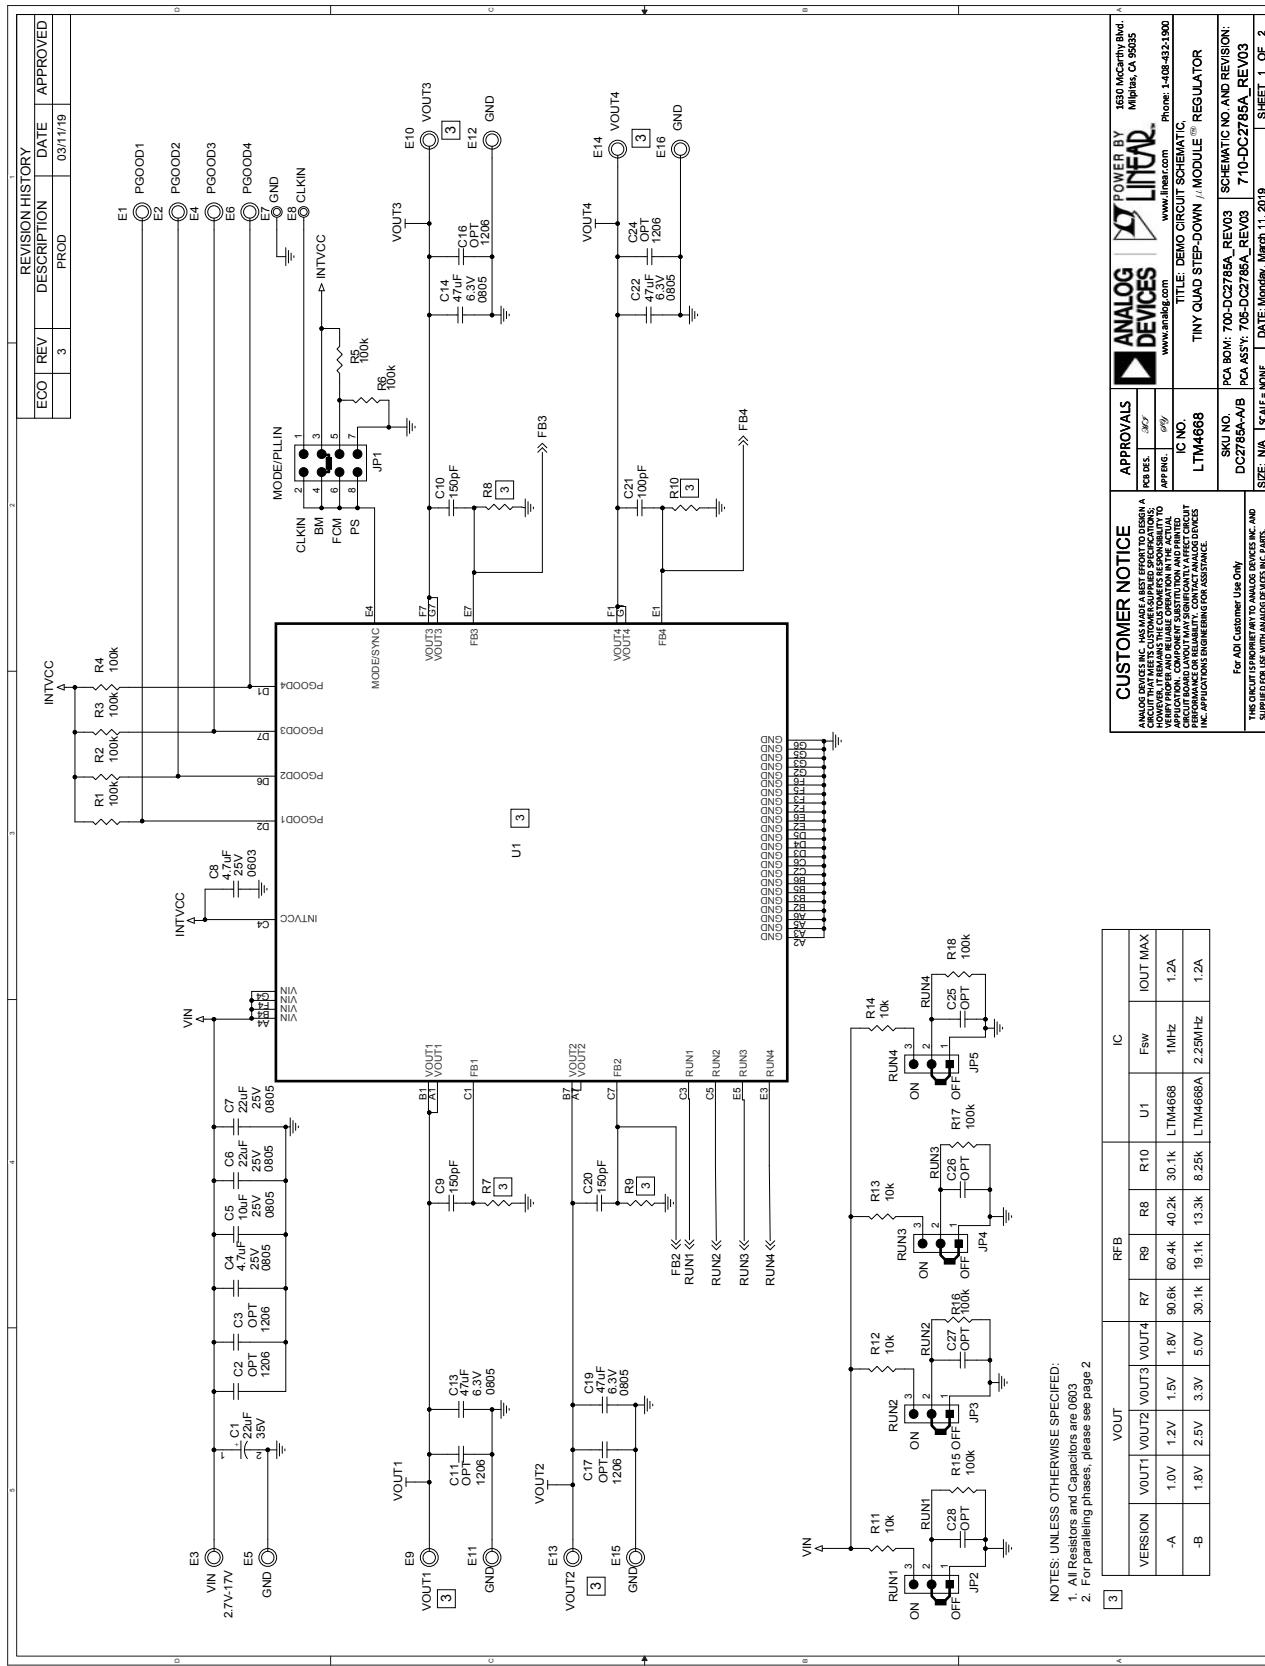

DEMO MANUAL DC2785A-B



ESD Caution

ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

Legal Terms and Conditions

By using the evaluation board discussed herein (together with any tools, components documentation or support materials, the "Evaluation Board"), you are agreeing to be bound by the terms and conditions set forth below ("Agreement") unless you have purchased the Evaluation Board, in which case the Analog Devices Standard Terms and Conditions of Sale shall govern. Do not use the Evaluation Board until you have read and agreed to the Agreement. Your use of the Evaluation Board shall signify your acceptance of the Agreement. This Agreement is made by and between you ("Customer") and Analog Devices, Inc. ("ADI"), with its principal place of business at One Technology Way, Norwood, MA 02062, USA. Subject to the terms and conditions of the Agreement, ADI hereby grants to Customer a free, limited, personal, temporary, non-exclusive, non-sublicensable, non-transferable license to use the Evaluation Board FOR EVALUATION PURPOSES ONLY. Customer understands and agrees that the Evaluation Board is provided for the sole and exclusive purpose referenced above, and agrees not to use the Evaluation Board for any other purpose. Furthermore, the license granted is expressly made subject to the following additional limitations: Customer shall not (i) rent, lease, display, sell, transfer, assign, sublicense, or distribute the Evaluation Board; and (ii) permit any Third Party to access the Evaluation Board. As used herein, the term "Third Party" includes any entity other than ADI, Customer, their employees, affiliates and in-house consultants. The Evaluation Board is NOT sold to Customer; all rights not expressly granted herein, including ownership of the Evaluation Board, are reserved by ADI. CONFIDENTIALITY. This Agreement and the Evaluation Board shall all be considered the confidential and proprietary information of ADI. Customer may not disclose or transfer any portion of the Evaluation Board to any other party for any reason. Upon discontinuation of use of the Evaluation Board or termination of this Agreement, Customer agrees to promptly return the Evaluation Board to ADI. ADDITIONAL RESTRICTIONS. Customer may not disassemble, decompile or reverse engineer chips on the Evaluation Board. Customer shall inform ADI of any occurred damages or any modifications or alterations it makes to the Evaluation Board, including but not limited to soldering or any other activity that affects the material content of the Evaluation Board. Modifications to the Evaluation Board must comply with applicable law, including but not limited to the RoHS Directive. TERMINATION. ADI may terminate this Agreement at any time upon giving written notice to Customer. Customer agrees to return to ADI the Evaluation Board at that time. LIMITATION OF LIABILITY. THE EVALUATION BOARD PROVIDED HEREUNDER IS PROVIDED "AS IS" AND ADI MAKES NO WARRANTIES OR REPRESENTATIONS OF ANY KIND WITH RESPECT TO IT. ADI SPECIFICALLY DISCLAIMS ANY REPRESENTATIONS, ENDORSEMENTS, GUARANTEES, OR WARRANTIES, EXPRESS OR IMPLIED, RELATED TO THE EVALUATION BOARD INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, TITLE, FITNESS FOR A PARTICULAR PURPOSE OR NONINFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. IN NO EVENT WILL ADI AND ITS LICENSORS BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES RESULTING FROM CUSTOMER'S POSSESSION OR USE OF THE EVALUATION BOARD, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DELAY COSTS, LABOR COSTS OR LOSS OF GOODWILL. ADI'S TOTAL LIABILITY FROM ANY AND ALL CAUSES SHALL BE LIMITED TO THE AMOUNT OF ONE HUNDRED US DOLLARS (\$100.00). EXPORT. Customer agrees that it will not directly or indirectly export the Evaluation Board to another country, and that it will comply with all applicable United States federal laws and regulations relating to exports. GOVERNING LAW. This Agreement shall be governed by and construed in accordance with the substantive laws of the Commonwealth of Massachusetts (excluding conflict of law rules). Any legal action regarding this Agreement will be heard in the state or federal courts having jurisdiction in Suffolk County, Massachusetts, and Customer hereby submits to the personal jurisdiction and venue of such courts. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this Agreement and is expressly disclaimed.

Rev 0