




HEAT SHRINK TUBING

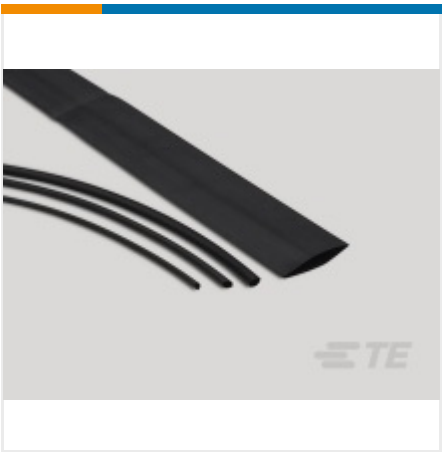

✓ Active

TE CONNECTIVITY (TE)

X4-3.0-0-SP

Raychem | SWFR X4

EJ1510-000

TE Internal Number: EJ1510-000

EU RoHS Compliant

EU ELV Compliant

Wall Type Single

Resistant To Mechanical Damage

Low Outgassing No

Product Source China

Packaging Method Spool

↓ **PRODUCT DRAWING**
English

DOCUMENTATION

Product Drawings

SWFR X4 SINGLE WALL HEAT SHRINKABLE TUBING

PDF

English

Catalog Pages/Data Sheets

1-1773894-4_SWFR_Tubing

PDF

English

Very-Thin-Wall, Highly Flame-Retardant, Zero Halogen, Metric-Sized Heat-Shrinkable Tubing

PDF

English

FEATURES



Please review product documents or [contact us](#) for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

Product Type Features

Wall Type Single
Product Family X4

Electrical Characteristics

Voltage (Max) (kV) .3

Body Features

Shrink Ratio 2:1
Color Black
Flexibility Very Flexible
Material ZEROHAL Polyolefin
Fluid Type Water

Dimensions

Recovered Wall Thickness (Nominal) .28 mm [.011 in]
Expanded Inside Diameter (Min) 3.3 mm [.13 in]
Recovered Inside Diameter (Max) 1.5 mm [.059 in]

Usage Conditions

Resistant To Mechanical Damage
Recovery Temperature (°C) 90
Operating Temperature Range (°C) -30 – 125
Flammability Flame-Retardant
Shrink Temperature (Min) (°C) 70
Fluid Resistance Moisture/Spray Protection

Product Availability

Applicable Region Global

Packaging Features

Packaging Method Spool

Other

Low Outgassing No
Product Source China

Statement of Compliance

Statement of Compliance
PDF