YS12S16 DC-DC Converter

9.6 - 14 VDC Input; 0.7525 - 5.5 VDC Programmable @ 16 A



RoHS Compliant

Bel Power Solutions point-of-load converters are recommended for use with regulated bus converters in an Intermediate Bus Architecture (IBA). The YS12S16 non-isolated DC-DC converters deliver up to 16 A of output current in an industry-standard surface-mount package. Operating from a 9.6-14 VDC input, the YS12S16 converters are ideal choices for Intermediate Bus Architectures where point-of-load power delivery is generally a requirement. They provide an extremely tight regulated programmable output voltage of 0.7525 V to 5.5 V.

The YS12S16 converters provide exceptional thermal performance, even in high temperature environments with minimal airflow. This is accomplished through the use of advanced circuitry, packaging, and processing techniques to achieve a design possessing ultra-high efficiency, excellent thermal management and a very low body profile.

The low body profile and the preclusion of heat sinks minimize impedance to system airflow, thus enhancing cooling for both upstream and downstream devices. The use of 100% automation for assembly, coupled with advanced power electronics and thermal design, results in a product with extremely high reliability.

Key Features & Benefits

- RoHS lead-free solder and lead-solder-exempted products are available
- Delivers up to 16 A (88 W)
- Extended input range 9.6 V – 14 V
- High efficiency (0.948 at 5 V output)
- Surface-mount package
- Industry-standard footprint and pinout
- Small size and low profile: 1.30” x 0.53” x 0.314” (33.02 x 13.46 x 7.98 mm)
- Weight: 0.23 oz [6.50 g]
- Coplanarity less than 0.003”, maximum
- Synchronous Buck Converter topology
- Start-up into pre-biased output
- No minimum load required
- Programmable output voltage via external resistor
- Operating ambient temperature: -40 °C to 85 °C
- Remote output sense
- Remote ON/OFF (positive or negative)
- Fixed-frequency operation
- Auto-reset output overcurrent protection
- Auto-reset overtemperature protection
- High reliability, MTBF approx. 27.2 Million Hours
- calculated per Telcordia TR-332, Method I Case 1
- All materials meet UL94, V-0 flammability rating
- Safety approved to UL/CSA 62368-1 and EN/IEC 62368-1

Applications

- Intermediate Bus Architectures
- Telecommunications
- Data communications
- Distributed Power Architectures
- Servers, workstations

Benefits

- High efficiency – no heat sink required
- Reduces total solution board area
- Tape and reel packing
- Compatible with pick & place equipment
- Minimizes part numbers in inventory
- Low cost

Downloaded from Arrow.com.

Electrical Specifications

Conditions: T_A = 25 ºC, Airflow = 300 LFM (1.5 m/s), Vin = 12 VDC, Vout = 0.7525 – 5.5 V, unless otherwise specified.

PARAMETER	NOTES	MIN	TYP	MAX	UNITS
Absolute Maximum Ratings					
Input Voltage	Continuous	-0.3		15	VDC
Operating Ambient Temperature		-40		85	°C
Storage Temperature		-55		125	°C
Feature Characteristics					
Switching Frequency			300		kHz
Output Voltage Trim Range[1]	By external resistor, See Trim Table 1	0.7525		5.5	VDC
Remote Sense Compensation[1]	Percent of $V_{OUT(NOM)}$			0.5	VDC
Turn-On Delay Time[2]	Full resistive load				
With Vin = (Converter Enabled, then Vin applied)	From Vin = Vin(min) to Vo=0.1* Vo(nom)		3		ms
With Enable (Vin = Vin(nom) applied, then enabled)	From enable to Vo= 0.1*Vo(nom)		3		ms
Rise time[2] (Full resistive load)	From 0.1*Vo(nom) to 0.9*Vo(nom)		4		ms
ON/OFF Control (Positive Logic)[3]	Converter Off	-5		0.8	VDC
	Converter On	2.4		Vin	VDC
ON/OFF Control (Negative Logic)[3]	Converter Off	2.4		Vin	VDC
	Converter On	-5		0.8	VDC
Input Characteristics					
Operating Input Voltage Range		9.6	12	14	VDC
Input Under Voltage Lockout					
Turn-on Threshold			9		VDC
Turn-off Threshold			8.5		VDC
Maximum Input Current	16 ADC Out @ 9.6 VDC In				
	V_{OUT} = 5.0 VDC			8.9	ADC
	V_{OUT} = 3.3 VDC			6	ADC
	V_{OUT} = 2.5 VDC			4.6	ADC
	V_{OUT} = 2.0 VDC			3.8	ADC
	V_{OUT} = 1.8 VDC			3.4	ADC
	V_{OUT} = 1.5 VDC			2.9	ADC
	V_{OUT} = 1.2 VDC			2.4	ADC
	V_{OUT} = 1.0 VDC			2.1	ADC
	V_{OUT} = 0.7525 VDC			1.7	ADC
Input Stand-by Current (Converter disabled)			3		mA
Input No Load Current (Converter enabled)	V_{OUT} = 5.0 VDC		83		mA
	V_{OUT} = 3.3 VDC		63		mA
	V_{OUT} = 2.5 VDC		53		mA
	V_{OUT} = 2.0 VDC		47		mA
	V_{OUT} = 1.8 VDC		45		mA
	V_{OUT} = 1.5 VDC		43		mA
	V_{OUT} = 1.2 VDC		41		mA
	V_{OUT} = 1.0 VDC		39		mA
	V_{OUT} = 0.7525 VDC		35		mA
Input Reflected-Ripple Current - i_s	See Fig. E for setup. (BW = 20 MHz)				
	V_{OUT} = 5.0 VDC		60		mA_{P-P}
	V_{OUT} = 3.3 VDC		43		mA_{P-P}
	V_{OUT} = 2.5 VDC		35		mA_{P-P}
	V_{OUT} = 2.0 VDC		35		mA_{P-P}
	V_{OUT} = 1.8 VDC		35		mA_{P-P}
	V_{OUT} = 1.5 VDC		33		mA_{P-P}

866.513.2839
tech.support@psbel.com
belfuse.com/power-solutions

© 2015 Bel Power Solutions, Inc.

Downloaded from Arrow.com.

	V_{OUT} = 1.2 VDC		23		mA_{P-P}
	V_{OUT} = 1.0 VDC		21		mA_{P-P}
	V_{OUT} = 0.7525 VDC		19		mA_{P-P}
Input Voltage Ripple Rejection	120 Hz		72		dB
Output Characteristics					
Output Voltage Set Point (no load)		-1.5	Vout	+1.5	%Vout
Output Regulation					
Over Line	Full resistive load		0.5		mV
Over Load	From no load to full load		5		mV
Output Voltage Range (Over all operating input voltage, resistive load and temperature conditions until end of life)		-2.5		+2.5	%Vout
Output Ripple and Noise - 20MHz bandwidth	Over line, load and temperature (Fig. E)				
Peak-to-Peak	V_{OUT} = 0.7525 VDC		12	19	mV_{P-P}
Peak-to-Peak	V_{OUT} = 5.0 VDC		40	65	mV_{P-P}
External Load Capacitance	Plus full load (resistive)				
Min ESR > 1mΩ				1,000	µF
Min ESR > 10 mΩ				5,000	µF
Output Current Range		0		16	A
Output Current Limit Inception (I_{OUT})			25		A
Output Short- Circuit Current , RMS Value	Short=10 mΩ, continuous		4		A
Dynamic Response					
Load current change from 8A – 16A, di/dt = 5 A/µS	Co = 100µF ceramic + 470 µF POS		140		mV
Settling Time (V_{OUT} < 10% peak deviation)			45		µs
Unloading current change from 16A – 8A, di/dt = -5 A/µS	Co = 100 µF ceramic + 470 µF POS		140		mV
Settling Time (V_{OUT} < 10% peak deviation)			45		µs
Efficiency	Full load (16A)				
	V_{OUT} = 5.0 VDC		94.8		%
	V_{OUT} = 3.3 VDC		92.5		%
	V_{OUT} = 2.5 VDC		90.5		%
	V_{OUT} = 2.0 VDC		89.0		%
	V_{OUT} = 1.8 VDC		88.0		%
	V_{OUT} = 1.5 VDC		86.0		%
	V_{OUT} = 1.2 VDC		84.0		%
	V_{OUT} = 1.0 VDC		80.5		%
	V_{OUT} = 0.7525 VDC		77.0		%

Notes:

1 The output voltage should not exceed 5.5V (taking into account both the programming and remote sense compensation).

2 Note that start-up time is the sum of turn-on delay time and rise time.

3 The converter is on if ON/OFF pin is left open.

866.513.2839
tech.support@psbel.com
belfuse.com/power-solutions

© 2015 Bel Power Solutions, Inc.

Downloaded from Arrow.com.

Operations

Input and Output Impedance

The YS12S16 converter should be connected via a low impedance to the DC power source. In many applications, the inductance associated with the distribution from the power source to the input of the converter can affect the stability of the converter. It is recommended to use decoupling capacitors (minimum 47 µF) placed as close as possible to the converter input pins in order to ensure stability of the converter and reduce input ripple voltage. Internally, the converter has 30 µF (low ESR ceramics) of input capacitance.

In a typical application, low - ESR tantalum or POS capacitors will be sufficient to provide adequate ripple voltage filtering at the input of the converter. However, very low ESR ceramic capacitors 47 µF-100 µF are recommended at the input of the converter in order to minimize the input ripple voltage. They should be placed as close as possible to the input pins of the converter.

The YS12S16 has been designed for stable operation with or without external capacitance. Low ESR ceramic capacitors placed as close as possible to the load (minimum 47 µF) are recommended for improved transient performance and lower output voltage ripple.
It is important to keep low resistance and low inductance PCB traces for connecting load to the output pins of the converter in order to maintain good load regulation.

ON/OFF (Pin 1)

The ON/OFF pin is used to turn the power converter on or off remotely via a system signal. There are two remote control options available, positive logic (standard option) and negative logic, and both are referenced to GND. The typical connections are shown in Fig. A.
The positive logic version turns the converter on when the ON/OFF pin is at a logic high or left open, and turns the converter off when at a logic low or shorted to GND.

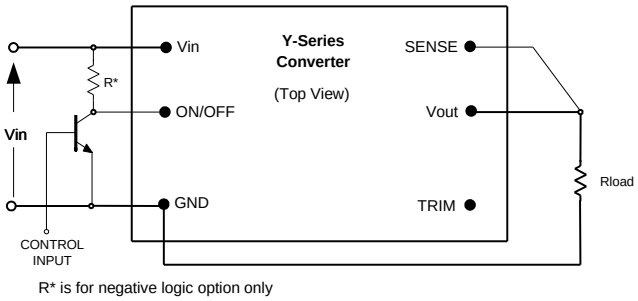


Fig. A: *Circuit configuration for ON/OFF function.*

The negative logic version turns the converter on when the ON/OFF pin is at logic low or left open, and turns the converter off when the ON/OFF pin is at a logic high or connected to Vin.

The ON/OFF pin is internally pulled-up to Vin for a positive logic version, and pulled-down for a negative logic version. A TTL or CMOS logic gate, open collector (open drain) transistor can be used to drive the ON/OFF pin. When using open collector (open drain) transistor with a negative logic option, add a pull-up resistor (R*) of 75K to Vin as shown in Fig. A;
This device must be capable of:

- sinking up to 0.2 mA at a low level voltage of ≤ 0.8 V
- sourcing up to 0.25 mA at a high logic level of 2.3 V – 5 V
- sourcing up to 0.75 mA when connected to Vin.

Remote Sense (Pin 2)

The remote sense feature of the converter compensates for voltage drops occurring only between Vout pin (Pin 4) of the converter and the load. The SENSE (Pin 2) pin should be connected at the load or at the point where regulation is required (see Fig. B). There is no sense feature on the output GND return pin, where the solid ground plane should provide low voltage drop.

© 2015 Bel Power Solutions, Inc.

Downloaded from Arrow.com.

If remote sensing is not required, the SENSE pin must be connected to the Vout pin (Pin 4) to ensure the converter will regulate at the specified output voltage. If these connections are not made, the converter will deliver an output voltage that is slightly higher than the specified value.

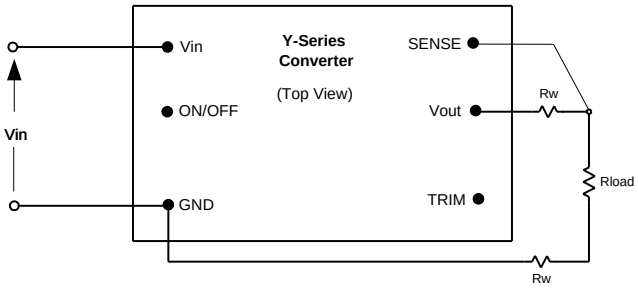


Fig. B: *Remote sense circuit configuration.*

Because the sense lead carries minimal current, large trace on the end-user board are not required. However, sense trace should be located close to a ground plane to minimize system noise and insure optimum performance.
When utilizing the remote sense feature, care must be taken not to exceed the maximum allowable output power capability of the converter, equal to the product of the nominal output voltage and the allowable output current for the given conditions.
When using remote sense, the output voltage at the converter can be increased up to 0.5 V above the nominal rating in order to maintain the required voltage across the load. Therefore, the designer must, if necessary, decrease the maximum current (originally obtained from the derating curves) by the same percentage to ensure the converter's actual output power remains at or below the maximum allowable output power.

Output Voltage Programming (Pin 3)

The output voltage can be programmed from
0.7525 V to 5.5 V by connecting an external resistor between TRIM pin (Pin 3) and GND pin (Pin 5); see Fig. C.
A trim resistor, R_{TRIM}, for a desired output voltage can be calculated using the following equation:

$$R_{TRIM} = \frac{10.5}{(V_{O\text{-}REQ} - 0.7525)} - 1 \qquad [k\Omega]$$

where,
R_{TRIM} = Required value of trim resistor [kΩ]
$V_{O\text{-}REQ}$ = Desired (trimmed) output voltage [V]

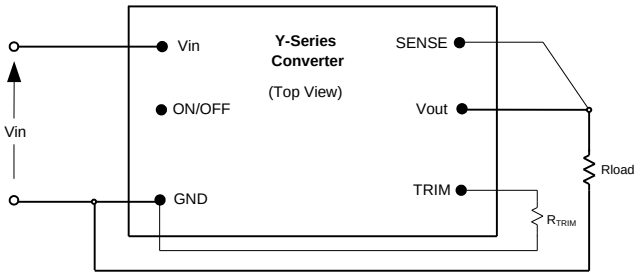


Fig. C*: Configuration for programming output voltage.*

Note that the tolerance of a trim resistor directly affects the output voltage tolerance. It is recommended to use standard 1% or 0.5% resistors; for tighter tolerance, two resistors in parallel are recommended rather than one standard value from Table 1.

Ground pin of the trim resistor should be connected directly to the converter GND pin (Pin 5) with no voltage drop in between. Table 1 provides the trim resistor values for popular output voltages.

© 2015 Bel Power Solutions, Inc.

Downloaded from Arrow.com.

Table 1: Trim Resistor Value

$V_{O\text{-}REG}$ [V]	R_{TRIM} [kΩ]	The Closest Standard Value [kΩ]
0.7525	open	
1.0	41.42	41.2
1.2	22.46	22.6
1.5	13.05	13.0
1.8	9.02	9.09
2.0	7.42	7.50
2.5	5.01	4.99
3.3	3.12	3.09
5.0	1.47	1.47
5.5	1.21	1.21

The output voltage can be also programmed by external voltage source. To make trimming less sensitive, a series external resistor Rext is recommended between TRIM pin and programming voltage source. Control Voltage can be calculated by the formula:

$$V_{CTRL} = 0.7 - \frac{(1+R_{EXT})(V_{O\text{-}REQ} - 0.7525)}{15} \quad [V]$$

where,

V_{CTRL} = Control voltage [V]

R_{EXT} = External resistor between TRIM pin and voltage source; the value can be chosen depending on the required output voltage range [kΩ].

Control voltages with $R_{EXT} = 0$ and $R_{EXT} = 15K$ are shown in Table 2.

Table 2: Control Voltage [VDC]

$V_{O\text{-}REG}$ [V]	V_{CTRL} (R_{EXT} = 0)	V_{CTRL}(R_{EXT} = 15K)
0.7525	0.700	0.700
1.0	0.684	0.436
1.2	0.670	0.223
1.5	0.650	-0.097
1.8	0.630	-0.417
2.0	0.617	-0.631
2.5	0.584	-1.164
3.3	0.530	-2.017
5.0	0.417	-3.831
5.5	0.384	-4.364

Protection Features

Input Undervoltage Lockout

Input undervoltage lockout is standard with this converter. The converter will shut down when the input voltage drops below a pre-determined voltage; it will start automatically when Vin returns to a specified range.
The input voltage must be at least 9.6V (typically 9V) for the converter to turn on. Once the converter has been turned on, it will shut off when the input voltage drops below typically 8.5V.

Output Overcurrent Protection (OCP)

The converter is protected against overcurrent and short circuit conditions. Upon sensing an over-current condition, the converter will enter hiccup mode. Once over-load or short circuit condition is removed, Vout will return to nominal value.

© 2015 Bel Power Solutions, Inc.

Downloaded from Arrow.com.

Overtemperature Protection (OTP)

The converter will shut down under an over-temperature condition to protect itself from overheating caused by operation outside the thermal derating curves, or operation in abnormal conditions such as system fan failure. After the converter has cooled to a safe operating temperature, it will automatically restart.

Safety Requirements

The converter meets North American and International safety regulatory requirements per UL/CSA 62368-1 and EN/IEC 62368-1. The maximum DC voltage between any two pins is Vin under all operating conditions. Therefore, the unit has ELV (extra low voltage) output; it meets ES1 requirements under the condition that all input voltages are ELV. The converter is not internally fused. To comply with safety agencies requirements, a recognized fuse with a maximum rating of 15 Amps must be used in series with the input line.

Characterization

General Information

The converter has been characterized for many operational aspects, to include thermal derating (maximum load current as a function of ambient temperature and airflow) for vertical mounting, efficiency, start-up and shutdown parameters, output ripple and noise, transient response to load step-change, overload and short circuit.
The figures are numbered as Fig. x.y, where x indicates the different output voltages, and y associates with specific plots (y = 1 for the vertical thermal derating, …). For example, Fig. x.1 will refer to the vertical thermal derating for all the output voltages in general.
The following pages contain specific plots or waveforms associated with the converter. Additional comments for specific data are provided below.

Test Conditions

All data presented were taken with the converter soldered to a test board, specifically a 0.060” thick printed wiring board (PWB) with four layers. The top and bottom layers were not metalized. The two inner layers, comprising two-ounce copper, were used to provide traces for connectivity to the converter.
The lack of metalization on the outer layers as well as the limited thermal connection ensured that heat transfer from the converter to the PWB was minimized. This provides a worst-case but consistent scenario for thermal derating purposes.
All measurements requiring airflow were made in the vertical and horizontal wind tunnel facilities using Infrared (IR) thermography and thermocouples for thermometry.
Ensuring components on the converter do not exceed their ratings is important to maintaining high reliability. If one anticipates operating the converter at or close to the maximum loads specified in the derating curves, it is prudent to check actual operating temperatures in the application. Thermographic imaging is preferable; if this capability is not available, then thermocouples may be used. . It is recommended the use of AWG #40 gauge thermocouples to ensure measurement accuracy. Careful routing of the thermocouple leads will further minimize measurement error. Refer to Fig. D for optimum measuring thermocouple locations.

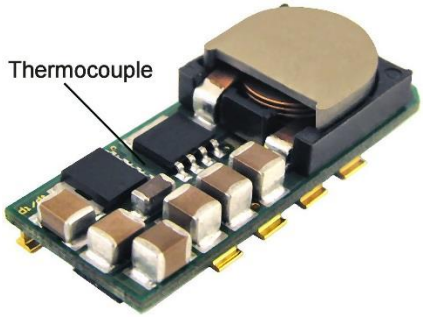


***Fig. D**: Location of the thermocouple for thermal testing.*

866.513.2839
tech.support@psbel.com
belfuse.com/power-solutions

© 2015 Bel Power Solutions, Inc.

Downloaded from Arrow.com.

Thermal Derating

Load current vs. ambient temperature and airflow rates are given in Figs. x.1 for maximum temperature of 120 °C. Ambient temperature was varied between 25 °C and 85 °C, with airflow rates from 30 to 500 LFM (0.15 m/s to 2.5 m/s), and vertical converter mounting. The airflow during the testing is parallel to the short axis of the converter, going from pin 1 and pin 6 to pins 2 – 5.

For each set of conditions, the maximum load current is defined as the lowest of:

(i) The output current at which any MOSFET temperature does not exceed a maximum specified temperature (120 °C) as indicated by the thermo-graphic image, or

(ii) The maximum current rating of the converter (16 A)

During normal operation, derating curves with maximum FET temperature less than or equal to 120 °C should not be exceeded. Temperature on the PCB at the thermocouple location shown in Fig. D should not exceed 120 °C in order to operate inside the derating curves.

Efficiency

Figure x.2 shows the efficiency vs. load current plot for ambient temperature of 25 ºC, airflow rate of 200 LFM (1 m/s) and input voltages of 9.6 V, 12 V, and 14 V.

Power Dissipation

Fig. x.3 shows the power dissipation vs. load current plot for Ta = 25 ºC, airflow rate of 200 LFM (1 m/s) with vertical mounting and input voltages of 9.6 V, 12 V, and 14 V.

Ripple and Noise

The output voltage ripple waveform is measured at full rated load current. Note that all output voltage waveforms are measured across a 1 µF ceramic capacitor.
The output voltage ripple and input reflected ripple current waveforms are obtained using the test setup shown in Figure E.

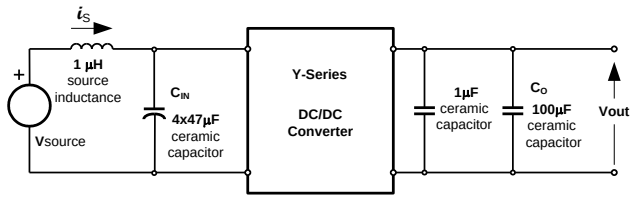


Fig. E: *Test setup for measuring input reflected ripple currents, i_s and output voltage ripple.*

© 2015 Bel Power Solutions, Inc.

Downloaded from Arrow.com.

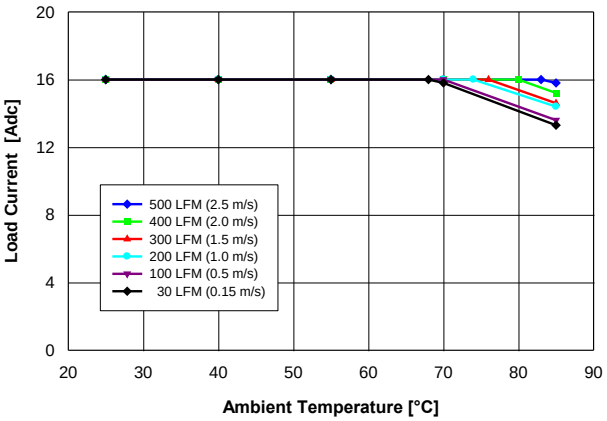


Fig. 5.0V.1: *Available load current vs. ambient temperature and airflow rates for Vout = 5.0V converter mounted vertically with Vin = 12V, and maximum MOSFET temperature ≤ 120°C.*

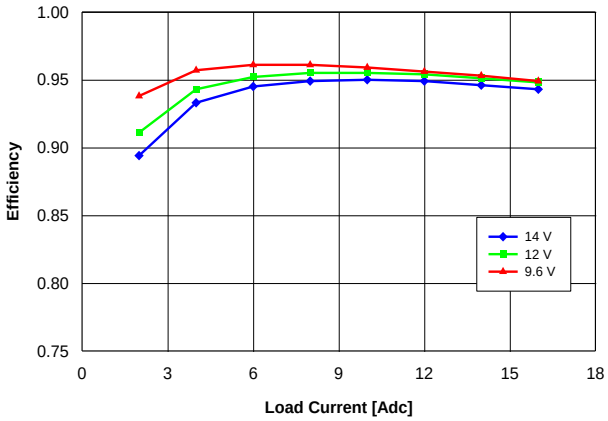


Fig. 5.0V.2: *Efficiency vs. load current and input voltage for Vout = 5.0V converter mounted vertically with air flowing at a rate of 200 LFM (1 m/s) and Ta = 25°C.*

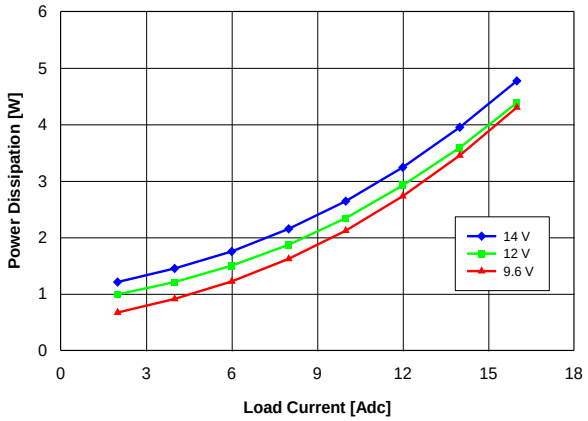


Fig. 5.0V.3: *Power loss vs. load current and input voltage for Vout = 5.0V converter mounted vertically with air flowing at a rate of 200 LFM (1 m/s) and Ta = 25°C.*

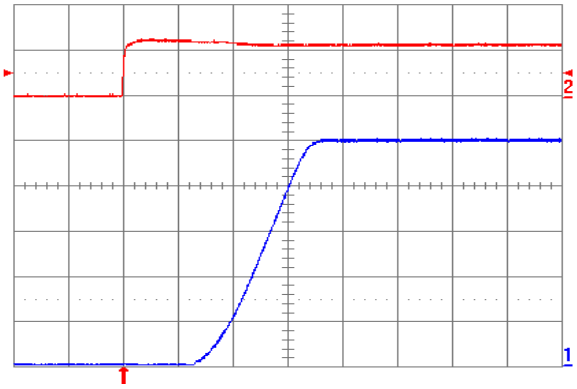


Fig. 5.0V.4: *Turn-on transient for Vout = 5.0V with application of Vin at full rated load current (resistive) and 100µF external capacitance at Vin = 12V. Top trace: Vin (10V/div.); Bottom trace: output voltage (1V/div.); Time scale: 2ms/div.*

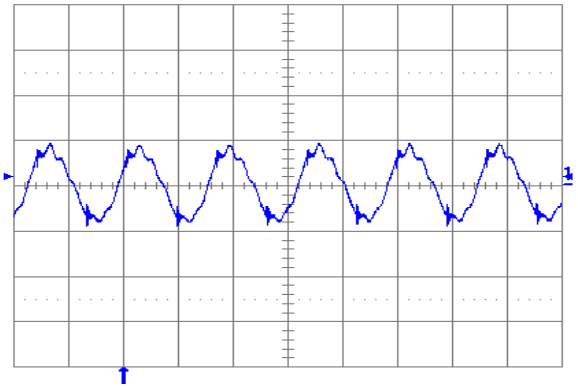


Fig. 5.0V.5: *Output voltage ripple (20mV/div.) at full rated load current into a resistive load with external capacitance 100µF ceramic + 1µF ceramic and Vin = 12V for Vout = 5.0V. Time scale: 2µs/div.*

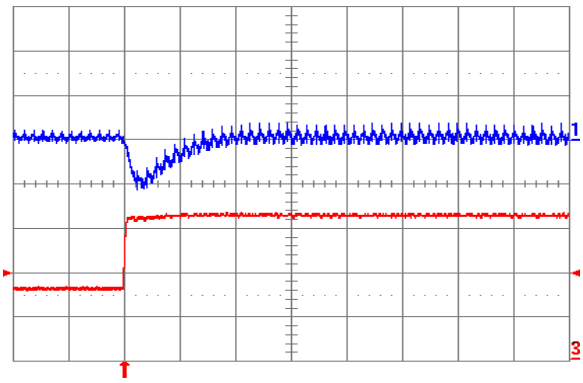


Fig. 5.0V.6: *Output voltage response for Vout = 5.0V to positive load current step change from 8A to 16A with slew rate of 5A/µs at Vin = 12V. Top trace: output voltage (200mV/div.); Bottom trace: load current (5A/div.). Co = 100µF ceramic. Time scale: 20µs/div.*

866.513.2839
tech.support@psbel.com
belfuse.com/power-solutions

© 2015 Bel Power Solutions, Inc.

Downloaded from Arrow.com.

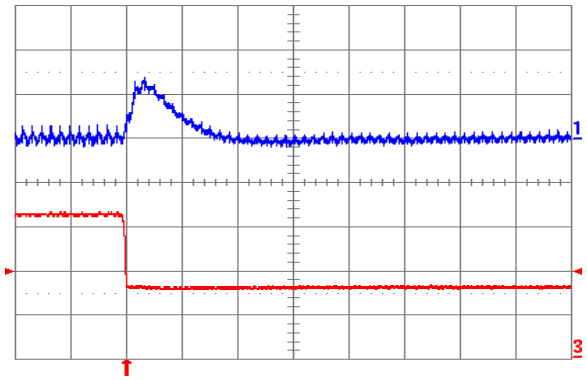


Fig. 5.0V.7: *Output voltage response for Vout = 5.0V to negative load current step change from 16A to 8A with slew rate of -5A/µs at Vin = 12V. Top trace: output voltage (200mV/div.); Bottom trace: load current (5A/div.). Co = 100µF ceramic. Time scale: 20µs/div.*

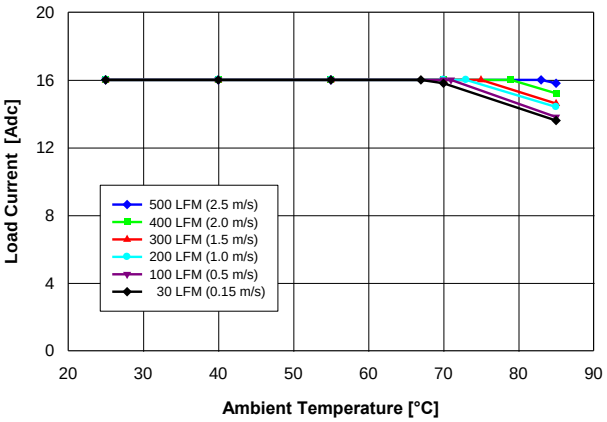


Fig. 3.3V.1: *Available load current vs. ambient temperature and airflow rates for Vout = 3.3V converter mounted vertically with Vin = 12V, and maximum MOSFET temperature ≤ 120°C.*

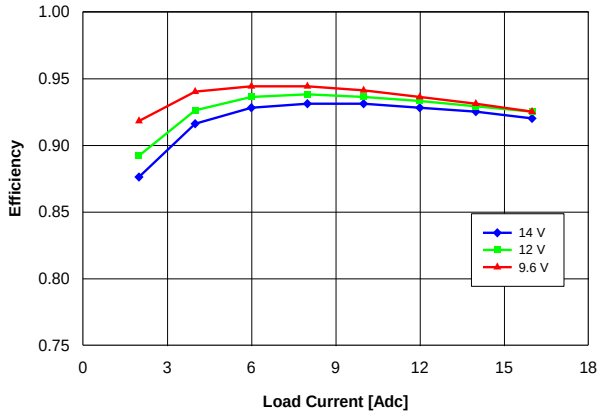


Fig. 3.3V.2: *Efficiency vs. load current and input voltage for Vout = 3.3V converter mounted vertically with air flowing at a rate of 200 LFM (1 m/s) and Ta = 25°C.*

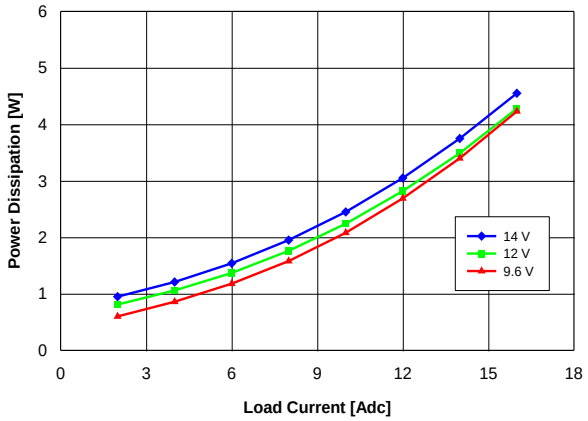


Fig. 3.3V.3: *Power loss vs. load current and input voltage for Vout = 3.3V converter mounted vertically with air flowing at a rate of 200 LFM (1 m/s) and Ta = 25°C.*

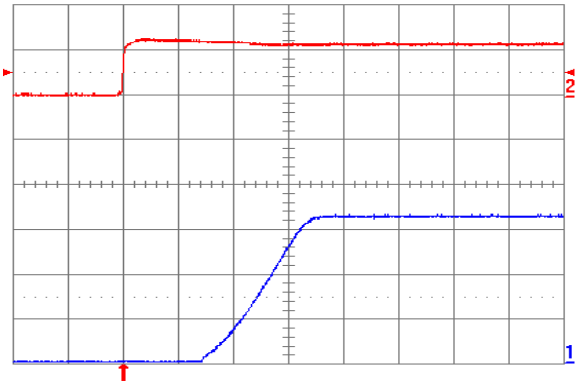


Fig. 3.3V.4: *Turn-on transient for Vout = 3.3V with application of Vin at full rated load current (resistive) and 100µF external capacitance at Vin = 12V. Top trace: Vin (10V/div.); Bottom trace: output voltage (1V/div.); Time scale: 2ms/div.*

866.513.2839
tech.support@psbel.com
belfuse.com/power-solutions

© 2015 Bel Power Solutions, Inc.

Downloaded from Arrow.com.

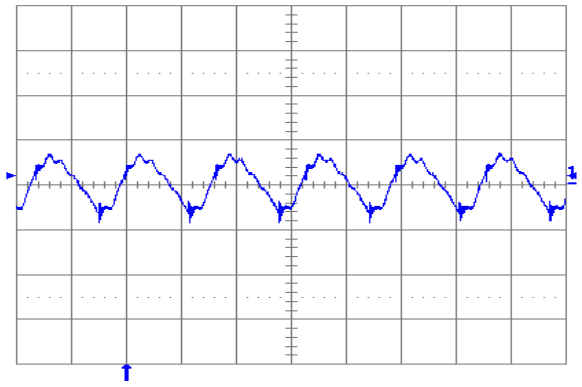


Fig. 3.3V.5: *Output voltage ripple (20mV/div.) at full rated load current into a resistive load with external capacitance 100µF ceramic + 1µF ceramic and Vin = 12V for Vout = 3.3V. Time scale: 2µs/div.*

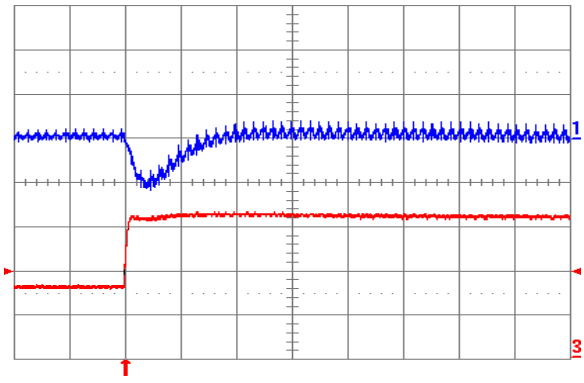


Fig. 3.3V.6: *Output voltage response for Vout = 3.3V to positive load current step change from 8A to 16A with slew rate of 5A/µs at Vin = 12V. Top trace: output voltage (200mV/div.); Bottom trace: load current (5A/div.). Co = 100µF ceramic. Time scale: 20µs/div.*

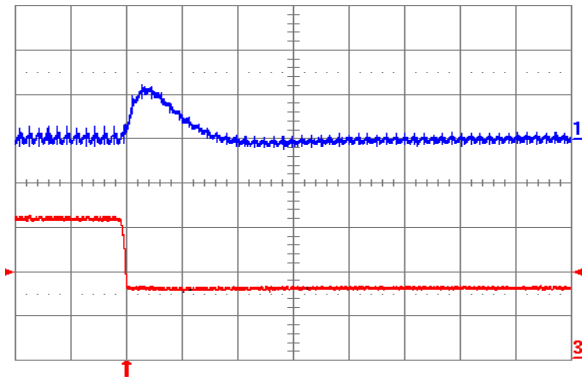


Fig. 3.3V.7: *Output voltage response for Vout = 3.3V to negative load current step change from 16A to 8A with slew rate of -5A/µs at Vin = 12V. Top trace: output voltage (200mV/div.); Bottom trace: load current (5A/div.). Co = 100µF ceramic. Time scale: 20µs/div.*

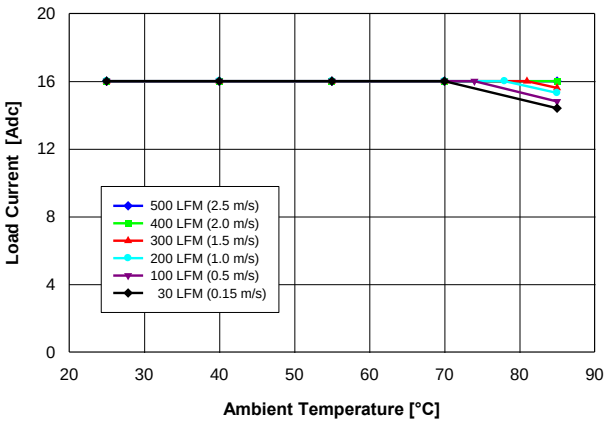


Fig. 2.5V.1: *Available load current vs. ambient temperature and airflow rates for Vout = 2.5V converter mounted vertically with Vin = 12V, and maximum MOSFET temperature ≤ 120°C.*

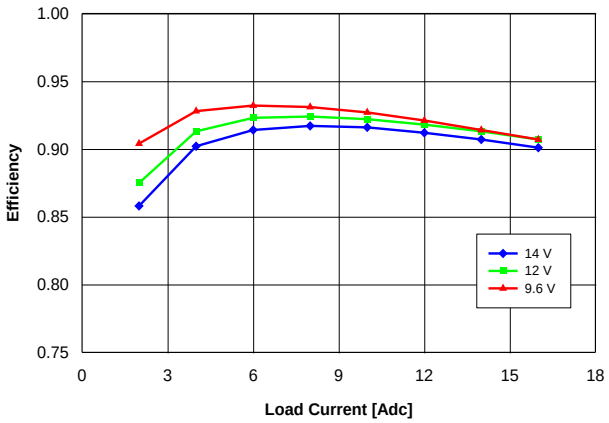


Fig. 2.5V.2: *Efficiency vs. load current and input voltage for Vout = 2.5V converter mounted vertically with air flowing at a rate of 200 LFM (1 m/s) and Ta = 25°C.*

866.513.2839
tech.support@psbel.com
belfuse.com/power-solutions

© 2015 Bel Power Solutions, Inc.

Downloaded from Arrow.com.

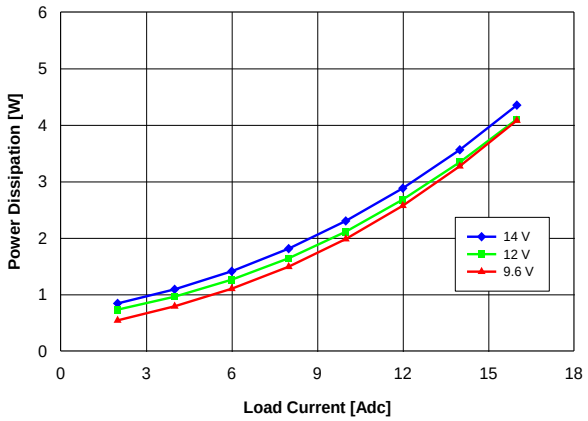


Fig. 2.5V.3: *Power loss vs. load current and input voltage for Vout = 2.5V converter mounted vertically with air flowing at a rate of 200 LFM (1 m/s) and Ta = 25°C.*

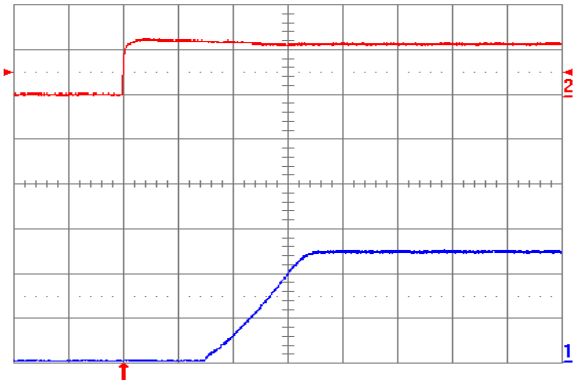


Fig. 2.5V.4: *Turn-on transient for Vout = 2.5V with application of Vin at full rated load current (resistive) and 100µF external capacitance at Vin = 12V. Top trace: Vin (10V/div.); Bottom trace: output voltage (1V/div.); Time scale: 2ms/div.*

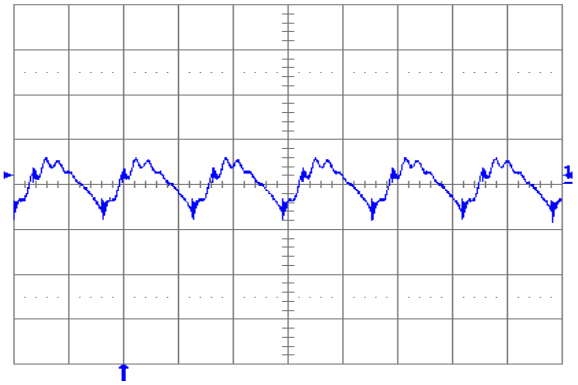


Fig. 2.5V.5: *Output voltage ripple (20mV/div.) at full rated load current into a resistive load with external capacitance 100µF ceramic + 1µF ceramic and Vin = 12V for Vout = 2.5V. Time scale: 2µs/div.*

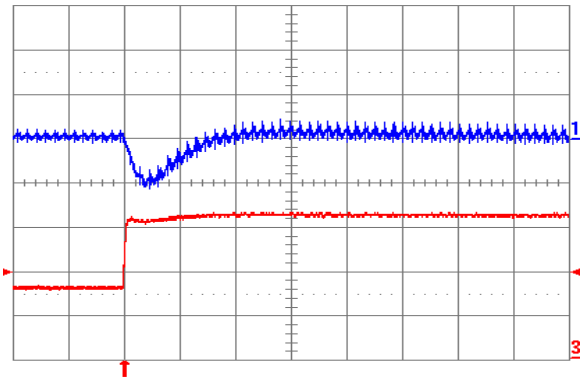


Fig. 2.5V.6: *Output voltage response for Vout = 2.5V to positive load current step change from 8A to 16A with slew rate of 5A/µs at Vin = 12V. Top trace: output voltage (200mV/div.); Bottom trace: load current (5A/div.). Co = 100µF ceramic. Time scale: 20µs/div.*

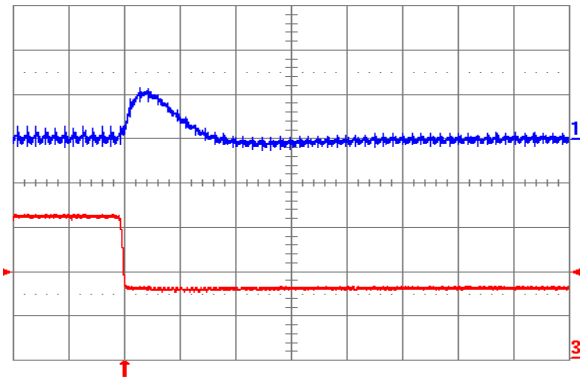


Fig. 2.5V.7: *Output voltage response for Vout = 2.5V to negative load current step change from 16A to 8A with slew rate of -5A/µs at Vin = 12V. Top trace: output voltage (200mV/div.); Bottom trace: load current (5A/div.). Co = 100µF ceramic. Time scale: 20µs/div.*

866.513.2839
tech.support@psbel.com
belfuse.com/power-solutions

© 2015 Bel Power Solutions, Inc.

Downloaded from Arrow.com.

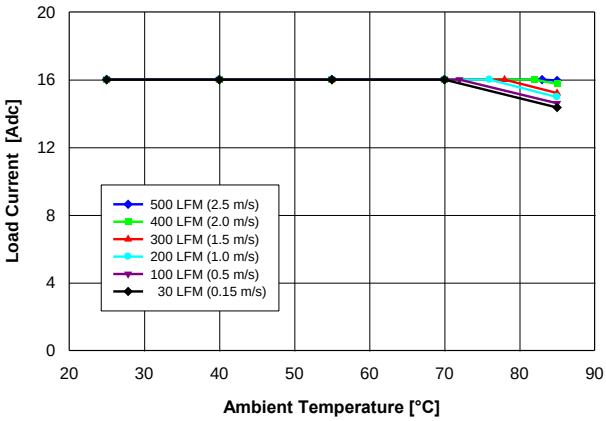


***Fig. 2.0V.1**: Available load current vs. ambient temperature and airflow rates for Vout = 2.0V converter mounted vertically with Vin = 12V, and maximum MOSFET temperature ≤ 120°C.*

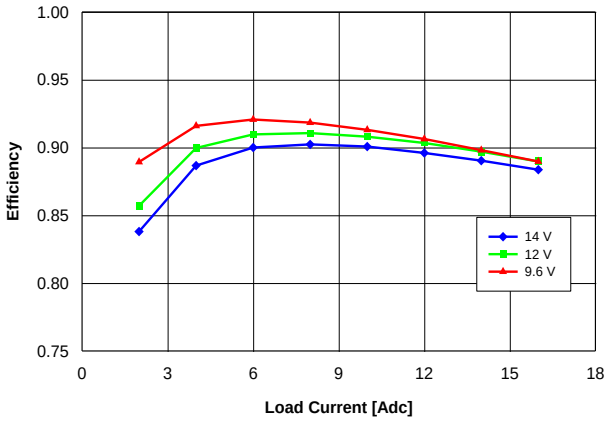


***Fig. 2.0V.2:** Efficiency vs. load current and input voltage for Vout = 2.0V converter mounted vertically with air flowing at a rate of 200 LFM (1 m/s) and Ta = 25°C.*

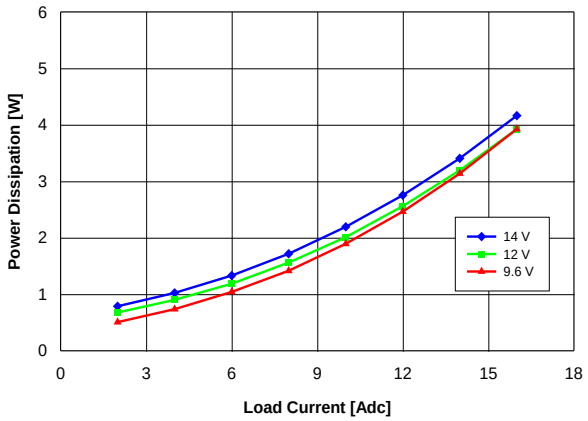


***Fig. 2.0V.3:** Power loss vs. load current and input voltage for Vout = 2.0V converter mounted vertically with air flowing at a rate of 200 LFM (1 m/s) and Ta = 25°C.*

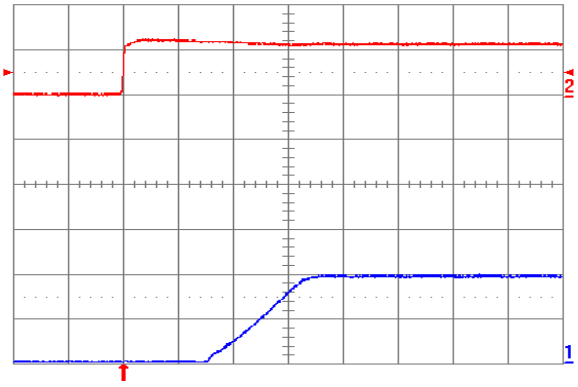


***Fig. 2.0V.4:** Turn-on transient for Vout = 2.0V with application of Vin at full rated load current (resistive) and 100µF external capacitance at Vin = 12V. Top trace: Vin (10V/div.); Bottom trace: output voltage (1V/div.); Time scale: 2ms/div.*

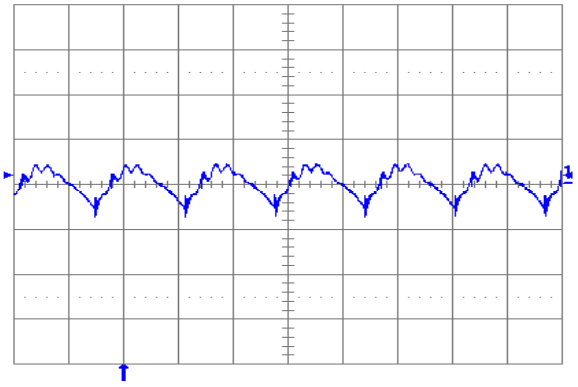


***Fig. 2.0V.5:** Output voltage ripple (20mV/div.) at full rated load current into a resistive load with external capacitance 100µF ceramic + 1µF ceramic and Vin = 12V for Vout = 2.0V. Time scale: 2µs/div.*

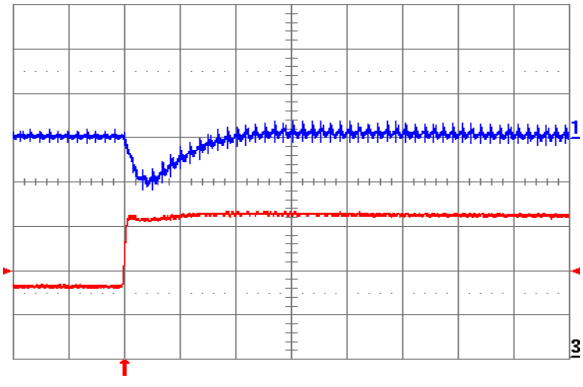


***Fig. 2.0V.6:** Output voltage response for Vout = 2.0V to positive load current step change from 8A to 16A with slew rate of 5A/µs at Vin = 12V. Top trace: output voltage (200mV/div.); Bottom trace: load current (5A/div.). Co = 100µF ceramic. Time scale: 20µs/div.*

866.513.2839
tech.support@psbel.com
belfuse.com/power-solutions

© 2015 Bel Power Solutions, Inc.

Downloaded from Arrow.com.

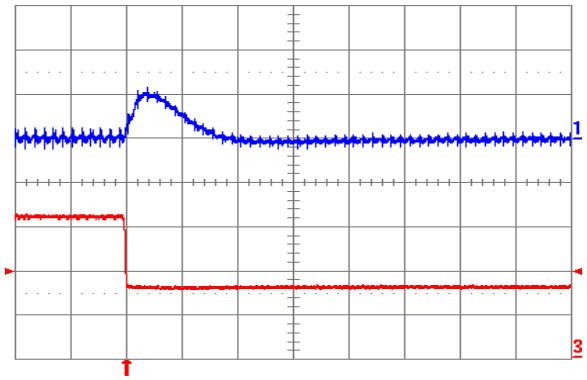


Fig. 2.0V.7: *Output voltage response for Vout = 2.0V to negative load current step change from 16A to 8A with slew rate of -5A/µs at Vin = 12V. Top trace: output voltage (200mV/div.); Bottom trace: load current (5A/div.). Co = 100µF ceramic. Time scale: 20µs/div.*

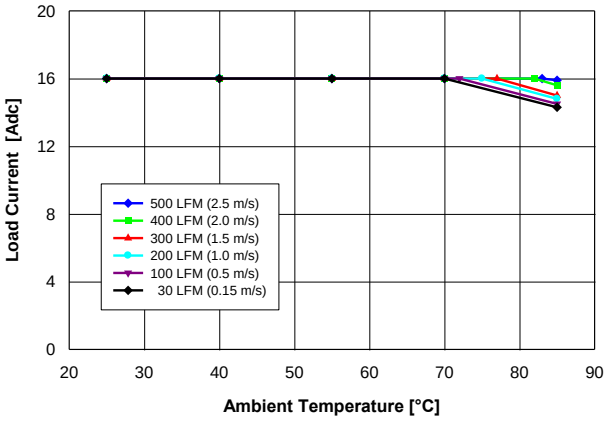


Fig. 1.8V.1: *Available load current vs. ambient temperature and airflow rates for Vout = 1.8V converter mounted vertically with Vin = 12V, and maximum MOSFET temperature ≤ 120°C.*

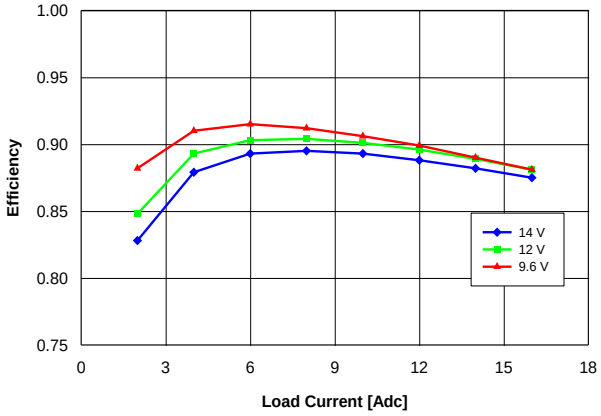


Fig. 1.8V.2: *Efficiency vs. load current and input voltage for Vout = 1.8V converter mounted vertically with air flowing at a rate of 200 LFM (1 m/s) and Ta = 25°C.*

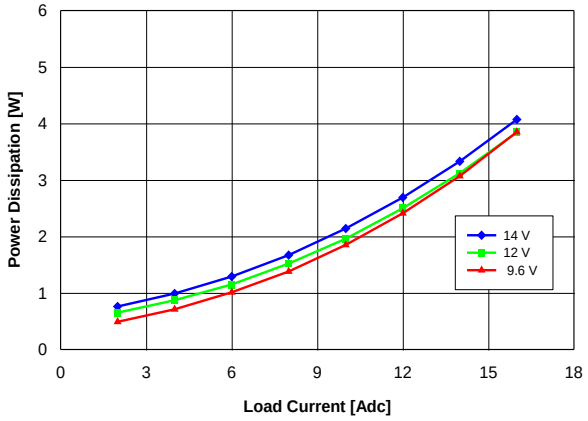


Fig. 1.8V.3: *Power loss vs. load current and input voltage for Vout = 1.8V converter mounted vertically with air flowing at a rate of 200 LFM (1 m/s) and Ta = 25°C.*

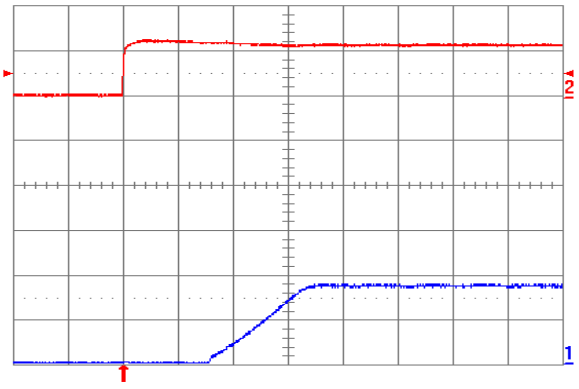


Fig. 1.8V.4: *Turn-on transient for Vout = 1.8V with application of Vin at full rated load current (resistive) and 100µF external capacitance at Vin = 12V. Top trace: Vin (10V/div.); Bottom trace: output voltage (1V/div.); Time scale: 2ms/div.*

866.513.2839
tech.support@psbel.com
belfuse.com/power-solutions

© 2015 Bel Power Solutions, Inc.

Downloaded from Arrow.com.

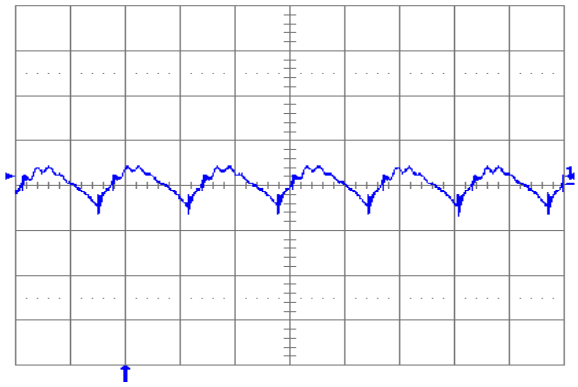


Fig. 1.8V.5: *Output voltage ripple (20mV/div.) at full rated load current into a resistive load with external capacitance 100µF ceramic + 1µF ceramic and Vin = 12V for Vout = 1.8V. Time scale: 2µs/div.*

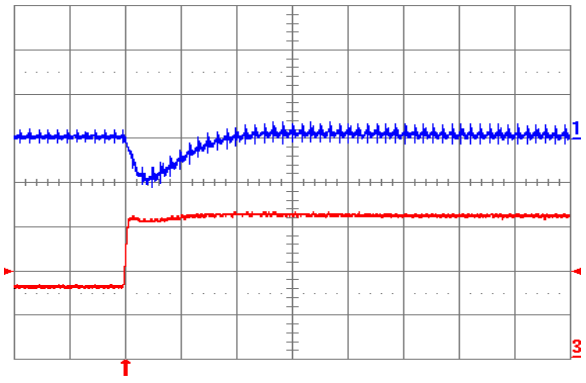


Fig. 1.8V.6: *Output voltage response for Vout = 1.8V to positive load current step change from 8A to 16A with slew rate of 5A/µs at Vin = 12V. Top trace: output voltage (200mV/div.); Bottom trace: load current (5A/div.). Co = 100µF ceramic. Time scale: 20µs/div.*

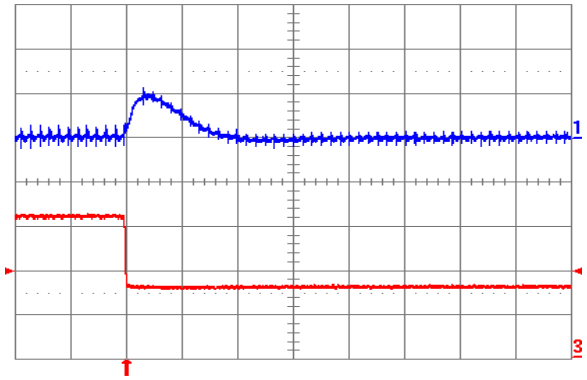


Fig. 1.8V.7: *Output voltage response for Vout = 1.8V to negative load current step change from 16A to 8A with slew rate of -5A/µs at Vin = 12V. Top trace: output voltage (200mV/div.); Bottom trace: load current (5A/div.). Co = 100µF ceramic. Time scale: 20µs/div.*

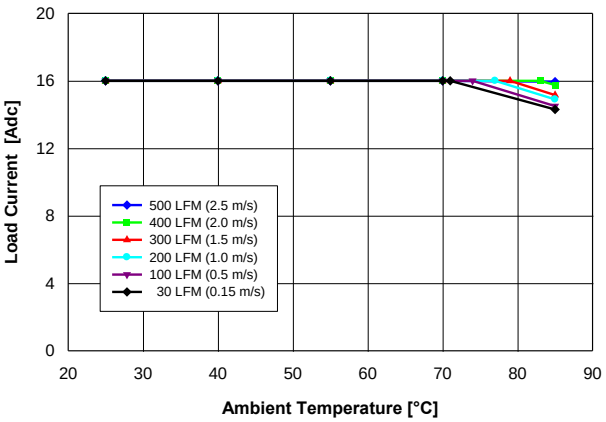


Fig. 1.5V.1: *Available load current vs. ambient temperature and airflow rates for Vout = 1.5V converter mounted vertically with Vin = 12V, air flowing and maximum MOSFET temperature ≤ 120°C.*

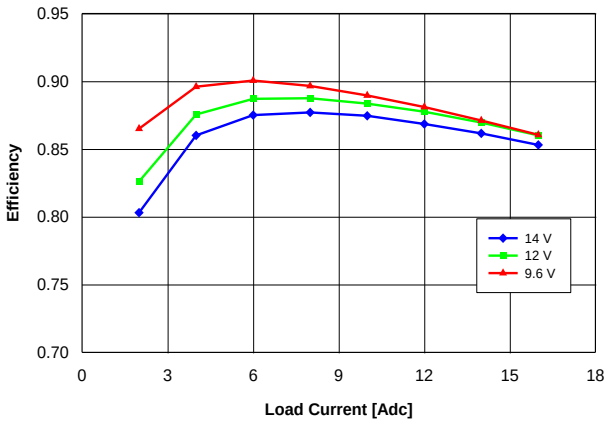


Fig. 1.5V.2: *Efficiency vs. load current and input voltage for Vout = 1.5V converter mounted vertically with air flowing at a rate of 200 LFM (1 m/s) and Ta = 25°C.*

866.513.2839
tech.support@psbel.com
belfuse.com/power-solutions

© 2015 Bel Power Solutions, Inc.

Downloaded from Arrow.com.

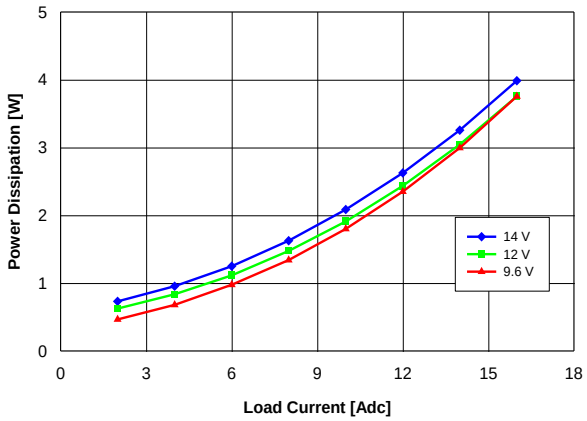


Fig. 1.5V.3: *Power loss vs. load current and input voltage for Vout = 1.5V converter mounted vertically with air flowing at a rate of 200 LFM (1 m/s) and Ta = 25°C.*

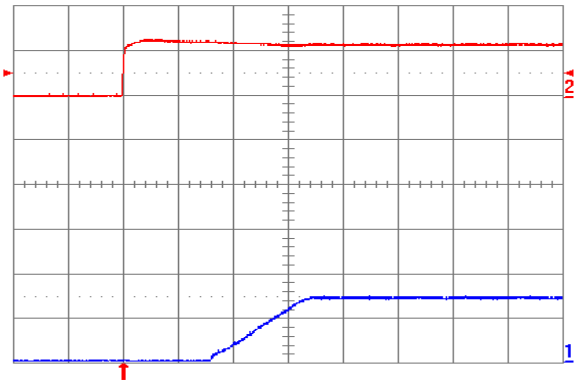


Fig. 1.5V.4: *Turn-on transient for Vout = 1.5V with application of Vin at full rated load current (resistive) and 100µF external capacitance at Vin = 12V. Top trace: Vin (10V/div.); Bottom trace: output voltage (1V/div.); Time scale: 2ms/div.*

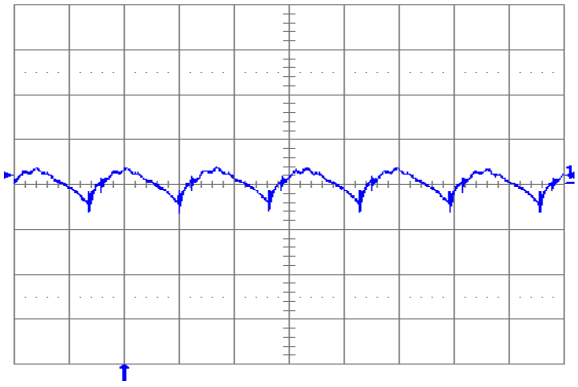


Fig. 1.5V.5: *Output voltage ripple (20mV/div.) at full rated load current into a resistive load with external capacitance 100µF ceramic + 1µF ceramic and Vin = 12V for Vout = 1.5V. Time scale: 2µs/div.*

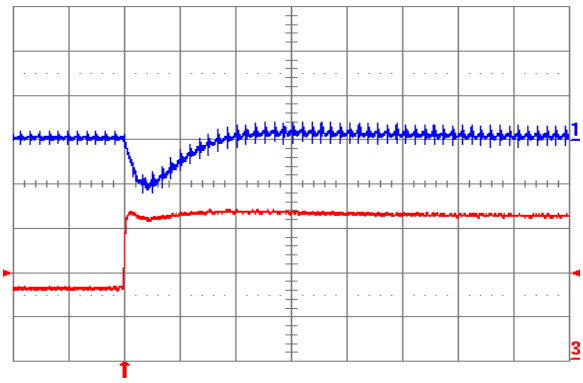


Fig. 1.5V.6: *Output voltage response for Vout = 1.5V to positive load current step change from 8A to 16A with slew rate of 5A/µs at Vin = 12V. Top trace: output voltage (200mV/div.); Bottom trace: load current (5A/div.). Co = 100µF ceramic. Time scale: 20µs/div.*

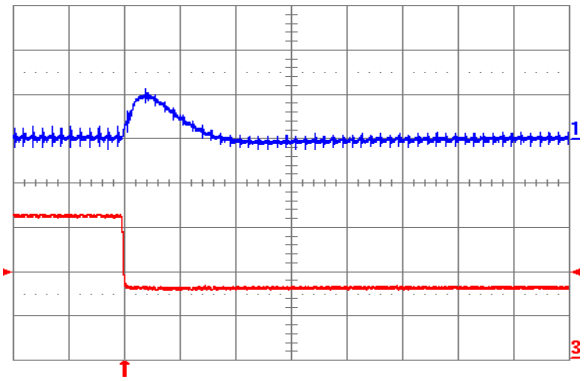


Fig. 1.5V.7: *Output voltage response for Vout = 1.5V to negative load current step change from 16A to 8A with slew rate of -5A/µs at Vin = 12V. Top trace: output voltage (200mV/div.); Bottom trace: load current (5A/div.). Co = 100µF ceramic. Time scale: 20µs/div.*

866.513.2839
tech.support@psbel.com
belfuse.com/power-solutions

© 2015 Bel Power Solutions, Inc.

Downloaded from Arrow.com.

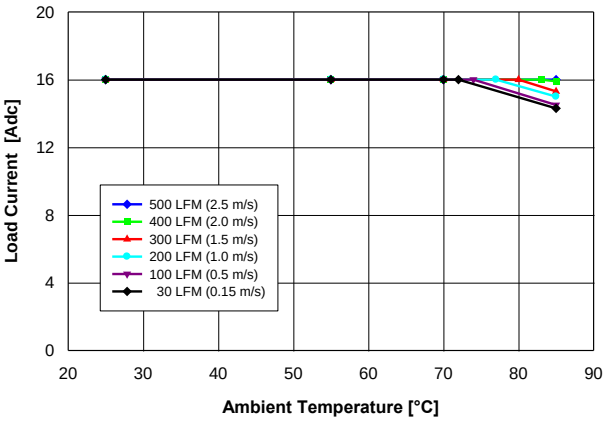


Fig. 1.2V.1: *Available load current vs. ambient temperature and airflow rates for Vout = 1.2V converter mounted vertically with Vin = 12V, and maximum MOSFET temperature ≤ 120°C.*

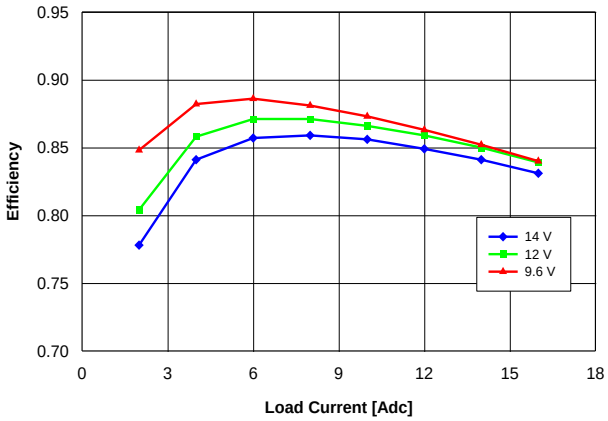


Fig. 1.2V.2: *Efficiency vs. load current and input voltage for Vout = 1.2V converter mounted vertically with air flowing at a rate of 200 LFM (1 m/s) and Ta = 25°C.*

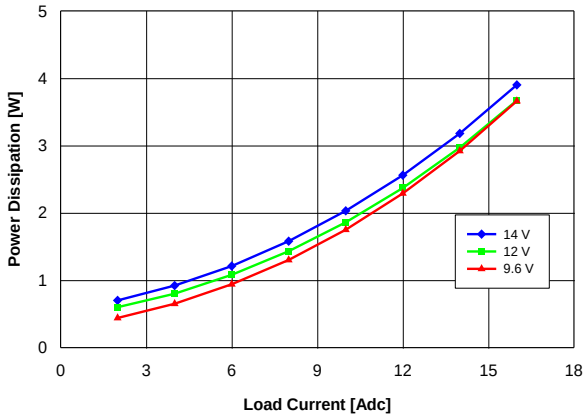


Fig. 1.2V.3: *Power loss vs. load current and input voltage for Vout = 1.2V converter mounted vertically with air flowing at a rate of 200 LFM (1 m/s) and Ta = 25°C.*

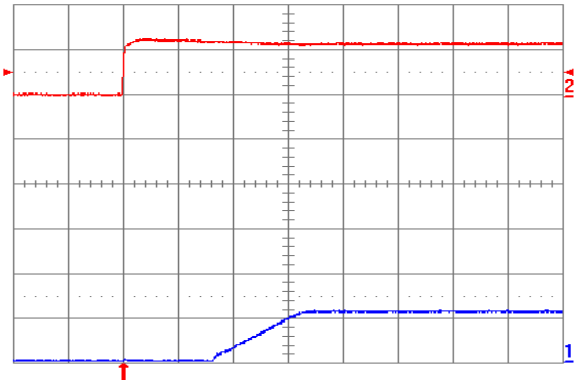


Fig. 1.2V.4: *Turn-on transient for Vout = 1.2V with application of Vin at full rated load current (resistive) and 100µF external capacitance at Vin = 12V. Top trace: Vin (10V/div.); Bottom trace: output voltage (1V/div.); Time scale: 2ms/div.*

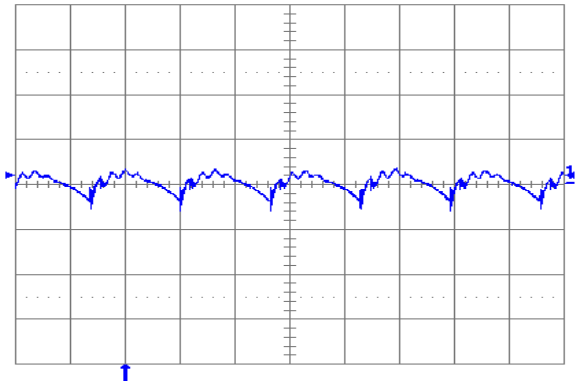


Fig. 1.2V.5: *Output voltage ripple (20mV/div.) at full rated load current into a resistive load with external capacitance 100µF ceramic + 1µF ceramic and Vin = 12V for Vout = 1.2V. Time scale: 2µs/div.*

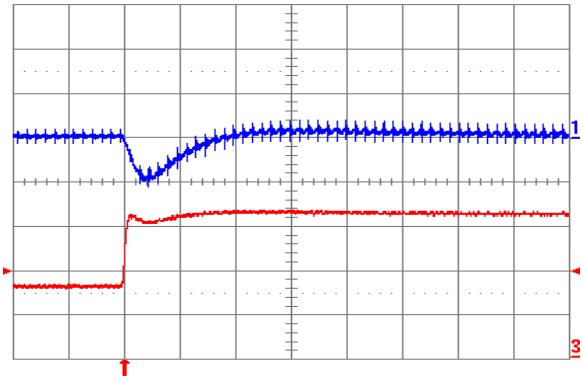


Fig. 1.2V.6: *Output voltage response for Vout = 1.2V to positive load current step change from 8A to 16A with slew rate of 5A/µs at Vin = 12V. Top trace: output voltage (200mV/div.); Bottom trace: load current (5A/div.). Co = 100µF ceramic. Time scale: 20µs/div.*

866.513.2839
tech.support@psbel.com
belfuse.com/power-solutions

© 2015 Bel Power Solutions, Inc.

Downloaded from Arrow.com.

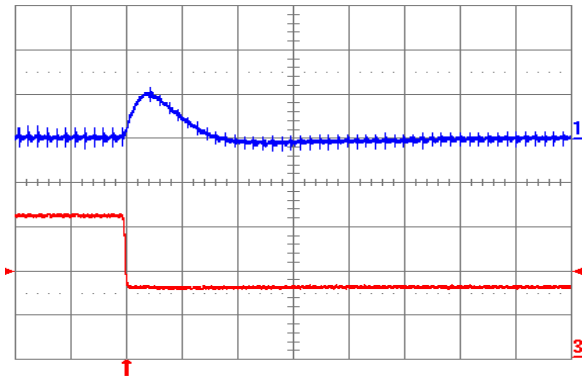


Fig. 1.2V.7: *Output voltage response for Vout = 1.2V to negative load current step change from 16A to 8A with slew rate of -5A/µs at Vin = 12V. Top trace: output voltage (200mV/div.); Bottom trace: load current (5A/div.). Co = 100µF ceramic. Time scale: 20µs/div.*

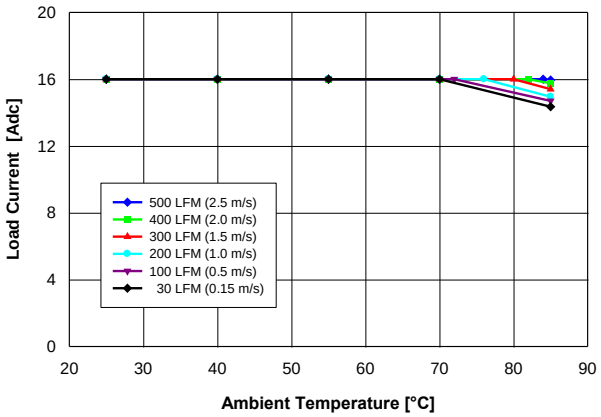


Fig. 1.0V.1: *Available load current vs. ambient temperature and airflow rates for Vout = 1.0V converter mounted vertically with Vin = 12V, and maximum MOSFET temperature ≤ 120°C.*

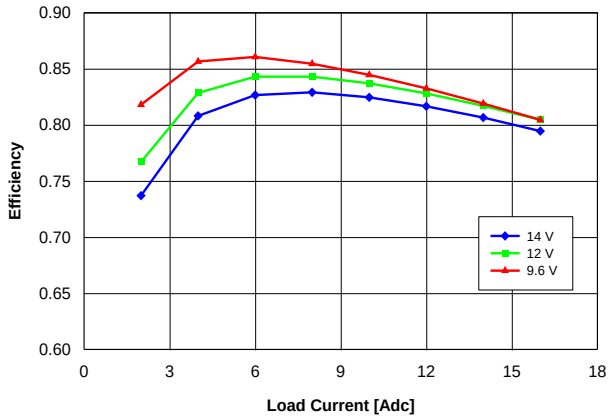


Fig. 1.0V.2: *Efficiency vs. load current and input voltage for Vout = 1.0V converter mounted vertically with air flowing at a rate of 200 LFM (1 m/s) and Ta = 25°C.*

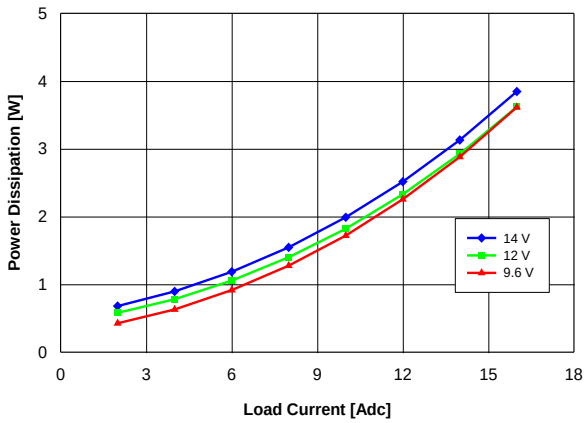


Fig. 1.0V.3: *Power loss vs. load current and input voltage for Vout = 1.0V converter mounted vertically with air flowing at a rate of 200 LFM (1 m/s) and Ta = 25°C.*

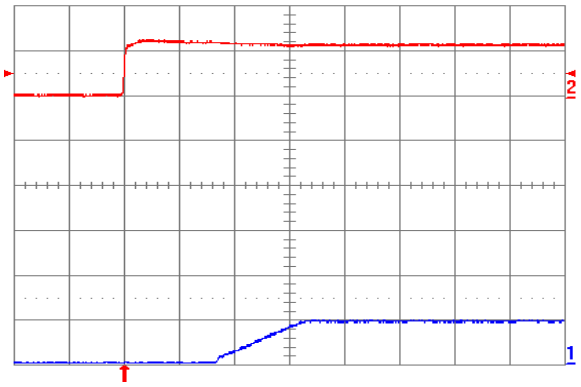


Fig. 1.0V.4: *Turn-on transient for Vout = 1.0V with application of Vin at full rated load current (resistive) and 100µF external capacitance at Vin = 12V. Top trace: Vin (10V/div.); Bottom trace: output voltage (1V/div.); Time scale: 2ms/div.*

866.513.2839
tech.support@psbel.com
belfuse.com/power-solutions

© 2015 Bel Power Solutions, Inc.

Downloaded from Arrow.com.

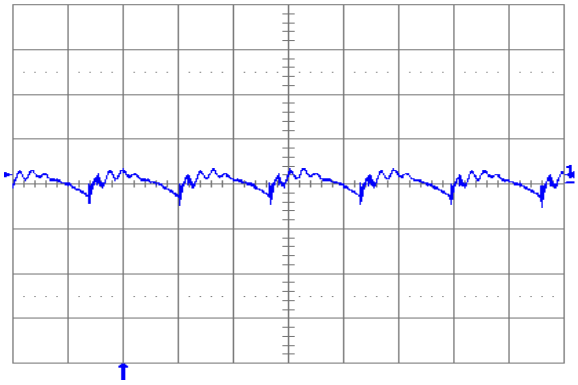


Fig. 1.0V.5: *Output voltage ripple (20mV/div.) at full rated load current into a resistive load with external capacitance 100µF ceramic + 1µF ceramic and Vin = 12V for Vout = 1.0V. Time scale: 2µs/div.*

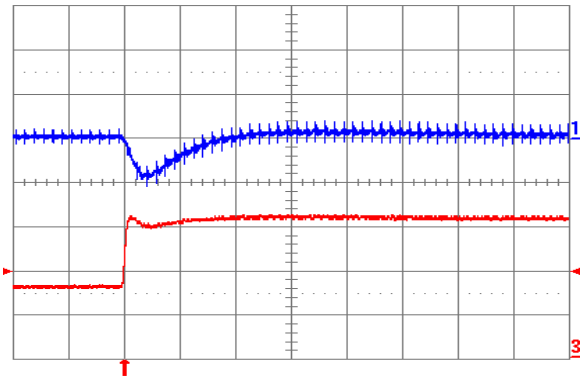


Fig. 1.0V.6: *Output voltage response for Vout = 1.0V to positive load current step change from 8A to 16A with slew rate of 5A/µs at Vin = 12V. Top trace: output voltage (200mV/div.); Bottom trace: load current (5A/div.). Co = 100µF ceramic. Time scale: 20µs/div.*

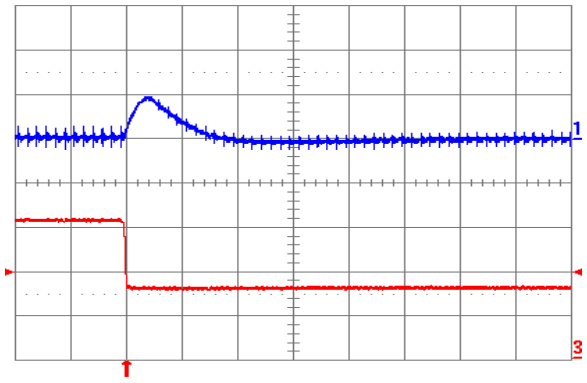


Fig. 1.0V.7: *Output voltage response for Vout = 1.0V to negative load current step change from 16A to 8A with slew rate of -5A/µs at Vin = 12V. Top trace: output voltage (200mV/div.); Bottom trace: load current (5A/div.). Co = 100µF ceramic. Time scale: 20µs/div.*

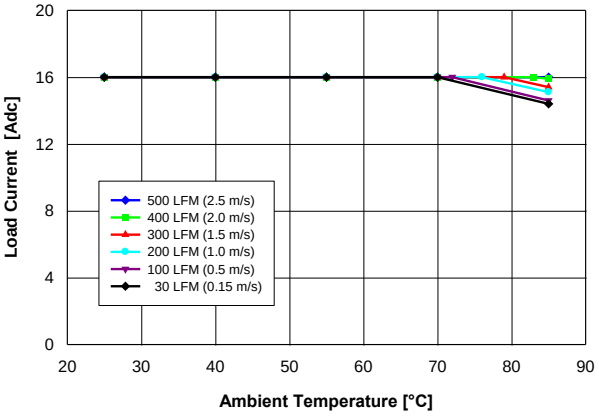


Fig. 0.7525V.1: *Available load current vs. ambient temperature and airflow rates for Vout = 1.0V converter mounted vertically with Vin = 12V, and maximum MOSFET temperature ≤ 120°C.*

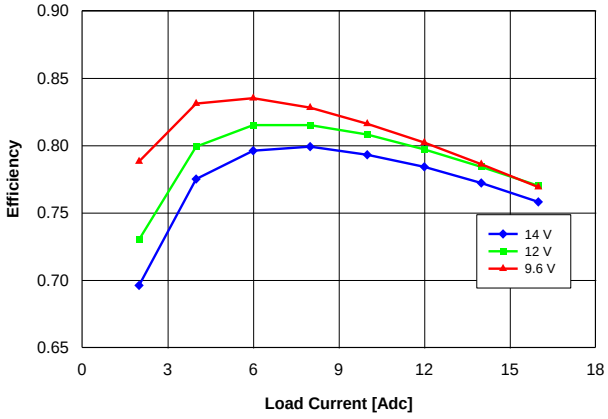


Fig. 0.7525V.2: *Efficiency vs. load current and input voltage for Vout = 0.7525V converter mounted vertically with air flowing at a rate of 200 LFM (1 m/s) and Ta = 25°C.*

866.513.2839
tech.support@psbel.com
belfuse.com/power-solutions

© 2015 Bel Power Solutions, Inc.

Downloaded from Arrow.com.

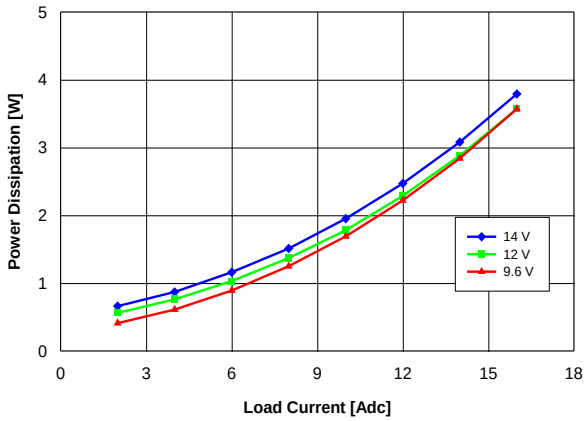


Fig. 0.7525V.3: *Power loss vs. load current and input voltage for Vout = 0.7525V converter mounted vertically with air flowing at a rate of 200 LFM (1 m/s) and Ta = 25°C.*

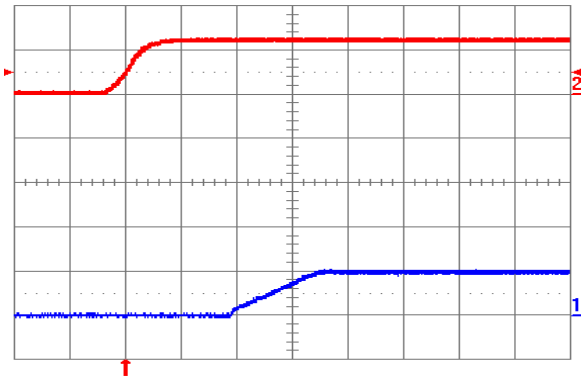


Fig. 0.7525V.4: *Turn-on transient for Vout = 0.7525V with application of Vin at full rated load current (resistive) and 100µF external capacitance at Vin = 12V. Top trace: Vin (10V/div.); Bottom trace: output voltage (1V/div.); Time scale: 2ms/div.*

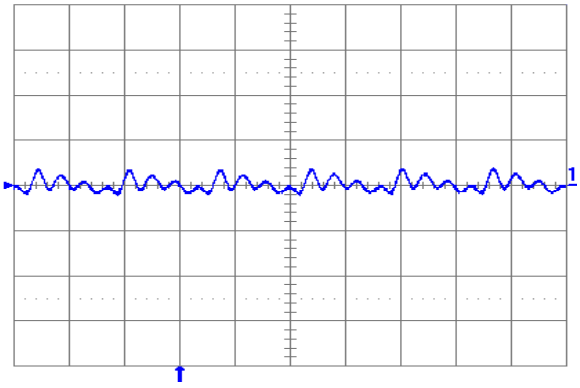


Fig. 0.7525V.5: *Output voltage ripple (20mV/div.) at full rated load current into a resistive load with external capacitance 100µF ceramic + 1µF ceramic and Vin = 12V for Vout = 0.7525V. Time scale: 2µs/div.*

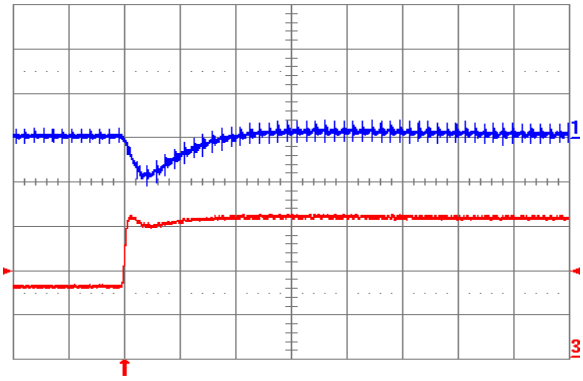


Fig. 0.7525V.6: *Output voltage response for Vout = 0.7525V to positive load current step change from 8A to 16A with slew rate of 5A/µs at Vin = 12V. Top trace: output voltage (200mV/div.); Bottom trace: load current (5A/div.). Co = 100µF ceramic. Time scale: 20µs/div.*

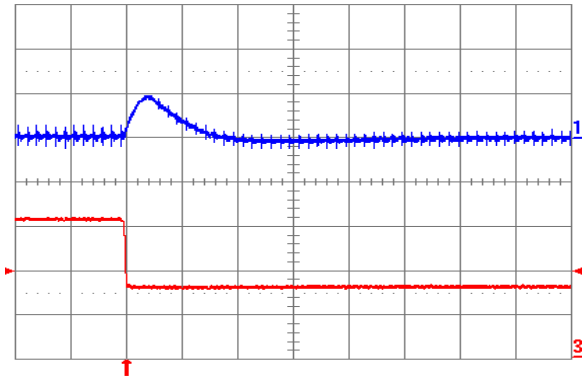


Fig. 0.7525V.7: *Output voltage response for Vout = 0.7525V to negative load current step change from 16A to 8A with slew rate of -5A/µs at Vin = 12V. Top trace: output voltage (200mV/div.); Bottom trace: load current (5A/div.). Co = 100µF ceramic. Time scale: 20µs/div.*


866.513.2839
tech.support@psbel.com
belfuse.com/power-solutions

© 2015 Bel Power Solutions, Inc.

Downloaded from Arrow.com.

YS12S16 DC-DC Converter

Physical Information

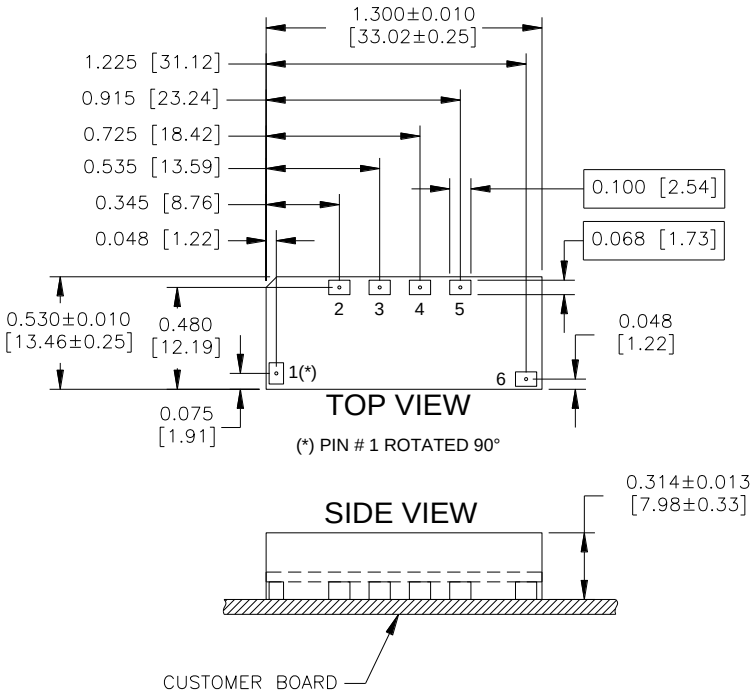

YS12S Pinout (Surface Mount)

PAD/PIN CONNECTIONS	
Pad/Pin #	**Function**
1	ON/OFF
2	SENSE
3	TRIM
4	Vout
5	GND
6	Vin

YS12S Platform Notes

- All dimensions are in inches [mm]
- Connector Material: Copper
- Connector Finish: Gold over Nickel
- Converter Weight: 0.23 oz [6.50 g]
- Converter Height: 0.327” Max., 0.301” Min.
- Recommended Surface-Mount Pads: Min. 0.080” X 0.112” [2.03 x 2.84]

Ordering Information

Product Series	Input Voltage	Mounting Scheme	Rated Load Current		Enable Logic	RoHS Compatible
YS	**12**	**S**	**16**	**–**	**0**	**G**
Y-Series	9.6 V – 14 V	S ⇒ Surface-Mount	16 A (0.7525 V to 5.5 V)		0 ⇒ Standard (Positive Logic) D ⇒ Opposite of Standard (Negative Logic)	No Suffix ⇒ RoHS lead-solder-exempt compliant G ⇒ RoHS compliant for all six substances

The example above describes P/N YS12S16-0G: 9.6V – 14V input, surface mount, 16A at 0.7525V to 5.5V output, standard enable logic, and RoHS compliant for all six substances. Please consult factory regarding availability of a specific version.

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.
TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

866.513.2839
tech.support@psbel.com
belfuse.com/power-solutions

© 2015 Bel Power Solutions, Inc.

Downloaded from Arrow.com.