S-8200A Series

www.ablic.com

BATTERY PROTECTION IC FOR 1-CELL PACK

© ABLIC Inc., 2010-2015

Rev.4.0_03

The S-8200A Series is a protection IC for lithium-ion / lithium polymer rechargeable batteries and includes high-accuracy voltage detection circuits and delay circuits.
The S-8200A Series is suitable for protecting 1-cell lithium-ion / lithium polymer rechargeable battery packs from overcharge, overdischarge, and overcurrent.

NOT RECOMMENDED FOR NEW DESIGN

■ Features

- High-accuracy voltage detection circuit

Overcharge detection voltage	3.5 V to 4.5 V (5 mV step)	Accuracy ±20 mV (Ta = +25°C) Accuracy ±25 mV (Ta = −10°C to +60°C)
Overcharge release voltage	3.1 V to 4.5 V*1	Accuracy ±30 mV
Overdischarge detection voltage	2.0 V to 3.4 V (10 mV step)	Accuracy ±35 mV
Overdischarge release voltage	2.0 V to 3.4 V*2	Accuracy ±50 mV
Discharge overcurrent detection voltage	0.05 V to 0.20 V (10 mV step)	Accuracy ±10 mV
Charge overcurrent detection voltage	−0.20 V to −0.05 V (25 mV step)	Accuracy ±15 mV

- Detection delay times are generated only by an internal circuit (external capacitors are unnecessary). Accuracy ±20%
- High-withstand voltage (VM pin and CO pin: Absolute maximum rating = 28 V)
- 0 V battery charge function "available" / "unavailable" is selectable.
- Power-down function "available" / "unavailable" is selectable.
- Wide operation temperature range Ta = −40°C to +85°C
- Low current consumption

During operation	2.8 µA typ., 5.0 µA max. (Ta = +25°C)
During power-down	0.1 µA max. (Ta = +25°C)

- Lead-free (Sn 100%), halogen-free

***1.** Overcharge release voltage = Overcharge detection voltage − Overcharge hysteresis voltage
(Overcharge hysteresis voltage can be selected as 0 V or from a range of 0.1 V to 0.4 V in 50 mV step.)
***2.** Overdischarge release voltage = Overdischarge detection voltage + Overdischarge hysteresis voltage
(Overdischarge hysteresis voltage can be selected as 0 V or from a range of 0.1 V to 0.7 V in 100 mV step.)

■ Applications


- Lithium-ion rechargeable battery pack
- Lithium polymer rechargeable battery pack

■ Packages

- SOT-23-6
- SNT-6A

Downloaded from Arrow.com.

■ Block Diagram

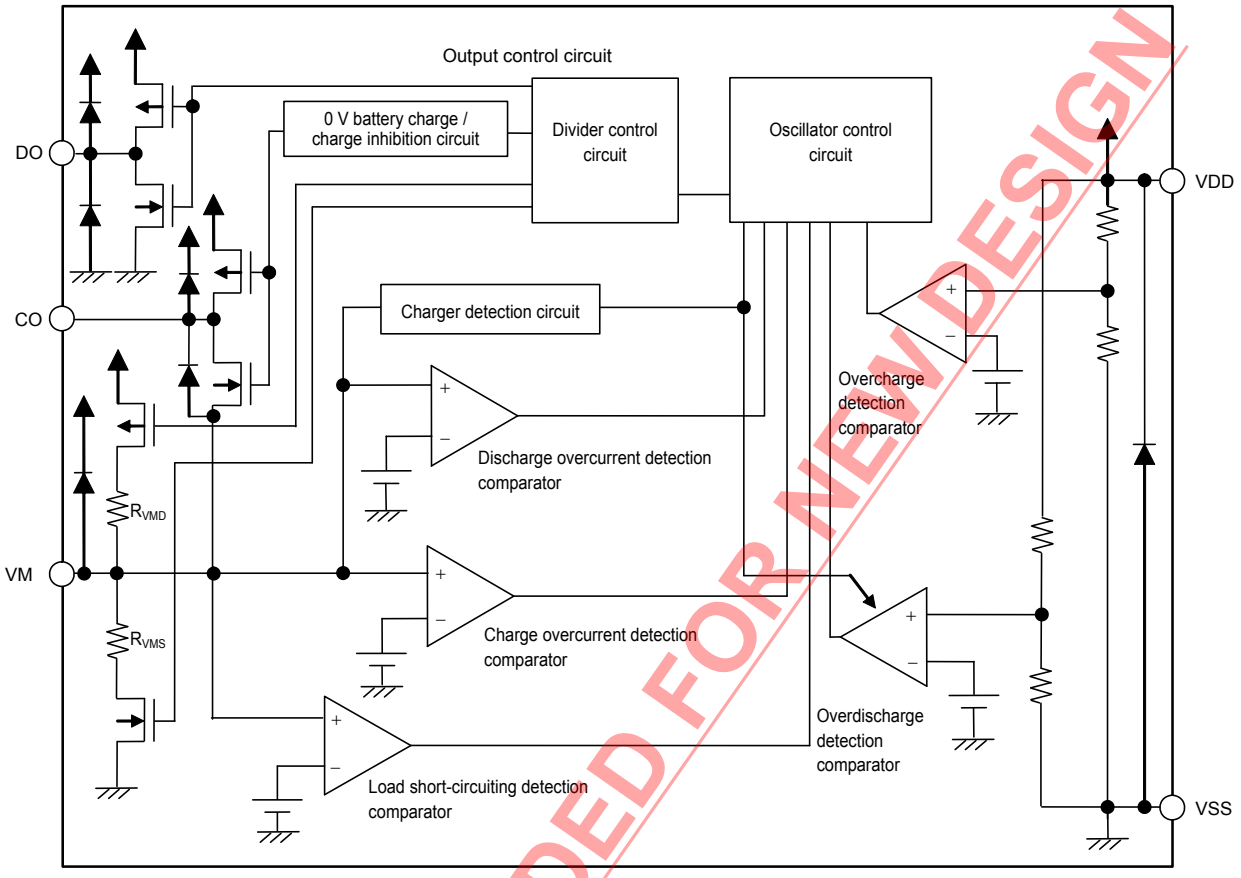

Remark All diodes shown in figure are parasitic diodes.


Figure 1

NOT RECOMMENDED FOR NEW DESIGN

Downloaded from Arrow.com.

■ Product Name Structure

1. Product name

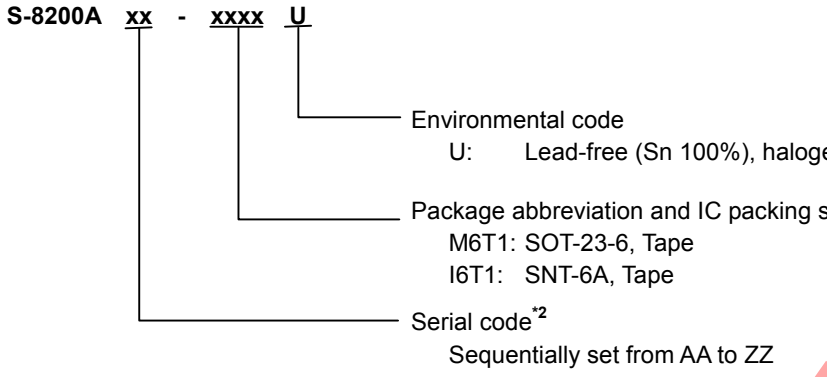

***1.** Refer to the tape drawing.
***2.** Refer to "**3. Product name list**".

2. Packages

Table 1 Package Drawing Codes

Package Name	Dimension	Tape	Reel	Land
SOT-23-6	MP006-A-P-SD	MP006-A-C-SD	MP006-A-R-SD	–
SNT-6A	PG006-A-P-SD	PG006-A-C-SD	PG006-A-R-SD	PG006-A-L-SD

NOT RECOMMENDED FOR NEW DESIGN

Downloaded from Arrow.com.

3. Product name list

3. 1 SOT-23-6

Table 2

Product Name	Over-charge Detection Voltage [V_{CU}]	Over-charge Release Voltage [V_{CL}]	Over-discharge Detection Voltage [V_{DL}]	Over-discharge Release Voltage [V_{DU}]	Discharge Overcurrent Detection Voltage [V_{DIOV}]	Load short-circuiting Detection Voltage [V_{SHORT}]	Charge Overcurrent Detection Voltage [V_{CIOV}]	0 V Battery Charge Function	Delay Time Combination*1	Power-down Function
S-8200AAC-M6T1U	4.225 V	4.025 V	2.500 V	2.900 V	0.150 V	0.500 V	−0.150 V	Available	(1)	Unavailable
S-8200AAH-M6T1U	4.375 V	4.175 V	2.300 V	2.300 V	0.130 V	0.500 V	−0.100 V	Available	(2)	Available
S-8200AAY-M6T1U	4.150 V	4.050 V	2.500 V	2.800 V	0.160 V	0.500 V	−0.100 V	Available	(1)	Unavailable
S-8200ABE-M6T1U	4.200 V	4.000 V	3.200 V	3.400 V	0.150 V	0.500 V	−0.100 V	Unavailable	(2)	Available
S-8200ABM-M6T1U	4.280 V	4.180 V	2.300 V	2.300 V	0.130 V	0.500 V	−0.125 V	Unavailable	(1)	Available
S-8200ABX-M6T1U	4.280 V	4.280 V	2.500 V	2.500 V	0.050 V	0.500 V	−0.050 V	Available	(1)	Available
S-8200ABZ-M6T1U	4.280 V	4.080 V	3.000 V	3.000 V	0.190 V	0.500 V	−0.075 V	Available	(2)	Available
S-8200ACF-M6T1U	4.350 V	4.000 V	2.400 V	3.000 V	0.200 V	0.500 V	−0.100 V	Available	(3)	Available
S-8200ACV-M6T1U	4.350 V	4.150 V	2.400 V	2.500 V	0.100 V	0.500 V	−0.100 V	Unavailable	(1)	Available
S-8200ACW-M6T1U	4.350 V	4.150 V	2.400 V	2.500 V	0.085 V	0.500 V	−0.100 V	Unavailable	(1)	Available

***1.** Refer to **Table 4** about the details of the delay time combinations.

3. 2 SNT-6A

Table 3

Product Name	Over-charge Detection Voltage [V_{CU}]	Over-charge Release Voltage [V_{CL}]	Over-discharge Detection Voltage [V_{DL}]	Over-discharge Release Voltage [V_{DU}]	Discharge Overcurrent Detection Voltage [V_{DIOV}]	Load short-circuiting Detection Voltage [V_{SHORT}]	Charge Overcurrent Detection Voltage [V_{CIOV}]	0 V Battery Charge Function	Delay Time Combination*1	Power-down Function
S-8200AAA-I6T1U	4.225 V	4.025 V	2.500 V	2.900 V	0.150 V	0.500 V	−0.150 V	Unavailable	(1)	Available
S-8200AAB-I6T1U	4.250 V	4.050 V	2.400 V	2.900 V	0.050 V	0.500 V	−0.100 V	Unavailable	(1)	Available
S-8200AAC-I6T1U	4.225 V	4.025 V	2.500 V	2.900 V	0.150 V	0.500 V	−0.150 V	Available	(1)	Unavailable
S-8200AAD-I6T1U	4.275 V	4.075 V	2.600 V	2.600 V	0.120 V	0.500 V	−0.100 V	Available	(2)	Available
S-8200AAF-I6T1U	4.225 V	4.025 V	2.800 V	2.800 V	0.150 V	0.500 V	−0.150 V	Unavailable	(1)	Available
S-8200AAG-I6T1U	4.275 V	4.075 V	2.600 V	2.600 V	0.180 V	0.500 V	−0.125 V	Available	(2)	Available
S-8200AAH-I6T1U	4.375 V	4.175 V	2.300 V	2.300 V	0.130 V	0.500 V	−0.100 V	Available	(2)	Available
S-8200ABA-I6T1U	4.425 V	4.225 V	2.300 V	2.300 V	0.165 V	0.500 V	−0.100 V	Unavailable	(2)	Available
S-8200ABI-I6T1U	4.275 V	4.175 V	2.300 V	2.400 V	0.025 V	0.175 V	−0.050 V	Available	(4)	Available
S-8200ABK-I6T1U	3.500 V	3.400 V	2.500 V	2.800 V	0.100 V	0.500 V	−0.100 V	Available	(2)	Available
S-8200ABL-I6T1U	4.390 V	4.190 V	2.500 V	2.500 V	0.130 V	0.500 V	−0.125 V	Unavailable	(1)	Available
S-8200ABM-I6T1U	4.280 V	4.180 V	2.300 V	2.300 V	0.130 V	0.500 V	−0.125 V	Unavailable	(1)	Available
S-8200ACN-I6T1U	4.275 V	4.075 V	2.800 V	2.800 V	0.200 V	0.500 V	−0.150 V	Available	(4)	Available
S-8200ACO-I6T1U	4.320 V	4.120 V	2.800 V	2.800 V	0.220 V	0.500 V	−0.200 V	Unavailable	(5)	Available
S-8200ACP-I6T1U	4.390 V	4.290 V	2.700 V	2.700 V	0.130 V	0.500 V	−0.125 V	Unavailable	(2)	Available
S-8200ACQ-I6T1U	4.420 V	4.220 V	2.600 V	2.600 V	0.120 V	0.500 V	−0.125 V	Available	(6)	Available
S-8200ACR-I6T1U	4.280 V	4.180 V	2.300 V	2.300 V	0.120 V	0.500 V	−0.100 V	Unavailable	(6)	Available

***1.** Refer to **Table 4** about the details of the delay time combinations.

Remark Please contact our sales office for the products with detection voltage value other than those specified above.

NOT RECOMMENDED FOR NEW DESIGN

Downloaded from Arrow.com.

Table 4

Delay Time Combination	Overcharge Detection Delay Time [t_{CU}]	Overdischarge Detection Delay Time [t_{DL}]	Discharge Overcurrent Detection Delay Time [t_{DIOV}]	Load Short-circuiting Detection Delay Time [t_{SHORT}]	Charge Overcurrent Detection Delay Time [t_{CIOV}]
(1)	1.0 s	64 ms	8 ms	250 µs	8 ms
(2)	1.0 s	32 ms	8 ms	250 µs	8 ms
(3)	256 ms	32 ms	8 ms	250 µs	16 ms
(4)	1.0 s	128 ms	8 ms	250 µs	8 ms
(5)	1.0 s	128 ms	16 ms	500 µs	16 ms
(6)	1.0 s	128 ms	16 ms	250 µs	8 ms

Remark The delay times can be changed within the range listed in **Table 5**. For details, please contact our sales office.

Table 5

Delay Time	Symbol	Selection Range			Remark
Overcharge detection delay time	t_{CU}	256 ms	512 ms	1.0 s*1	Select a value from the left.
Overdischarge detection delay time	t_{DL}	32 ms	64 ms*1	128 ms	Select a value from the left.
Discharge overcurrent detection delay time	t_{DIOV}	4 ms	8 ms*1	16 ms	Select a value from the left.
Load short-circuiting detection delay Time	t_{SHORT}	250 µs*1	500 µs	1 ms	Select a value from the left.
Charge overcurrent detection delay time	t_{CIOV}	4 ms	8 ms*1	16 ms	Select a value from the left.

***1.** This value is the delay time of the standard product.

NOT RECOMMENDED FOR NEW DESIGN

Downloaded from Arrow.com.

■ Pin Configurations

1. SOT-23-6

Top view




Figure 2

Table 6

Pin No.	Symbol	Description
1	DO	Connection pin of discharge control FET gate (CMOS output)
2	VM	Voltage detection pin between VM pin and VSS pin (Overcurrent / charger detection pin)
3	CO	Connection pin of charge control FET gate (CMOS output)
4	NC*1	No connection
5	VDD	Input pin for positive power supply
6	VSS	Input pin for negative power supply

***1.** The NC pin is electrically open.
The NC pin can be connected to VDD pin or VSS pin.

2. SNT-6A

Top view




Figure 3

Table 7

Pin No.	Symbol	Description
1	NC*1	No connection
2	CO	Connection pin of charge control FET gate (CMOS output)
3	DO	Connection pin of discharge control FET gate (CMOS output)
4	VSS	Input pin for negative power supply
5	VDD	Input pin for positive power supply
6	VM	Voltage detection pin between VM pin and VSS pin (Overcurrent / charger detection pin)

***1.** The NC pin is electrically open.
The NC pin can be connected to VDD pin or VSS pin.

NOT RECOMMENDED FOR NEW DESIGN

Downloaded from Arrow.com.

■ Absolute Maximum Ratings

Table 8

(Ta = +25°C unless otherwise specified)

Item		Symbol	Applied Pin	Absolute Maximum Rating	Unit
Input voltage between VDD pin and VSS pin		V_{DS}	VDD	V_{SS} − 0.3 to V_{SS} + 12	V
VM pin input voltage		V_{VM}	VM	V_{DD} − 28 to V_{DD} + 0.3	V
DO pin output voltage		V_{DO}	DO	V_{SS} − 0.3 to V_{DD} + 0.3	V
CO pin output voltage		V_{CO}	CO	V_{VM} − 0.3 to V_{DD} + 0.3	V
Power dissipation	SOT-23-6	P_D	−	650*1	mW
	SNT-6A		−	400*1	mW
Operation ambient temperature		T_{opr}	−	−40 to +85	°C
Storage temperature		T_{stg}	−	−55 to +125	°C

***1.** When mounted on board
[Mounted board]
(1) Board size: 114.3 mm × 76.2 mm × t1.6 mm
(2) Board name: JEDEC STANDARD51-7

Caution **The absolute maximum ratings are rated values exceeding which the product could suffer physical damage. These values must therefore not be exceeded under any conditions.**

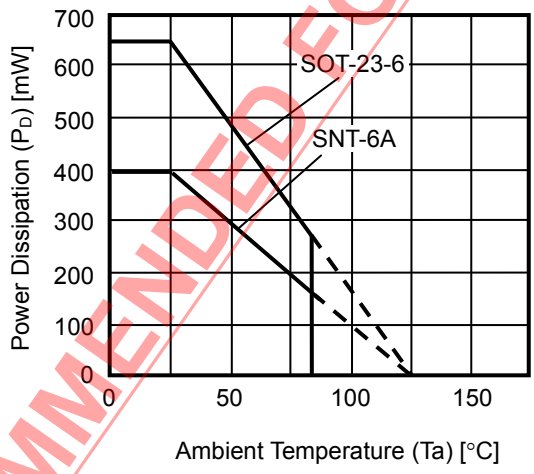


Figure 4 Power Dissipation of Package (When Mounted on Board)

NOT RECOMMENDED FOR NEW DESIGN

Downloaded from Arrow.com.

■ Electrical Characteristics

1. Ta = +25°C

Table 9

(Ta = +25°C unless otherwise specified)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Test Circuit
Detection Voltage							
Overcharge detection voltage	V_{CU}	–	V_{CU} – 0.020	V_{CU}	V_{CU} + 0.020	V	1
		Ta = –10°C to +60°C*1	V_{CU} – 0.025	V_{CU}	V_{CU} + 0.025	V	1
Overcharge release voltage	V_{CL}	$V_{CL} \neq V_{CU}$	V_{CL} – 0.030	V_{CL}	V_{CL} + 0.030	V	1
		$V_{CL} = V_{CU}$	V_{CL} – 0.025	V_{CL}	V_{CL} + 0.020	V	1
Overdischarge detection voltage	V_{DL}	–	V_{DL} – 0.035	V_{DL}	V_{DL} + 0.035	V	2
Overdischarge release voltage	V_{DU}	$V_{DL} \neq V_{DU}$	V_{DU} – 0.050	V_{DU}	V_{DU} + 0.050	V	2
		$V_{DL} = V_{DU}$	V_{DU} – 0.035	V_{DU}	V_{DU} + 0.035	V	2
Discharge overcurrent detection voltage	V_{DIOV}	–	V_{DIOV} – 0.010	V_{DIOV}	V_{DIOV} + 0.010	V	2
Load short-circuiting detection voltage	V_{SHORT}	–	V_{SHORT} – 0.100	V_{SHORT}	V_{SHORT} + 0.100	V	2
Charge overcurrent detection voltage	V_{CIOV}	–	V_{CIOV} – 0.015	V_{CIOV}	V_{CIOV} + 0.015	V	2
0 V Battery Charge Function							
0 V battery charge starting charger voltage	V_{0CHA}	0 V battery charge function "available"	0.0	0.7	1.0	V	2
0 V battery charge inhibition battery voltage	V_{0INH}	0 V battery charge function "unavailable"	0.6	0.8	1.1	V	2
Internal Resistance							
Resistance between VM pin and VDD pin	R_{VMD}	V_{DD} = 1.8 V, V_{VM} = 0 V	100	300	900	kΩ	3
Resistance between VM pin and VSS pin	R_{VMS}	V_{DD} = 3.4 V, V_{VM} = 1.0 V	10	20	40	kΩ	3
Input Voltage							
Operation voltage between VDD pin and VSS pin	V_{DSOP1}	–	1.5	–	6.5	V	–
Operation voltage between VDD pin and VM pin	V_{DSOP2}	–	1.5	–	28	V	–
Input Current (With Power-down Function)							
Current consumption during operation	I_{OPE}	V_{DD} = 3.4 V, V_{VM} = 0 V	1.0	2.8	5.0	μA	2
Current consumption during power-down	I_{PDN}	V_{DD} = V_{VM} = 1.5 V	–	–	0.1	μA	2
Input Current (Without Power-down Function)							
Current consumption during operation	I_{OPE}	V_{DD} = 3.4 V, V_{VM} = 0 V	1.0	2.8	5.0	μA	2
Current consumption during overdischarge	I_{OPED}	V_{DD} = V_{VM} = 1.5 V	–	–	3.5	μA	2
Output Resistance							
CO pin resistance "H"	R_{COH}	V_{CO} = 3.0 V, V_{DD} = 3.4 V, V_{VM} = 0 V	5	10	20	kΩ	4
CO pin resistance "L"	R_{COL}	V_{CO} = 0.4 V, V_{DD} = 4.6 V, V_{VM} = 0 V	5	10	20	kΩ	4
DO pin resistance "H"	R_{DOH}	V_{DO} = 3.0 V, V_{DD} = 3.4 V, V_{VM} = 0 V	5	10	20	kΩ	4
DO pin resistance "L"	R_{DOL}	V_{DO} = 0.4 V, V_{DD} = 1.8 V, V_{VM} = 0 V	5	10	20	kΩ	4
Delay Time							
Overcharge detection delay time	t_{CU}	–	t_{CU} × 0.8	t_{CU}	t_{CU} × 1.2	–	5
Overdischarge detection delay time	t_{DL}	–	t_{DL} × 0.8	t_{DL}	t_{DL} × 1.2	–	5
Discharge overcurrent detection delay time	t_{DIOV}	–	t_{DIOV} × 0.8	t_{DIOV}	t_{DIOV} × 1.2	–	5
Load short-circuiting detection delay time	t_{SHORT}	–	t_{SHORT} × 0.8	t_{SHORT}	t_{SHORT} × 1.2	–	5
Charge overcurrent detection delay time	t_{CIOV}	–	t_{CIOV} × 0.8	t_{CIOV}	t_{CIOV} × 1.2	–	5

*1. Since products are not screened at high and low temperature, the specification for this temperature range is guaranteed by design, not tested in production.

NOT RECOMMENDED FOR NEW DESIGN

Downloaded from Arrow.com.

2. Ta = –40°C to +85°C*1

Table 10

(Ta = –40°C to +85°C*1 unless otherwise specified)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Test Circuit
Detection Voltage							
Overcharge detection voltage	V_{CU}	–	V_{CU} – 0.045	V_{CU}	V_{CU} + 0.030	V	1
Overcharge release voltage	V_{CL}	$V_{CL} \neq V_{CU}$	V_{CL} – 0.070	V_{CL}	V_{CL} + 0.040	V	1
		$V_{CL} = V_{CU}$	V_{CL} – 0.050	V_{CL}	V_{CL} + 0.030	V	1
Overdischarge detection voltage	V_{DL}	–	V_{DL} – 0.070	V_{DL}	V_{DL} + 0.045	V	2
Overdischarge release voltage	V_{DU}	$V_{DL} \neq V_{DU}$	V_{DU} – 0.090	V_{DU}	V_{DU} + 0.060	V	2
		$V_{DL} = V_{DU}$	V_{DU} – 0.070	V_{DU}	V_{DU} + 0.045	V	2
Discharge overcurrent detection voltage	V_{DIOV}	–	V_{DIOV} – 0.010	V_{DIOV}	V_{DIOV} + 0.010	V	2
Load short-circuiting detection voltage	V_{SHORT}	–	V_{SHORT} – 0.100	V_{SHORT}	V_{SHORT} + 0.100	V	2
Charge overcurrent detection voltage	V_{CIOV}	–	V_{CIOV} – 0.015	V_{CIOV}	V_{CIOV} + 0.015	V	2
0 V Battery Charge Function							
0 V battery charge starting charger voltage	V_{0CHA}	0 V battery charge function "available"	0.0	0.7	1.5	V	2
0 V battery charge inhibition battery voltage	V_{0INH}	0 V battery charge function "unavailable"	0.4	0.8	1.3	V	2
Internal Resistance							
Resistance between VM pin and VDD pin	R_{VMD}	V_{DD} = 1.8 V, V_{VM} = 0 V	78	300	1310	kΩ	3
Resistance between VM pin and VSS pin	R_{VMS}	V_{DD} = 3.4 V, V_{VM} = 1.0 V	7.2	20	44	kΩ	3
Input Voltage							
Operation voltage between VDD pin and VSS pin	V_{DSOP1}		1.5	–	6.5	V	–
Operation voltage between VDD pin and VM pin	V_{DSOP2}	–	1.5	–	28	V	–
Input Current (With Power-down Function)							
Current consumption during operation	I_{OPE}	V_{DD} = 3.4 V, V_{VM} = 0 V	0.7	2.8	5.5	μA	2
Current consumption during power-down	I_{PDN}	V_{DD} = V_{VM} = 1.5 V	–	–	0.15	μA	2
Input Current (Without Power-down Function)							
Current consumption during operation	I_{OPE}	V_{DD} = 3.4 V, V_{VM} = 0 V	0.7	2.8	5.5	μA	2
Current consumption during overdischarge	I_{OPED}	V_{DD} = V_{VM} = 1.5 V	–	–	3.8	μA	2
Output Resistance							
CO pin resistance "H"	R_{COH}	V_{CO} = 3.0 V, V_{DD} = 3.4 V, V_{VM} = 0 V	2.4	10	30	kΩ	4
CO pin resistance "L"	R_{COL}	V_{CO} = 0.4 V, V_{DD} = 4.6 V, V_{VM} = 0 V	2.4	10	30	kΩ	4
DO pin resistance "H"	R_{DOH}	V_{DO} = 3.0 V, V_{DD} = 3.4 V, V_{VM} = 0 V	2.4	10	30	kΩ	4
DO pin resistance "L"	R_{DOL}	V_{DO} = 0.4 V, V_{DD} = 1.8 V, V_{VM} = 0 V	2.4	10	30	kΩ	4
Delay Time							
Overcharge detection delay time	t_{CU}	–	t_{CU} × 0.6	t_{CU}	t_{CU} × 1.6	–	5
Overdischarge detection delay time	t_{DL}	–	t_{DL} × 0.6	t_{DL}	t_{DL} × 1.6	–	5
Discharge overcurrent detection delay time	t_{DIOV}	–	t_{DIOV} × 0.6	t_{DIOV}	t_{DIOV} × 1.6	–	5
Load short-circuiting detection delay time	t_{SHORT}	–	t_{SHORT} × 0.6	t_{SHORT}	t_{SHORT} × 1.6	–	5
Charge overcurrent detection delay time	t_{CIOV}	–	t_{CIOV} × 0.6	t_{CIOV}	t_{CIOV} × 1.6	–	5

NOT RECOMMENDED FOR NEW DESIGN

***1.** Since products are not screened at high and low temperature, the specification for this temperature range is guaranteed by design, not tested in production.

Downloaded from Arrow.com.

■ Test Circuits

Caution Unless otherwise specified, the output voltage levels "H" and "L" at CO pin (V_{CO}) and DO pin (V_{DO}) are judged by the threshold voltage (1.0 V) of the N-channel FET. Judge the CO pin level with respect to V_{VM} and the DO pin level with respect to V_{SS}.

1. Overcharge detection voltage, overcharge release voltage (Test circuit 1)

Overcharge detection voltage (V_{CU}) is defined as the voltage V1 at which V_{CO} goes from "H" to "L" when the voltage V1 is gradually increased from the starting condition of V1 = 3.4 V. Overcharge release voltage (V_{CL}) is defined as the voltage V1 at which V_{CO} goes from "L" to "H" when the voltage V1 is then gradually decreased. Overcharge hysteresis voltage (V_{HC}) is defined as the difference between V_{CU} and V_{CL}.

2. Overdischarge detection voltage, overdischarge release voltage (Test circuit 2)

Overdischarge detection voltage (V_{DL}) is defined as the voltage V1 at which V_{DO} goes from "H" to "L" when the voltage V1 is gradually decreased from the starting condition of V1 = 3.4 V, V2 = 0 V. Overdischarge release voltage (V_{DU}) is defined as the voltage V1 at which V_{DO} goes from "L" to "H" when the voltage V1 is then gradually increased. Overdischarge hysteresis voltage (V_{HD}) is defined as the difference between V_{DU} and V_{DL}.

3. Discharge overcurrent detection voltage (Test circuit 2)

Discharge overcurrent detection voltage (V_{DIOV}) is defined as the voltage V2 whose delay time for changing V_{DO} from "H" to "L" is discharge overcurrent delay time (t_{DIOV}) when the voltage V2 is increased from the starting condition of V1 = 3.4 V, V2 = 0 V.

4. Load short-circuiting detection voltage (Test circuit 2)

Load short-circuiting detection voltage (V_{SHORT}) is defined as the voltage V2 whose delay time for changing V_{DO} from "H" to "L" is load short-circuiting delay time (t_{SHORT}) when the voltage V2 is increased from the starting condition of V1 = 3.4 V, V2 = 0 V.

5. Charge overcurrent detection voltage (Test circuit 2)

Charge overcurrent detection voltage (V_{CIOV}) is defined as the voltage V2 whose delay time for changing V_{CO} from "H" to "L" is charge overcurrent delay time (t_{CIOV}) when the voltage V2 is decreased from the starting condition of V1 = 3.4 V, V2 = 0 V.

6. Current consumption during operation (Test circuit 2)

The current consumption during operation (I_{OPE}) is the current that flows through the VDD pin (I_{DD}) under the set conditions of V1 = 3.4 V and V2 = 0 V.

7. Current consumption during power-down, current consumption during overdischarge (Test circuit 2)

7. 1 With power-down function

The current consumption during power-down (I_{PDN}) is I_{DD} under the set conditions of V1 = V2 = 1.5 V.

7. 2 Without power-down function

The current consumption during overdischarge (I_{OPED}) is I_{DD} under the set conditions of V1 = V2 = 1.5 V.

NOT RECOMMENDED FOR NEW DESIGN

Downloaded from Arrow.com.

8. Resistance between VM pin and VDD pin (Test circuit 3)

R_{VMD} is the resistance between VM pin and VDD pin under the set conditions of V1 = 1.8 V, V2 = 0 V.

9. Resistance between VM pin and VSS pin (Test circuit 3)

R_{VMS} is the resistance between VM pin and VSS pin under the set conditions of V1 = 3.4 V, V2 = 1.0 V.

10. CO pin resistance "H" (Test circuit 4)

The CO pin resistance "H" (R_{COH}) is the resistance between VDD pin and CO pin under the set conditions of V1 = 3.4 V, V2 = 0 V, V3 = 3.0 V.

11. CO pin resistance "L" (Test circuit 4)

The CO pin resistance "L" (R_{COL}) is the resistance between VM pin and CO pin under the set conditions of V1 = 4.6 V, V2 = 0 V, V3 = 0.4 V.

12. DO pin resistance "H" (Test circuit 4)

The DO pin resistance "H" (R_{DOH}) is the resistance between VDD pin and DO pin under the set conditions of V1 = 3.4 V, V2 = 0 V, V4 = 3.0 V.

13. DO pin resistance "L" (Test circuit 4)

The DO pin resistance "L" (R_{DOL}) is the resistance between VSS pin and DO pin under the set conditions of V1 = 1.8 V, V2 = 0 V, V4 = 0.4 V.

14. Overcharge detection delay time (Test circuit 5)

The overcharge detection delay time (t_{CU}) is the time needed for V_{CO} to go to "L" just after the voltage V1 increases and exceeds V_{CU} under the set conditions of V1 = 3.4 V, V2 = 0 V.

15. Overdischarge detection delay time (Test circuit 5)

The overdischarge detection delay time (t_{DL}) is the time needed for V_{DO} to go to "L" after the voltage V1 decreases and falls below V_{DL} under the set conditions of V1 = 3.4 V, V2 = 0 V.

16. Discharge overcurrent detection delay time (Test circuit 5)

The discharge overcurrent detection delay time (t_{DIOV}) is the time needed for V_{DO} to go to "L" after the voltage V2 increases and exceeds V_{DIOV} under the set conditions of V1 = 3.4 V, V2 = 0 V.

NOT RECOMMENDED FOR NEW DESIGN

Downloaded from Arrow.com.

17. Load short-circuiting detection delay time (Test circuit 5)

The load short-circuiting detection delay time (t_{SHORT}) is the time needed for V_{DO} to go to "L" after the voltage V2 increases and exceeds V_{SHORT} under the set conditions of V1 = 3.4 V, V2 = 0 V.

18. Charge overcurrent detection delay time (Test circuit 5)

The charge overcurrent detection delay time (t_{CIOV}) is the time needed for V_{CO} to go to "L" after the voltage V2 decreases and falls below V_{CIOV} under the set conditions of V1 = 3.4 V, V2 = 0 V.

19. 0 V battery charge starting charger voltage (0 V battery charge function "available") (Test circuit 2)

The 0 V charge starting charger voltage (V_{0CHA}) is defined as the absolute value of voltage V2 at which V_{CO} goes to "H" ($V_{CO} = V_{DD}$) when the voltage V2 is gradually decreased from the starting conditions of V1 = V2 = 0 V.

20. 0 V battery charge inhibition battery voltage (0 V battery charge function "unavailable") (Test circuit 2)

The 0 V charge inhibition battery voltage (V_{0INH}) is defined as the voltage V1 at which V_{CO} goes to "H" ($V_{CO} = V_{DD}$) when the voltage V1 is gradually increased, after setting V1 = 0 V, V2 = −4.0 V.

NOT RECOMMENDED FOR NEW DESIGN

Downloaded from Arrow.com.

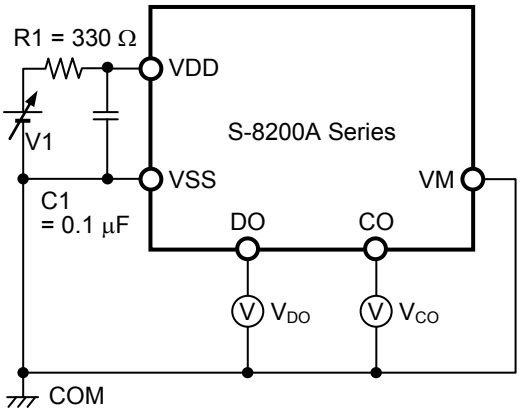


Figure 5 Test Circuit 1

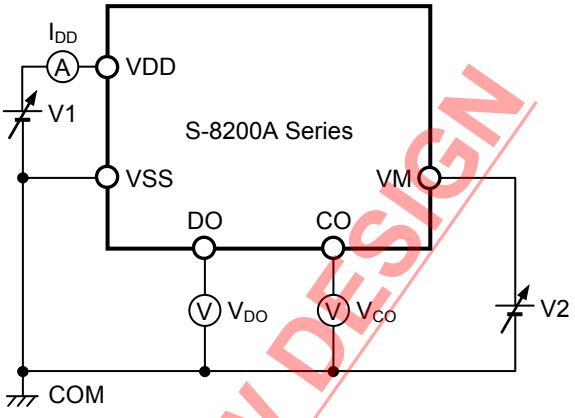


Figure 6 Test Circuit 2

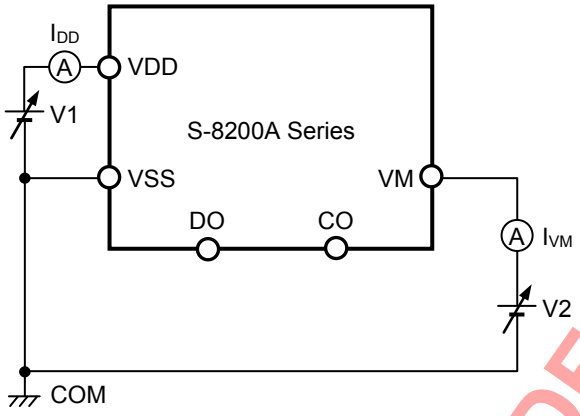


Figure 7 Test Circuit 3

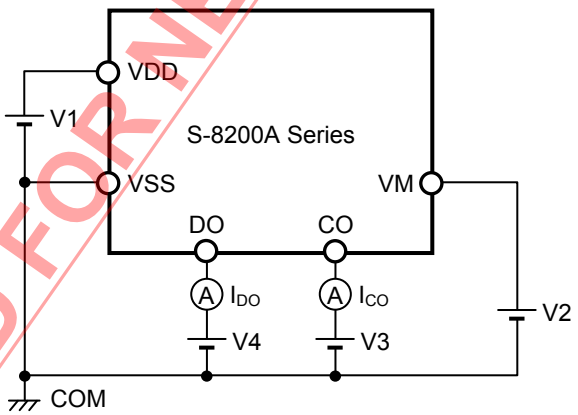


Figure 8 Test Circuit 4

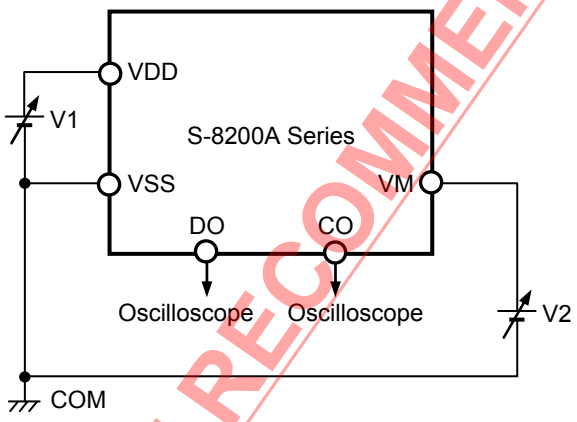


Figure 9 Test Circuit 5

NOT RECOMMENDED FOR NEW DESIGN

Downloaded from Arrow.com.

■ Operation

Remark Refer to "■ **Battery Protection IC Connection Example**".

1. Normal status

The S-8200A Series monitors the voltage of the battery connected between the VDD pin and VSS pin, the voltage between the VM pin and VSS pin to control charging and discharging. When the battery voltage is in the range from overdischarge detection voltage (V_{DL}) to overcharge detection voltage (V_{CU}), and the VM pin voltage is in the range from charge overcurrent detection voltage (V_{CIOV}) to discharge overcurrent detection voltage (V_{DIOV}), the S-8200A Series turns both the charge and discharge control FETs on. This condition is called the normal status, and in this condition charging and discharging can be carried out freely.
The resistance (R_{VMD}) between the VM pin and VDD pin, and the resistance (R_{VMS}) between the VM pin and VSS pin are not connected in the normal status.

Caution When the battery is connected for the first time, the S-8200A Series may not be in the normal status. In this case, short the VM pin and VSS pin, or set the VM pin voltage at the level of V_{CIOV} or more and at the level of V_{DIOV} or less by connecting the charger. The S-8200A Series then becomes the normal status.

2. Overcharge status

2. 1 $V_{CL} \neq V_{CU}$ (Product in which overcharge release voltage differs from overcharge detection voltage)

When the battery voltage becomes higher than V_{CU} during charging in the normal status and detection continues for the overcharge detection delay time (t_{CU}) or longer, the S-8200A Series turns the charge control FEToff to stop charging. This condition is called the overcharge status.
R_{VMD} and R_{VMS} are not connected in the overcharge status.
The overcharge status is released in the following two cases.

(1) In the case that the VM pin voltage is lower than V_{DIOV}, the S-8200A Series releases the overcharge status when the battery voltage falls below overcharge release voltage (V_{CL}).
(2) In the case that the VM pin voltage is higher than or equal to V_{DIOV}, the S-8200A Series releases the overcharge status when the battery voltage falls below V_{CU}.

When the discharge is started by connecting a load after the overcharge detection, the VM pin voltage rises by the V_f voltage of the parasitic diode than the VSS pin voltage, because the discharge current flows through the parasitic diode in the charge control FET. If this VM pin voltage is higher than or equal to V_{DIOV}, the S-8200A Series releases the overcharge status when the battery voltage is lower than or equal to V_{CU}.

Caution If the battery is charged to a voltage higher than V_{CU} and the battery voltage does not fall below V_{CU} even when a heavy load is connected, discharge overcurrent detection and load short-circuiting detection do not function until the battery voltage falls below V_{CU}. Since an actual battery has an internal impedance of tens of mΩ, the battery voltage drops immediately after a heavy load that causes overcurrent is connected, and discharge overcurrent detection and load short-circuiting detection function.

NOT RECOMMENDED FOR NEW DESIGN

Downloaded from Arrow.com.

2. 2 V_{CL} = V_{CU} (Product in which overcharge release voltage is the same as overcharge detection voltage)

When the battery voltage becomes higher than V_{CU} during charging in the normal status and detection continues for t_{CU} or longer, the S-8200A Series turns the charge control FET off to stop charging. This condition is called the overcharge status.
R_{VMD} and R_{VMS} are not connected in the overcharge status.
The overcharge status is released in the following two cases.

(1) In the case that the VM pin voltage is higher than or equal to V_{CIOV}, and is lower than V_{DIOV}, the S-8200A Series releases the overcharge status when the battery voltage falls below V_{CL}.
(2) In the case that the VM pin voltage is higher than or equal to V_{DIOV}, the S-8200A Series releases the overcharge status when the battery voltage falls below V_{CU}.

When the discharge is started by connecting a load after the overcharge detection, the VM pin voltage rises by the V_f voltage of the parasitic diode than the VSS pin voltage, because the discharge current flows through the parasitic diode in the charging control FET. If this VM pin voltage is higher than or equal to V_{DIOV}, the S-8200A Series releases the overcharge status when the battery voltage is lower than or equal to V_{CU}.
For the actual application boards, changing the battery voltage and the charger voltage simultaneously enables to measure V_{CL}. In this case, the charger is always necessary to have the equivalent voltage level to the battery voltage. The charger keeps VM pin voltage higher than or equal to V_{CIOV} and lower than or equal to V_{DIOV}. The S-8200A Series releases the overcharge status when the battery voltage falls below V_{CL}.

Caution
1. **If the battery is charged to a voltage higher than V_{CU} and the battery voltage does not fall below V_{CU} even when a heavy load is connected, discharge overcurrent detection and load short-circuiting detection do not function until the battery voltage falls below V_{CU}. Since an actual battery has an internal impedance of tens of mΩ, the battery voltage drops immediately after a heavy load that causes overcurrent is connected, and discharge overcurrent detection and load short-circuiting detection function.**
2. **When a charger is connected after overcharge detection, the overcharge status is not released even if the battery voltage is below V_{CL}. The overcharge status is released when the VM pin voltage goes over V_{CIOV} by removing the charger.**

3. Overdischarge status

When the battery voltage falls below overdischarge detection voltage (V_{DL}) during discharging in the normal status and the detection continues for the overdischarge detection delay time (t_{DL}) or longer, the S-8200A Series turns the discharge control FET off to stop discharging. This condition is called the overdischarge status.
Under the overdischarge status, the VM pin and VDD pin are shorted by R_{VMD} in the S-8200A Series. The VM pin voltage is pulled up by R_{VMD}.
When a battery in the overdischarge status is connected to a charger and provided that the VM pin voltage is lower than −0.7 V typ., the S-8200A Series releases the overdischarge status when the battery voltage reaches V_{DL} or higher.
When VM pin voltage is not lower than −0.7 V typ., the S-8200A Series releases the overdischarge status when the battery voltage reaches V_{DU} or higher.
R_{VMS} is not connected in the overdischarge status.

3. 1 With power-down function

Under the overdischarge status, when voltage between the VDD pin and VM pin is 0.8 V typ. or lower, the power-down function works and the current consumption is reduced to the current consumption during power-down (I_{PDN}). By connecting a battery charger, the power-down function is released when the VM pin voltage is 0.7 V typ. or lower.

NOT RECOMMENDED FOR NEW DESIGN

Downloaded from Arrow.com.

4. Discharge overcurrent status (discharge overcurrent, load short-circuiting)

When a battery in the normal status is in the status where the VM pin voltage is equal to or higher than V_{DIOV} because the discharge current is equal to or higher than the specified value and the status lasts for the discharge overcurrent detection delay time (t_{DIOV}), the discharge control FET is turned off and discharging is stopped. This status is called the discharge overcurrent status.
In the discharge overcurrent status, the VM pin and VSS pin are shorted by the R_{VMS} in the S-8200A Series. However, the VM pin voltage is the VDD pin voltage due to the load as long as the load is connected. When the load is disconnected, the VM pin returns to the VSS pin voltage.
The VM pin voltage returns to V_{DIOV} or lower, the S-8200A Series releases the discharge overcurrent status.
R_{VMD} is not connected in the discharge overcurrent status.

5. Charge overcurrent status

When a battery in the normal status is in the status where the VM pin voltage is equal to or lower than V_{CIOV} because the charge current is equal to or higher than the specified value and the status lasts for the charge overcurrent detection delay time (t_{CIOV}), the charge control FET is turned off and charging is stopped. This status is called the charge overcurrent status.
The S-8200A Series releases the charge overcurrent status when the VM pin voltage returns to V_{CIOV} or higher by removing the charger.
The charge overcurrent detection function does not work in the overdischarge status.
R_{VMD} and R_{VMS} are not connected in the charge overcurrent status.

6. 0 V battery charge function "available"

This function is used to recharge a connected battery whose voltage is 0 V due to self-discharge. When the 0 V battery charge starting charger voltage (V_{0CHA}) or a higher voltage is applied between the EB+ and EB− pins by connecting a charger, the charge control FET gate is fixed to the VDD pin voltage.
When the voltage between the gate and source of the charge control FET becomes equal to or higher than the threshold voltage due to the charger voltage, the charge control FET is turned on to start charging. At this time, the discharge control FET is off and the charging current flows through the internal parasitic diode in the discharging control FET. When the battery voltage becomes equal to or higher than V_{DU}, the S-8200A Series enters the normal status.

Caution
1. **Some battery providers do not recommend charging for a completely self-discharged battery. Please ask the battery provider to determine whether to enable or inhibit the 0 V battery charge function.**
2. **The 0 V battery charge function has higher priority than the charge overcurrent detection function. Consequently, a product in which use of the 0 V battery charge function is enabled charges a battery forcibly and the charge overcurrent cannot be detected when the battery voltage is lower than V_{DL}.**

7. 0 V battery charge function "unavailable"

This function inhibits recharging when a battery that is internally short-circuited (0 V battery) is connected. When the battery voltage is the 0 V battery charge inhibition battery voltage (V_{0INH}) or lower, the charge control FET gate is fixed to the EB− pin voltage to inhibit charging. When the battery voltage is V_{0INH} or higher, charging can be performed.

Caution Some battery providers do not recommend charging for a completely self-discharged battery. Please ask the battery provider to determine whether to enable or inhibit the 0 V battery charge function.

NOT RECOMMENDED FOR NEW DESIGN

Downloaded from Arrow.com.

8. Delay circuit

The detection delay times are determined by dividing a clock of approximately 4 kHz by the counter.

Remark t_{DIOV} and t_{SHORT} start when V_{DIOV} is detected. When V_{SHORT} is detected over t_{SHORT} after V_{DIOV}, the S-8200A Series turns the discharge control FET off within t_{SHORT} from the time of detecting V_{SHORT}.

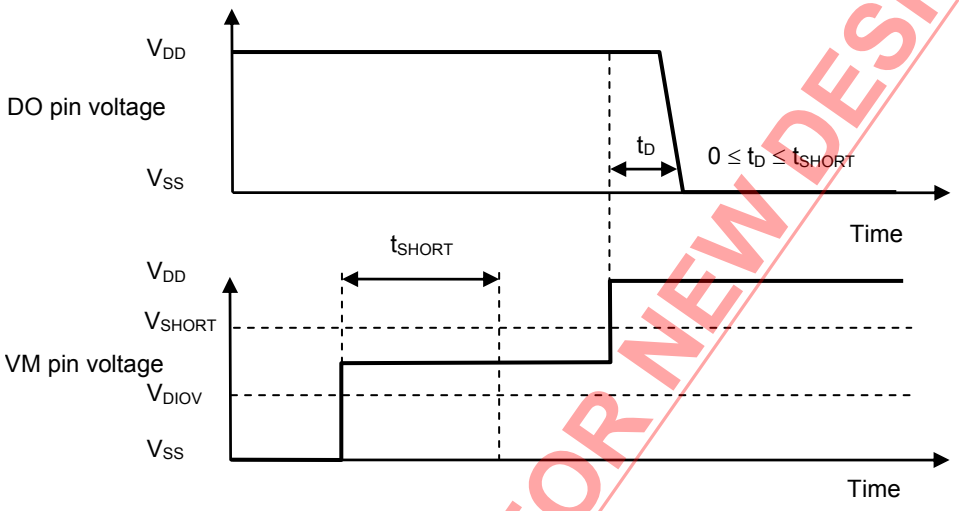



Figure 10

NOT RECOMMENDED FOR NEW DESIGN

Downloaded from Arrow.com.

■ Timing Charts

1. Overcharge detection, overdischarge detection

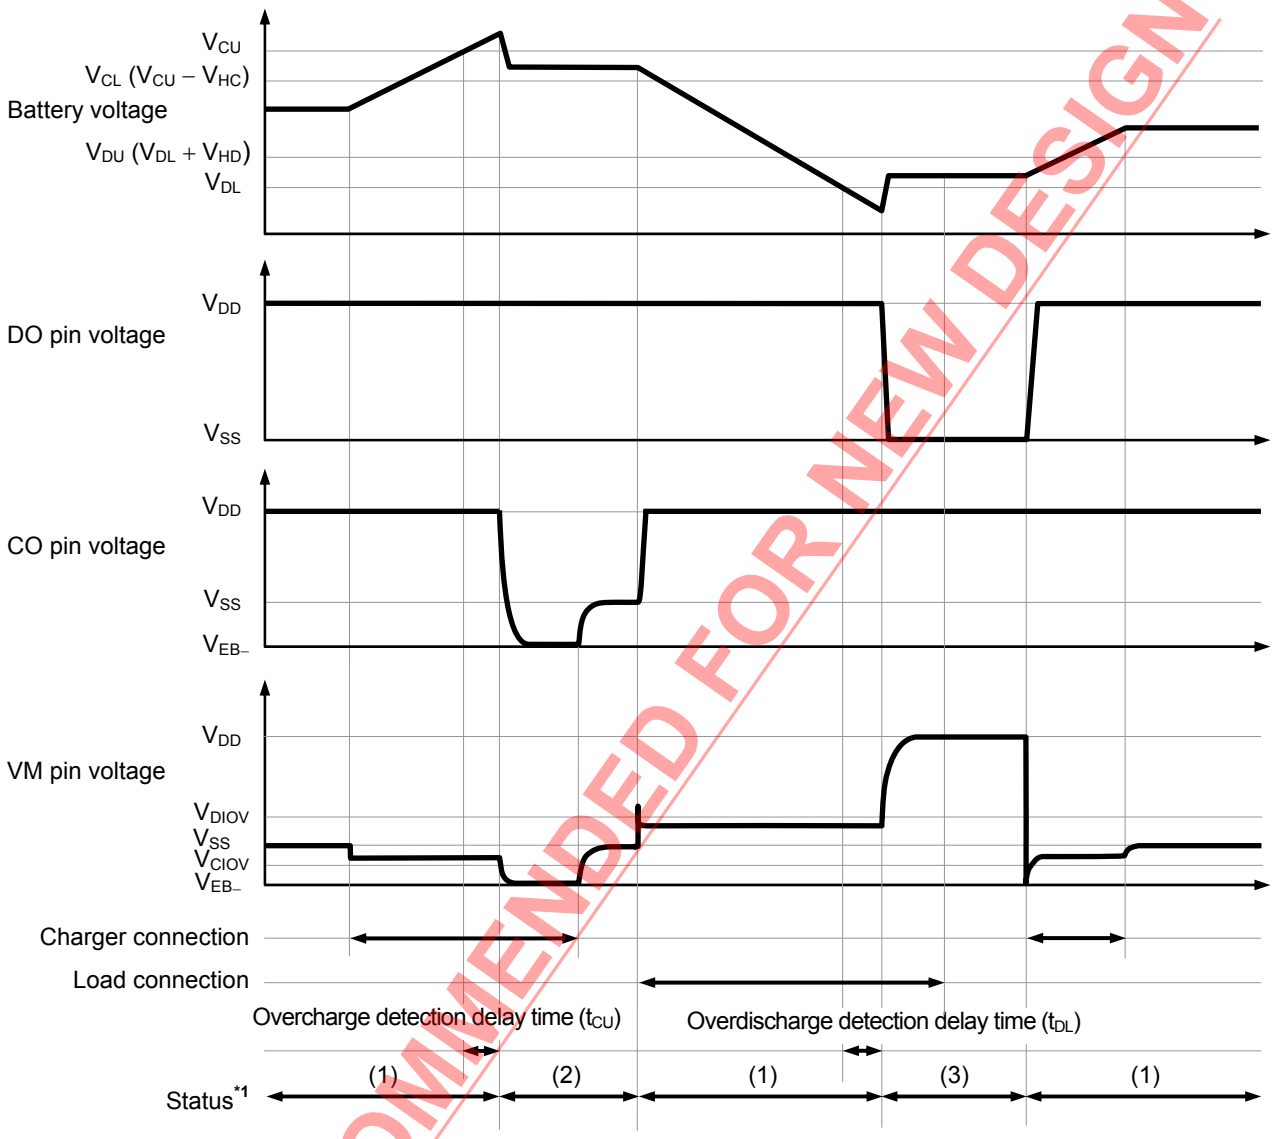

***1.** (1): Normal status
(2): Overcharge status
(3): Overdischarge status


Remark The charger is assumed to charge with a constant current.

Figure 11

NOT RECOMMENDED FOR NEW DESIGN

Downloaded from Arrow.com.

2. Discharge overcurrent detection

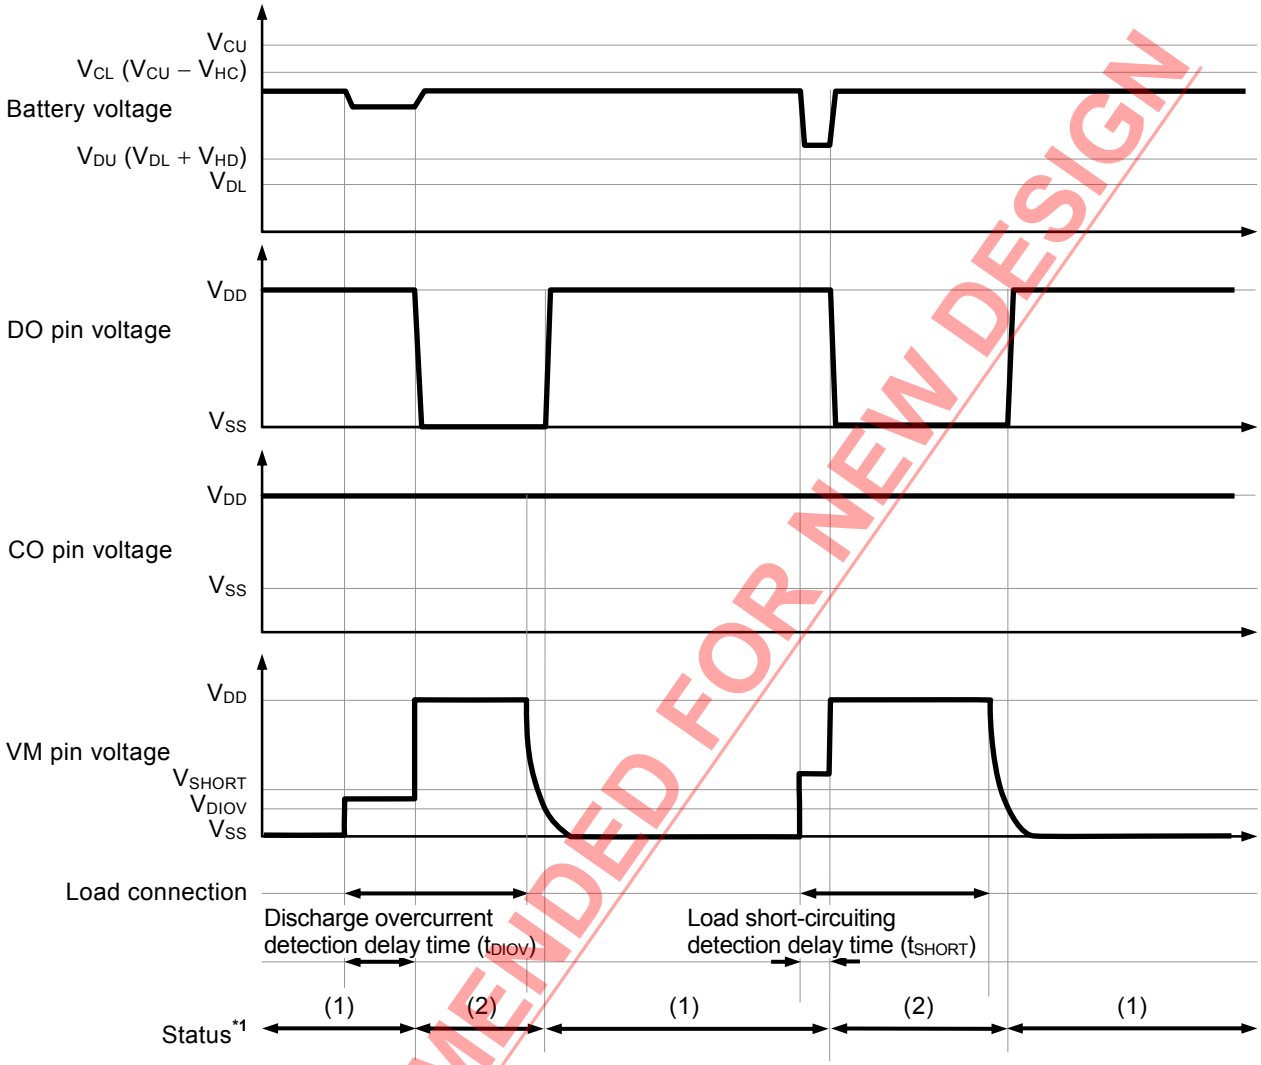

*1. (1): Normal status
(2): Discharge overcurrent status


Remark The charger is assumed to charge with a constant current.

Figure 12

NOT RECOMMENDED FOR NEW DESIGN

Downloaded from Arrow.com.

3. Charge overcurrent detection

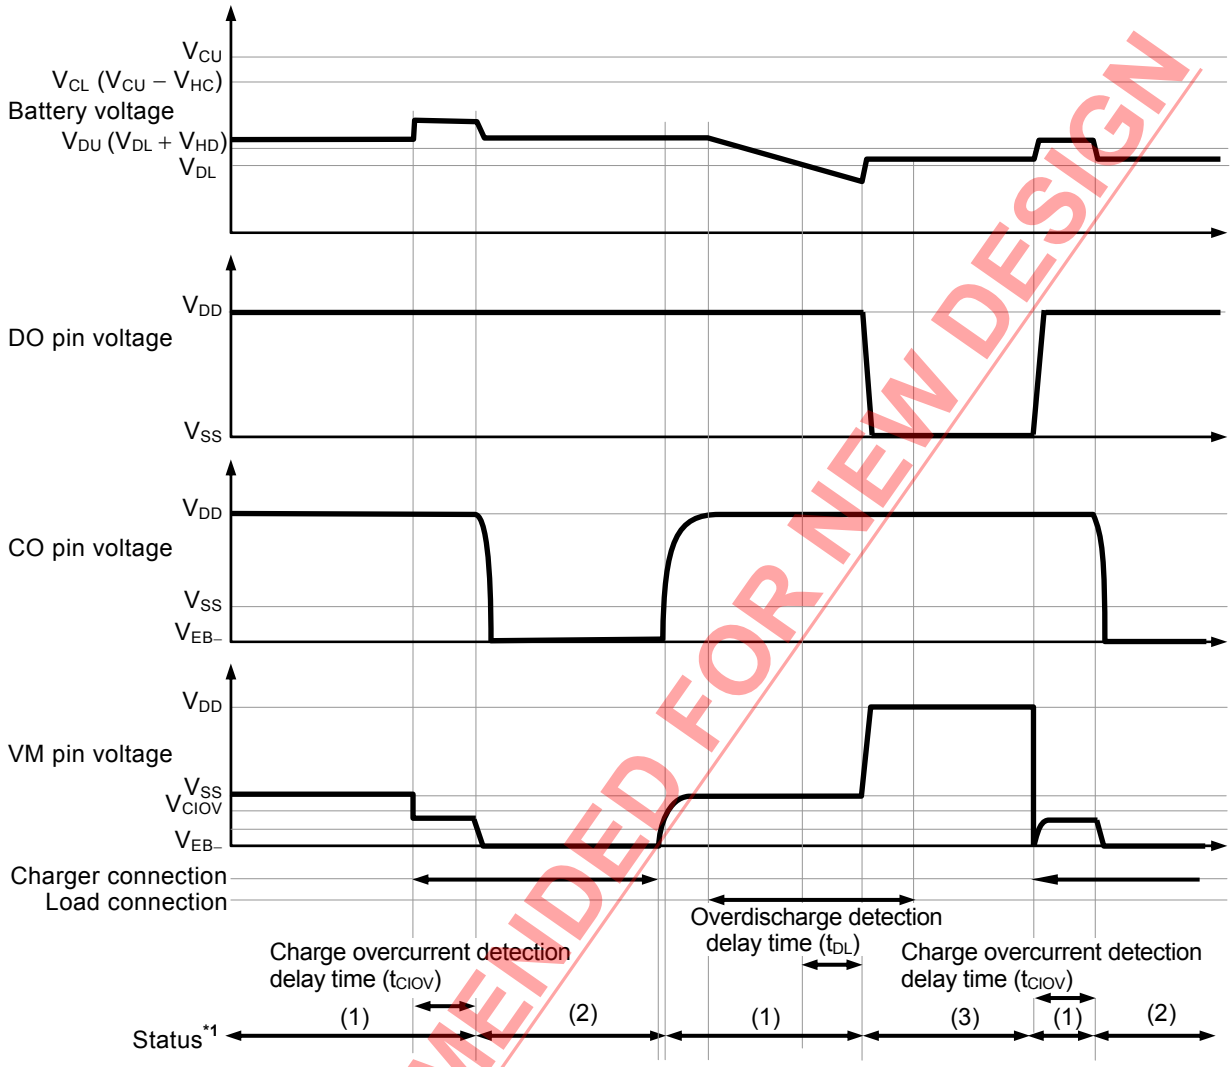

***1.** (1): Normal status
(2): Charge overcurrent status
(3): Overdischarge status

Remark The charger is assumed to charge with a constant current.

Figure 13

NOT RECOMMENDED FOR NEW DESIGN

Downloaded from Arrow.com.

■ Battery Protection IC Connection Example

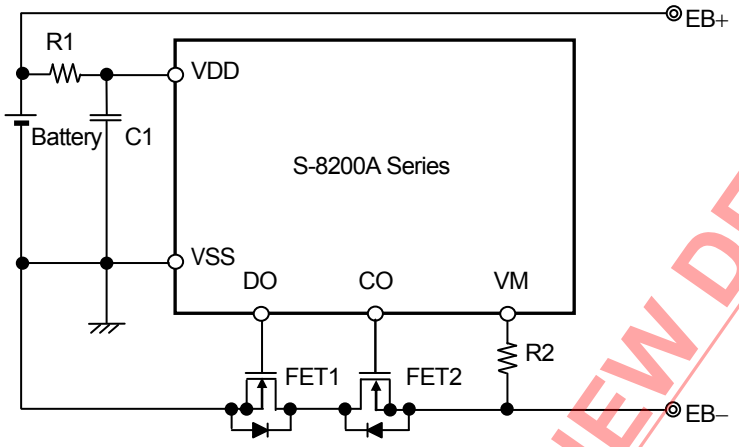


Figure 14

Table 11 Constants for External Components

Symbol	Part	Purpose	Min.	Typ.	Max.	Remark
FET1	N-channel MOS FET	Discharge control	–	–	–	Threshold voltage ≤ Overdischarge detection voltage*1 Gate to source withstand voltage ≥ Charger voltage*2
FET2	N-channel MOS FET	Charge control	–	–	–	Threshold voltage ≤ Overdischarge detection voltage*1 Gate to source withstand voltage ≥ Charger voltage*2
R1	Resistor	ESD protection, For power fluctuation	150 Ω	330 Ω	1 kΩ	Resistance should be as small as possible to avoid lowering the overcharge detection accuracy due to current consumption.*3
C1	Capacitor	For power fluctuation	0.068 μF	0.1 μF	1.0 μF	Connect a capacitor of 0.068 μF or higher between VDD pin and VSS pin.*4
R2	Resistor	Protection for reverse connection of a charger	300 Ω	2 kΩ	4 kΩ	Select as large a resistance as possible to prevent current when a charger is connected in reverse.*5

***1.** If the threshold voltage of a FET is low, the FET may not cut the charge current. If a FET with a threshold voltage equal to or higher than the overdischarge detection voltage is used, discharging may be stopped before overdischarge is detected.

***2.** If the withstand voltage between the gate and source is lower than the charger voltage, the FET may be destroyed.

***3.** An accuracy of overcharge detection voltage is guaranteed by R1 = 330 Ω. Connecting resistors with other values worsen the accuracy. In case of connecting larger resistor to R1, the voltage between the VDD pin and VSS pin may exceed the absolute maximum rating because the current flows to the S-8200A Series from the charger due to reverse connection of charger. Connect a resistor of 150 Ω or more to R1 for ESD protection.

***4.** When connecting a resistor of 150 Ω or less to R1 or a capacitor of 0.068 μF or less to C1, the S-8200A Series may malfunction when power dissipation is largely fluctuated.

***5.** When a resistor more than 4 kΩ is connected to R2, the charge current may not be cut.

Caution 1. The above constants may be changed without notice.

2. It has not been confirmed whether the operation is normal or not in circuits other than the above example of connection. In addition, the example of connection shown above and the constant do not guarantee proper operation. Perform thorough evaluation using the actual application to set the constant.

NOT RECOMMENDED FOR NEW DESIGN

Downloaded from Arrow.com.

■ Precautions

- The application conditions for the input voltage, output voltage, and load current should not exceed the package power dissipation.
- Do not apply an electrostatic discharge to this IC that exceeds the performance ratings of the built-in electrostatic protection circuit.
- ABLIC Inc. claims no responsibility for any and all disputes arising out of or in connection with any infringement by products including this IC of patents owned by a third party.


NOT RECOMMENDED FOR NEW DESIGN

Downloaded from Arrow.com.


■ Characteristics (Typical Data)

1. Current consumption


1. 1 I_{OPE} vs. Ta

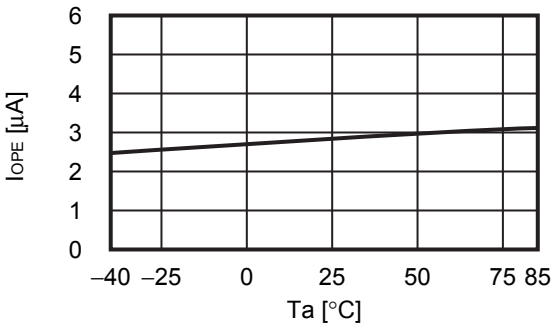

1. 2 I_{PDN} vs. Ta

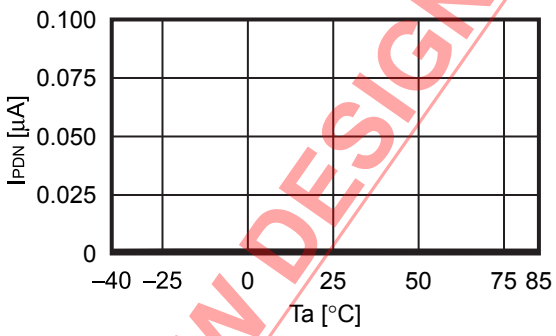

1. 3 I_{OPE} vs. V_{DD}

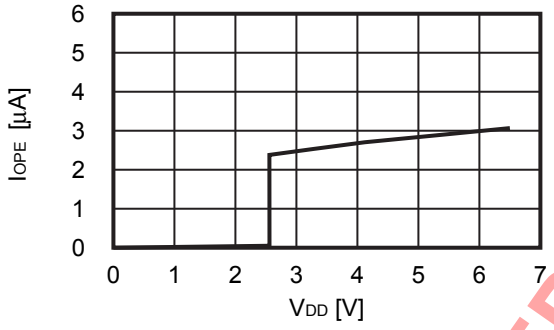


NOT RECOMMENDED FOR NEW DESIGN


Downloaded from Arrow.com.

2. Overcharge detection / release voltage, overdischarge detection / release voltage, overcurrent detection voltage, charge overcurrent detection voltage, and delay time


2. 1 V_{CU} vs. Ta

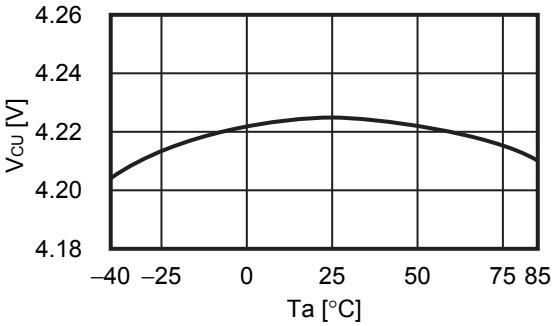


2. 2 V_{CL} vs. Ta

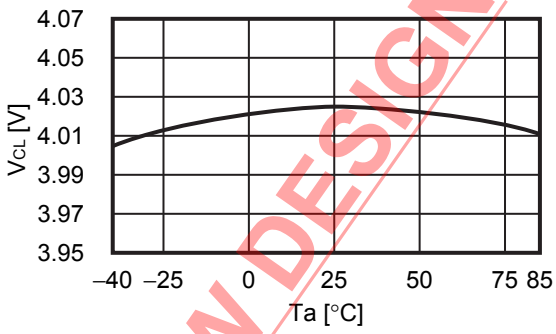


2. 3 V_{DL} vs. Ta

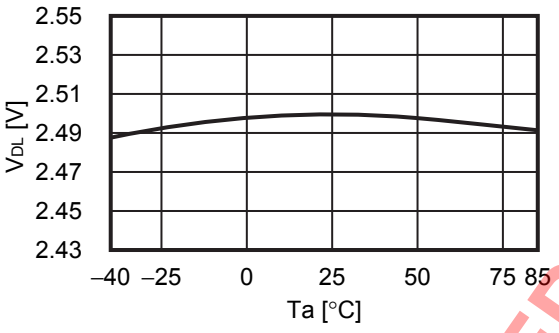


2. 4 V_{DU} vs. Ta

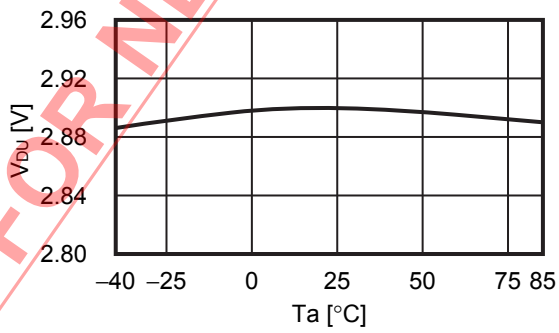


2. 5 t_{CU} vs. Ta

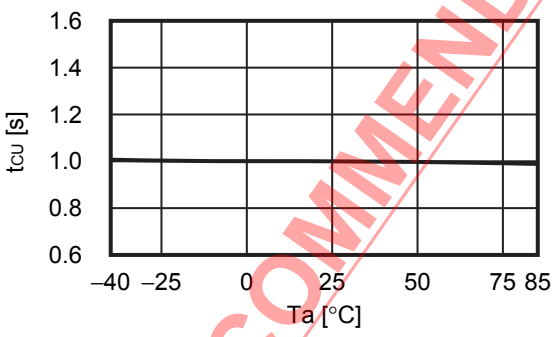


2. 6 t_{DL} vs. Ta

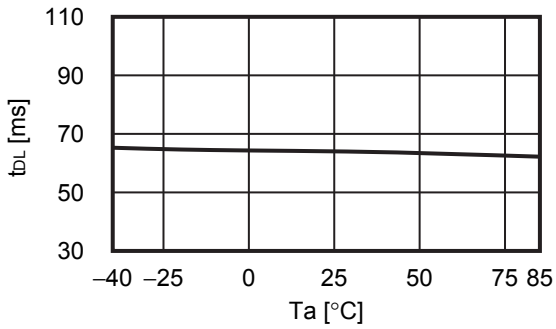

2. 7 V_{DIOV} vs. Ta

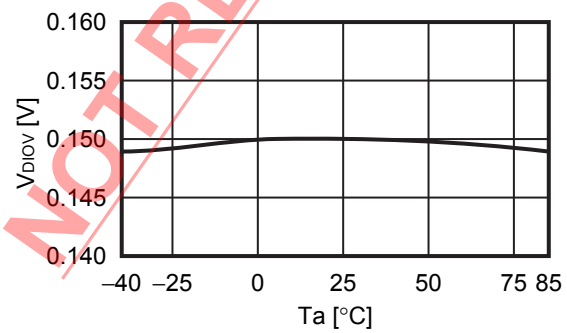


2. 8 t_{DIOV} vs. V_{DD}

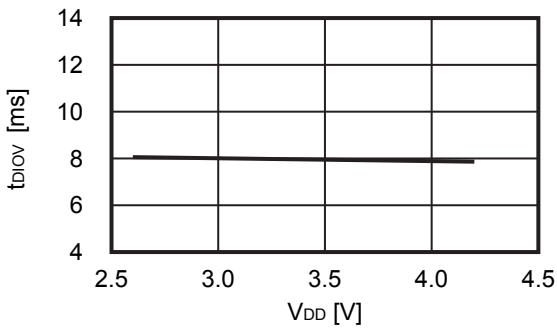


NOT RECOMMENDED FOR NEW DESIGN

Downloaded from Arrow.com.


2. 9 t_{DIOV} vs. Ta

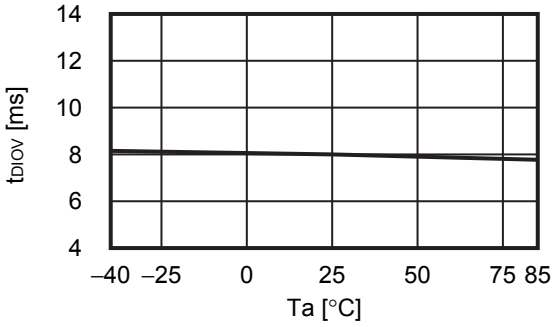


2. 10 V_{CIOV} vs. Ta

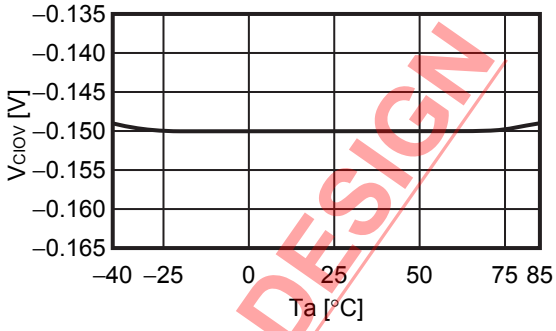


2. 11 t_{CIOV} vs. V_{DD}

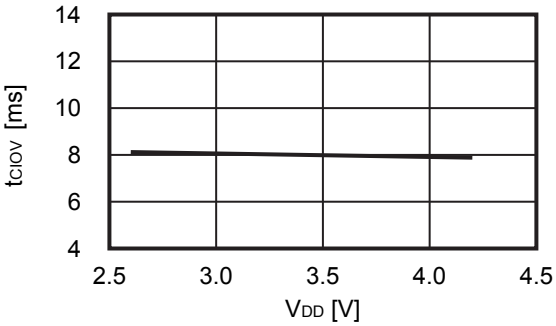


2. 12 t_{CIOV} vs. Ta

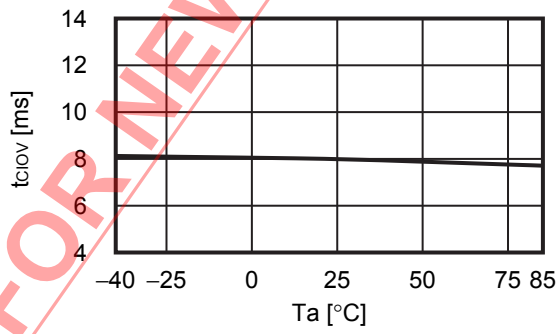


2. 13 V_{SHORT} vs. Ta

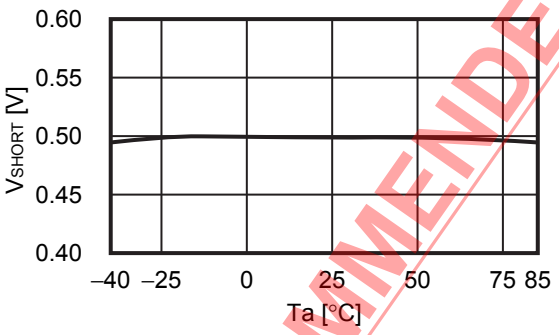

2. 14 t_{SHORT} vs. V_{DD}

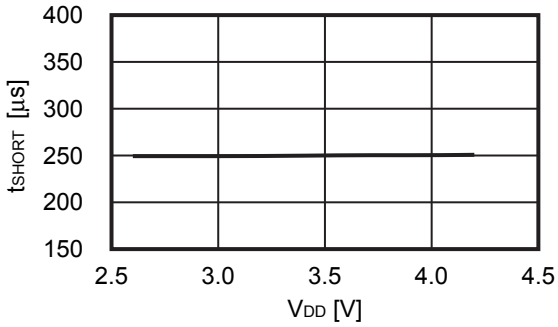

2. 15 t_{SHORT} vs. Ta

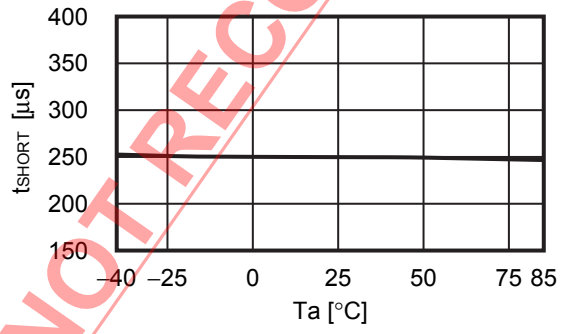


NOT RECOMMENDED FOR NEW DESIGN


Downloaded from Arrow.com.

3. CO pin / DO pin


3. 1 R_{COH} vs. V_{CO}

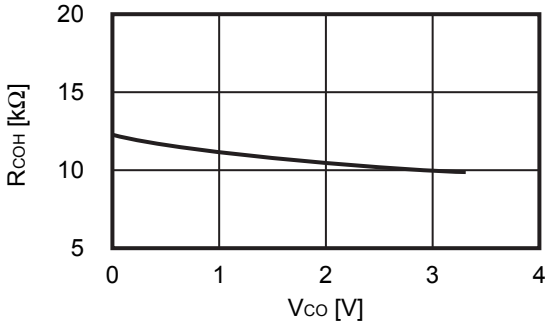


3. 2 R_{COL} vs. V_{CO}

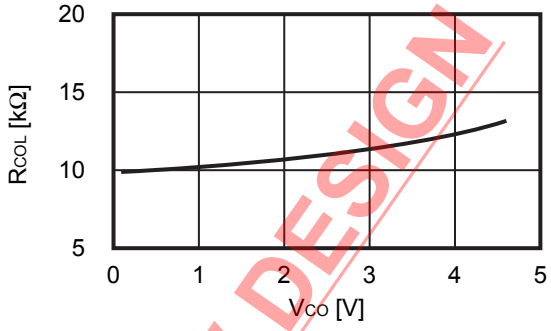

3. 3 R_{DOH} vs. V_{DO}

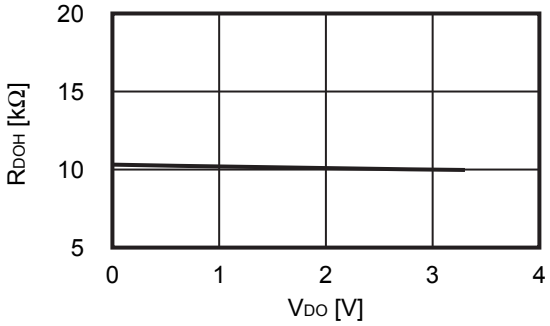

3. 4 R_{DOL} vs. V_{DO}

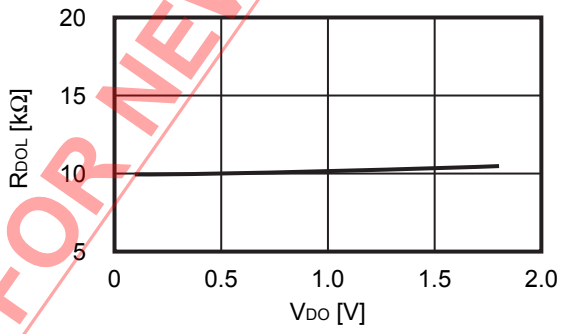


NOT RECOMMENDED FOR NEW DESIGN

Downloaded from Arrow.com.

■ Marking Specifications

1. SOT-23-6

Top view



(1) to (3): Product code (refer to **Product name vs. Product code**)
(4): Lot number


Product name vs. Product code

Product Name	Product Code		
	(1)	(2)	(3)
S-8200AAC-M6T1U	V	3	C
S-8200AAH-M6T1U	V	3	H
S-8200AAY-M6T1U	V	3	Y
S-8200ABE-M6T1U	V	4	E
S-8200ABM-M6T1U	V	4	M
S-8200ABX-M6T1U	V	4	X
S-8200ABZ-M6T1U	V	4	Z
S-8200ACF-M6T1U	S	Y	F
S-8200ACV-M6T1U	S	Y	V
S-8200ACW-M6T1U	S	Y	W

NOT RECOMMENDED FOR NEW DESIGN

Downloaded from Arrow.com.

2. SNT-6A




(1) to (3): Product code (refer to **Product name vs. Product code**)
(4) to (6): Lot number

Product name vs. Product code

Product Name	Product Code		
	(1)	(2)	(3)
S-8200AAA-I6T1U	V	3	A
S-8200AAB-I6T1U	V	3	B
S-8200AAC-I6T1U	V	3	C
S-8200AAD-I6T1U	V	3	D
S-8200AAF-I6T1U	V	3	F
S-8200AAG-I6T1U	V	3	G
S-8200AAH-I6T1U	V	3	H
S-8200ABA-I6T1U	V	4	A
S-8200ABI-I6T1U	V	4	I
S-8200ABK-I6T1U	V	4	K
S-8200ABL-I6T1U	V	4	L
S-8200ABM-I6T1U	V	4	M
S-8200ACN-I6T1U	S	Y	N
S-8200ACO-I6T1U	S	Y	O
S-8200ACP-I6T1U	S	Y	P
S-8200ACQ-I6T1U	S	Y	Q
S-8200ACR-I6T1U	S	Y	R

NOT RECOMMENDED FOR NEW DESIGN

Downloaded from Arrow.com.

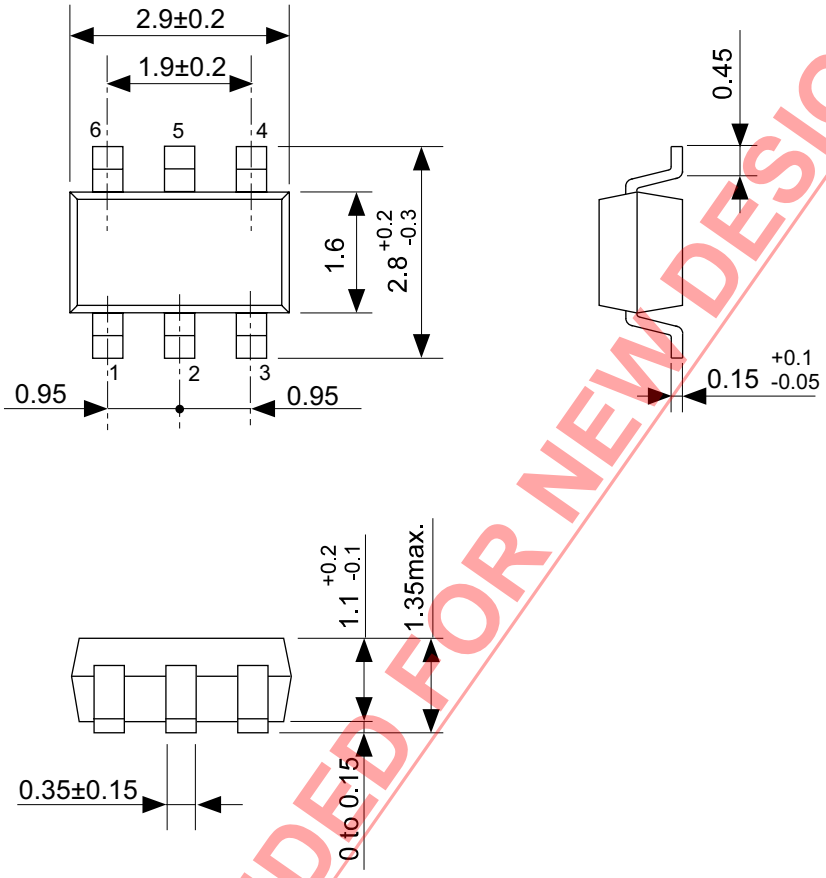


NOT RECOMMENDED FOR NEW DESIGN

No. MP006-A-P-SD-2.1

TITLE	SOT236-A-PKG Dimensions
No.	MP006-A-P-SD-2.1
ANGLE	
UNIT	mm

ABLIC Inc.

Downloaded from Arrow.com.

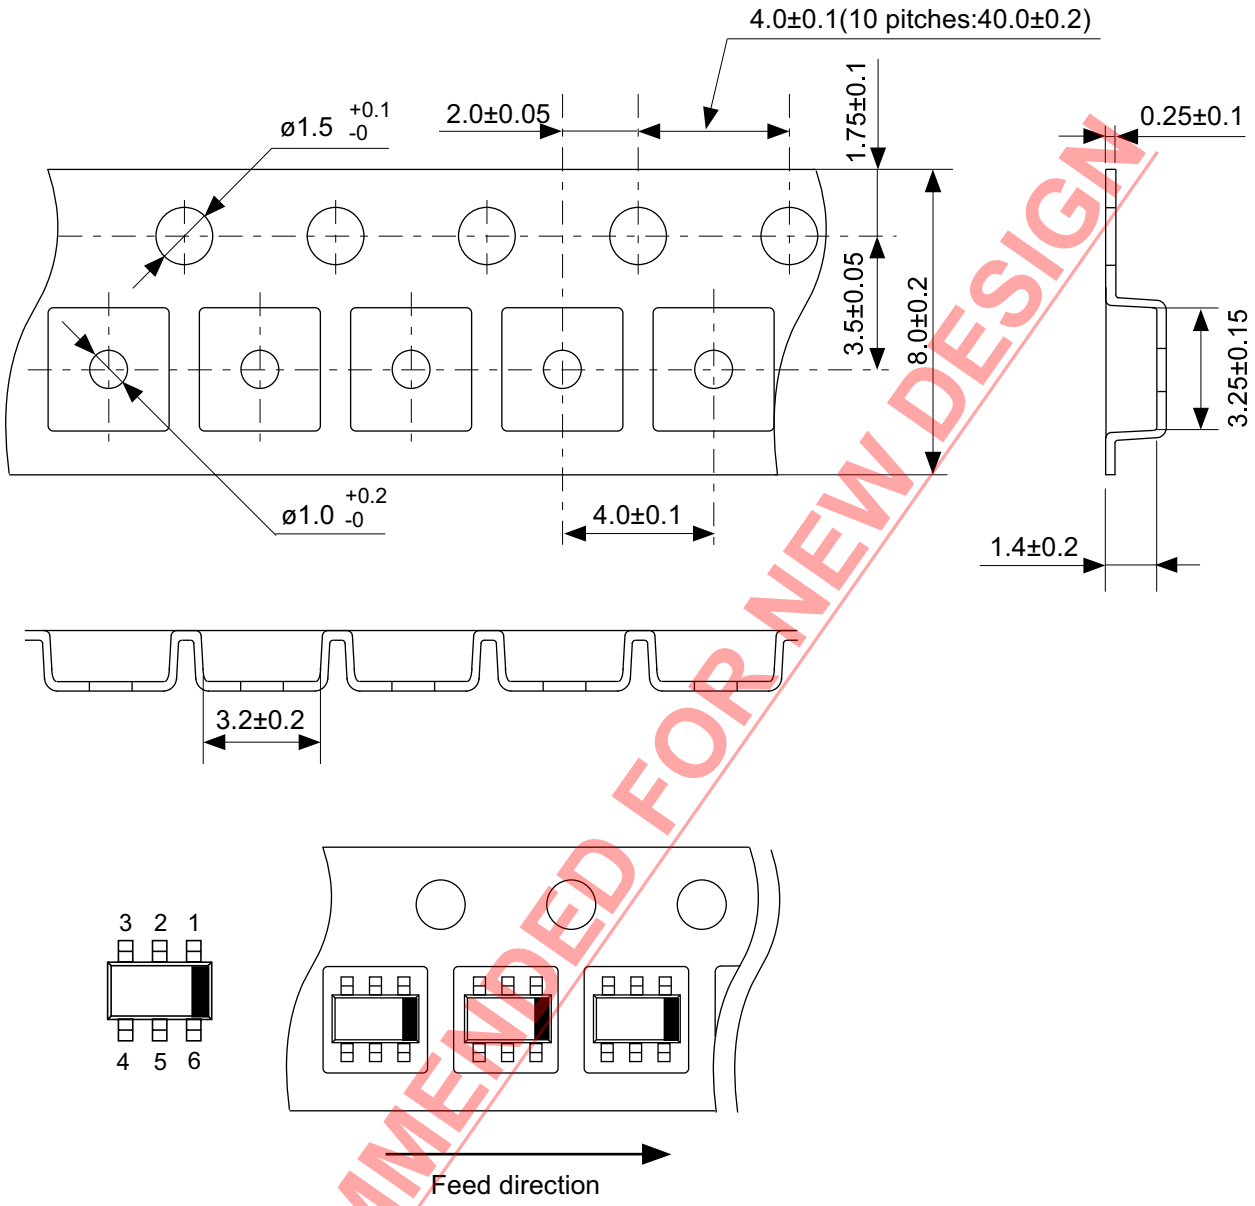


NOT RECOMMENDED FOR NEW DESIGN


No. MP006-A-C-SD-3.1

TITLE	SOT236-A-Carrier Tape
No.	MP006-A-C-SD-3.1
ANGLE	
UNIT	mm
ABLIC Inc.	

Downloaded from Arrow.com.

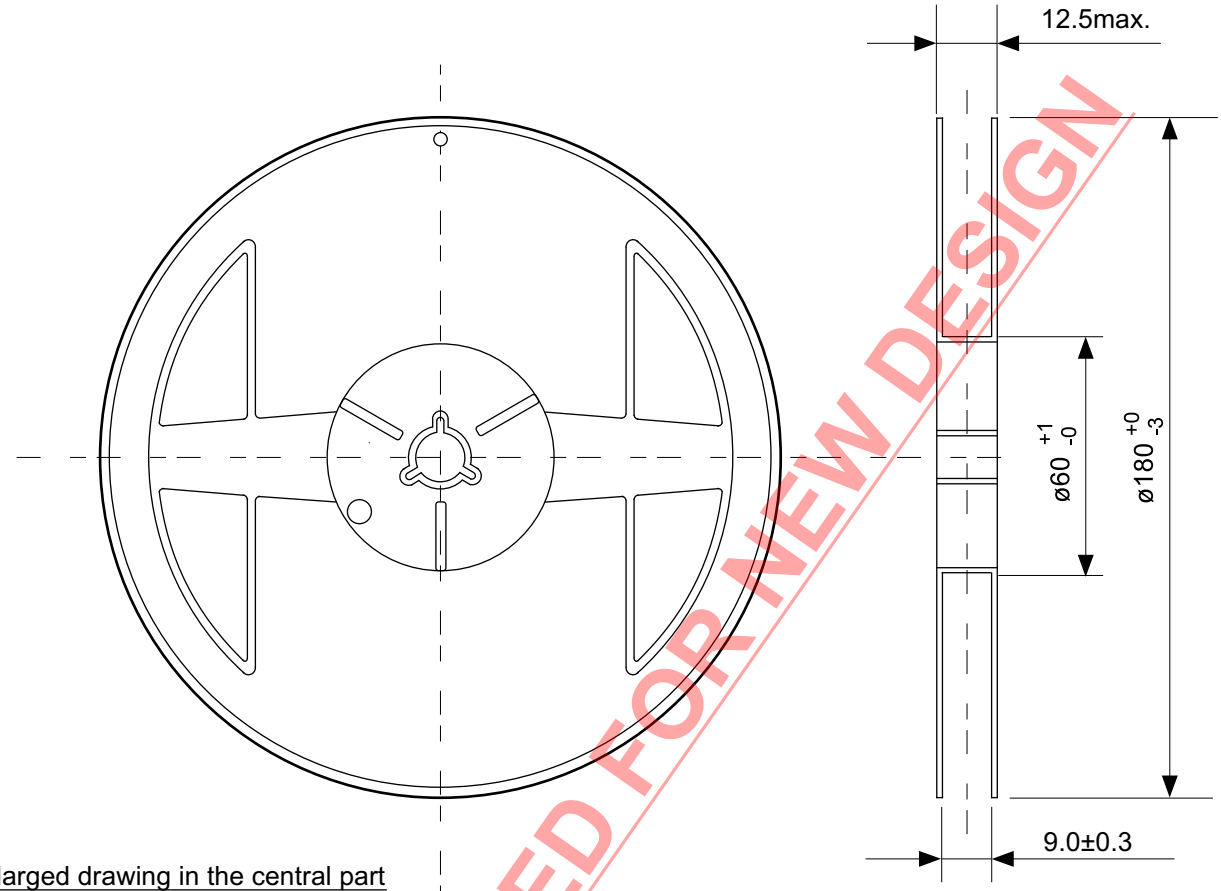

Enlarged drawing in the central part

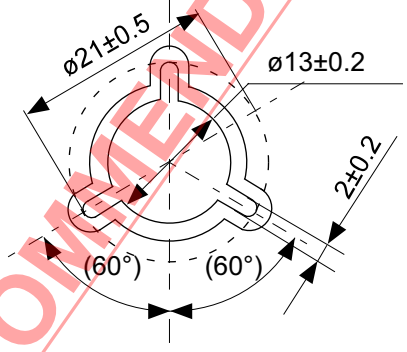


No. MP006-A-R-SD-2.1

NOT RECOMMENDED FOR NEW DESIGN

TITLE	SOT236-A-Reel		
No.	MP006-A-R-SD-2.1		
ANGLE		QTY	3,000
UNIT	mm		
ABLIC Inc.			

Downloaded from Arrow.com.

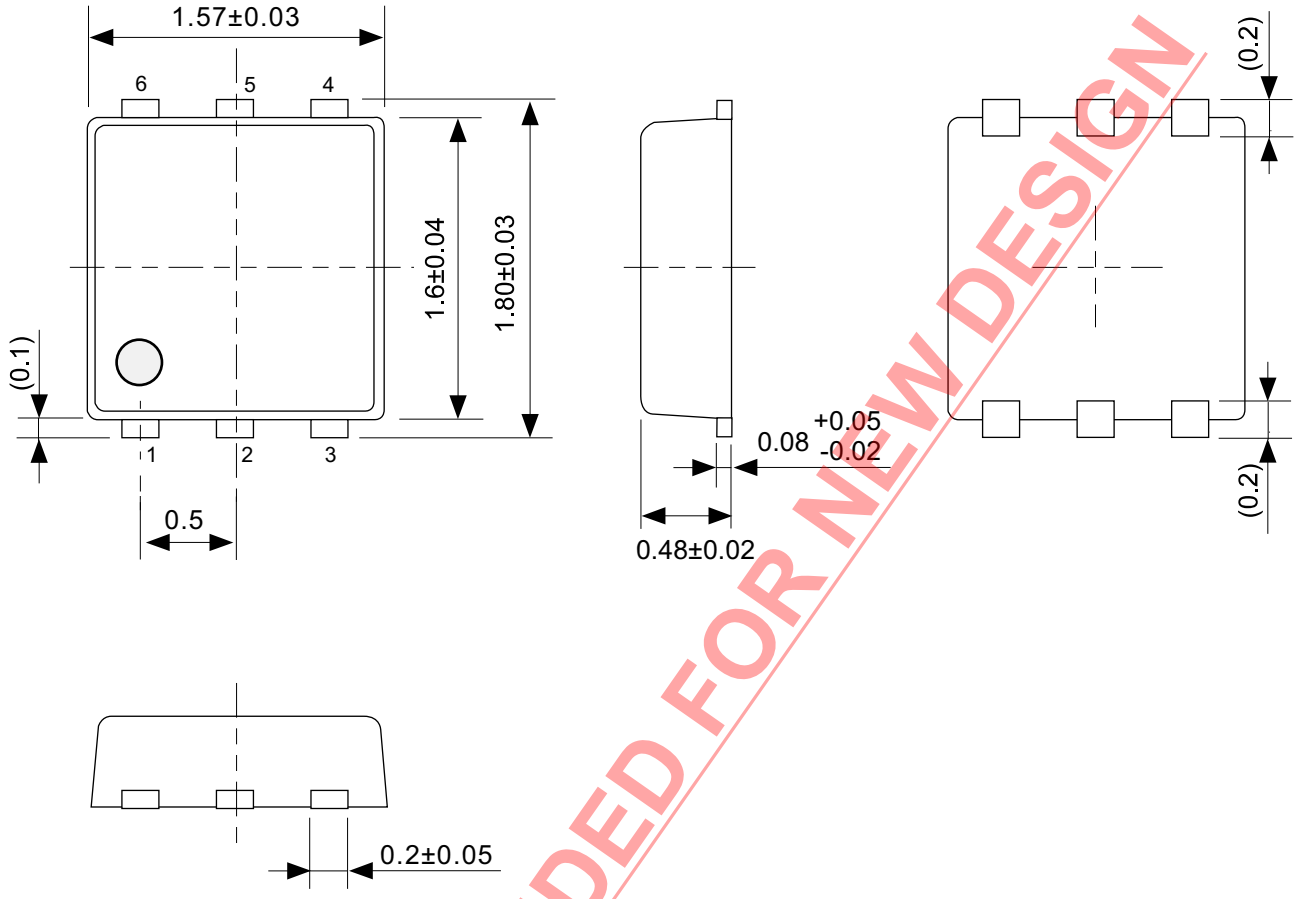


NOT RECOMMENDED FOR NEW DESIGN

No. PG006-A-P-SD-2.1

TITLE	SNT-6A-A-PKG Dimensions
No.	PG006-A-P-SD-2.1
ANGLE	
UNIT	mm
ABLIC Inc.	

Downloaded from Arrow.com.

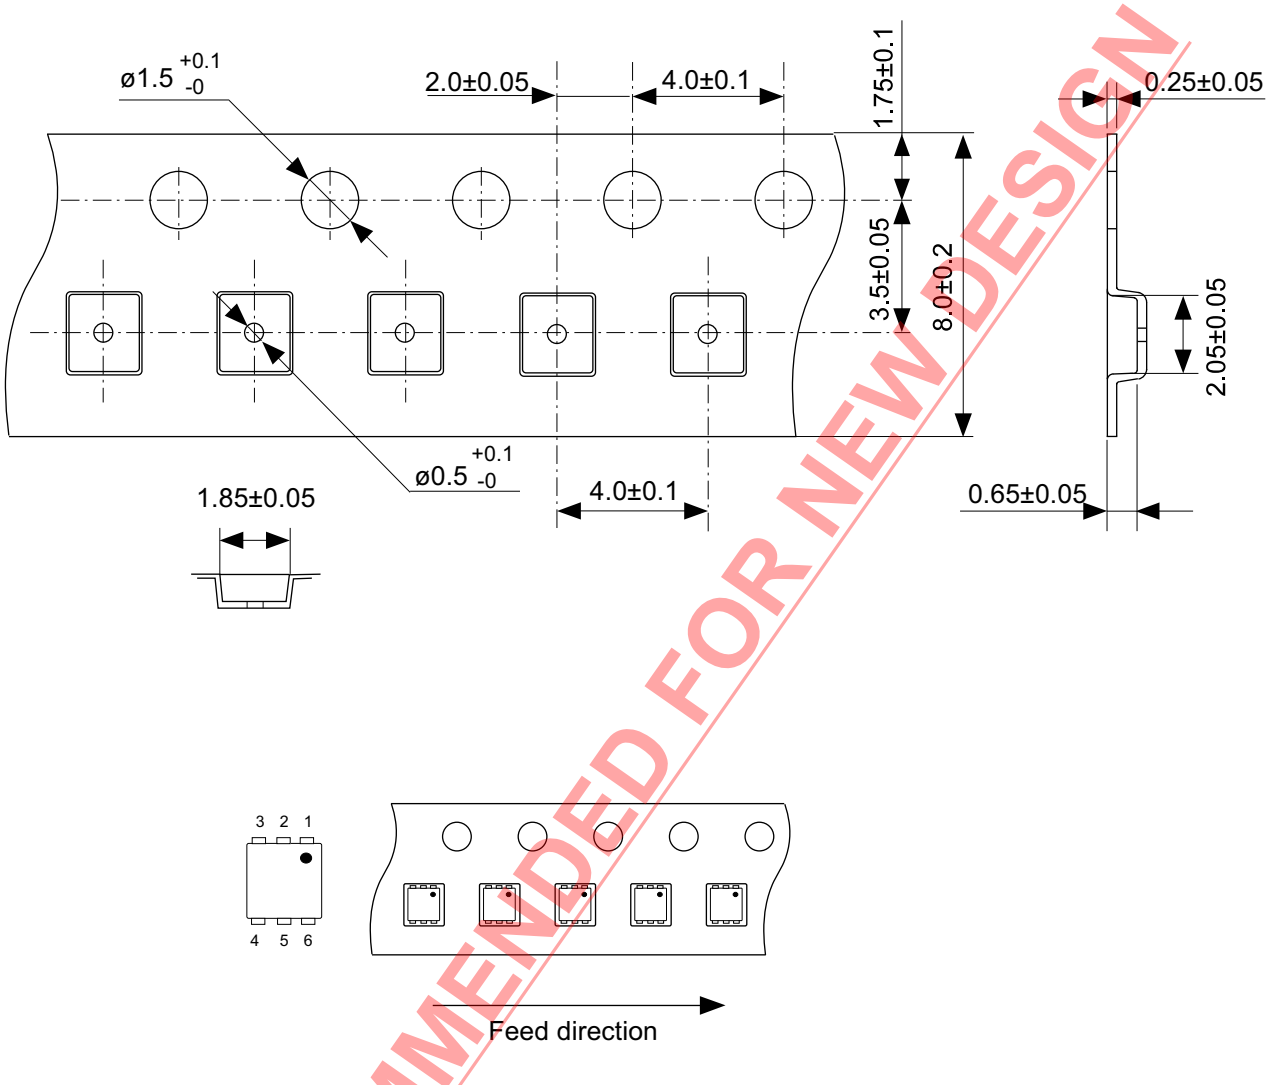


NOT RECOMMENDED FOR NEW DESIGN


No. PG006-A-C-SD-2.0

TITLE	SNT-6A-A-Carrier Tape
No.	PG006-A-C-SD-2.0
ANGLE	
UNIT	mm
ABLIC Inc.	

Downloaded from Arrow.com.

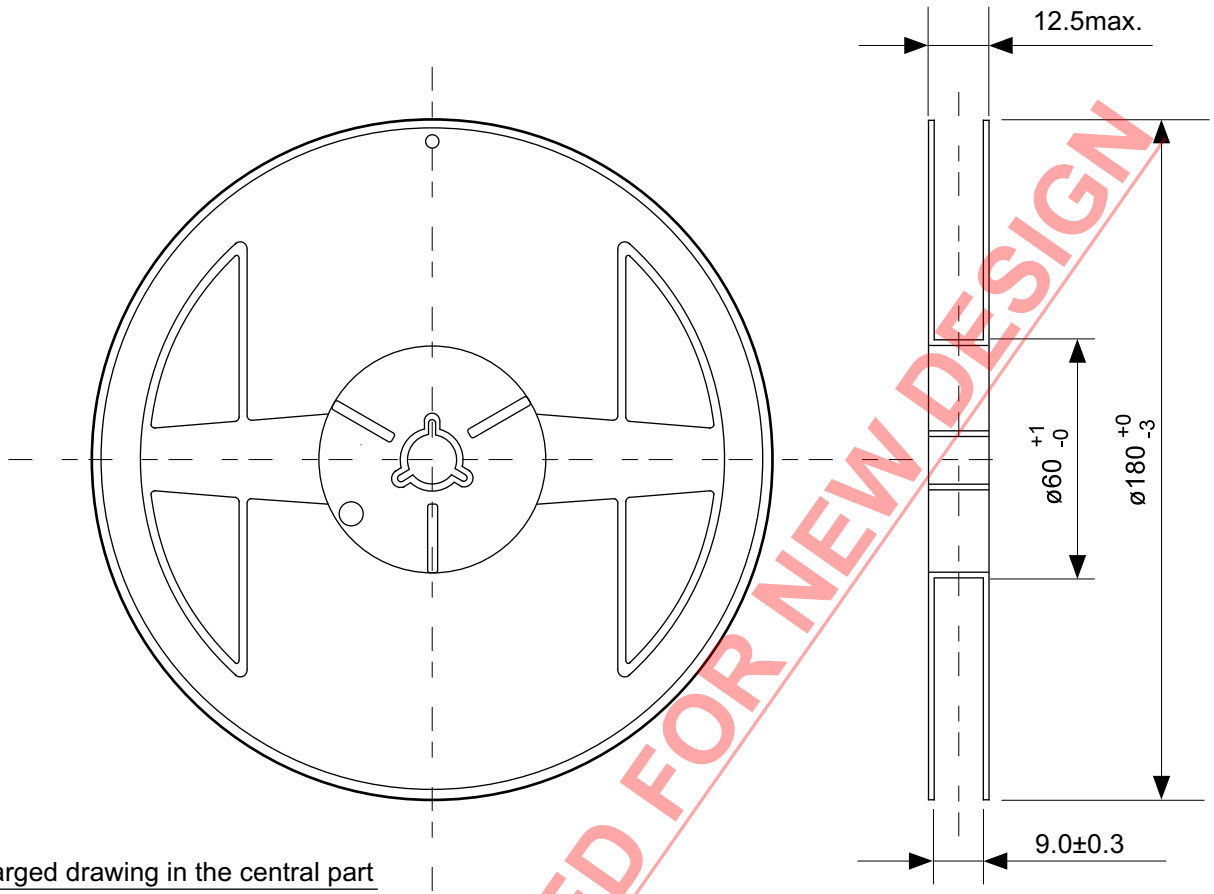

Enlarged drawing in the central part

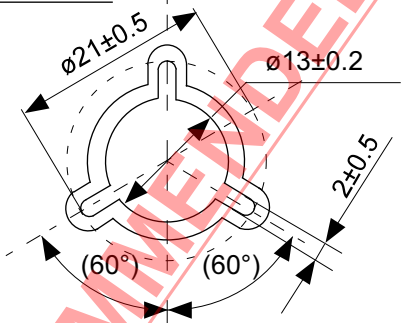


No. PG006-A-R-SD-1.0

NOT RECOMMENDED FOR NEW DESIGN

TITLE	SNT-6A-A-Reel		
No.	PG006-A-R-SD-1.0		
ANGLE		QTY.	5,000
UNIT	mm		
ABLIC Inc.			

Downloaded from Arrow.com.

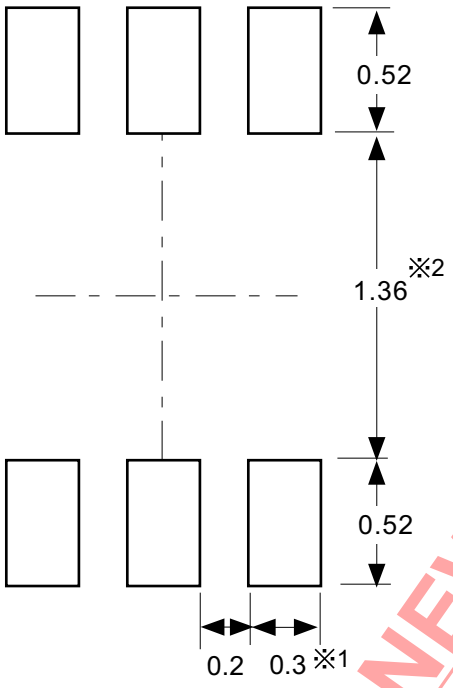

※1. ランドパターンの幅に注意してください (0.25 mm min. / 0.30 mm typ.)。
※2. パッケージ中央にランドパターンを広げないでください (1.30 mm ~ 1.40 mm)。

注意 1. パッケージのモールド樹脂下にシルク印刷やハンダ印刷などしないでください。
2. パッケージ下の配線上のソルダーレジストなどの厚みをランドパターン表面から0.03 mm 以下にしてください。
3. マスク開口サイズと開口位置はランドパターンと合わせてください。
4. 詳細は〝SNTパッケージ活用の手引き〟を参照してください。

※1. Pay attention to the land pattern width (0.25 mm min. / 0.30 mm typ.).
※2. Do not widen the land pattern to the center of the package (1.30 mm ~ 1.40 mm).

Caution 1. Do not do silkscreen printing and solder printing under the mold resin of the package.
2. The thickness of the solder resist on the wire pattern under the package should be 0.03 mm or less from the land pattern surface.
3. Match the mask aperture size and aperture position with the land pattern.
4. Refer to "SNT Package User's Guide" for details.

※1. 请注意焊盘模式的宽度 (0.25 mm min. / 0.30 mm typ.)。
※2. 请勿向封装中间扩展焊盘模式 (1.30 mm ~ 1.40 mm)。

注意 1. 请勿在树脂型封装的下面印刷丝网、焊锡。
2. 在封装下、布线上的阻焊膜厚度 (从焊盘模式表面起) 请控制在 0.03 mm 以下。
3. 钢网的开口尺寸和开口位置请与焊盘模式对齐。
4. 详细内容请参阅 "SNT 封装的应用指南"。

NOT RECOMMENDED FOR NEW DESIGN

No. PG006-A-L-SD-4.1

TITLE	SNT-6A-A -Land Recommendation
No.	PG006-A-L-SD-4.1
ANGLE	
UNIT	mm

ABLIC Inc.

Downloaded from Arrow.com.

Disclaimers (Handling Precautions)

1. All the information described herein (product data, specifications, figures, tables, programs, algorithms and application circuit examples, etc.) is current as of publishing date of this document and is subject to change without notice.
2. The circuit examples and the usages described herein are for reference only, and do not guarantee the success of any specific mass-production design.
   ABLIC Inc. is not liable for any losses, damages, claims or demands caused by the reasons other than the products described herein (hereinafter "the products") or infringement of third-party intellectual property right and any other right due to the use of the information described herein.
3. ABLIC Inc. is not liable for any losses, damages, claims or demands caused by the incorrect information described herein.
4. Be careful to use the products within their ranges described herein. Pay special attention for use to the absolute maximum ratings, operation voltage range and electrical characteristics, etc.
   ABLIC Inc. is not liable for any losses, damages, claims or demands caused by failures and / or accidents, etc. due to the use of the products outside their specified ranges.
5. Before using the products, confirm their applications, and the laws and regulations of the region or country where they are used and verify suitability, safety and other factors for the intended use.
6. When exporting the products, comply with the Foreign Exchange and Foreign Trade Act and all other export-related laws, and follow the required procedures.
7. The products are strictly prohibited from using, providing or exporting for the purposes of the development of weapons of mass destruction or military use. ABLIC Inc. is not liable for any losses, damages, claims or demands caused by any provision or export to the person or entity who intends to develop, manufacture, use or store nuclear, biological or chemical weapons or missiles, or use any other military purposes.
8. The products are not designed to be used as part of any device or equipment that may affect the human body, human life, or assets (such as medical equipment, disaster prevention systems, security systems, combustion control systems, infrastructure control systems, vehicle equipment, traffic systems, in-vehicle equipment, aviation equipment, aerospace equipment, and nuclear-related equipment), excluding when specified for in-vehicle use or other uses by ABLIC, Inc. Do not apply the products to the above listed devices and equipments.
   ABLIC Inc. is not liable for any losses, damages, claims or demands caused by unauthorized or unspecified use of the products.
9. In general, semiconductor products may fail or malfunction with some probability. The user of the products should therefore take responsibility to give thorough consideration to safety design including redundancy, fire spread prevention measures, and malfunction prevention to prevent accidents causing injury or death, fires and social damage, etc. that may ensue from the products' failure or malfunction.
   The entire system in which the products are used must be sufficiently evaluated and judged whether the products are allowed to apply for the system on customer's own responsibility.
10. The products are not designed to be radiation-proof. The necessary radiation measures should be taken in the product design by the customer depending on the intended use.
11. The products do not affect human health under normal use. However, they contain chemical substances and heavy metals and should therefore not be put in the mouth. The fracture surfaces of wafers and chips may be sharp. Be careful when handling these with the bare hands to prevent injuries, etc.
12. When disposing of the products, comply with the laws and ordinances of the country or region where they are used.
13. The information described herein contains copyright information and know-how of ABLIC Inc. The information described herein does not convey any license under any intellectual property rights or any other rights belonging to ABLIC Inc. or a third party. Reproduction or copying of the information from this document or any part of this document described herein for the purpose of disclosing it to a third-party is strictly prohibited without the express permission of ABLIC Inc.
14. For more details on the information described herein or any other questions, please contact ABLIC Inc.'s sales representative.
15. This Disclaimers have been delivered in a text using the Japanese language, which text, despite any translations into the English language and the Chinese language, shall be controlling.

NOT RECOMMENDED FOR NEW DESIGN

Downloaded from Arrow.com.