

OLGA-WAS

Asymmetric beam for wall-washing. Assembly with holder and installation tape.



SPECIFICATION:


Dimensions	Ø 32.0
Height	20.8 mm
Fastening	tape
ROHS compliant	yes 

MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
OLGA-WAS	Single lens	PMMA	clear		
OLGA-HLD	Holder	PC	black		
SPUTNIK-TAPE3	Tape	Acryl tape	black		

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
CA16308_OLGA-WAS » Box size: 476 x 273 x 292 mm	792	132	66	9.0


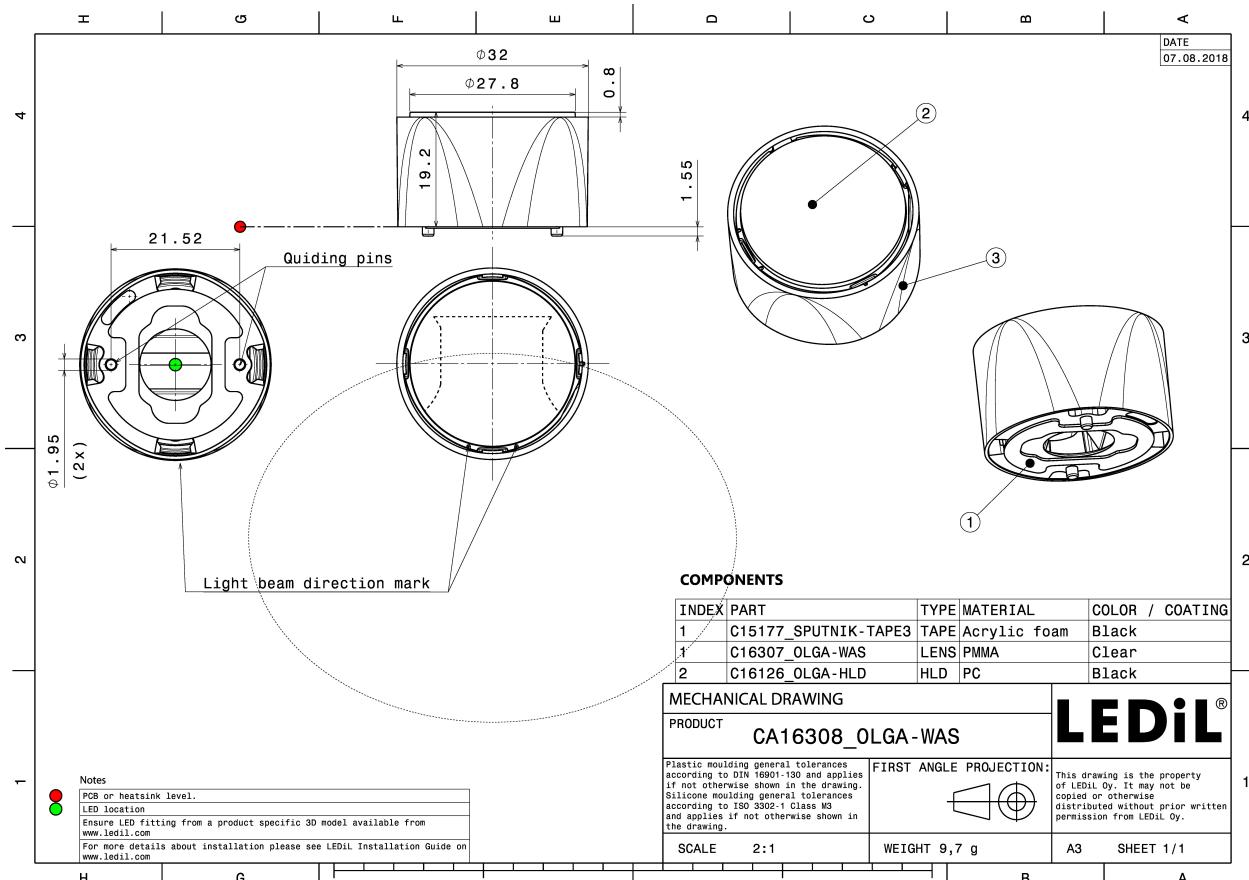


See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):




LED XHP35 HD
 FWHM / FWTM Asymmetric
 Efficiency 73 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

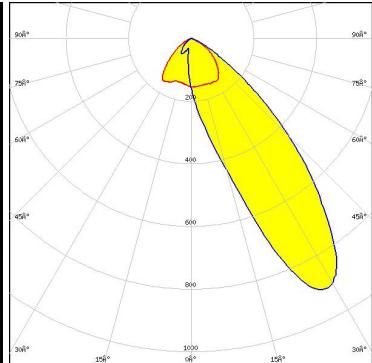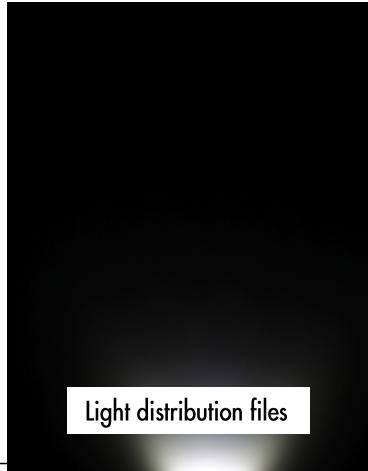

Light distribution files




LED XHP35 HI
 FWHM / FWTM Asymmetric
 Efficiency 76 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

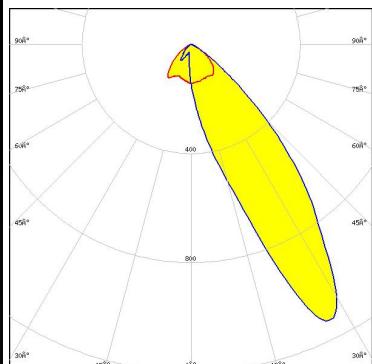

Light distribution files



LED XHP50.2
 FWHM / FWTM Asymmetric
 Efficiency 67 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

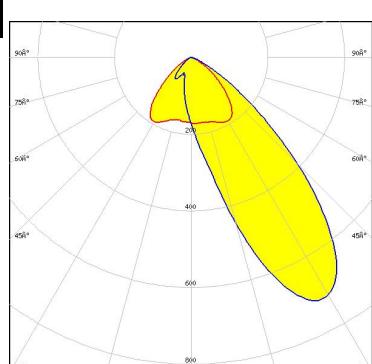


Light distribution files

OPTICAL RESULTS (MEASURED):




LED XHP70.2
FWHM / FWTM Asymmetric
Efficiency 70 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

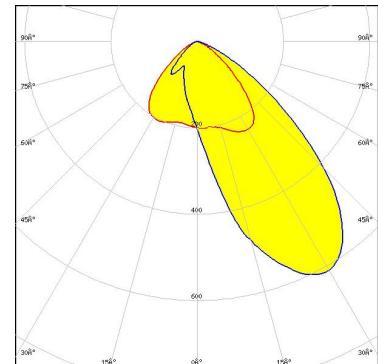

Light distribution files




LED XM-L3
FWHM / FWTM Asymmetric
Efficiency 72 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

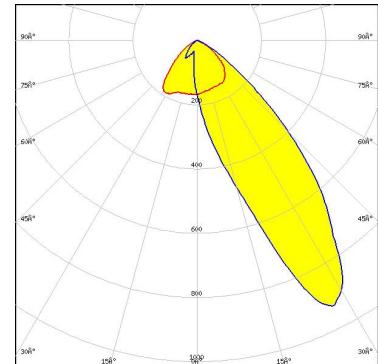

Light distribution files



LED XP-E2
FWHM / FWTM Asymmetric
Efficiency 76 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

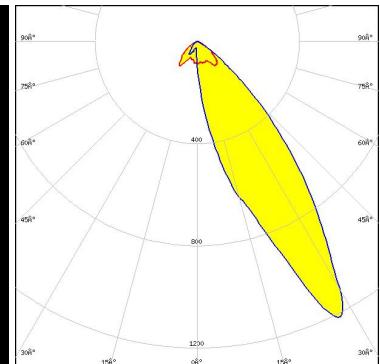


Light distribution files

OPTICAL RESULTS (MEASURED):





LED XP-G2
 FWHM / FWTM Asymmetric
 Efficiency 76 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

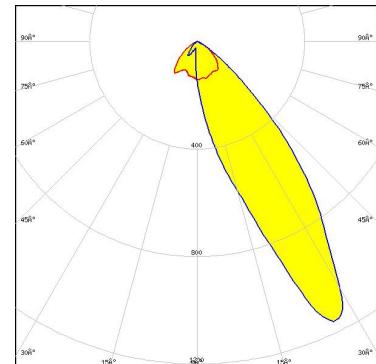

Light distribution files





LED XP-G2
 FWHM / FWTM Asymmetric
 Efficiency 75 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

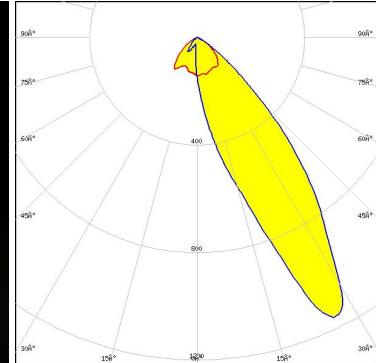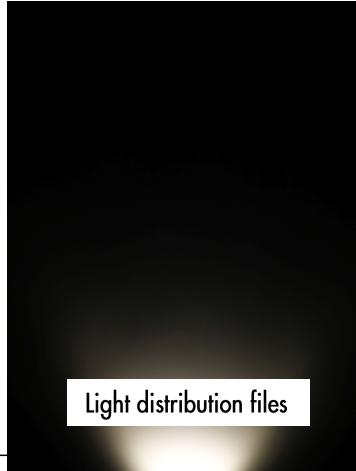

Light distribution files



LED XP-G3
 FWHM / FWTM Asymmetric
 Efficiency 72 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

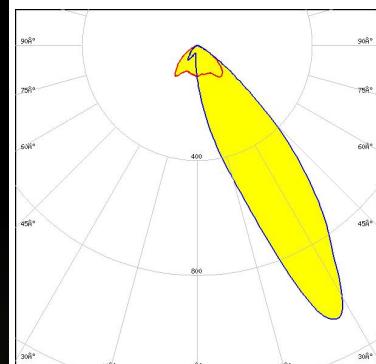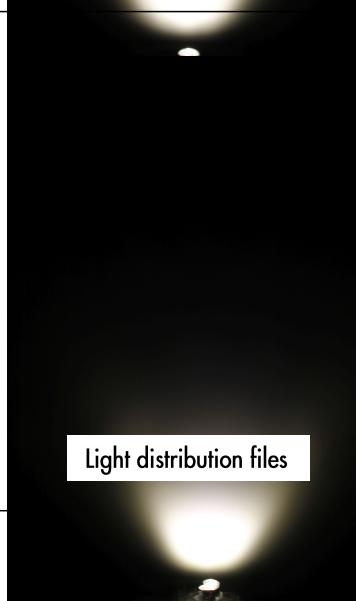

Light distribution files


OPTICAL RESULTS (MEASURED):



LED XP-L2
FWHM / FWTM Asymmetric
Efficiency 72 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:




Light distribution files

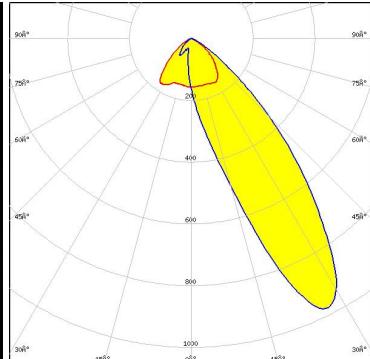

LED XQ-E HD
FWHM / FWTM Asymmetric
Efficiency 67 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:




Light distribution files

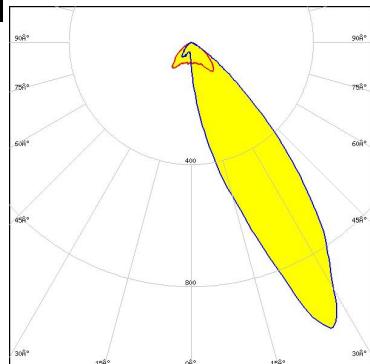

LED XQ-E HI
FWHM / FWTM Asymmetric
Efficiency 72 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:




Light distribution files

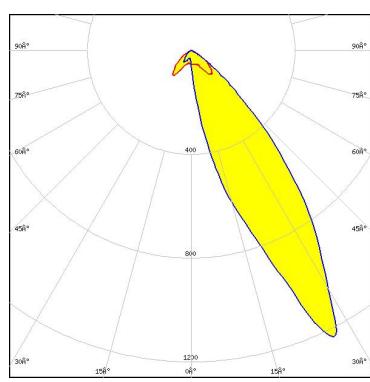

OPTICAL RESULTS (MEASURED):




LED XT-E
FWHM / FWTM Asymmetric
Efficiency 71 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

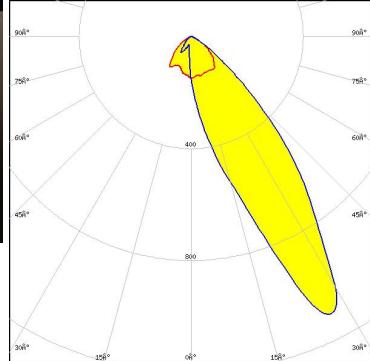

Light distribution files




LED LUXEON 5050 Round LES
FWHM / FWTM Asymmetric
Efficiency 75 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

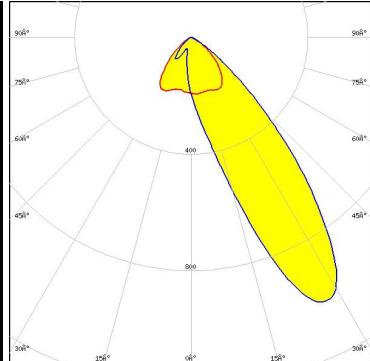

Light distribution files



LED LUXEON M/MX
FWHM / FWTM Asymmetric
Efficiency 75 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

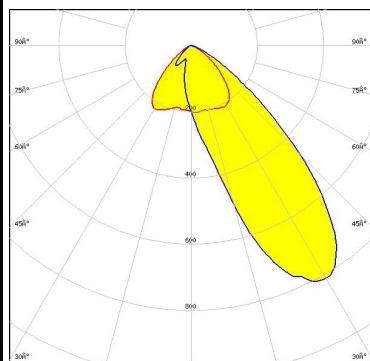


Light distribution files

OPTICAL RESULTS (MEASURED):




LED LUXEON MZ
 FWHM / FWTM Asymmetric
 Efficiency 75 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

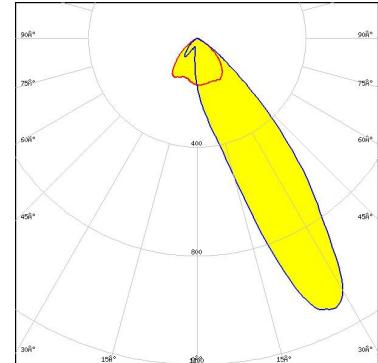

Light distribution files




LED LUXEON TX
 FWHM / FWTM Asymmetric
 Efficiency 72 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

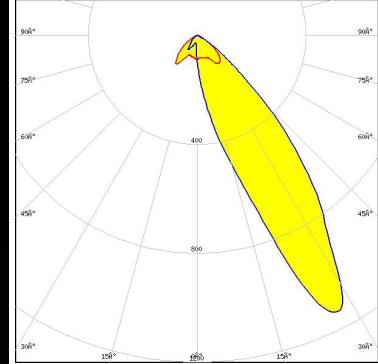

Light distribution files



LED LUXEON V
 FWHM / FWTM Asymmetric
 Efficiency 73 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:


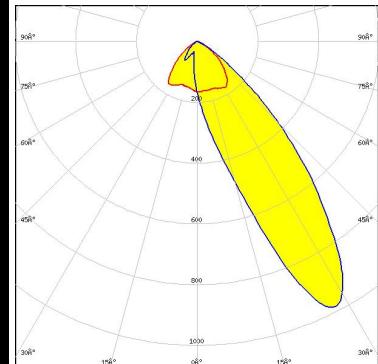


Light distribution files

OPTICAL RESULTS (MEASURED):




LED LUXEON Z ES
FWHM / FWTM Asymmetric
Efficiency 76 %
Peak intensity 1.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

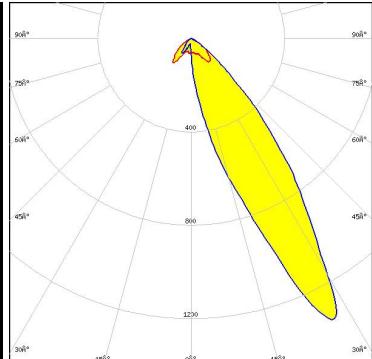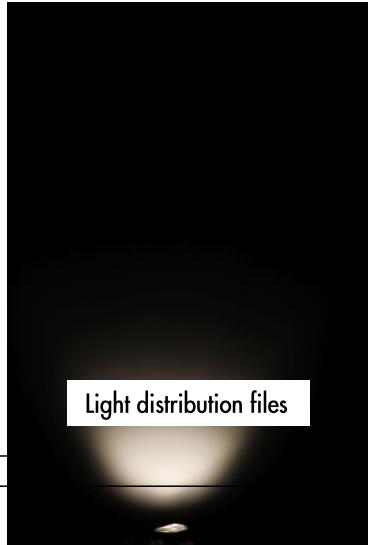

Light distribution files




LED NCSxE17A
FWHM / FWTM Asymmetric
Efficiency 72 %
Peak intensity 1.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

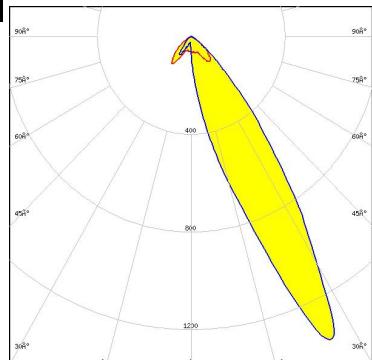

Light distribution files



LED NVSW319B
FWHM / FWTM Asymmetric
Efficiency 75 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

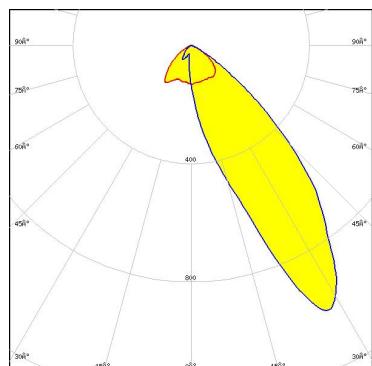


Light distribution files

OPTICAL RESULTS (MEASURED):





LED NVSxE21A
FWHM / FWTM Asymmetric
Efficiency 72 %
Peak intensity 1.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

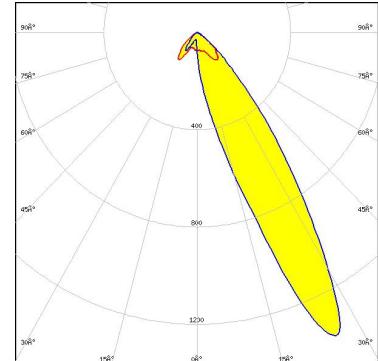

Light distribution files



LED NVSxx19B/NVSxx19C
FWHM / FWTM Asymmetric
Efficiency 75 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

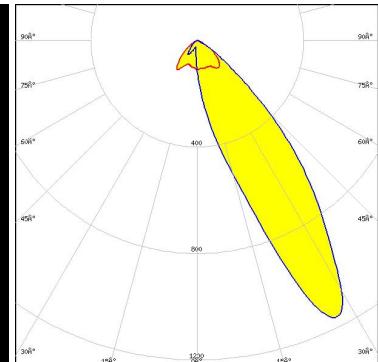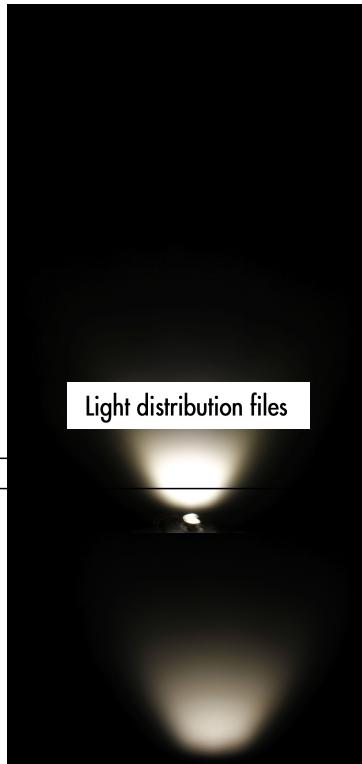


Light distribution files



Opto Semiconductors

LED Duris S8
FWHM / FWTM Asymmetric
Efficiency 75 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

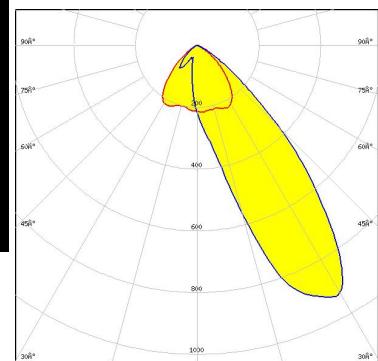

Light distribution files

OPTICAL RESULTS (MEASURED):


OSRAM

Opto Semiconductors

LED OSCONIQ P 3737 (2W version)
FWHM / FWTM Asymmetric
Efficiency 75 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



Light distribution files

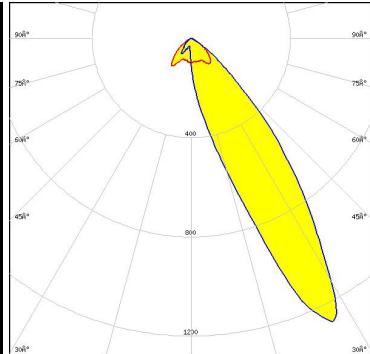


OSRAM

Opto Semiconductors

LED OSCONIQ P 3737 (3W version)
FWHM / FWTM Asymmetric
Efficiency 75 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



Light distribution files

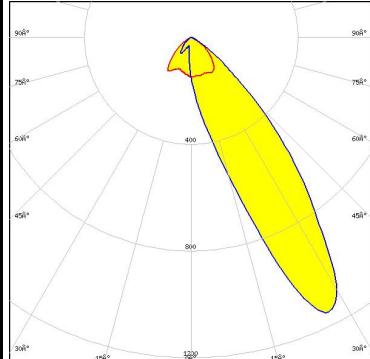


OSRAM

Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3
FWHM / FWTM Asymmetric
Efficiency 76 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



Light distribution files

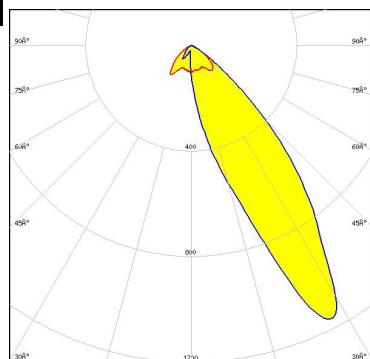


OPTICAL RESULTS (MEASURED):

OSRAM

Opto Semiconductors

LED OSLON SSL 150
FWHM / FWTM Asymmetric
Efficiency 71 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

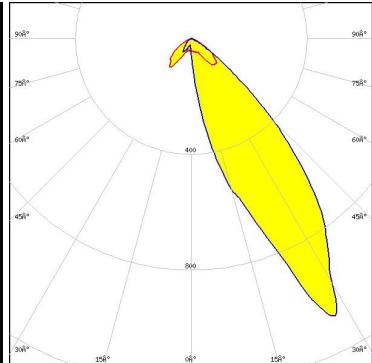


Light distribution files

OSRAM

Opto Semiconductors


LED OSTAR Stage (S2WN)
FWHM / FWTM Asymmetric
Efficiency 76 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour/type RGBW
Required components:

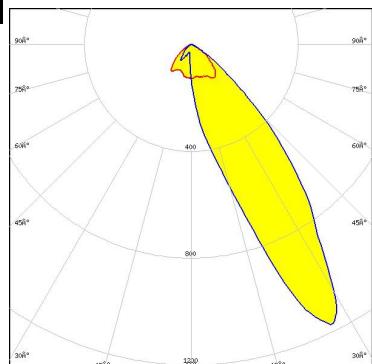

Light distribution files

SAMSUNG

LED LH231B
FWHM / FWTM Asymmetric
Efficiency 74 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

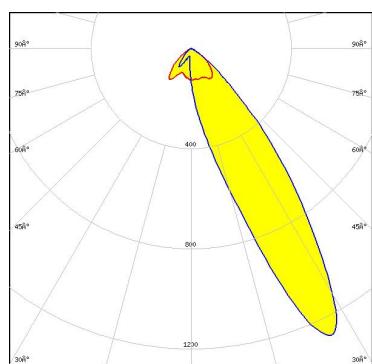


Light distribution files

OPTICAL RESULTS (MEASURED):

SAMSUNG


LED LH351B
FWHM / FWTM Asymmetric
Efficiency 78 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

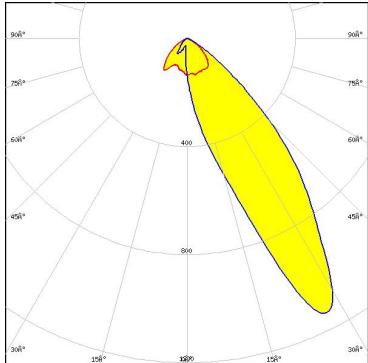

Light distribution files

SAMSUNG


LED LH351C
FWHM / FWTM Asymmetric
Efficiency 79 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

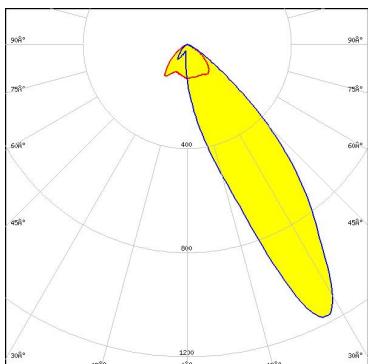

Light distribution files

SAMSUNG

LED LH351D
FWHM / FWTM Asymmetric
Efficiency 77 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

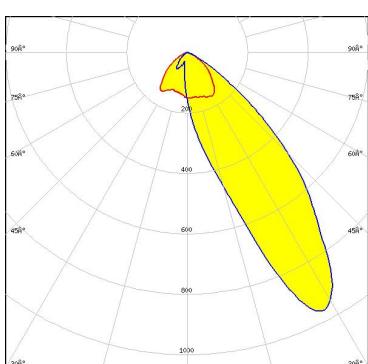


Light distribution files

OPTICAL RESULTS (MEASURED):


SAMSUNG

LED LH508A
FWHM / FWTM Asymmetric
Efficiency 75 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

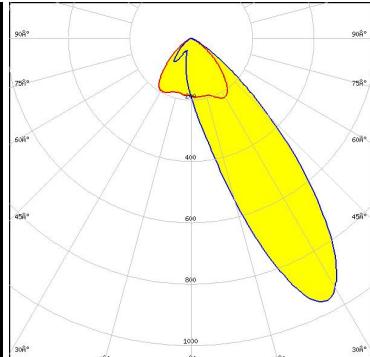


SEOUL SEMICONDUCTOR

LED WICOP 5050
FWHM / FWTM Asymmetric
Efficiency 69 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

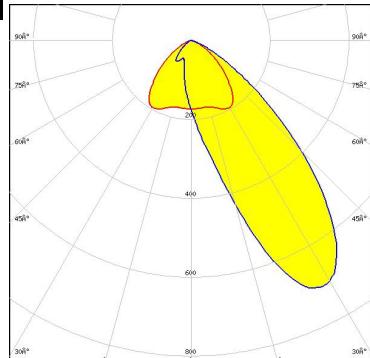

SEOUL SEMICONDUCTOR


LED Z5M3
FWHM / FWTM Asymmetric
Efficiency 71 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

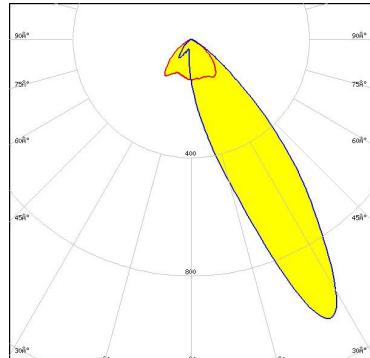

OPTICAL RESULTS (SIMULATED):




LED XHP35.2 HI
 FWHM / FWTM Asymmetric
 Efficiency 78 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

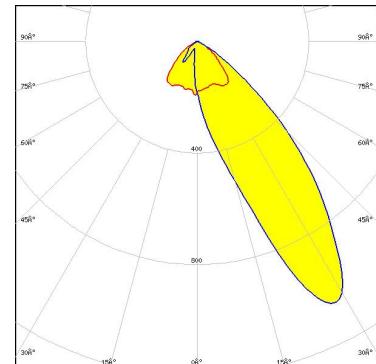

Light distribution files




LED XHP50.3 HD
 FWHM / FWTM Asymmetric
 Efficiency 77 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

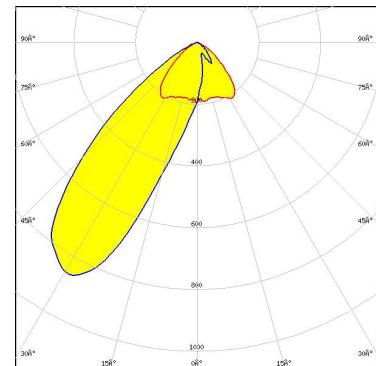

Light distribution files



LED XHP50.3 HI
 FWHM / FWTM Asymmetric
 Efficiency 96 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

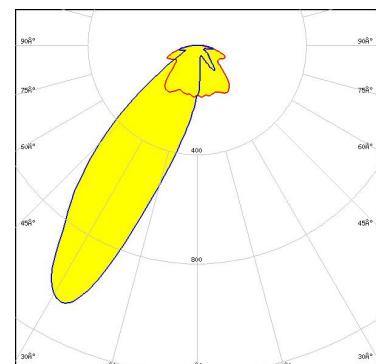


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XHP70.3 HD
 FWHM / FWTM Asymmetric
 Efficiency 76 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

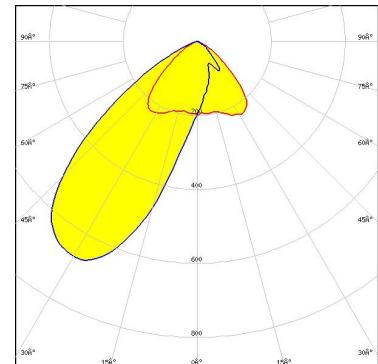

Light distribution files




LED XP-G2 HE
 FWHM / FWTM Asymmetric
 Efficiency 79 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

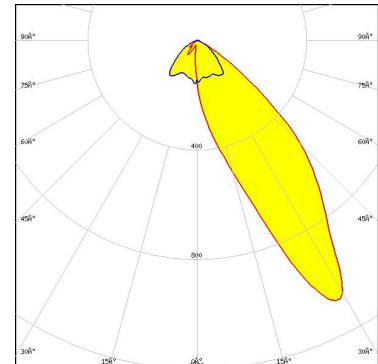

Light distribution files



LED XP-G4
 FWHM / FWTM Asymmetric
 Efficiency 85 %
 Peak intensity 1.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

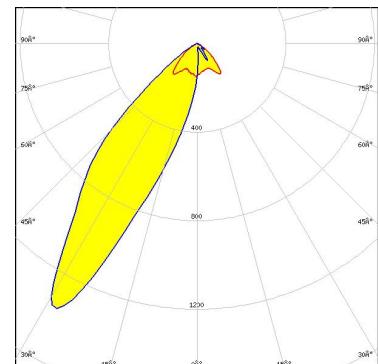


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XP-G4 HI
 FWHM / FWTM Asymmetric
 Efficiency 77 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

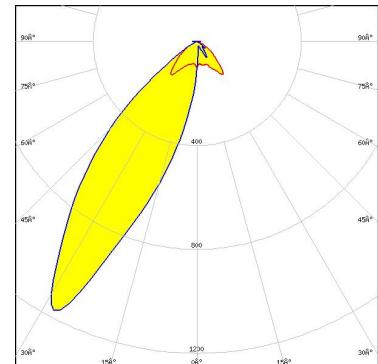

Light distribution files




LED XP-L HI
 FWHM / FWTM Asymmetric
 Efficiency 80 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

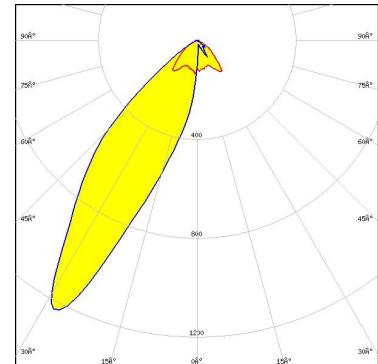

Light distribution files



LED LUXEON 7070
 FWHM / FWTM Asymmetric
 Efficiency 95 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:


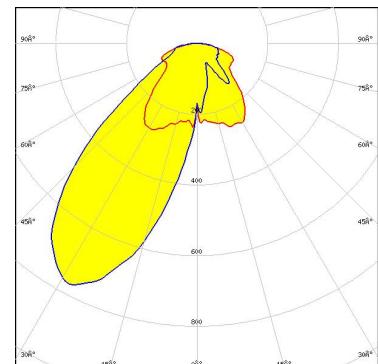


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED	SST-20 Gen2
FWHM / FWTM	Asymmetric
Efficiency	78 %
Peak intensity	1.3 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

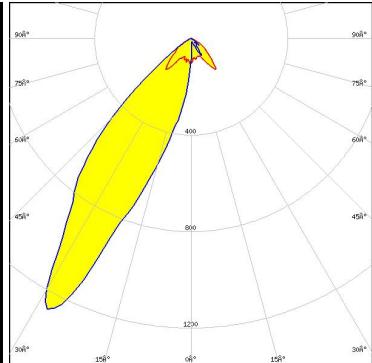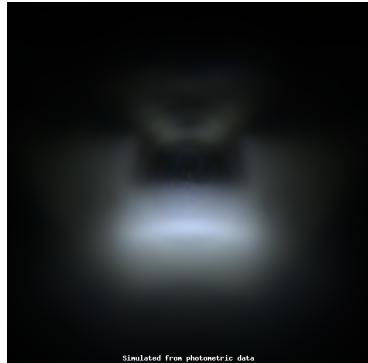

Light distribution files




LED	SST-70X-WCS
FWHM / FWTM	Asymmetric
Efficiency	77 %
Peak intensity	1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

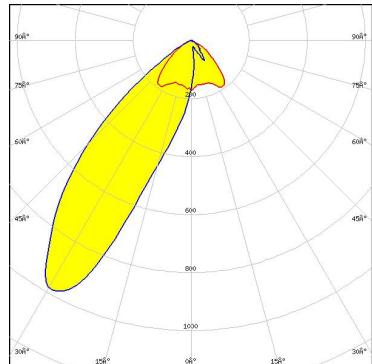

Light distribution files



LED	NV4WB35AM
FWHM / FWTM	Asymmetric
Efficiency	78 %
Peak intensity	1.1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

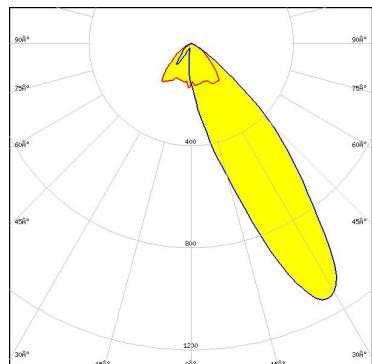


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED NV4x144A
 FWHM / FWTM Asymmetric
 Efficiency 78 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

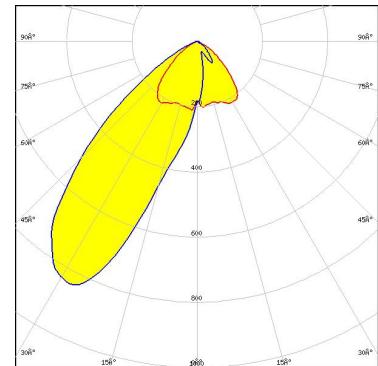

Light distribution files




LED OSLON Pure 1414
 FWHM / FWTM Asymmetric
 Efficiency 81 %
 Peak intensity 1.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

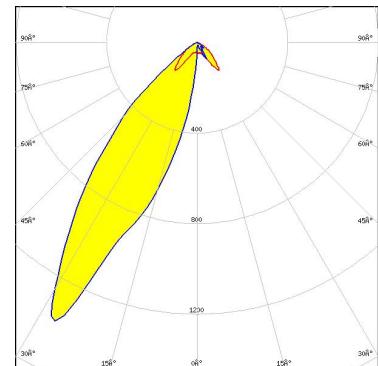

Light distribution files




LED OSLON Pure 1414
 FWHM / FWTM Asymmetric
 Efficiency 79 %
 Peak intensity 1.4 cd/lm
 LEDs/each optic 4
 Light colour/type RGBW
 Required components:

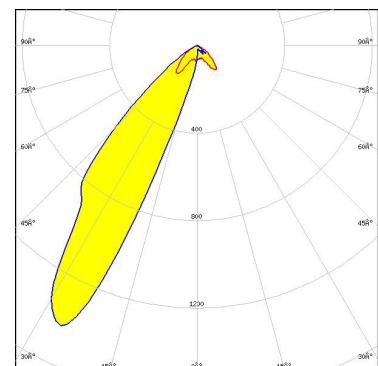

Light distribution files

OPTICAL RESULTS (SIMULATED):

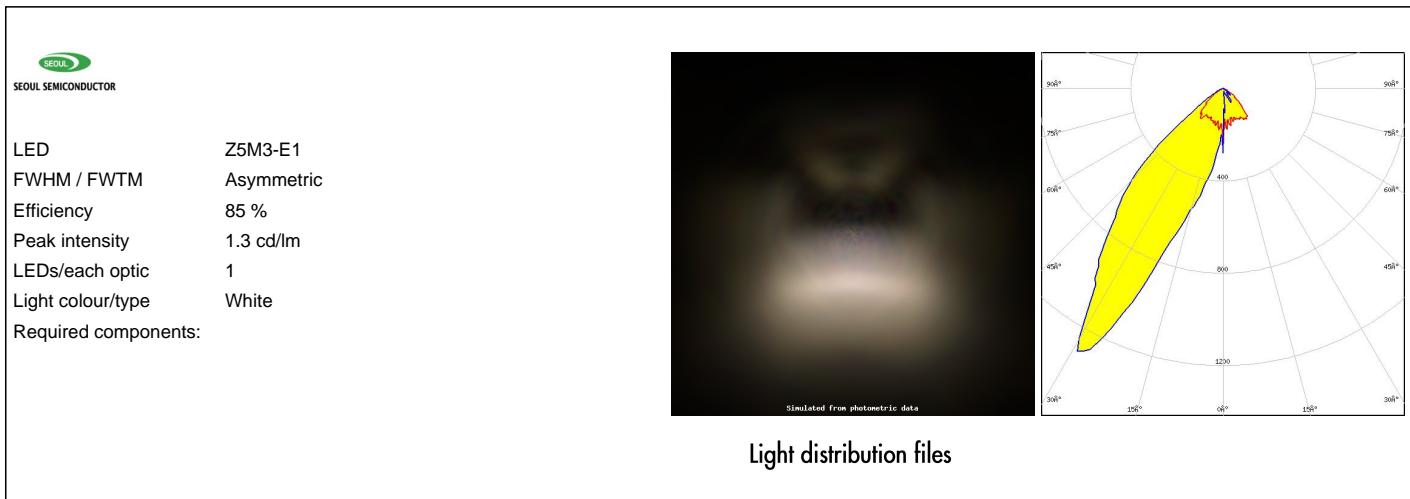

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy
Joensuunkatu 7
FI-24100 SALO
Finland

LEDiL Inc.
228 West Page Street
Suite D
Sycamore IL 60178
USA

**Ledil Optics Technology
(Shenzhen) Co., Ltd.**
405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

**Local sales and technical
support**
www.ledil.com/
where_to_buy

Shipping locations
Poznan, Poland
Hong Kong, China

Distribution Partners
www.ledil.com/
where_to_buy