
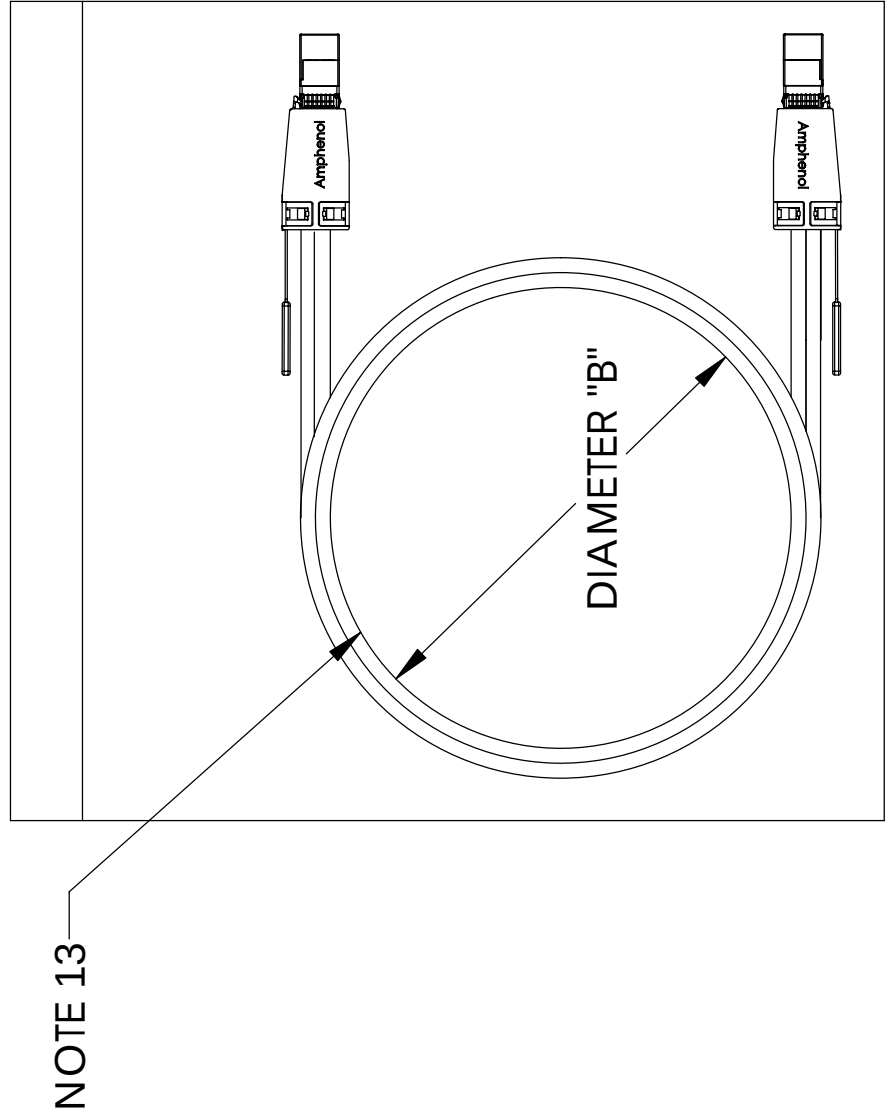
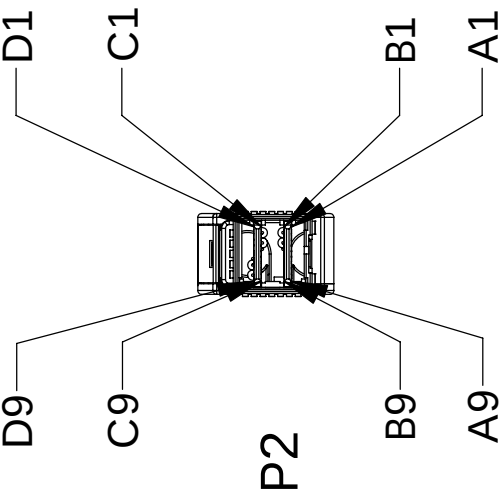


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMPHENOL INTERCONNECT PRODUCTS CORP. ANY REPRODUCTION OR DISCLOSURE TO THIRD PARTIES, IN PART OR WHOLE, WITHOUT THE EXPRESS WRITTEN PERMISSION OF AMPHENOL INTERCONNECT PRODUCTS CORP. IS PROHIBITED.

AHSI P/N	LENGTH "A" (mm)	DIAMETER "B"	WIRE AWG	EPROM REV	MANUAL SOLDER	AUTO SOLDER
601760001	500 ± 12	7.0" ± 1.0"	30	F	YES	YES
601760002	500 ± 12	7.0" ± 1.0"	28	F	YES	YES
601760003	1000 ± 25	7.0" ± 1.0"	30	F	YES	YES
601760004	1000 ± 25	7.0" ± 1.0"	28	F	YES	YES
601760005	2000 ± 50	7.0" ± 1.0"	30	F	YES	YES
601760006	2000 ± 50	7.0" ± 1.0"	28	F	YES	YES
601760007	3000 ± 75	7.0" ± 1.0"	30	F	YES	YES
601760008	3000 ± 75	7.0" ± 1.0"	28	F	YES	YES
601760009	4000 ± 100	10.0" ± 1.0"	28	F	YES	YES

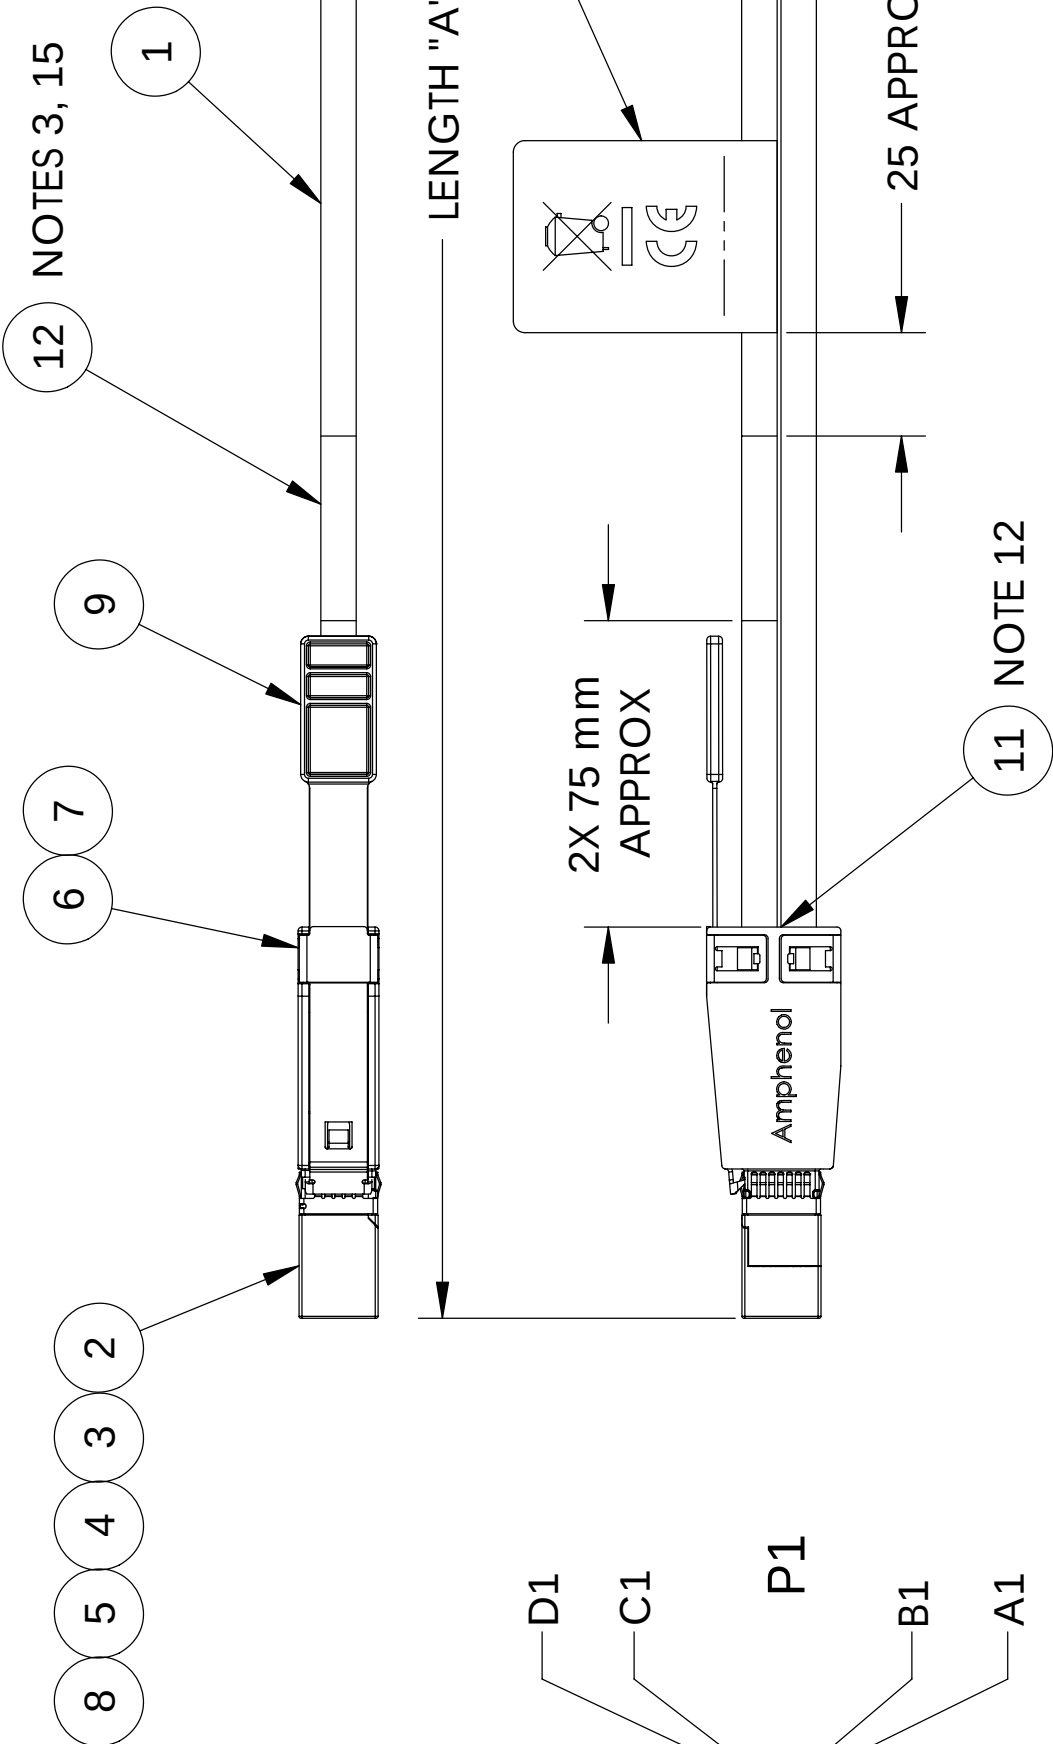


BAGGED CABLE ASSY
NOT TO SCALE

- THIS DRAWING IS RESERVED FOR AMPHENOL STANDARD PRODUCT.
- TEST COMPLETED ASSEMBLIES PER CS-1189. TEST ASSEMBLIES AT 12.00 Gbps AND/OR PER AMPHENOL IOPS-4002 SPEC.
- A PRE-PRINTED LABEL WITH THE INFORMATION SHOWN IN THE LABEL DETAIL IS POSITIONED WITHIN THE INDICATED AREA ON THE CABLE ASSEMBLY. NOTE: ASSEMBLIES LESS THAN ONE METER REQUIRE ONLY ONE LABEL (P1 END).
- UL LABEL MUST BE ON SHIPPING CARTON PER SUBJECT 764 OF THE UL COMPONENT WIRING HARNESS (ZPFW2) FILE #E86140. CSA LABEL MUST BE ON SHIPPING CARTON.
- PACKAGE COMPLETED ASSY IN AN APPROPRIATELY SIZED ANTI-STATIC BAG.
- INSTALL DUST COVER OVER EACH CONNECTOR PRIOR TO SHIPMENT TO CUSTOMER.
- MARK LABEL WITH SERIAL NUMBER. ENDICOTT LOCATION PREFIX IS "APL"; CHINA LOCATION PREFIX IS "APE"; ENDICOTT LOCATION PREFIX IS "APE".
- EPROM PROGRAM PER CS-1154. EPROM SERIAL No. MUST MATCH CABLE LABEL SERIAL No.
- CAUTION: ANTI-STATIC CONTROL MEASURES MUST BE OBSERVED DURING THE MANUFACTURE OF THIS ASSEMBLY.
- POT MOLD BOTH CABLE ENDS PER MFG PROCESS. USE LOCITE 3106 TO COVER CABLE TERMINATION AREAS.
- ALL MATERIALS USED IN THE MANUFACTURE OF THIS ASSEMBLY SHALL COMPLY WITH AMPHENOL REGULATED MATERIALS SPECIFICATION CS-1152.
- WRAP ONE TURN OF COPPER TAPE (ITEM 11) AROUND CBL JACKET AND PULL BACK CBL BRAID OVER COPPER TAPE ON BOTH ENDS.
- COIL AND BAG ASSEMBLIES APPROXIMATELY AS SHOWN.
- MANUFACTURING USING LEAD FREE SOLDER PER AMPHENOL CS-1186.
- LABELS SHALL BE WRAPPED OVER INDIVIDUAL LEG OF CABLE ASSEMBLY.
- PERMANENTLY MARK LABEL WITH 'WEEE' LOGO AND 'CE' LOGO. REF AHSI SPEC CS-1210. A ROHS2 CERTIFICATE OF COMPLIANCE MUST BE INCLUDED IN EACH SHIPPING CARTON.

NOTES: UNLESS OTHERWISE SPECIFIED

REV.	DESCRIPTION	DATE	APPROVED
1	INITIAL DESIGN	12/08/11	JR
2	ADDED NOTE 15	01/20/12	JR
3	ADDED 4M LENGTH OPTION	02/20/12	JR
A	NEW RELEASE PER EO 302811	04/12	DEC
B	REVISED PER ECN 303155	08/12	DEC
C	REVISED PER ECN 303620	12/12	DEC
D	REVISED PER ECN 303703	01/13	DEC
E	REVISED PER ECN 304544	08/13	DEC
F	REVISED PER ECN 305047	01/14	DEC

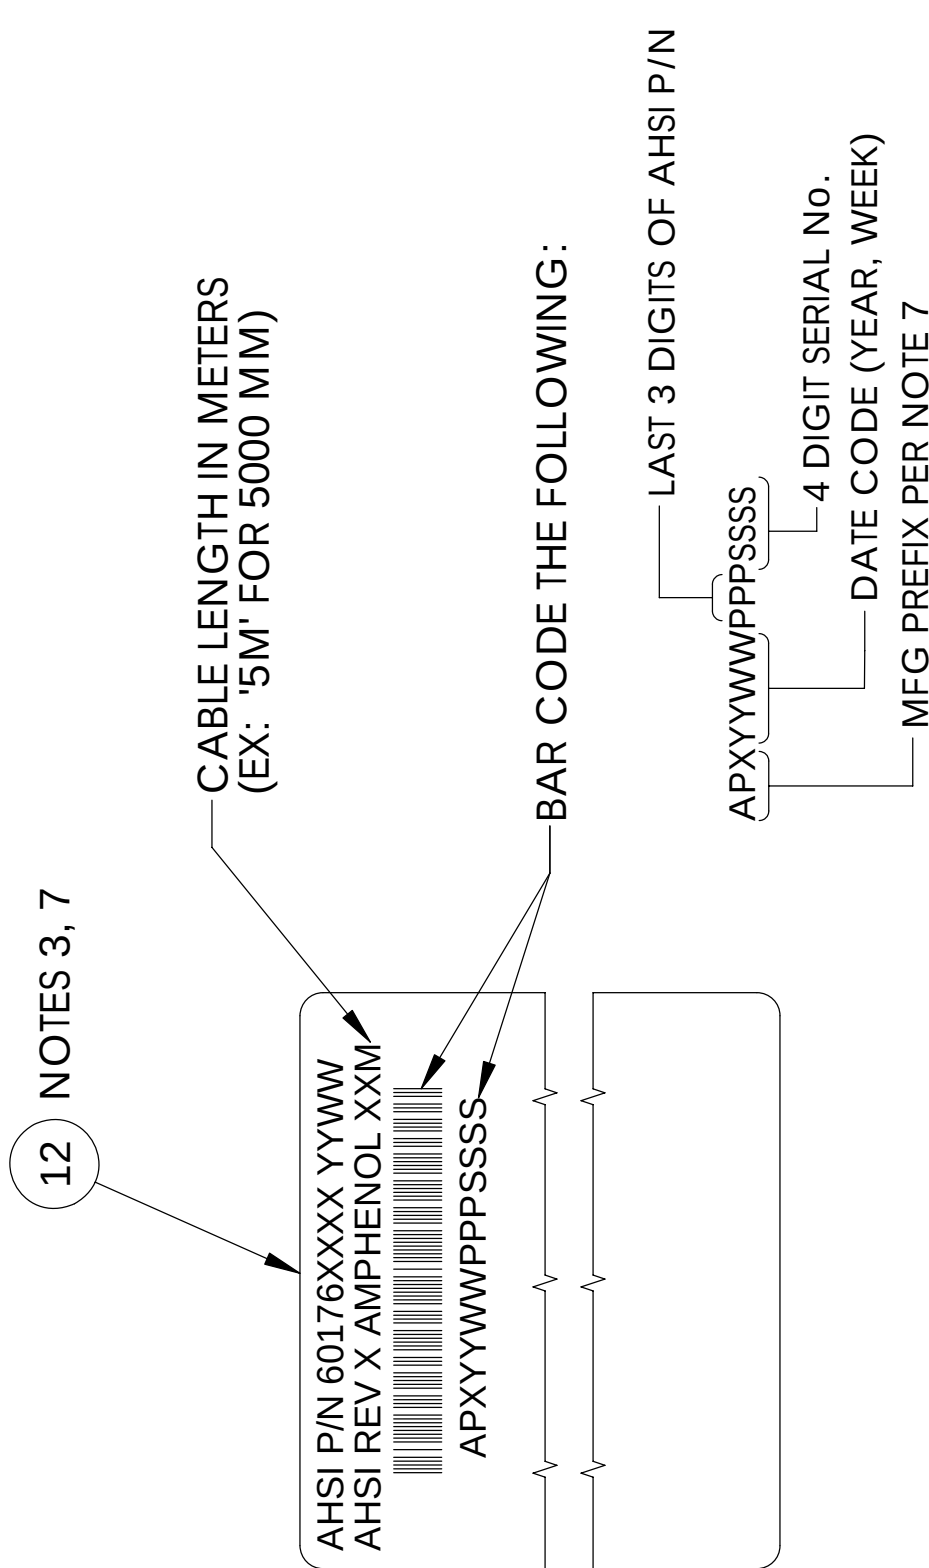

SPECIFICATION CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: DECIMALS .XX FRACTIONS 16/1010 SCALE 1:1 THIRD ANGLE PROJECTION	EAR NO.	80014-1077A	
	APPROVALS	DATE	
	DRAWN J. RENTON	01/20/12	
	CHECKED		
THIRD ANGLE PROJECTION	RESP ENG J. RENTON	01/20/12	
	MFG ENG		
AMPHENOL INTERCONNECT PRODUCTS CORP. 20 Valley St. Endicott, NY, 13760		CABLE ASSEMBLY, ROUND-MINISAS HD TO MINISAS HD 4X, 30-28 AWG, 6Gbps	
SIZE DWG. NO.		D	60176XXXXX
REV.		F	

CAD FILE 60176	SCALE 1:1	SHEET 1 OF 1
----------------	-----------	--------------