

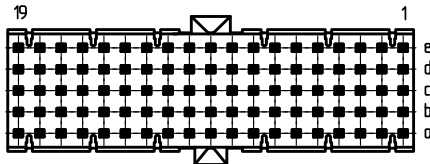


# Bestückungsplan - *contact layout*

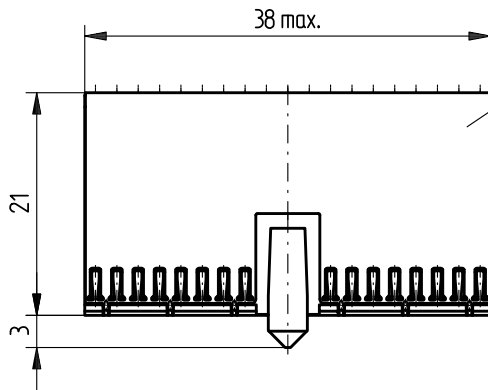


■ = bestückt - *assemble*

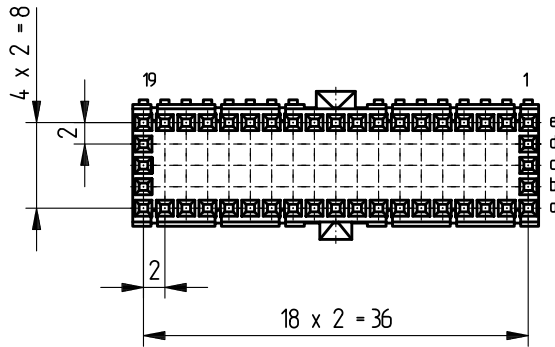


Abschirmblech 124966  
*shielding*

EE-Zone für  
durchkontaktierte  
Löcher  $\varnothing 0.6 \pm 0.05$   
*Compliant zone for  
thru hole  
 $\varnothing 0.6 \pm 0.05$*

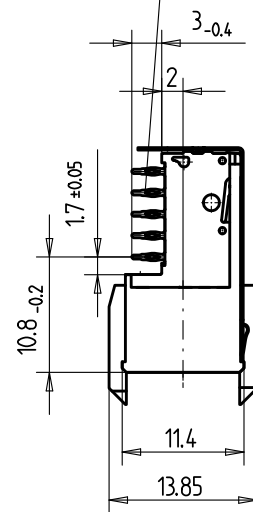

Lochbild für Leiterplatte  
(Bestückungsseite)

*Board hole pattern  
(Component mounting side)*

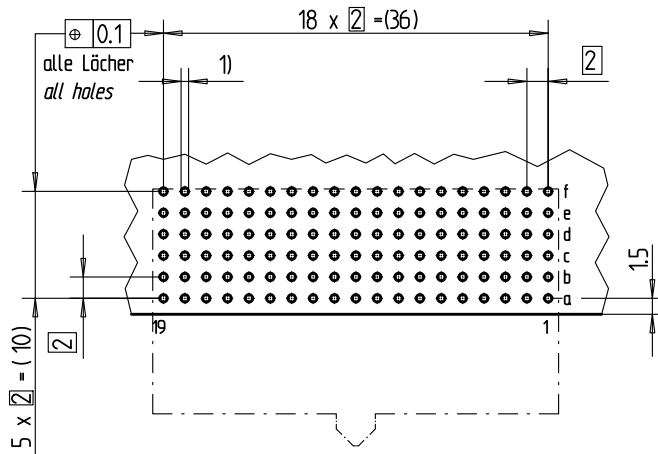

- 1)  $\varnothing 0.6 \pm 0.05$  Durchmesser des metallisierten Loches  
 $\varnothing 0.6 \pm 0.05$  *Diameter of finished plated-through hole*
- $\varnothing 0.7 \pm 0.02$  Bohrungsdurchmesser des Loches  
 $\varnothing 0.7 \pm 0.02$  *Diameter of drilled hole*



Schichtaufbau im metallisierten Loch  
siehe Zeichnung 114406

*Metal plating of plated-through hole  
see drawing 114406*

Fehlende Masse und Angaben nach IEC 61076-4-101  
*Missing information and dimensions per IEC 61076-4-101*

Bedruckung siehe Zeichnung 401194  
*Marking see drawing 401194*

Consider protection memo from DIN 34

Information: Abschirmblech oben montiert <i>shielding mounted on top</i>		Tolerances  All Dimensions in mm		Scale 2:1	
All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.		Designation ERmet Federleiste AB 19 <i>ERmet Female Type AB 19</i>	
		 www.ERNI.com		134075	
c	20.02.2008	V:00064953 SZA		ERMAB19	
Index	Date				