



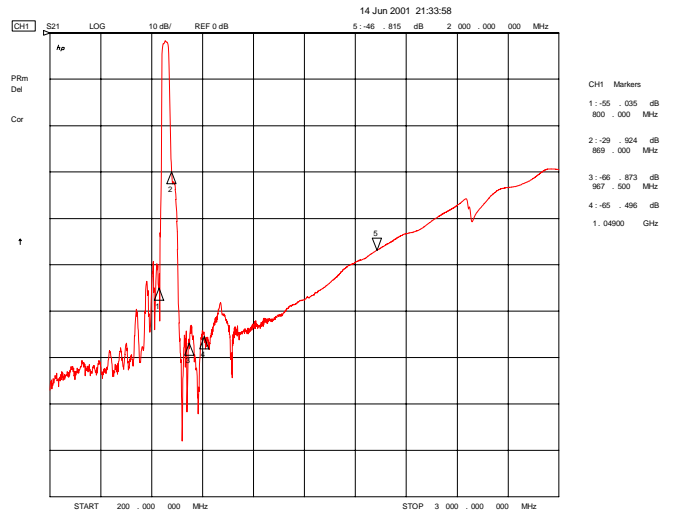


AMPS/CDMA Tx RF Filter(836.5 MHz) Part number FSR0836H3

Typical Performance


Frequency Response

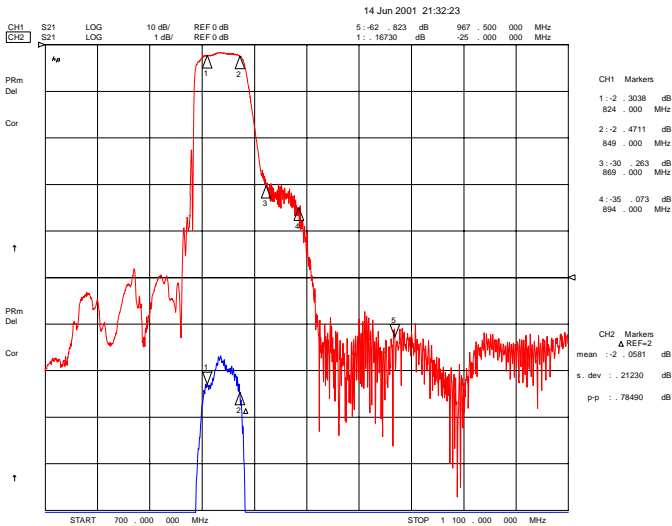

Smith Chart (S11, S22)

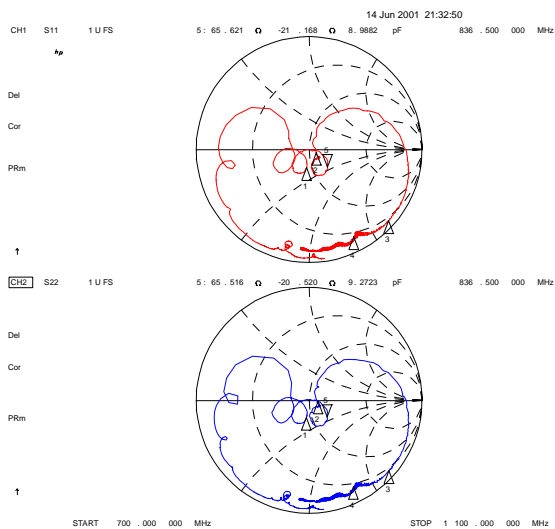

VSWR (S11, S22)

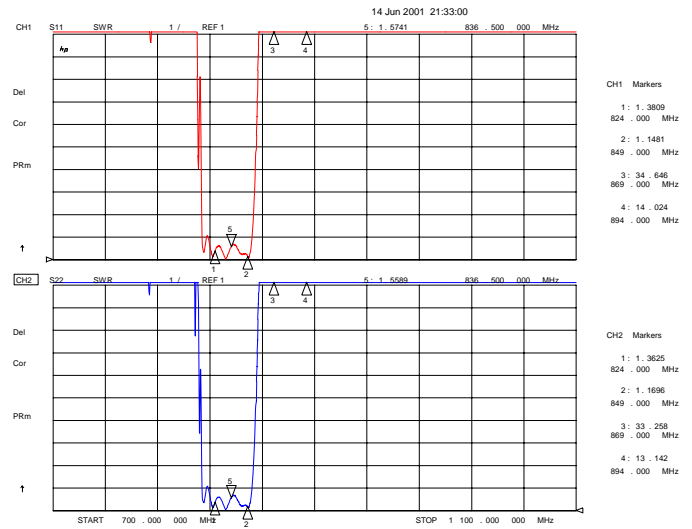

2001-JUN-14



AMPS/CDMA Tx RF Filter(836.5 MHz)

Part number **FSRS0836H3**

Environmental Specification


	Min	Typical	Max	Unit
Operation Temperature Range	-30		85	°C
DC Voltage	-5		5	V
Input Power		10	20	dBm
Input Impedance		50		Ω
Output Impedance		50		Ω

Electrical Specification

Parameters	Frequency(MHz)	Specification	Unit	Remarks
		LG (FSRS0836H3)		
Center Frequency		836.5	MHz	
Insertion Loss	824 to 849	3.5 max (2.6 typ)	dB	
Ripple	824 to 849	1.5 max (0.8 typ)	dB	
VSWR	824 to 849	2.5 max (1.7 typ)		
Attenuation	DC to 800	45 min (49 typ)	dB	
	869 to 1049	25 min (29 typ)	dB	
	1049 to 1200	50 min (59 typ)	dB	
	1200 to 2000	40 min (47 typ)	dB	

Design and specifications are subject to change without notice.

Package Dimension

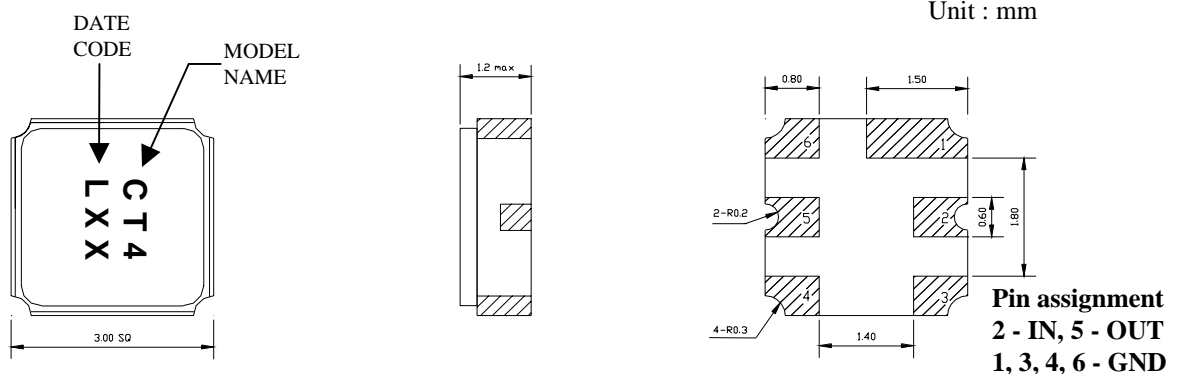

Contact Point

Seoul, Korea Domestic Sales

TEL : +82-2-2005-5264~8

FAX : +82-2-2005-5252

e-mail : dhleeb@lginnotek.com

Overseas Sales

TEL : +82-2-2005-5226

FAX : +82-2-2005-5206~7

e-mail : jwleeb@lginnotek.com

San Diego, USA R&D, Marketing Office

TEL : 1-858-693-0101

FAX : 1-858-693-0091

e-mail : khbaek@lginfocomm.com