


CXT5551

**SURFACE MOUNT  
NPN SILICON TRANSISTOR**



**SOT-89 CASE**



[www.centrasemi.com](http://www.centrasemi.com)

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CXT5551 type is an NPN silicon transistor manufactured by the epitaxial planar process, epoxy molded in a surface mount package, designed for high voltage amplifier applications.

**MARKING: FULL PART NUMBER**

**MAXIMUM RATINGS:** ( $T_A=25^{\circ}\text{C}$ )

|                                            |
|--------------------------------------------|
| Collector-Base Voltage                     |
| Collector-Emitter Voltage                  |
| Emitter-Base Voltage                       |
| Continuous Collector Current               |
| Power Dissipation                          |
| Operating and Storage Junction Temperature |
| Thermal Resistance                         |

**SYMBOL**

|                |             |
|----------------|-------------|
| $V_{CBO}$      | 180         |
| $V_{CEO}$      | 160         |
| $V_{EBO}$      | 6.0         |
| $I_C$          | 600         |
| $P_D$          | 1.2         |
| $T_J, T_{stg}$ | -65 to +150 |
| $\Theta_{JA}$  | 104         |

**UNITS**

|                      |
|----------------------|
| V                    |
| V                    |
| V                    |
| mA                   |
| W                    |
| $^{\circ}\text{C}$   |
| $^{\circ}\text{C/W}$ |

**ELECTRICAL CHARACTERISTICS:** ( $T_A=25^{\circ}\text{C}$  unless otherwise noted)

| SYMBOL        | TEST CONDITIONS                                                                               | MIN | MAX  | UNITS         |
|---------------|-----------------------------------------------------------------------------------------------|-----|------|---------------|
| $I_{CBO}$     | $V_{CB}=120\text{V}$                                                                          |     | 50   | nA            |
| $I_{CBO}$     | $V_{CB}=120\text{V}, T_A=100^{\circ}\text{C}$                                                 |     | 50   | $\mu\text{A}$ |
| $I_{EBO}$     | $V_{EB}=4.0\text{V}$                                                                          |     | 50   | nA            |
| $BV_{CBO}$    | $I_C=100\mu\text{A}$                                                                          | 180 |      | V             |
| $BV_{CEO}$    | $I_C=1.0\text{mA}$                                                                            | 160 |      | V             |
| $BV_{EBO}$    | $I_E=10\mu\text{A}$                                                                           | 6.0 |      | V             |
| $V_{CE(SAT)}$ | $I_C=10\text{mA}, I_B=1.0\text{mA}$                                                           |     | 0.15 | V             |
| $V_{CE(SAT)}$ | $I_C=50\text{mA}, I_B=5.0\text{mA}$                                                           |     | 0.20 | V             |
| $V_{BE(SAT)}$ | $I_C=10\text{mA}, I_B=1.0\text{mA}$                                                           |     | 1.00 | V             |
| $V_{BE(SAT)}$ | $I_C=50\text{mA}, I_B=5.0\text{mA}$                                                           |     | 1.00 | V             |
| $h_{FE}$      | $V_{CE}=5.0\text{V}, I_C=1.0\text{mA}$                                                        | 80  |      |               |
| $h_{FE}$      | $V_{CE}=5.0\text{V}, I_C=10\text{mA}$                                                         | 80  | 250  |               |
| $h_{FE}$      | $V_{CE}=5.0\text{V}, I_C=50\text{mA}$                                                         | 30  |      |               |
| $f_T$         | $V_{CE}=10\text{V}, I_C=10\text{mA}, f=100\text{MHz}$                                         | 100 | 300  | MHz           |
| $C_{ob}$      | $V_{CB}=10\text{V}, I_E=0, f=1.0\text{MHz}$                                                   |     | 6.0  | pF            |
| $h_{fe}$      | $V_{CE}=10\text{V}, I_C=1.0\text{mA}, f=1.0\text{kHz}$                                        | 50  | 200  |               |
| NF            | $V_{CE}=5.0\text{V}, I_C=200\mu\text{A}, R_S=10\Omega,$<br>$f=10\text{Hz to } 15.7\text{kHz}$ |     | 8.0  | dB            |

R6 (23-February 2010)


**CXT5551**

**SURFACE MOUNT**

**NPN SILICON TRANSISTOR**



**SOT-89 CASE - MECHANICAL OUTLINE**

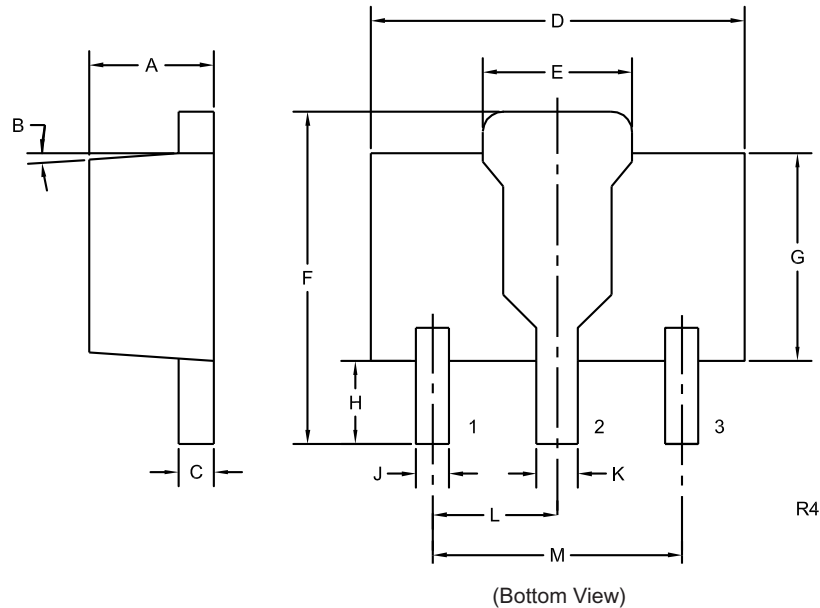

**LEAD CODE:**

- 1) Emitter
- 2) Collector
- 3) Base

**MARKING:**

**FULL PART NUMBER**

| DIMENSIONS |        |       |             |      |
|------------|--------|-------|-------------|------|
| SYMBOL     | INCHES |       | MILLIMETERS |      |
|            | MIN    | MAX   | MIN         | MAX  |
| A          | 0.055  | 0.067 | 1.40        | 1.70 |
| B          | 4°     |       | 4°          |      |
| C          | 0.014  | 0.018 | 0.35        | 0.46 |
| D          | 0.173  | 0.185 | 4.40        | 4.70 |
| E          | 0.064  | 0.074 | 1.62        | 1.87 |
| F          | 0.146  | 0.177 | 3.70        | 4.50 |
| G          | 0.090  | 0.106 | 2.29        | 2.70 |
| H          | 0.028  | 0.051 | 0.70        | 1.30 |
| J          | 0.014  | 0.019 | 0.36        | 0.48 |
| K          | 0.017  | 0.023 | 0.44        | 0.58 |
| L          | 0.059  |       | 1.50        |      |
| M          | 0.118  |       | 3.00        |      |

SOT-89 (REV: R4)

R6 (23-February 2010)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centrasemi.com](http://www.centrasemi.com)

**Worldwide Field Representatives:**  
[www.centrasemi.com/wwreps](http://www.centrasemi.com/wwreps)

**Worldwide Distributors:**  
[www.centrasemi.com/wwdistributors](http://www.centrasemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centrasemi.com/terms](http://www.centrasemi.com/terms)