


Digital output Gage Pressure Sensor

MMR906 Datasheet

DESCRIPTION



The MMR906 digitally outputs a pressure value which was corrected. Customers need no correction because it corrects and outputs the differences of sensors and temperature characteristics. It does not require complicated sensor drive or control circuit, and devices with high performance can be made only with this module and an external microcontroller which will be the host.

FEATURES

- Small package: 5.0(W) × 6.0(D) × 7.2(H)mm
Operating pressure range: -30~360mmHg (-4~47.99kPa).
- Effective resolution: 0.025mmHgRMS (3.4PaRMS) (at MODE1)
- Pressure measurement error (With OffsetCancel): ±2.0mmHg(±267Pa)
Pressure measurement error (With UserCalibration): ±1.0mmHg(±133pa)
- It corrects the differences of sensors and temperature characteristics when shipped from our factory.
- It digitally outputs pressure value by a built-in sequencer (SPI)
- Noise reduction is possible by a built-in second order LowPassFilter.
- RoHS compliant
- Halogen-free

INDEX

DESCRIPTION	1
FEATURES.....	1
BLOCK DIAGRAM.....	3
PIN CONFIGURATION.....	4
TERMINAL EXPLANATIONS	5
ABSOLUTE MAXIMUM RATINGS	6
RECOMMENDED OPERATING CONDITIONS.....	6
ELECTRICAL CHARACTERISTICS	7
Analog characteristics.....	7
I/O Digital I/O.....	7
Pressure sensor characteristics.....	8
Temperature sensor characteristics	8
Definition of characteristics	9
FUNCTION EXPLANATION.....	11
Function Outline.....	11
Flow chart of pressure/temperature measurement	12
SERIAL COMMUNICATION INTERFACE	13
Baud rate	13
SPI format.....	14
Baud rate	15
Command.....	16
State transition table	18
Timing Chart.....	19
TYPICAL APPLICATION CIRCUIT	19
TYPICAL PERFORMANCE CHARACTERISTICS	20
DIMENSIONS	25
MARKING CONTENTS	26
PRODUCT NAME.....	27
PRODUCT LINEUP	27
PRESSURE SENSOR LINEUP	28
NOTES.....	29
ATTENTION	30
ADDDITIONAL NOTES	30
PACKING SPECIFICATIONS (TRAY).....	31
PACKING SPECIFICATIONS (TAPING, R HOUSING).....	36
CONDITION FOR PACKAGE MOUNTING	42
Design example of mount pad.....	42
Pb-Free recommended profile condition	43
Storage method	44

BLOCK DIAGRAM

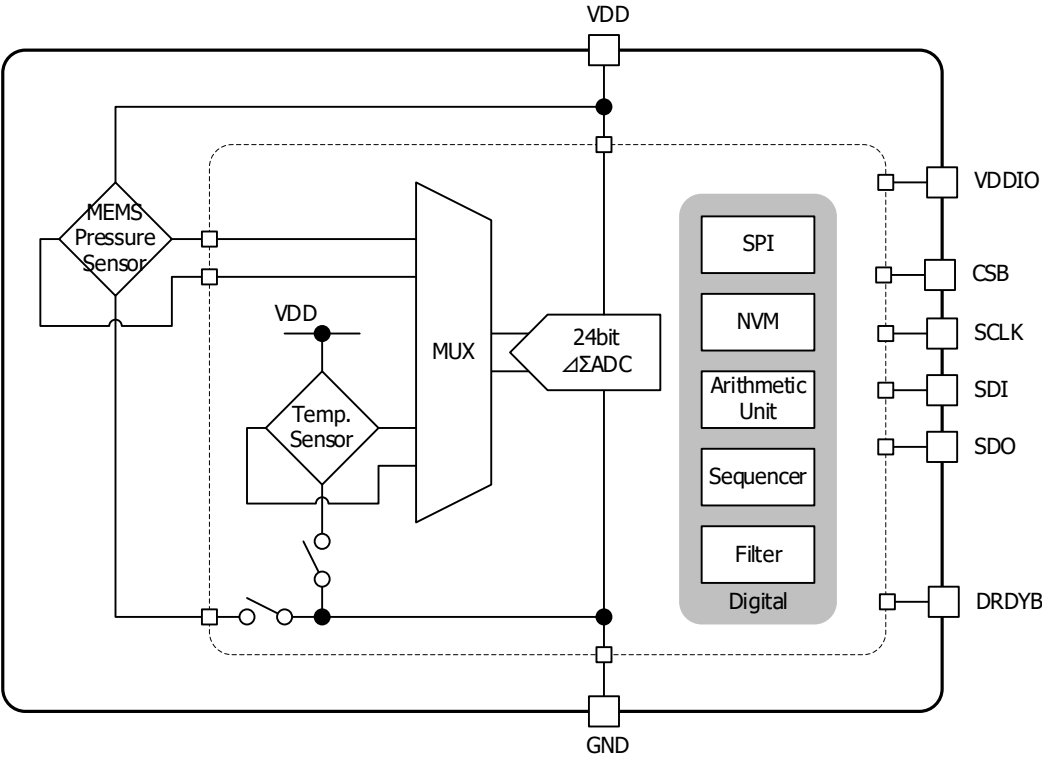


Fig. 1 Block diagram

PIN CONFIGURATION

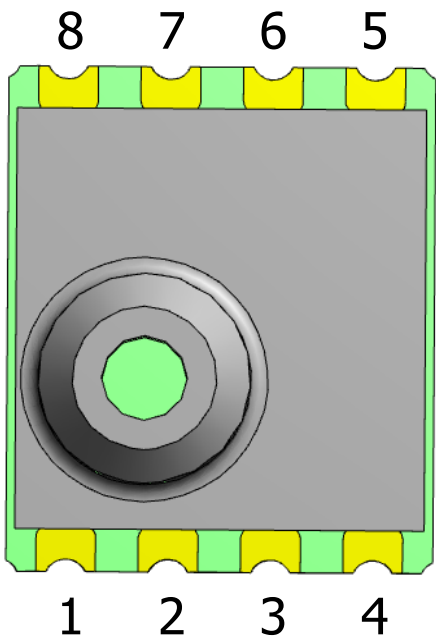


Fig. 2 configuration (Top view)

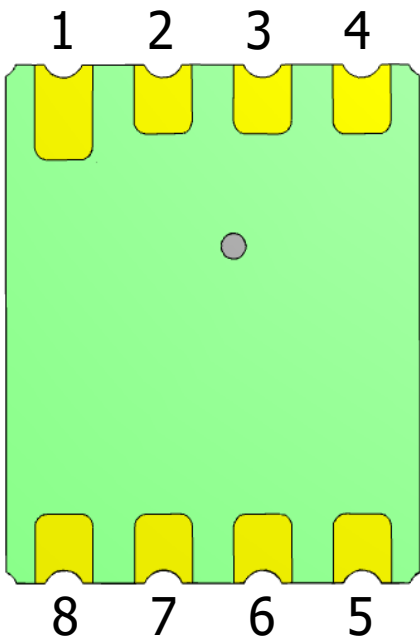


Fig. 3 Pin configuration (Bottom view)

TERMINAL EXPLANATIONS

Table 1 Pin table

No.	Pin Name	Type	Function
1	SCLK	I	Serial clock (SCLK)
2	DRDYB	O	Output terminal which notifies the completion of pressure measurement and calculation correction (negative logic)
3	VDD	I	Power-supply for analog circuit
4	VDDIO	I	Power-supply for digital I/O
5	GND	-	GND
6	CSB	I	Chip select
7	SDO	O	Serial Data Output (SDO=MISO)
8	SDI	I	Serial Data Input (SDI=MOSI)

ABSOLUTE MAXIMUM RATINGS

(unless otherwise specified, Ta=25°C)

Item	Symbol	Min.	Max.	Unit
Storage temperature range	T _{STG}	-20	70	°C
Analog supply voltage	VDD _{MAX}	-0.3	4.0	V
Digital I/O voltage	VDDIO _{MAX}	-0.3	4.0	V
Overpressure	P _{MAX}	-100 (-13.33)	600 (80)	mmHg (kPa)
Pressure medium (note ¹)	-	AIR (non-condensing)		-

note¹: Storage and operation in an environment of dry and non-corrosive gases.

RECOMMENDED OPERATING CONDITIONS

(unless otherwise specified, Ta=25°C)

Item	Symbol	Min.	Typ.	Max.	Unit
Operating temperature range	T _{OPR}	0	-	60	°C
Analog supply voltage	VDD _{OPR}	1.7	3.0	3.6	V
Digital I/O voltage	VDDIO _{OPR}	1.14	-	3.6	V
Operating pressure range	P _{OPR}	-30 (-4)	-	360 (47.99)	mmHg (kPa)

ELECTRICAL CHARACTERISTICS

Analog characteristics

(unless Ta=25°C, VDD=VDDIO=3.0V)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit.
VDD Current consumption	I _{VDDact}	Pressure measure active	510	640	770	μA
	I _{VDDsd}	Shutdown	-	0.01	0.1	
VDDIO Current consumption	I _{VDDIOact}	Pressure measure active	1.2	1.8	2.4	μA
	I _{VDDIOsd}	Shutdown	-	0.1	1.0	
Conversion time	t _{con1}	MODE1	15.250	15.625	16.000	msec
	t _{con2}	MODE2	7.73	7.92	8.11	
	t _{con3}	MODE3	3.97	4.07	4.17	
	t _{con4}	MODE4	241	247	253	

I/O Digital I/O

(unless otherwise specified, Ta=25°C, VDD=1.7~3.6V, VDDIO=1.14~3.6V)

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
High level input voltage	V _{IH}	-	0.8 × VDDIO	-	VDDIO + 0.3	V
Low level input voltage	V _{IL}	-	-0.3	-	0.2 × VDDIO	V
Output voltage High level	V _{OH1}	VDDIO ≥ 2.0V I _{OH} =-3mA	VDDIO - 0.4	-	-	V
	V _{OH2}	VDDIO < 2.0V I _{OH} =-1mA	0.8 × VDDIO	-	-	V
Output voltage Low level	V _{OL1}	VDDIO ≥ 2.0V I _{OL} =3mA	-	-	0.4	V
	V _{OL2}	VDDIO < 2.0V I _{OL} =1mA	-	-	0.2 × VDDIO	V

Pressure sensor characteristics

(unless otherwise specified, Ta=25°C, VDD=3.0V, VDDIO=1.14~3.6V)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Pressure resolution	P _{Res}	-	-	0.001	-	mmHg
Pressure effective resolution	P _{Eres1}	MODE1	-	0.025	0.050	mmHg RMS
	P _{Eres2}	MODE2	-	0.035	0.070	
	P _{Eres3}	MODE3	-	0.050	0.100	
	P _{Eres4}	MODE4 High Resolution Mode	-	0.007	0.014	
Pressure effective resolution (with LowPassFilter)	P _{Eres1} 1st	MODE1 LowPassFilter 1st	-	0.016	-	mmHg RMS
	P _{Eres2} 1st	MODE2 LowPassFilter 1st	-	0.021	-	
	P _{Eres3} 1st	MODE3 LowPassFilter 1st	-	0.030	-	
	P _{Eres1} 1st + 2nd	MODE1 LowPassFilter 1st+2nd	-	0.011	-	
	P _{Eres2} 1st + 2nd	MODE2 LowPassFilter 1st+2nd	-	0.014	-	
	P _{Eres3} 1st + 2nd	MODE3 LowPassFilter 1st+2nd	-	0.019	-	
Pressure measurement error (With OffsetCancel) (note ²)	P _{Err-off}	-10 ~ 330mmHg Ta = 0°C~50°C	-2	-	2	mmHg
Pressure measurement error (With UserCalibration) (note ²)	P _{Err-caliboff}	-10 ~ 330mmHg Ta = 0°C~50°C	-1	-	1	mmHg

note²: It can take advantage of the performance to the fullest by OffsetCancel, and UserCalibration.

Temperature sensor characteristics

(unless otherwise specified, Ta=25°C, VDD=3.0V, VDDIO=1.14~3.6V)

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Temperature resolution	T _{Res}	-	-	488.281	-	10 ⁻⁶ °C
Temperature measurement error	T _{Err}	0°C ~ 50°C	-2.0	-	2.0	°C

Definition of characteristics

Pressure measurement value P_{Result}

It is the device output value obtained by Read Pressure Result Command.

Pressure resolution P_{Res}

This Value is equivalent to 1LSB of output digital value.

Pressure effective resolution P_{Eres}

Measure 16 points after the pressure output is stable, and it is the standard deviation of the 16 points.

Pressure offset P_{Off}

It is Pressure measurement value under no air pressure.

Pressure measurement value (With OffsetCancel) $P_{Result-off}$

It is the value that subtracted a Pressure offset from Pressure measurement value.

Equation

$P_{Result-off} = P_{Result} - P_{Off}$ (Eq1)

P_{Result} : Pressure measurement value

P_{Off} : Pressure measurement value under no air pressure.

For set operation, Assume that set will get it again each time under no air pressure.

Pressure measurement value (With UserCalibration) $P_{Result-calib}$

It is the Pressure measurement value with UserCalibration.

Equation

$P_{Result-calib} = (P_{Result} - P_{Off}) \times Ratio$ (Eq2)

$Ratio = (P_{max} - P_{min}) / (P_{Result-max} - P_{Result-min})$ (Eq3)

P_{Result} : Pressure measurement value

P_{Off} : Pressure measurement value under no air pressure.

For set operation, Assume that set will get it again each time under no air pressure.

Ratio : Calibration ratio.

Please obtain and calculate it after device mounting, and store it in ROM of MCU

P_{max} : Max pressure

P_{min} : Min pressure

$P_{Result-max}$: Pressure measurement value at Max pressure

$P_{Result-min}$: Pressure measurement value at Min pressure

Pressure measurement error P_{Err}

It is the deviation amount of the Pressure measurement value from the ideal line.

Pressure measurement error (With OffsetCancel) $P_{Err-off}$

It is the deviation amount of the Pressure measurement value with OffsetCancel from the ideal line.

Pressure measurement error (With UserCalibration) $P_{Err-calib}$

It is the deviation amount of the measurement value with UserCalibration from the ideal line.

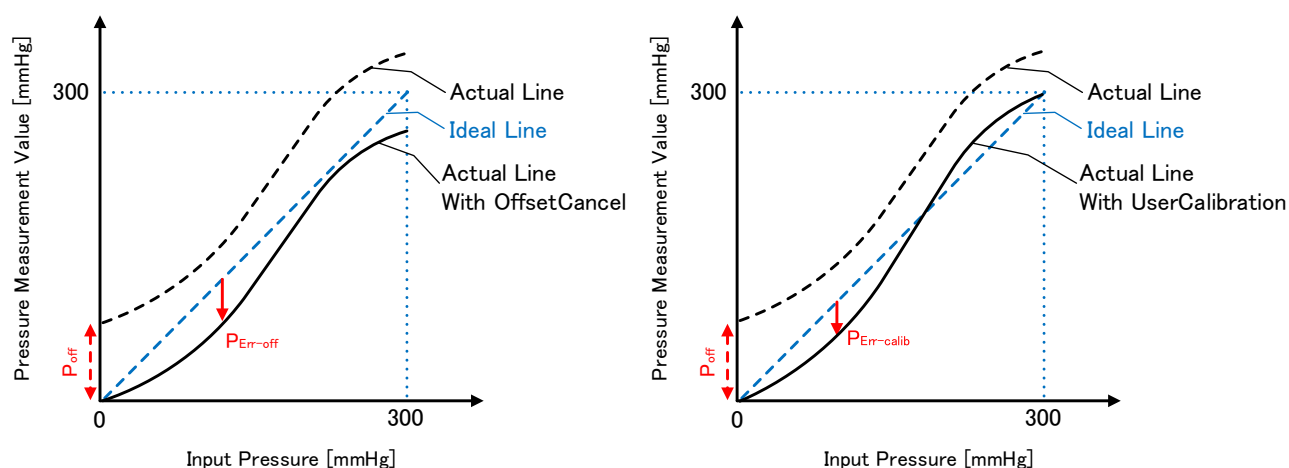


Fig. 4 Definition of Characteristics

FUNCTION EXPLANATION

Function Outline

The MMR906 is consists of piezoresistive pressure sensor and an analog front end IC.

It converts analog output voltage from piezoresistive pressure sensor to digital value of 24 bits, and corrects and outputs variations of sensor characteristics due to variations of temperature and process.

Conversion time and Pressure effective resolution are selectable with the mode of different four. Conversion time and Pressure effective resolution are in the relationship of trade-off. When measuring during pressurization by a pump, MODE1 is recommended.

Noise reduction is possible by a built-in second order LowPassFilter. Cutoff frequency is shown in Table 2. It is applied first step filter by Result Command 0xC4. It is applied first step and second step filter by Result Command 0xC6.

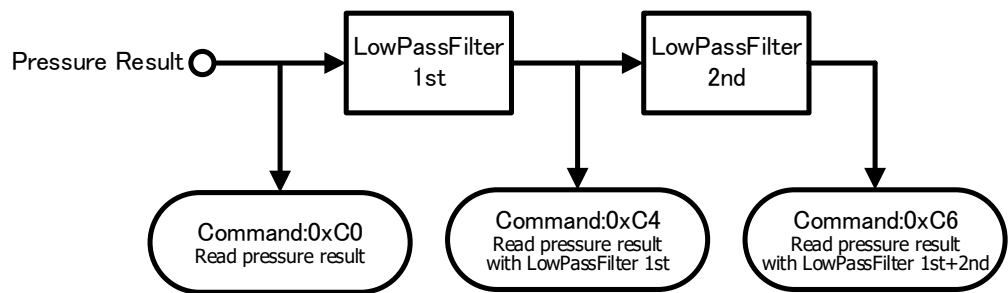


Fig. 5 LowPassFilter Configuration

Table 2 Cutoff Frequency

	1st fc[Hz]	2nd fc[Hz]
MODE1	10.14	5.07
MODE2	20.00	10.00
MODE3	38.92	19.47
MODE4	0.64	0.32

Table 3 example of Pressure effective resolution

	No filter [mmHgRMS]	1st [mmHgRMS]	1st+2nd [mmHgRMS]
MODE1	0.015	0.011	0.007
MODE2	0.021	0.015	0.009
MODE3	0.028	0.019	0.012
MODE4	0.008	0.007	0.007

Flow chart of pressure/temperature measurement

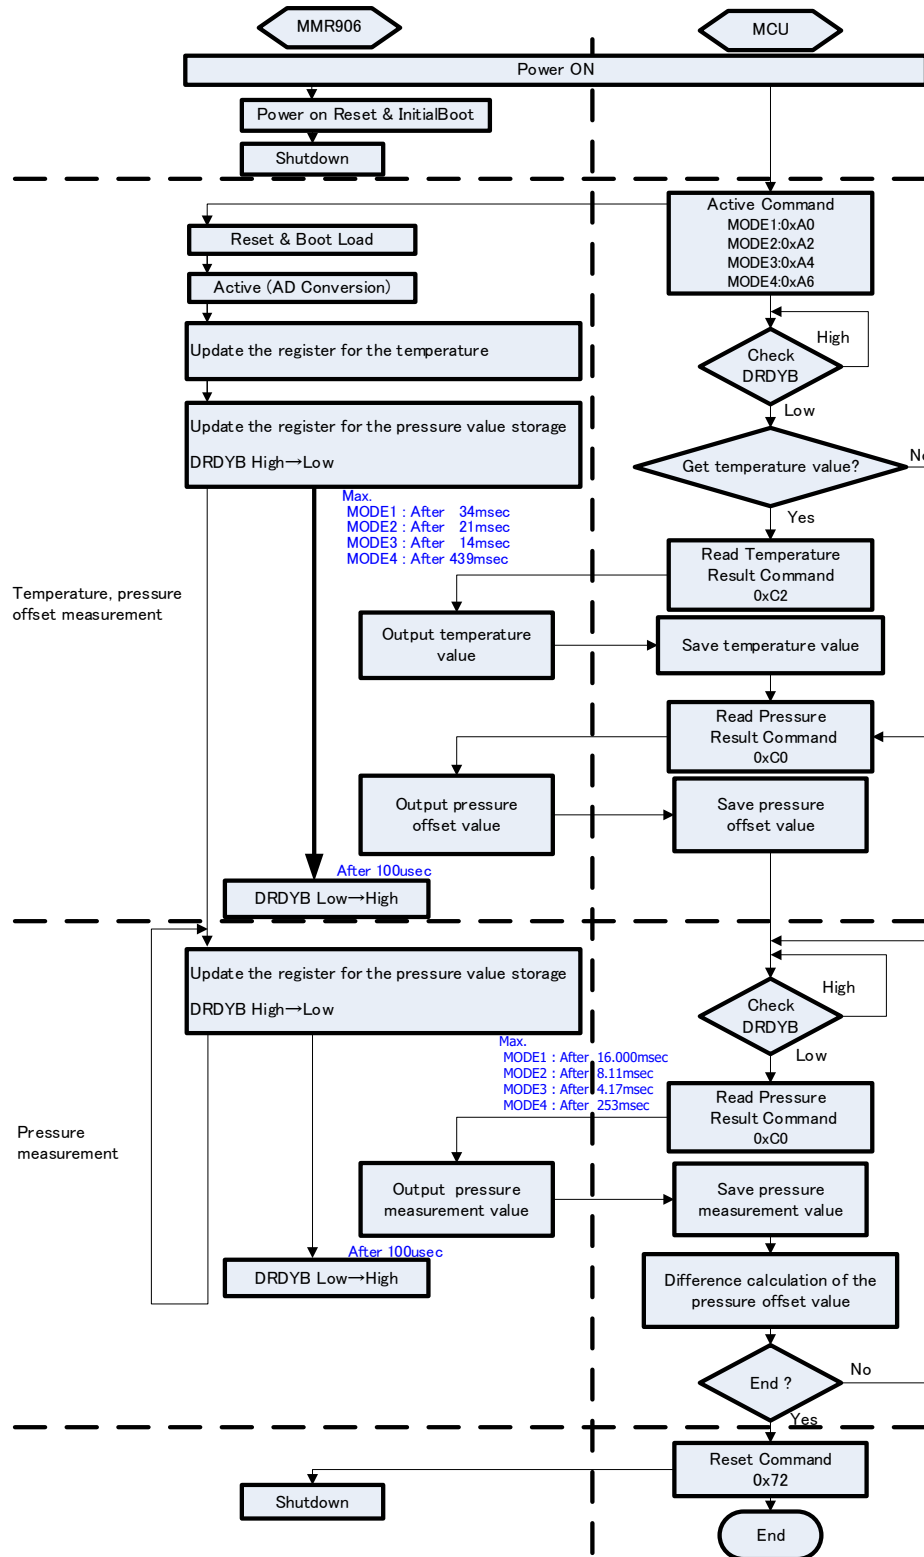


Fig. 6 Flow chart of pressure/temperature measurement

SERIAL COMMUNICATION INTERFACE

It supports SPI (max. 5Mbps) as an interface for serial communication.

Baud rate

※ This item is not inspected at the time of shipment.
(unless otherwise specified, Ta=25°C, VDD=1.7~3.6V)

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
SPI communication speed	BR _{SPI1}	VDDIO $\geq$ 2.0V Cb $\leq$ 100pF	-	-	5.0	Mbps
	BR _{SPI2}	VDDIO < 2.0V Cb $\leq$ 100pF	-	-	1.0	
	BR _{SPI3}	VDDIO $\geq$ 2.0V Cb $\leq$ 400pF	-	-	2.5	
	BR _{SPI4}	VDDIO < 2.0V Cb $\leq$ 400pF	-	-	0.5	

SPI format

SPI command format is shown below. Data send/receive is started when CSB becomes low level from the status when SCLK is high level. Input data is sampled on rising edges of the SCLK. (SPI MODE 3) For the detailed timing, please refer to the each command format.

SPI Operation Command format

- Corresponding Command
- Reset Command (0x72)
 - Active Command (0xA0, 0xA2, 0xA4, 0xA6)

Please send command code of 8 bits. When their commands are received, it turns over ACK to 8 bits and it performs operation corresponding to each command.

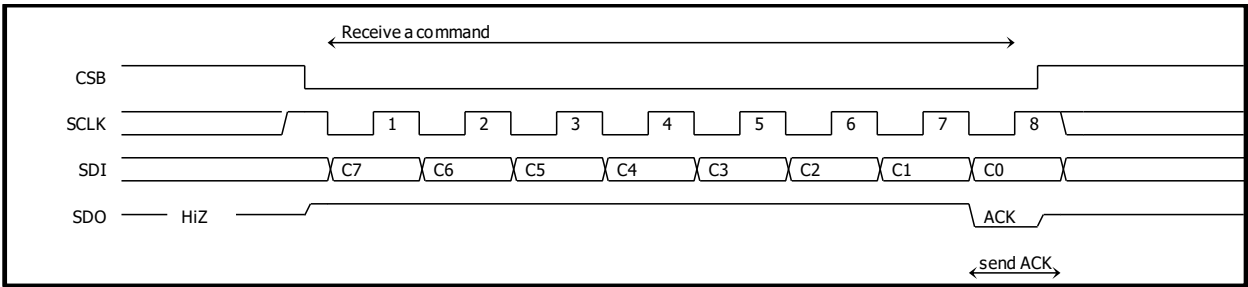


Fig. 7 SPI Operation Command format

SPI Result Command format

- Corresponding Command
- Result Command (0xC0, 0xC2, 0xC4, 0xC6)
 - Status Command (0x80)

Please send reset command or active command of 8 bits. When the command is received, it turns over ACK to 8 bits and it outputs the data at 24 bits, MSB first.

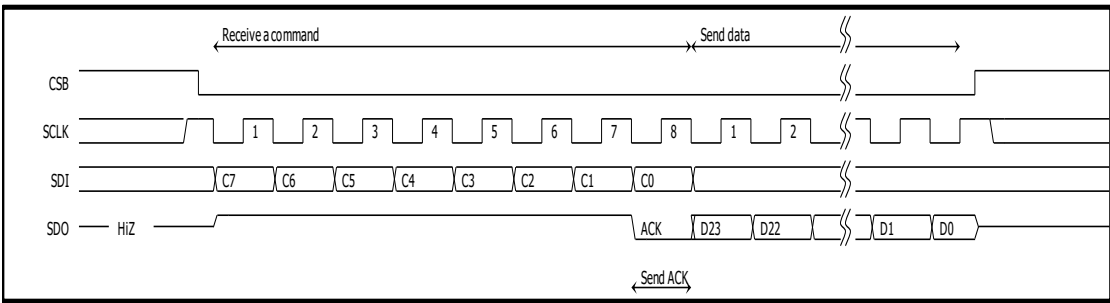


Fig. 8 SPI Result Command format

Baud rate

※ This item is not inspected at the time of shipment.

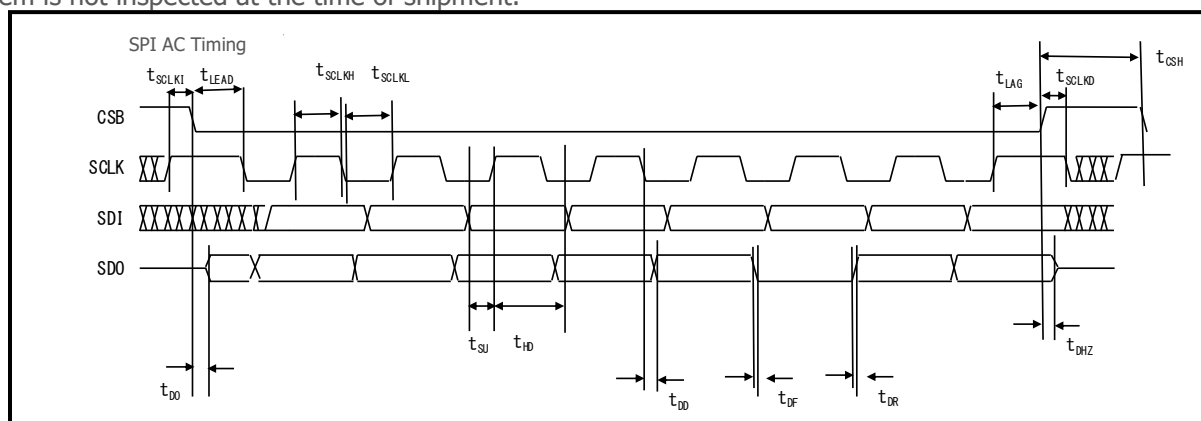


Fig. 9 SPI AC timing chart

Table 4 SPI AC Characteristics

Items	Symbol	VDDIO < 2V		VDDIO ≥ 2V		Unit
		min.	max.	min.	max.	
SCLK frequency (Duty 50±10%)	f_{SCLK}	-	1	-	5	MHz
SCLK High period (90%~90%)	t_{SCLKH}	400		80	-	ns
SCLK Low period (10%~10%)	t_{SCLKL}	400		80	-	ns
SCLK wait time	t_{SCLKI}	500	-	100	-	ns
SCLK Delay time	t_{SCLKD}	0	-	0	-	ns
CSB High period (90%~90%)	t_{CSH}	1000	-	200	-	ns
Time from CSB falling to SCLK falling	t_{LEAD}	0	-	0	-	ns
Time from SCLK rising to CSB rising	t_{LAG}	500	-	100	-	ns
SDI setup time	t_{SU}	100	-	10	-	ns
SDI hold time	t_{HD}	10	-	10	-	ns
SDO rise time (Load 100pF) (10%~90%)	t_{DR}		50	-	50	ns
SDO fall time (Load 100pF) (10%~90%)	t_{DF}		50	-	50	ns
SDO output delay time (Load 100pF)	t_{DDY}	-	120	-	60	ns
Time from CSB falling to SDO output (Load 100pF) Time from CSB falling to SDO output	t_{ACC}	-	120	-	60	ns
Time from CSB rising to SDO output HiZ (Load 100pF)	t_{DHZ}	-	170	-	170	ns

Command

Table 5 Operation Command list

Command Name		Command Code									Action
		HEX.	BIN.								
			C7	C6	C5	C4	C3	C2	C1	C0	
Reset		0x72	0	1	1	1	0	0	1	0	Reset and Return to Shutdown state
Active	Measure at MODE 1	0xA0	1	0	1	0	0	0	0	0	Start measure at MODE1
	Measure at MODE 2	0xA2	1	0	1	0	0	0	1	0	Start measure at MODE 2
	Measure at MODE 3	0xA4	1	0	1	0	0	1	0	0	Start measure at MODE 3
	Measure at MODE 4	0xA6	1	0	1	0	0	1	1	0	Start measure at MODE 4

Table 6 Result Command list (1/2)

Command Name	Command Code									Action															
	HEX.	BIN.																							
		C7	C6	C5	C4	C3	C2	C1	C0																
Read Pressure Result	0xC0	1	1	0	0	0	0	0	0	Read pressure result															
	0xC4	1	1	0	0	0	1	0	0	Read pressure result with LowPassFilter 1st															
	0xC6	1	1	0	0	0	1	1	0	Read pressure result with LowPassFilter 1st+2nd															
	Read compensated pressure result. It outputs the result of pressure measurement at 24bits, MSB first. A negative number is expressed by 2's complement. About output range, in case of positive output : 000000 h ~ 7FFFFFFF h (in decimal number : 0 ~ +8388607), in case of negative output : FFFFFFFF h ~ 800000 h (in decimal number : -1 ~ -8388608) However, the result of measurement when being used beyond a recommended operating condition can't be guaranteed. Pressure value = DEC. / 1000 Output example:																								
	<table><tr><th>BIN.</th><th>HEX.</th><th>DEC.</th><th>Pressure</th></tr><tr><td>111111111110100010010000 b</td><td>FFE890 h</td><td>-6000</td><td>-6.000mmHg</td></tr><tr><td>000000000000000000000000 b</td><td>000000 h</td><td>0</td><td>0.000mmHg</td></tr><tr><td>000001001001001111100000 b</td><td>0493E0 h</td><td>300000</td><td>300.000mmHg</td></tr></table>									BIN.	HEX.	DEC.	Pressure	111111111110100010010000 b	FFE890 h	-6000	-6.000mmHg	000000000000000000000000 b	000000 h	0	0.000mmHg	000001001001001111100000 b	0493E0 h	300000	300.000mmHg
BIN.	HEX.	DEC.	Pressure																						
111111111110100010010000 b	FFE890 h	-6000	-6.000mmHg																						
000000000000000000000000 b	000000 h	0	0.000mmHg																						
000001001001001111100000 b	0493E0 h	300000	300.000mmHg																						

Table 7 Result command list (2/2)

Command Name	Command Code									Action
	HEX.	BIN.								
		C7	C6	C5	C4	C3	C2	C1	C0	
Read Temperature Result	0xC2	1	1	0	0	0	0	1	0	Read Temperature result
	Read compensated temperature result. It outputs the result of pressure measurement at 24bits, MSB first. A negative number is expressed by 2's complement. About output range, in case of positive output : 000000 h ~ 7FFFFFF h (in decimal number : 0 ~ +8388607), in case of negative output : FFFFFFF h ~ 800000 h (in decimal number : -1 ~ -8388608) However, the result of measurement when being used beyond a recommended operating condition can't be guaranteed.									
	Temperature value = DEC. / 2^16									
	Output example:									
	BIN.					HEX.		DEC.		Temperature
	000001010000000000000000 b					050000 h		327680		5.000 °C
	000110010000000000000000 b					190000 h		1638400		25.000 °C
	001011010000000000000000 b					2D0000 h		2949120		45.000 °C
Status	0x80	1	0	0	0	0	0	0	0	Output status signals that can indicate the IC status
	Output 8bits data depending on the conditions									
	D7	D6	D5	D4	D3	D2	D1	D0	State	
	0	0	0	0	0	0	0	0	Shutdown	
	1	1	1	0	1	1	0	1	Active	

State transition table

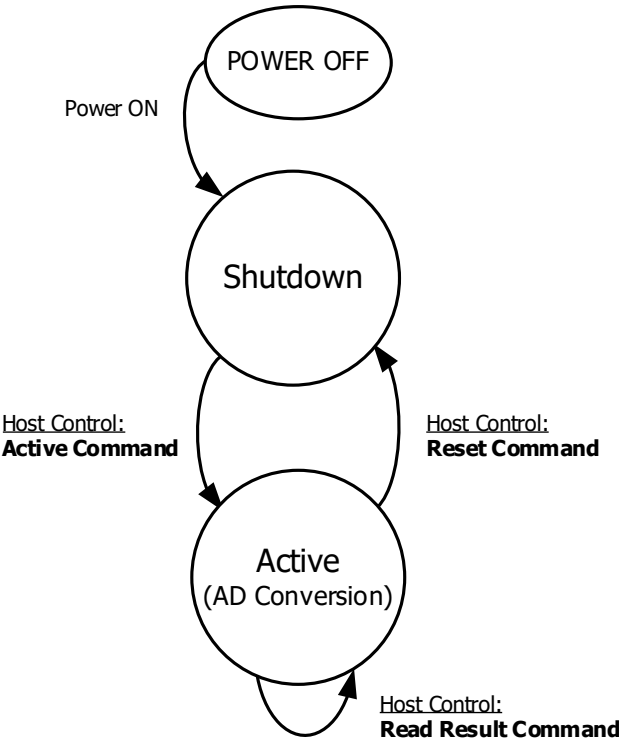


Fig. 10 State transition diagram

Table 8 State transition table

State Command	Shutdown	Active
Reset	Power on Reset & Initial Boot =>Shutdown	Power on Reset & Initial Boot =>Shutdown
Active	Reset & Boot Load =>Active state(AD conversion)	Ignore(note ³) =>Keep state
Result	Ignore(note ³) =>Keep state	Output result =>Keep state
Status	Output code =>Keep state	Output code =>Keep state

note³: NACK is returned to the command.

Timing Chart

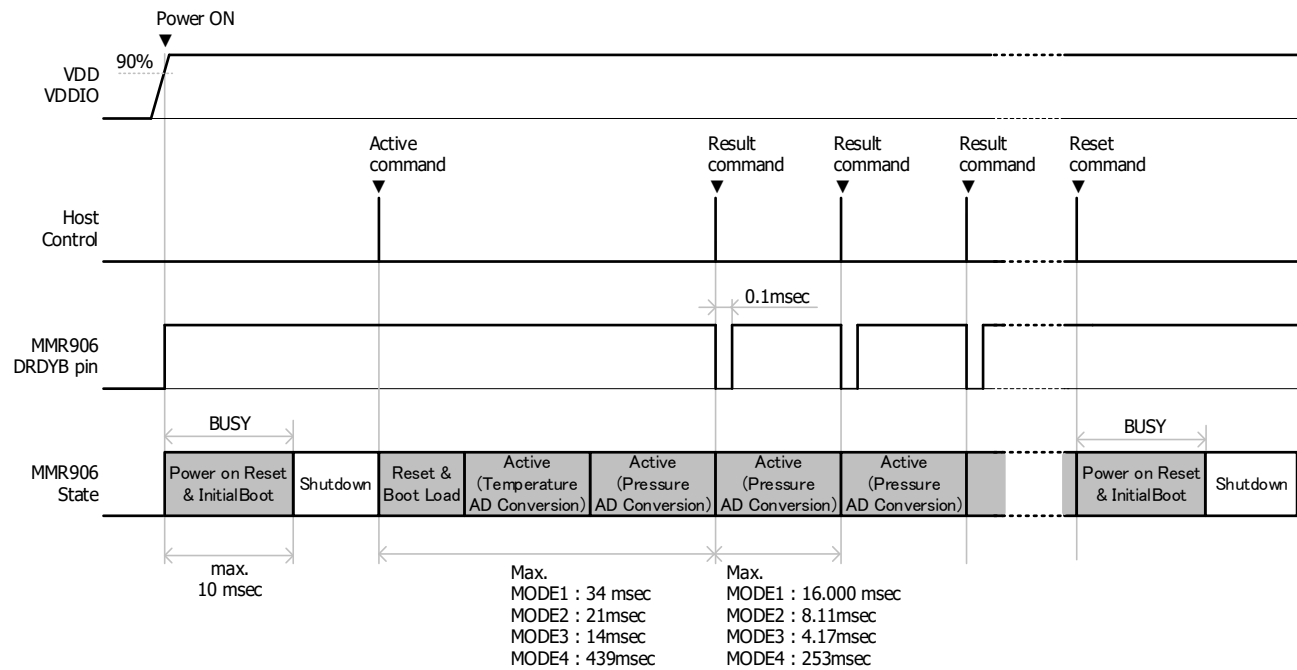


Fig. 11 Timing Chart

note⁴: Power on reset voltage is set to 1.62V in case of VDD<1.8V, and set to 1.08V in case of VDDIO<1.2V.

TYPICAL APPLICATION CIRCUIT

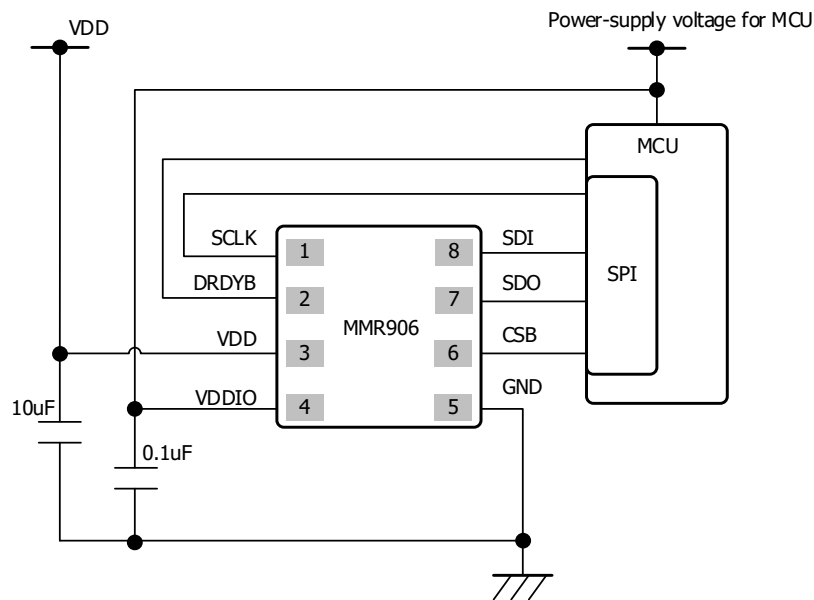


Fig. 12 Typical Electrical Connection

TYPICAL PERFORMANCE CHARACTERISTICS

(unless otherwise specified, Ta=25°C, VDD=VDDIO=3.0V)

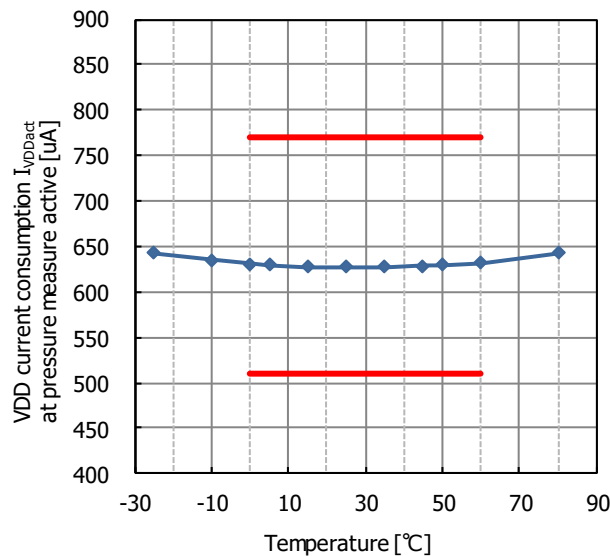


Fig. 13.1 VDD current consumption I_{VDDact} at pressure measure active temperature characteristic

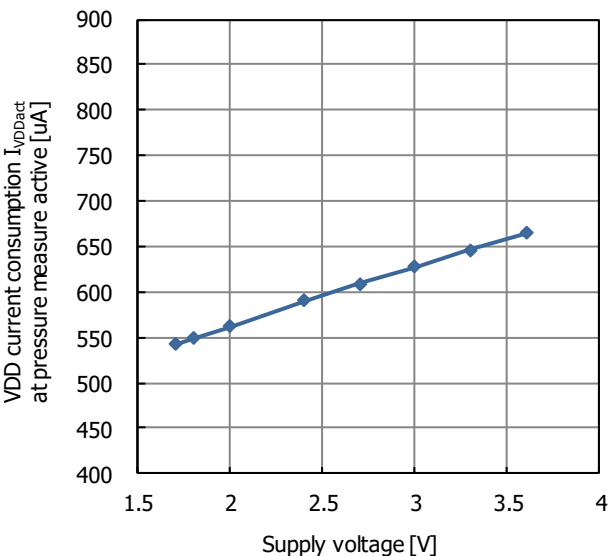


Fig.13.2 VDD current consumption I_{VDDact} at pressure measure active supply voltage characteristic

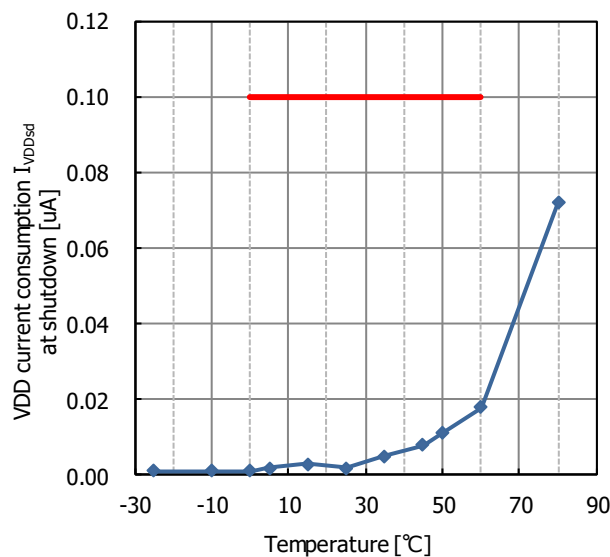


Fig.13.3 VDD current consumption I_{VDDsd} at shutdown temperature characteristic

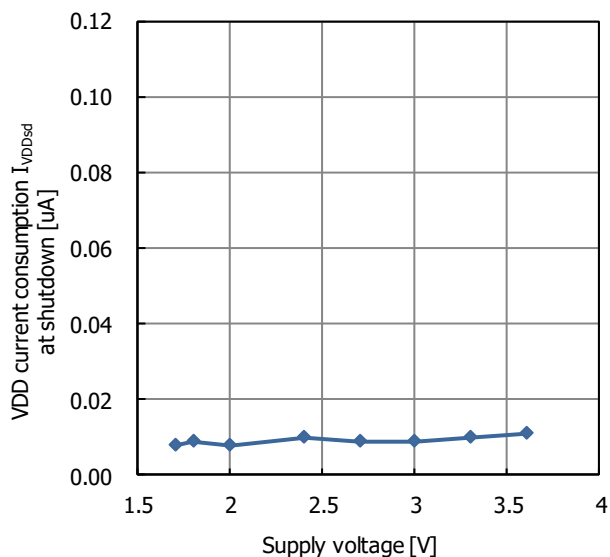


Fig.13.4 VDD current consumption I_{VDDsd} at shutdown supply voltage characteristic

(unless otherwise specified, Ta=25°C, VDD=VDDIO=3.0V)

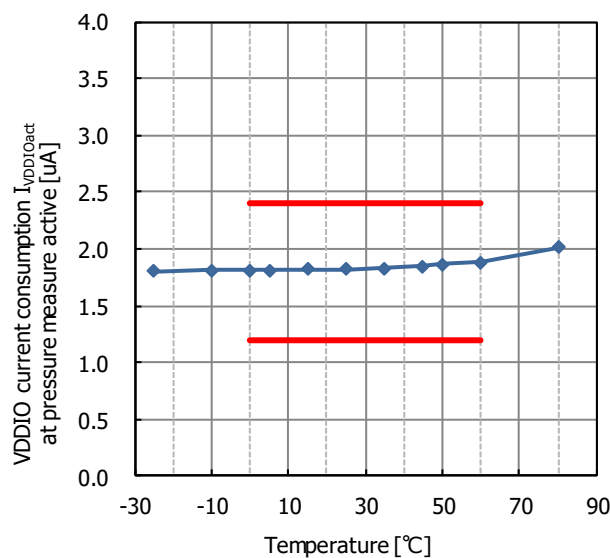


Fig.13.5 VDDIO current consumption $I_{VDDIOact}$ at pressure measure active temperature characteristic

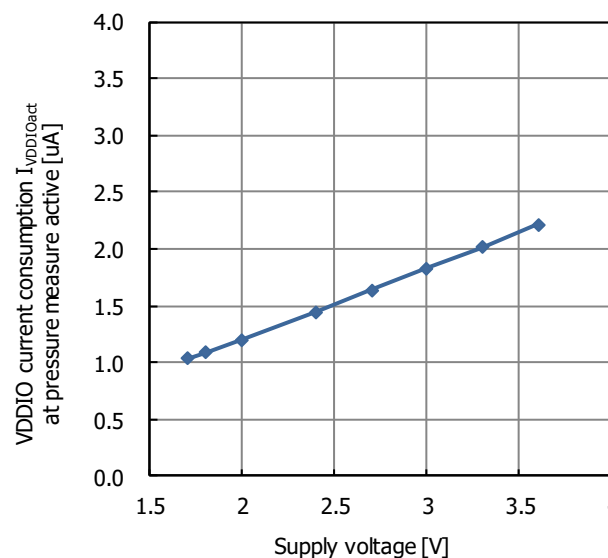


Fig.13.6 VDDIO current consumption $I_{VDDIOact}$ at pressure measure active supply voltage characteristic

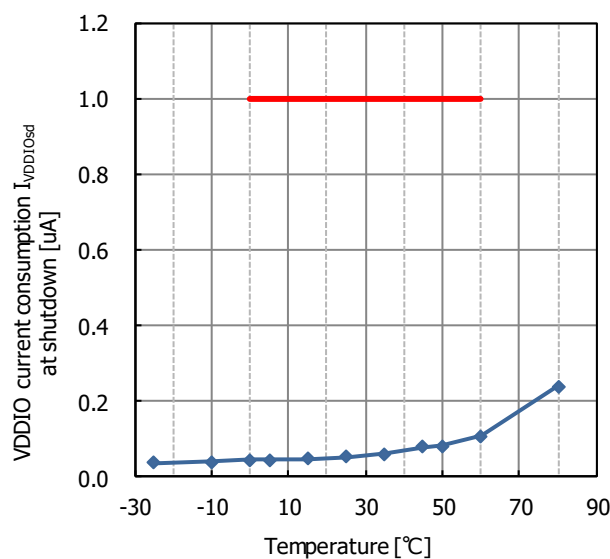


Fig.13.7 VDDIO current consumption $I_{VDDIOsd}$ at shutdown temperature characteristic

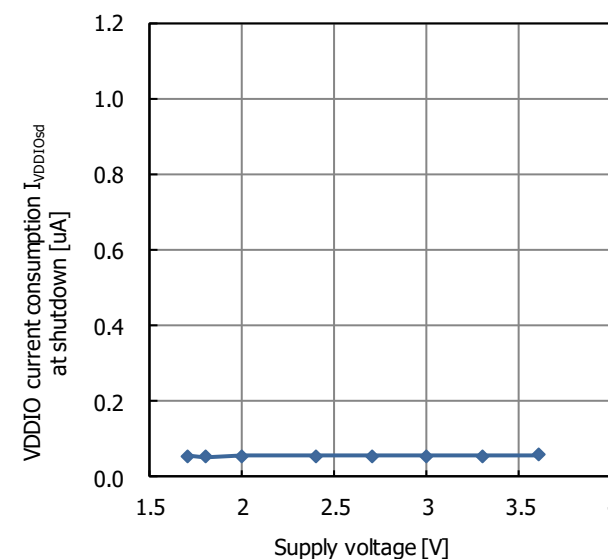


Fig.13.8 VDDIO current consumption $I_{VDDIOsd}$ at shutdown supply voltage characteristic

(unless otherwise specified, Ta=25°C, VDD=VDDIO=3.0V)

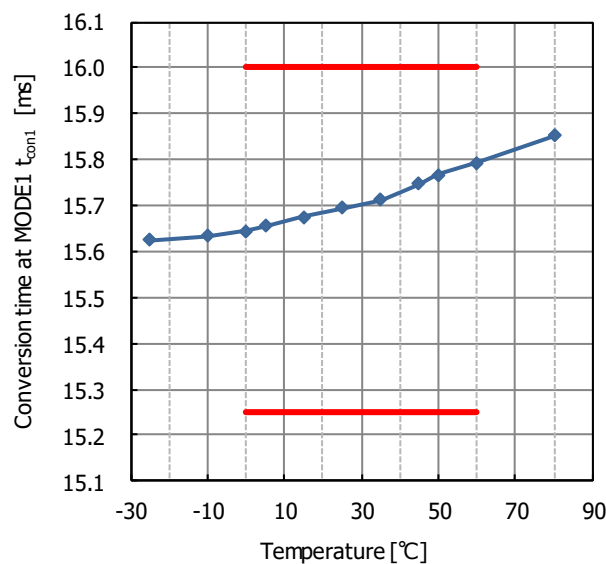


Fig.13.9 Conversion time at MODE1 t_{con1} temperature characteristic

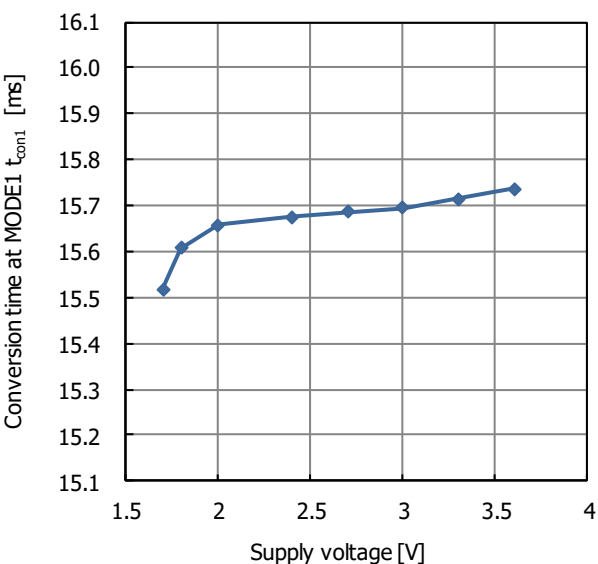


Fig.13.10 Conversion time at MODE1 t_{con1} supply voltage characteristic

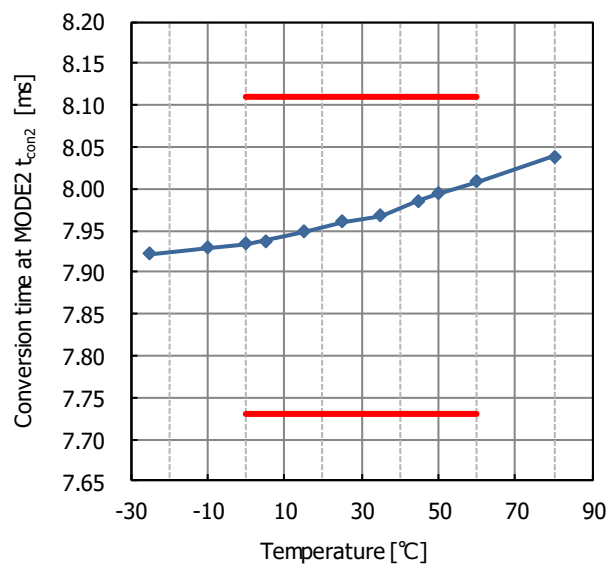


Fig.13.11 Conversion time at MODE2 t_{con2} temperature characteristic

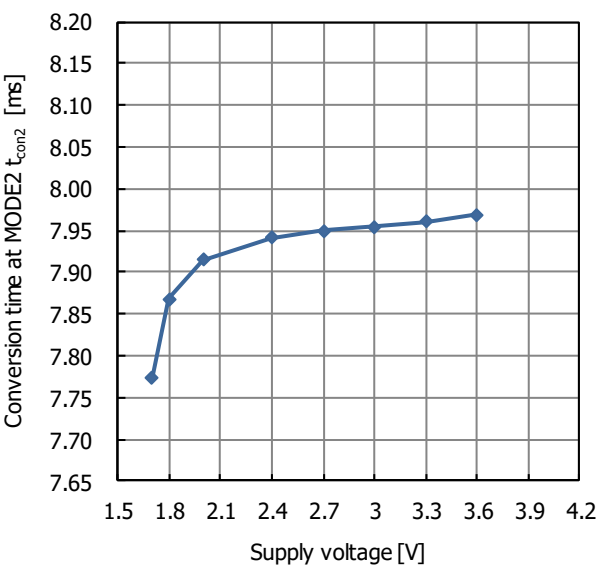


Fig.13.12 Conversion time at MODE2 t_{con2} supply voltage characteristic

(unless otherwise specified, Ta=25°C, VDD=VDDIO=3.0V)

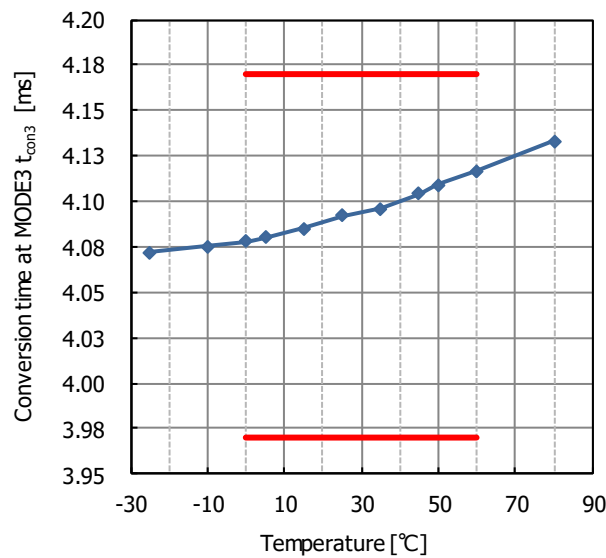


Fig.13.13 Conversion time at MODE 3 temperature characteristic

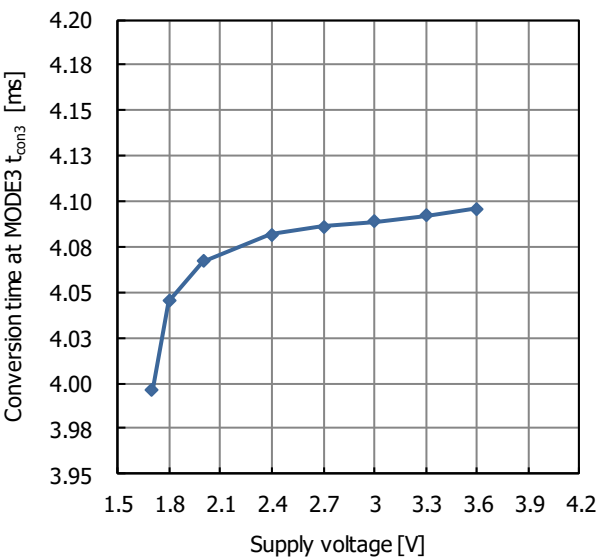


Fig.13.14 Conversion time at MODE 3 supply voltage characteristic

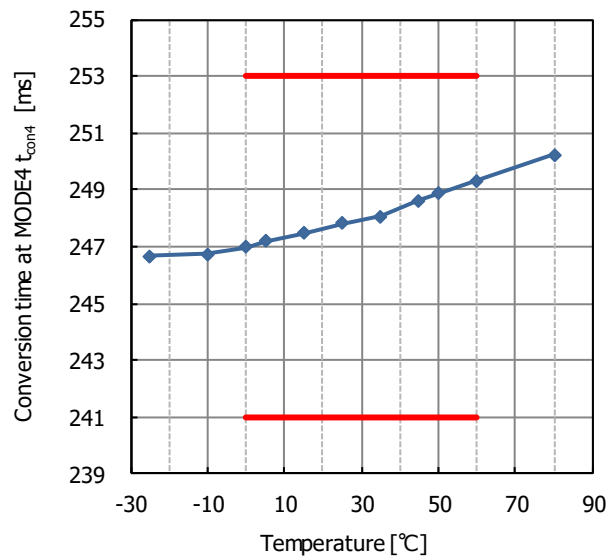


Fig.13.15 Conversion time at MODE 4 temperature characteristic

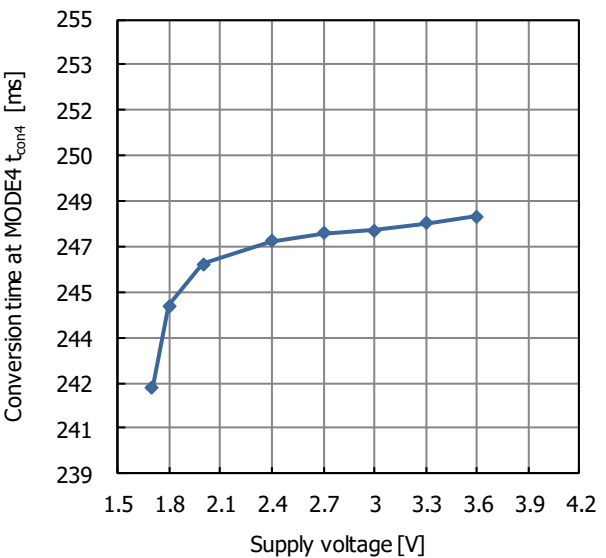


Fig.13.16 Conversion time at MODE 4 supply voltage characteristic

(unless otherwise specified, Ta=25°C, VDD=VDDIO=3.0V)

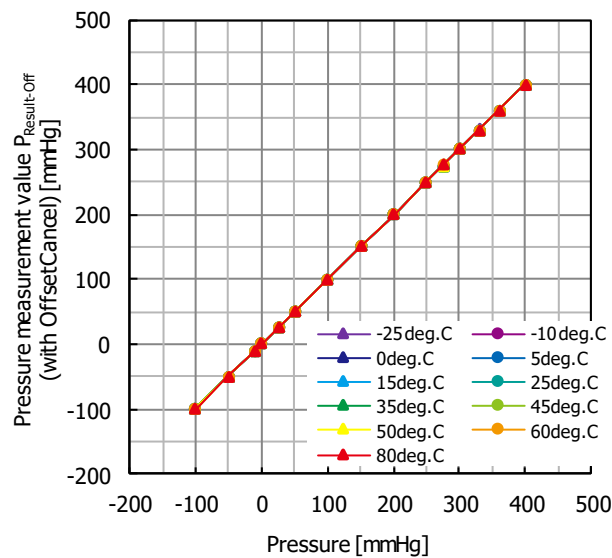


Fig.13.17 Pressure measurement value $P_{Result-Off}$ (with Offset Cancel) temperature characteristic

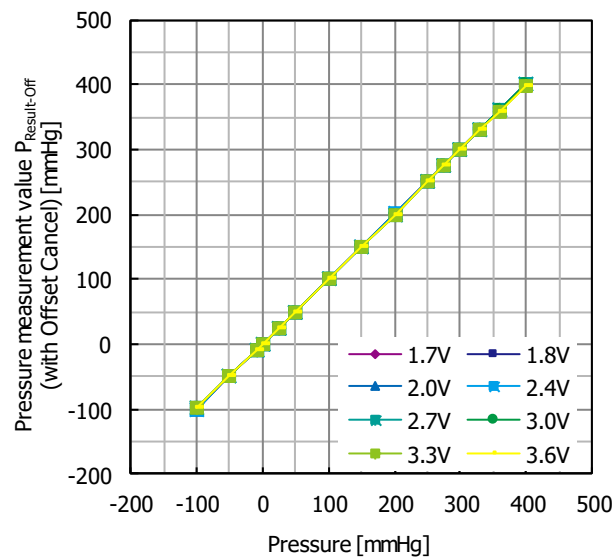


Fig.13.18 Pressure measurement value $P_{Result-Off}$ (with Offset Cancel) supply voltage characteristic

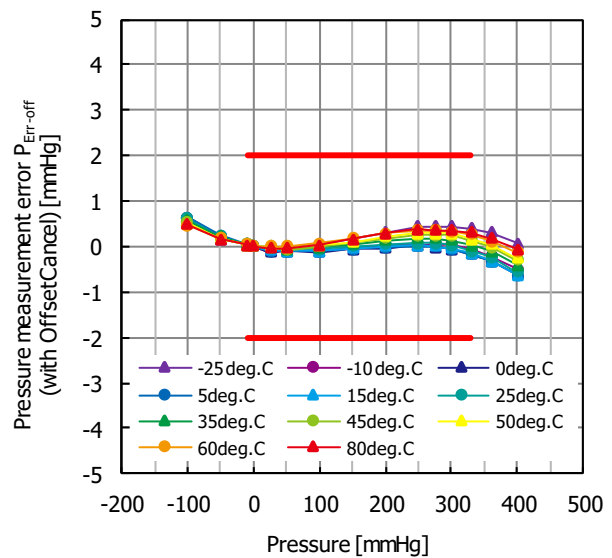


Fig.13.19 Pressure measurement error $P_{Err-Off}$ (with Offset Cancel) temperature characteristic

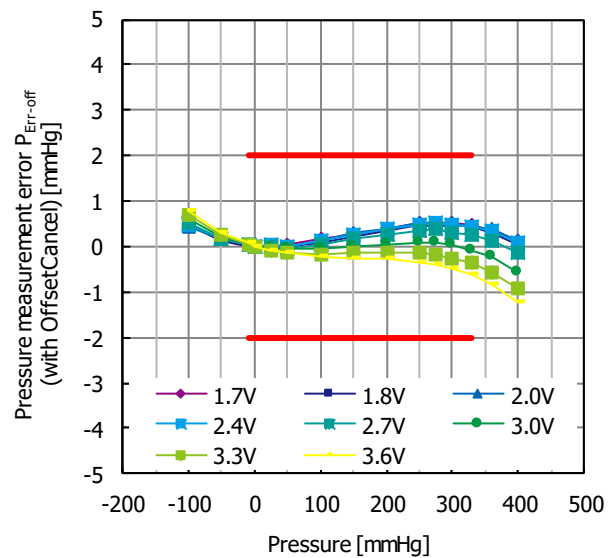


Fig.13.20 Pressure measurement error $P_{Err-Off}$ (with Offset Cancel) supply voltage characteristic

DIMENSIONS

PACKAGE : MEMS-8B

UNIT	mm
------	----

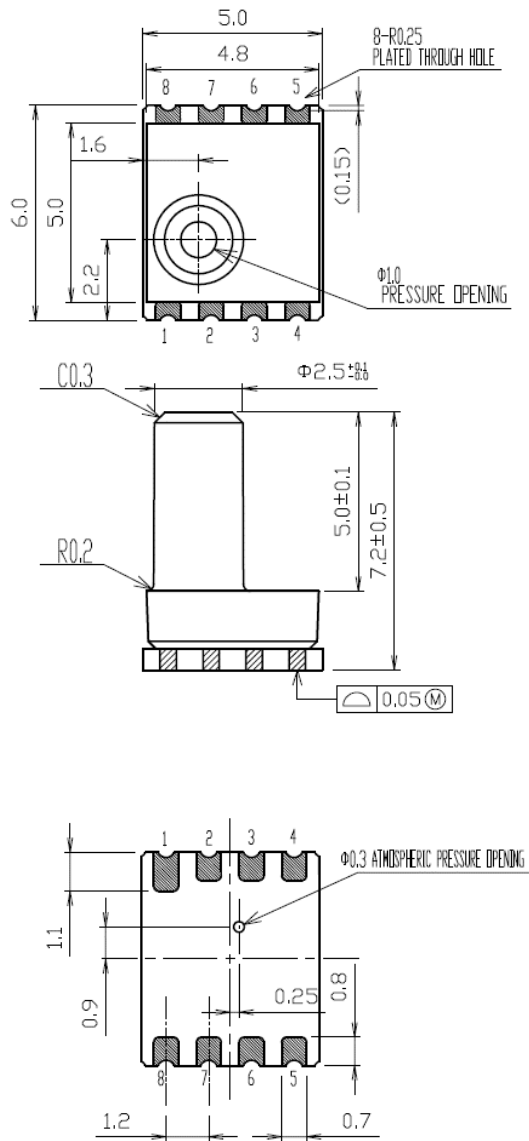



Table.11 Terminal list

PIN No.	Name
1	SCLK
2	DRDYB
3	VDD
4	VDDIO
5	GND
6	CSB
7	SDO
8	SDI

Print circuit board specifications


Grade	FR-4
UL	94V-0
Thickness	0.6 ± 0.1
Structure	2 Layers PCB with through holes
Parts assemble	One side
Resist	Both side

MARKING CONTENTS

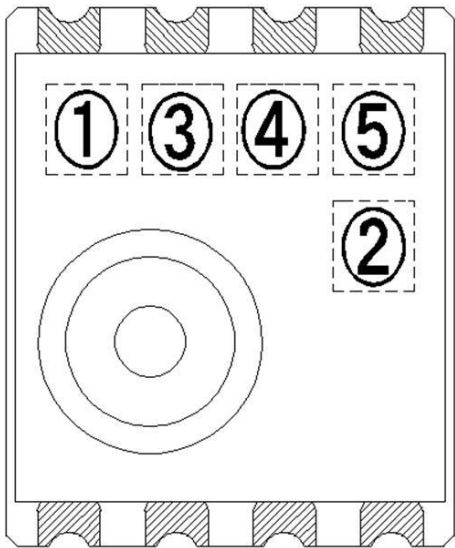

①	Model name		marking	
	MMR906		6	
②	Rank		marking	
	X		X	
③	Production year			
④	Production month			
	month	marking	month	marking
	JAN	1	JUL	7
	FEB	2	AUG	8
	MAR	3	SEP	9
	APR	4	OCT	J
	MAY	5	NOV	K
	JUN	6	DEC	L
⑤	Production day			
	day	marking	day	marking
	1	1	16	G
	2	2	17	H
	3	3	18	J
	4	4	19	K
	5	5	20	L
	6	6	21	M
	7	7	22	N
	8	8	23	P
	9	9	24	R
	10	A	25	S
	11	B	26	T
	12	C	27	U
	13	D	28	V
	14	E	29	W
	15	F	30	X
			31	Y

PRODUCT NAME

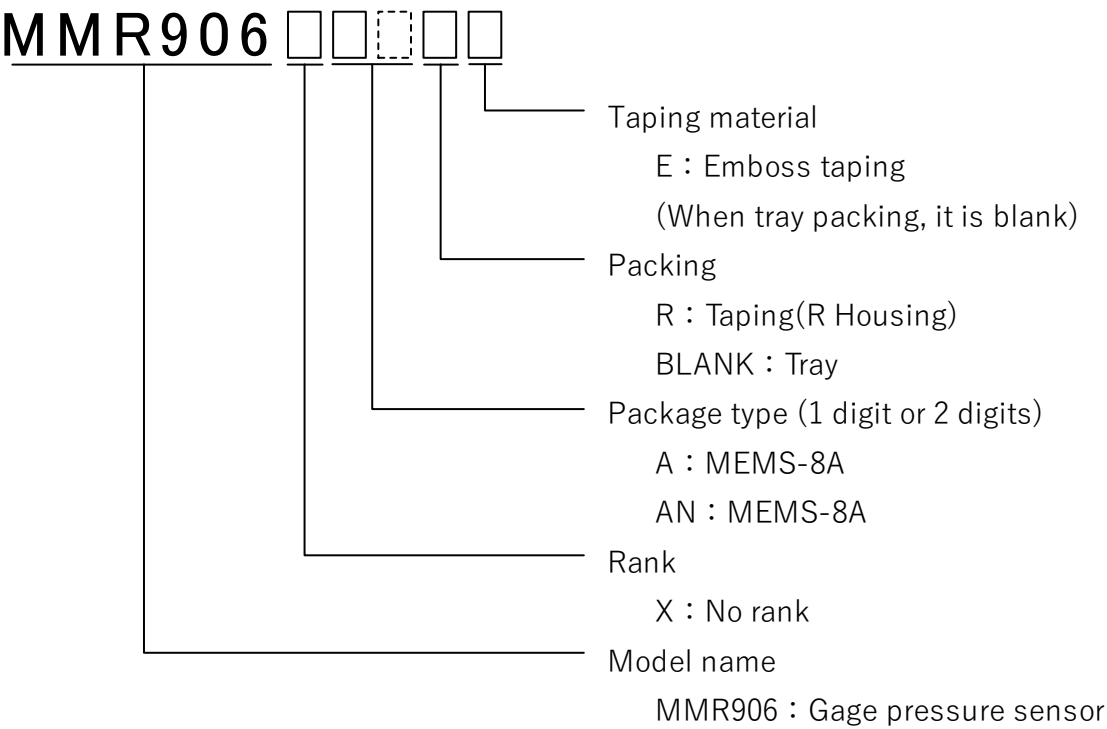

PRODUCT LINEUP

Product Name	Packing	Status
MMR906XAN	Tray	MP
MMR906XARE	Taping(R)	MP

PRESSURE SENSOR LINEUP

Function	Product Name	Size [mm] (L x W x H)	Pressure Range [Pa]	Full Scale [Pa]	Pressure Measurement error [%FS]	Span Accuracy [%FS]	Effective Resolution [PaRMS]	Packing	Halogen	Status
Gage Pressure Sensor	MMR920C02A	7 x 7 x 7.2	-1,961 ~ 1,961	1,961	2.0	1.30	0.2	Tray	Contain	Developing
	MMR920C02ARE	7 x 7 x 7.2	-1,961 ~ 1,961	1,961	2.0	1.30	0.2	Taping (R)	Contain	Developing
	MMR920C04A	7 x 7 x 7.2	-3,922 ~ 3,922	3,922	1.0	0.65	0.2	Tray	Contain	MP
	MMR920C04ARE	7 x 7 x 7.2	-3,922 ~ 3,922	3,922	1.0	0.65	0.2	Taping (R)	Contain	MP
	MMR920C07A	7 x 7 x 7.2	-6,865 ~ 6,865	6,865	1.0	0.65	0.2	Tray	Contain	Developing
	MMR920C07ARE	7 x 7 x 7.2	-6,865 ~ 6,865	6,865	1.0	0.65	0.2	Taping (R)	Contain	Developing
	MMR920C10A	7 x 7 x 7.2	-9,807 ~ 9,807	9,807	1.0	0.65	0.2	Tray	Contain	MP
	MMR920C10ARE	7 x 7 x 7.2	-9,807 ~ 9,807	9,807	1.0	0.65	0.2	Taping (R)	Contain	MP
	MMR906XAN	6 x 5 x 7.2	-1,000 ~ 40,000	40,000	-	0.66	1.0	Tray	Free	MP
	MMR906XARE	6 x 5 x 7.2	-1,000 ~ 40,000	40,000	-	0.66	1.0	Taping (R)	Free	MP
	MMR902A34A	7 x 7 x 7.2	-1,000 ~ 40,000	40,000	2.3	0.66	0.7	Tray	Free	MP
	MMR902A34ABE	7 x 7 x 7.2	-1,000 ~ 40,000	40,000	2.3	0.66	0.7	Taping (B)	Free	MP
	MMR902A34ARE	7 x 7 x 7.2	-1,000 ~ 40,000	40,000	2.3	0.66	0.7	Taping (R)	Free	MP
Differential Pressure Sensor	MMR940C02A	29 x 18 x 14.25	-1,961 ~ 1,961	1,961	(2.0)	1.30	0.2	Tray	Contain	Planning
	MMR940C04A	29 x 18 x 14.25	-3,922 ~ 3,922	3,922	(1.0)	0.65	0.2	Tray	Contain	Developing
	MMR940C07A	29 x 18 x 14.25	-6,865 ~ 6,865	6,865	(1.0)	0.65	0.2	Tray	Contain	Planning
	MMR940C10A	29 x 18 x 14.25	-9,807 ~ 9,807	9,807	(1.0)	0.65	0.2	Tray	Contain	Planning

NOTES

Safety Precautions

- Though Mitsumi Electric Co., Ltd. (hereinafter referred to as "Mitsumi") works continually to improve our product's quality and reliability, semiconductor products may generally malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of this product could cause loss of human life, bodily injury, or damage to property, including data loss or corruption. Before customers use this product, create designs including this product, or incorporate this product into their own applications, customers must also refer to and comply with (a) the latest versions or all of our relevant information, including without limitation, product specifications, data sheets and application notes for this product and (b) the user's manual, handling instructions or all relevant information for any products which is to be used, or combined with this products. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. Mitsumi assumes no liability for customers' product design or applications.
- This product is intended for applying to computers, OA units, communication units, instrumentation units, machine tools, industrial robots, AV units, household electrical appliances, and other general electronic units.
- If you have any intentions to apply this product to the units related to the control and safety of transportation units (vehicles, trains, etc.), traffic signaling units, disaster-preventive & burglar-proof units, or the like, contact our sales representatives in advance.
- Don't apply this product to any aeronautical & space systems, submarine repeaters, nuclear power controllers, medical units involving the human life, or the like.
- Before using this product, even when it is not used for the usage written above, notify and present us beforehand if special care and attention are needed for its application, intended purpose, environment of usage, risk, and the design or inspection specification corresponding to them.
- If any damage to our customer is objectively identified to be caused by the defect of this product, Mitsumi is responsible for it. In this case, Mitsumi is liable for the cost limited to the delivery price of this product.

Application considerations during actual circuit design

- The outline of parameters described herein has been chosen as an explanation of the standard parameters and performance of the product. When you actually plan to use the product, please ensure that the outside conditions are reflected in the actual circuit and assembling designs.
- Before using this product, please evaluate and confirm the actual application with this product mounted and embedded.
- To investigate the influence by applied transient load or external noise, It is necessary to evaluate and confirm them with mounting this product to the actual application.
- Any usage above the maximum rating may destroy this product or shorten the lifetime. Be sure to use this product under the maximum rating.
- If you continue to use this product highly-loaded (applying high temperature, large current or high voltage; or variation of temperature) even under the absolute maximum rating and even in the operating range, the reliability of this product may decrease significantly. Please design appropriate reliability in consideration of power dissipation and voltage corresponding to the temperature and designed lifetime after confirming our individual reliability documents (such as reliability test report or estimated failure rate). It is recommended that, before using this product, you appropriately derate the maximum power dissipation (typically, 80% or less of the maximum value) considering parameters including ambient temperature, input voltage, and output current.

Precautions for Foreign Exchange and Foreign Trade Control Act

- If you export or take products and technologies in this document which are subject to security trade control based on the Foreign Exchange and Foreign Trade Act to overseas from Japan, permission of the Japanese government is required.

Prohibitions for Industrial Property Rights

- Since this document contains the contents related to our copyright and know-how, you are requested not to use this document for any purpose other than the application of this product.
- If a use of this product causes a dispute related to the industrial property rights of a third party, Mitsumi has no liability for any disputes except those which arise directly from the manufacturing and manufacturing method of our products.

Precautions for Product Liability Act

- No responsibility is assumed by us for any consequence resulting from any wrong or improper use or operation, etc. of this product.

Others

- Any part of the contents contained herein must not be reprinted or reproduced without our prior permission.
- In case of any question arises out of the description in this specification, it shall be settled by the consultation between both parties promptly.

ATTENTION

- This product is designed and manufactured with the intention of normal use in general electronics. No special circumstance as described below is considered for the use of it when it is designed. With this reason, any use and storage under the circumstances below may affect the performance of this product. Prior confirmation of performance and reliability is requested to customers.
 - Environment with strong static electricity or electromagnetic wave
 - Environment with high temperature or high humidity where dew condensation may occur
- This product is not designed to withstand radioactivity, and must avoid using in a radioactive environment.

ADDDITIONAL NOTES

- The pressure medium which can use directly is only air. Please do not use other media, especially corrosive gases (organic solvent gas, sulfurous acid gas, hydrogen sulfide gas, etc.) and media which include moisture and foreign substance, since they could cause damages or malfunctions.
- Please handle it noting the foreign body mixing with the pressure opening and atmospheric pressure opening after opening packing.
- When cut folding the PCB after mounting this product, take measures to prevent stress to the package. Also, when you insert the tube in this product, please note that plugging it vertically. Load in the lateral direction of the cover of the nozzle is up to 1kg or less. (Load condition: position of height 4mm from the marking surface.) Excessive load could cause damages of cover, or air leak by peeling from the interface of the cover and the substrate, or malfunctions.
- The light that enters from the pressure entrance reaches the semiconductor chip. Please avoid use in the environment that light enters into the pressure entrance directly, because the semiconductor chip might malfunction because of light.

PACKING SPECIFICATIONS (TRAY)


QUANTITY

- VACUUM PACKING 800 pcs / SHIELD BAG
- BOX PACKING MAX 6,400 pcs / BOX (8BAGS)


THE QUANTITY IS FILLED IN THE PACKING SLIP

PACKING SPECIFICATIONS

- TRAY STORAGE SPECIFICATION

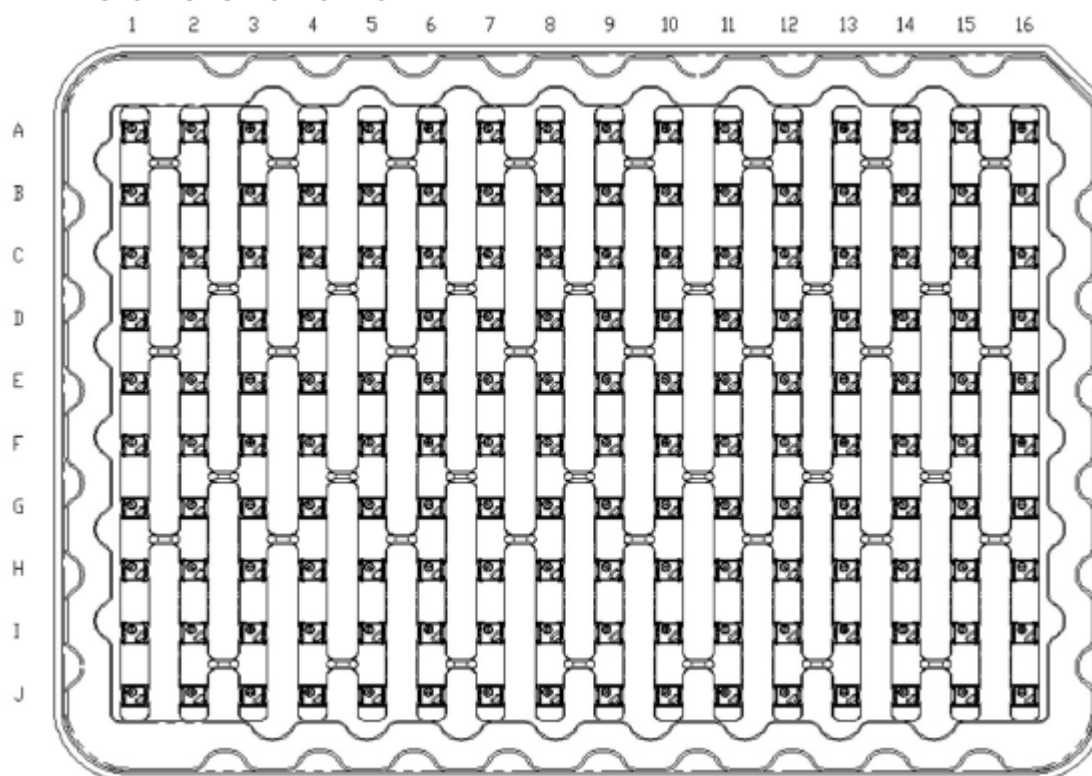

1. PRODUCTION STORAGE DIRECTION

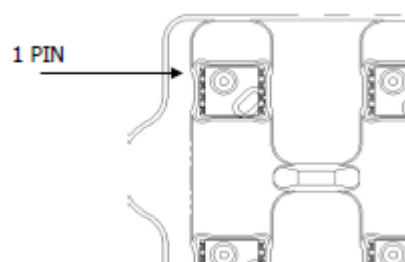

2. BROKEN NUMBER PRODUCTION STORAGE

REGARDING BROKEN NUMBER PRODUCTION STORAGE,
IT IS HOUSED IN FOLLOWING-ORDER.


(A1, B1, ..., I1, J1), (A2, B2, ..., I2, J2), ..., (A16, B16, ..., I16, J16)

3. TRAY MATERIAL, DISPOSED ELECTRICATION PREVENTION.


· TRAY DIMENSION

TRAY A


UNIT	mm
------	----

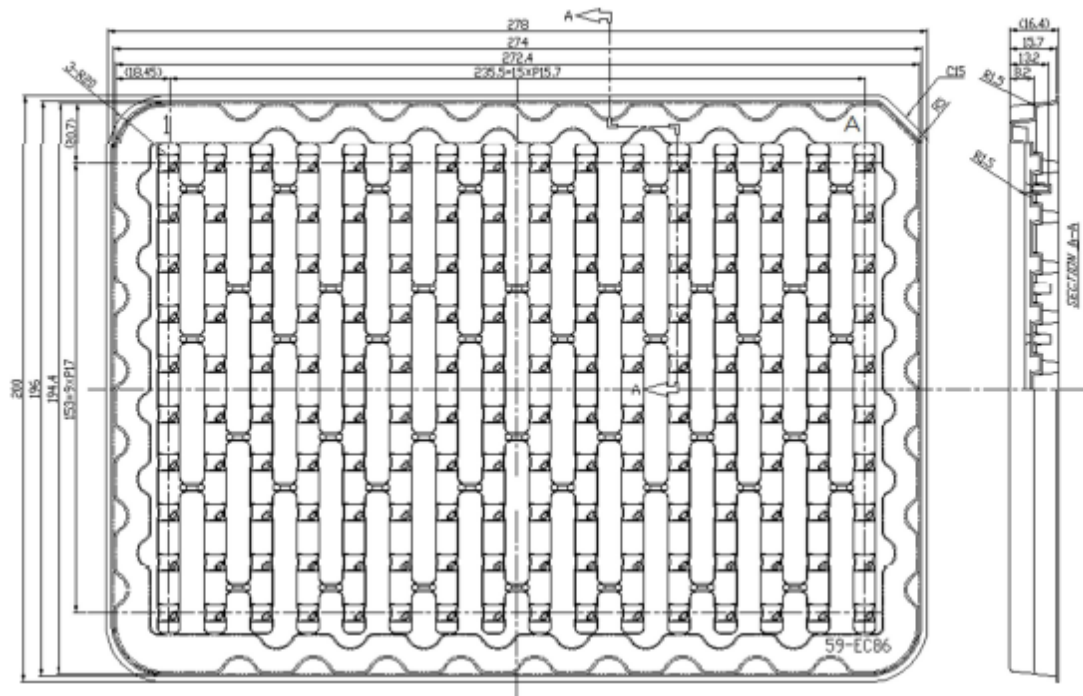

TRAY B

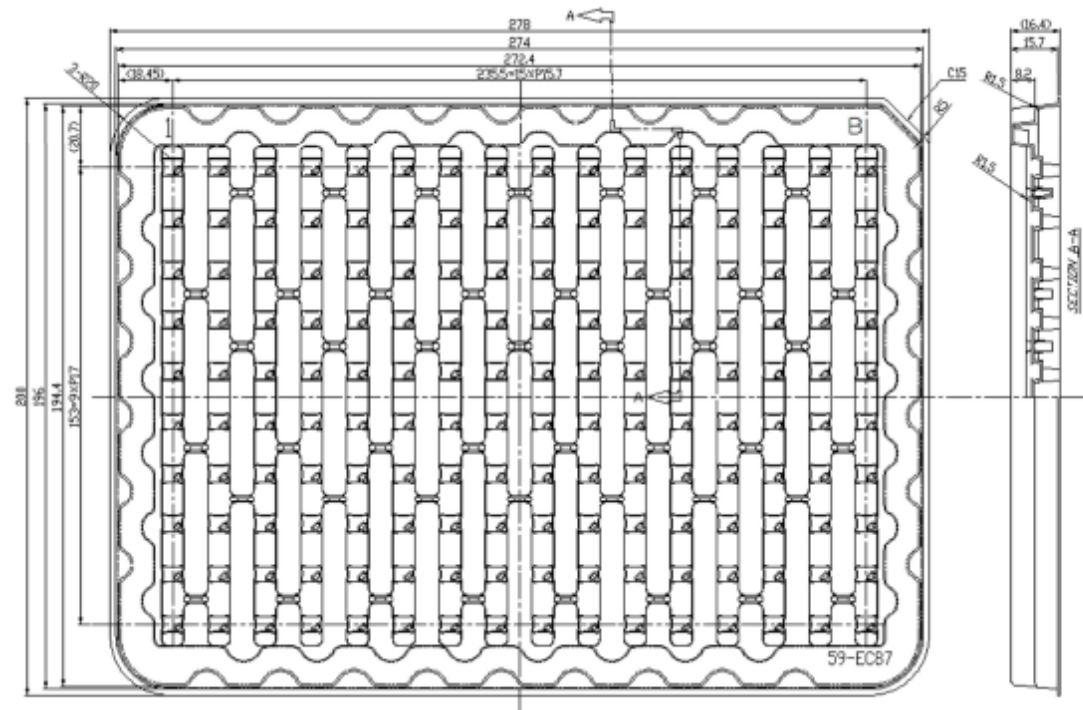


· PACKING SPECIFICATION

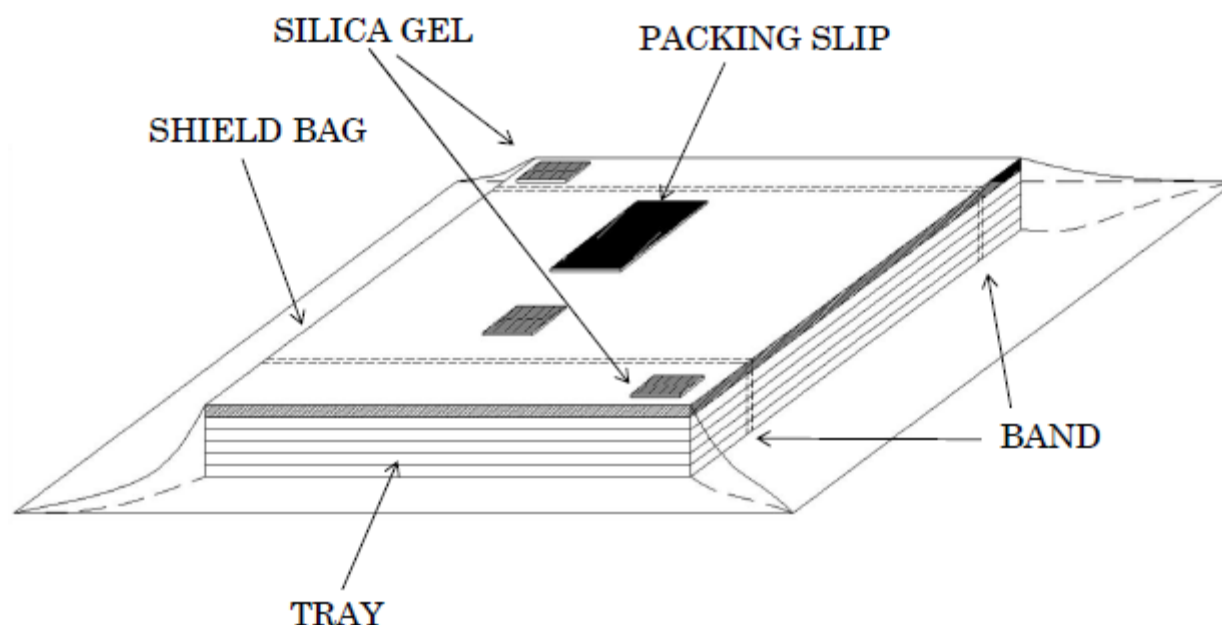

THESE 6 TRAYS WHICH ARE 5 TRAYS WITH PRODUCTS AND EMPTY TRAY AS LID ARE PILED UP. ALSO, THESE TRAYS ARE FIXED BY BAND. THESE ARE VACUUM-HEAT-SEALED TOGETHER WITH THE SILICA GEL.
※THIS TRAY HAS TYPE A AND TYPE B. THEY ARE PILED UP ALTERNATELY.
(IT IS POSSIBLE TO USE BOTH TYPE TRAYS AS EMPTY ONE.)

· BOX DIMENSION

UNIT : mm

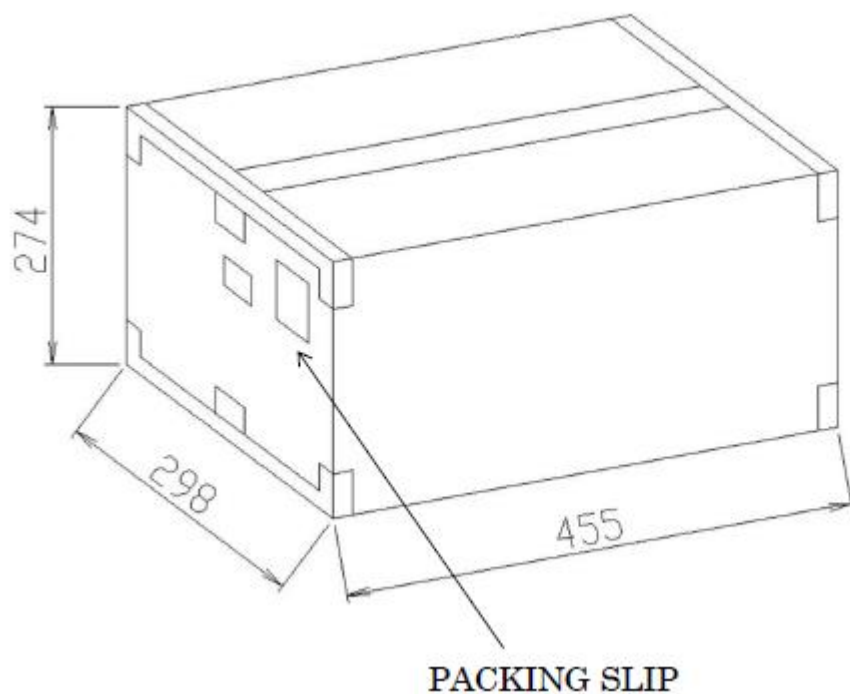

PUT MAX 8 BAGS IN THE CARTON BOX.
AFTER PACKING BY TAPE (6,400 PCS MAX)
PUT THE PACKING SLIP ON THE SIDE OF THE CARTON BOX.

· PACKING SLIP SPECIFICATION

MITSUMI ELECTRIC CO., LTD.

 現 品 票 PACKING SLIP

納入 MEDRD.

品 番 PART NO.

品 名 DESCRIPTION
MMR901XA

注 冊 P/O NO.

特 記 NOTE
MMR901XA PBF

TOTAL Q'TY/BOXES Q'TY/BOX

番 号 番 号 / 番 号

DATE
15/07/30

LOT NO.

R 番 SPEC. R.
R901

1

2

3

4

5

6

7

出 検
'15.07.30
合 格

- ① CUSTOMER NAME

② CUSTOMER'S MODEL NAME

③ MITSUMI MODEL NAME

④ "G mark" meaning is RoHS-compliant.


⑤ PACKING Q'TY (PACK/CARTON)

⑥ QC STAMP(SHIPMENT DATE)

※This is pass-stamp about shipment inspection.

⑦ MITSUMI DRAWING NUMBER

MARK LOT NUMBER

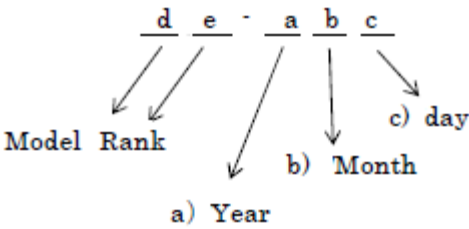

a)	Production year			
b)	Production month			
	month	marking	month	marking
	JAN	1	JUL	7
	FEB	2	AUG	8
	MAR	3	SEP	9
	APR	4	OCT	J
	MAY	5	NOV	K
	JUN	6	DEC	L
c)	Production day			
	day	marking	day	marking
	1	1	16	G
	2	2	17	H
	3	3	18	J
	4	4	19	K
	5	5	20	L
	6	6	21	M
	7	7	22	N
	8	8	23	P
	9	9	24	R
	10	A	25	S
	11	B	26	T
	12	C	27	U
	13	D	28	V
	14	E	29	W
	15	F	30	X
			31	Y

PACKING SPECIFICATIONS (TAPING, R HOUSING)


QUANTITY

- REEK PACKING 700 pcs / REEL
- BOX PACKING MAX 700 pcs / BOX (1REEL)

THE QUANTITY IS FILLED IN THE PACKING SLIP


PACKING SPECIFICATIONS

- HOUSING SPECIFICATION

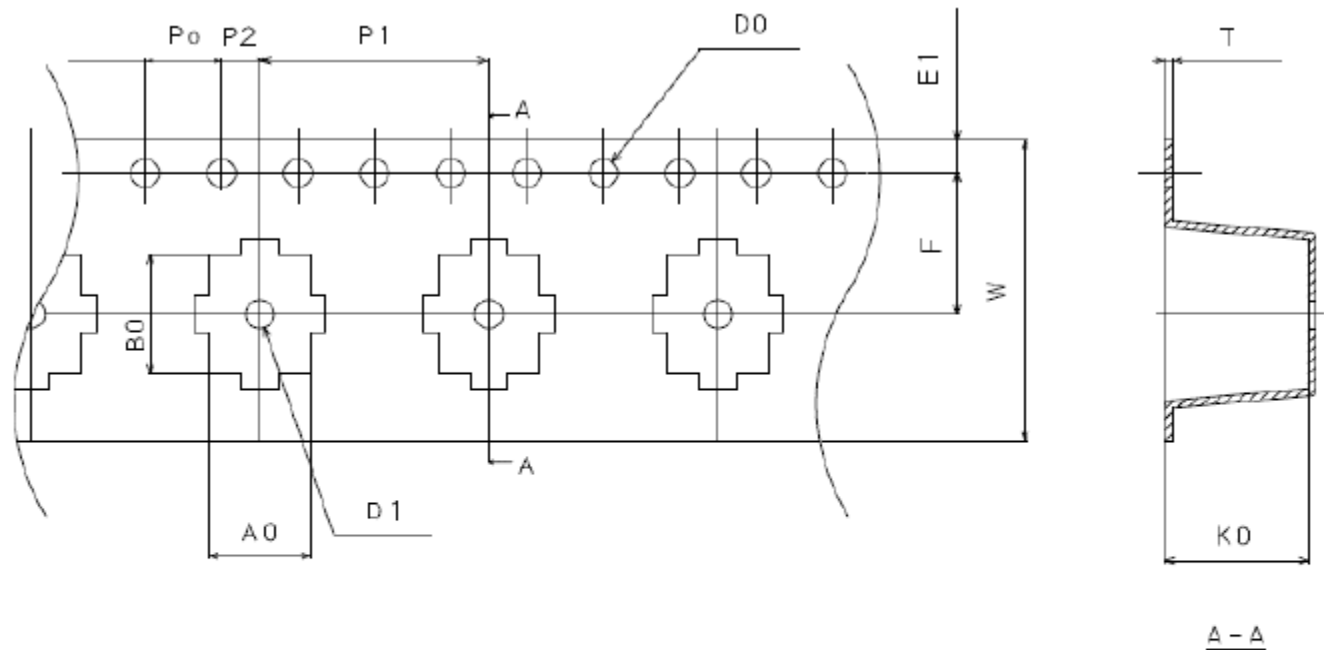


SYM.	A0	B0	W	F	E1	P1	P2	P0	φ D0	T	K0	φ D1
UNIT	5.3	6.3	16.0	7.5	1.75	12.0	2.0	4.0	1.5	0.4	7.6	1.5
mm	±0.1	±0.1	+0.3 -0.1	±0.1	±0.1	±0.1	±0.1	±0.1	+0.1 -0.0	±0.05	±0.1	±0.1

1. PRODUCTION STORAGE DIRECTION

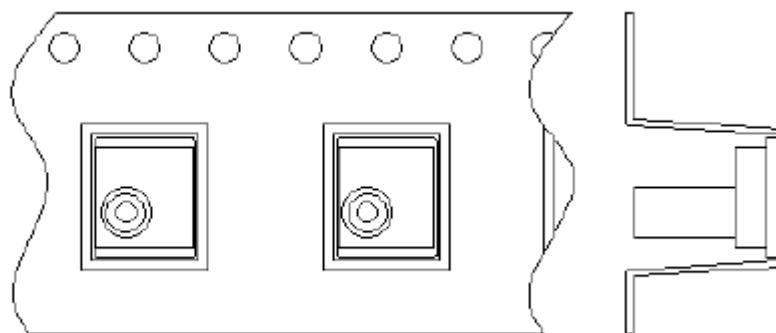R HOUSING


2. CARRIER TAPE MATERIAL : DISPOSED ELECTRICATION PREVENTION.
3. THE LENGTH OF LEADER TAPE : MORE THAN 100 mm INCLUDING 9 OR MORE EMBOSES IN WHICH NO COMPONENT IS PLACED.
4. THE LENGTH OF TRAILER TAPE : MORE THAN 160 mm INCLUDING EMBOSES IN WHICH NO COMPONENT IS PLACED.

・ REEL DIMENSION

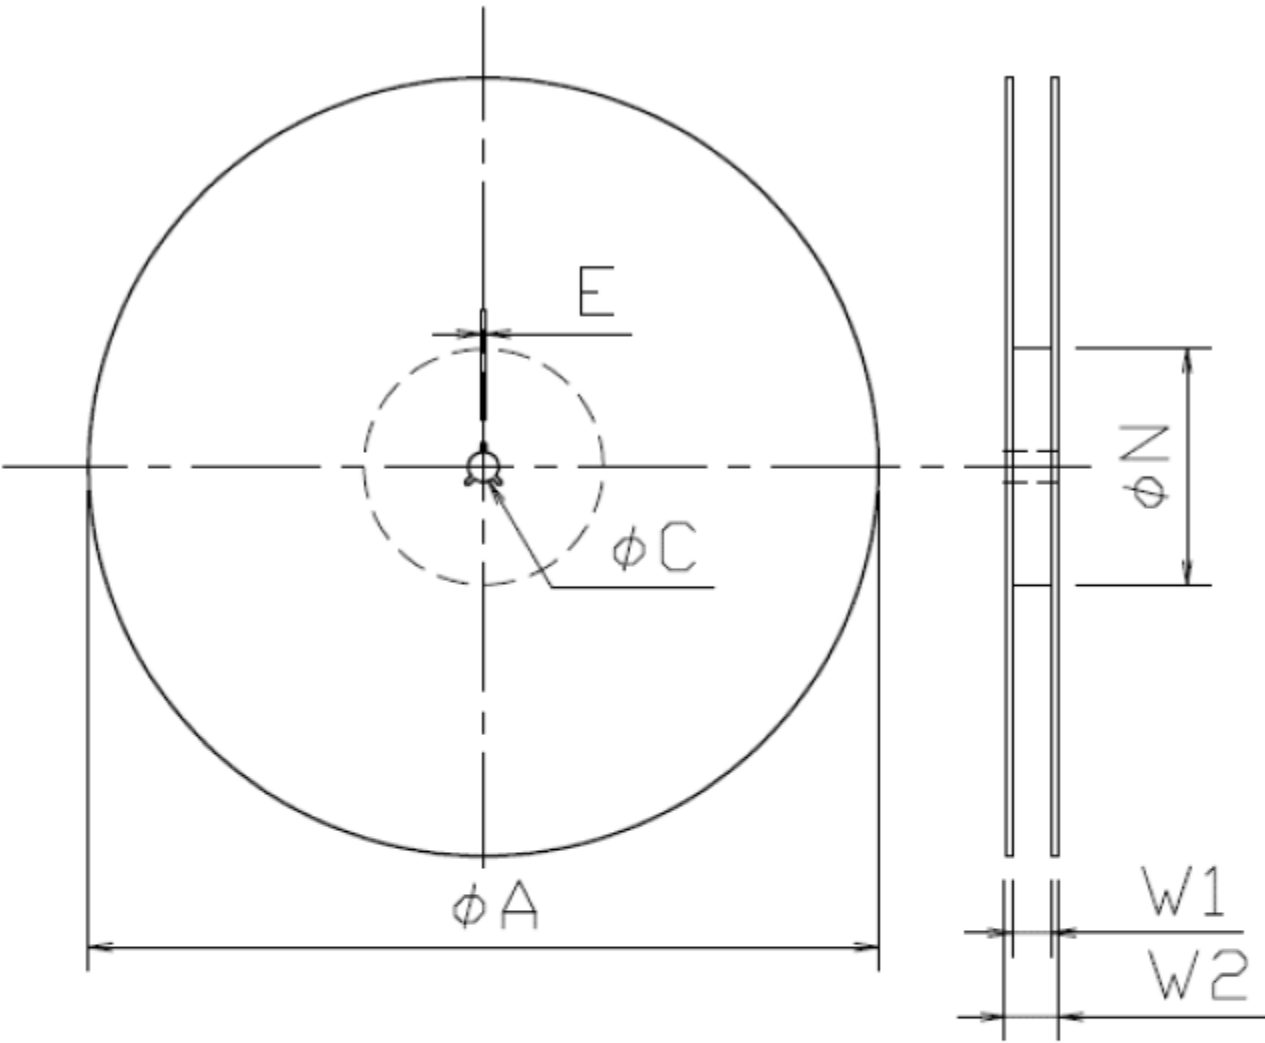


記号 SYM.	ϕA	ϕC	ϕN	E	W1	W2
UNIT	330	13.0	100	2.0	17.4	21.4
mm	±2.0	±0.2	±1.0	±0.5	±1.0	±1.0

· MOISTURE PROOF PACKING

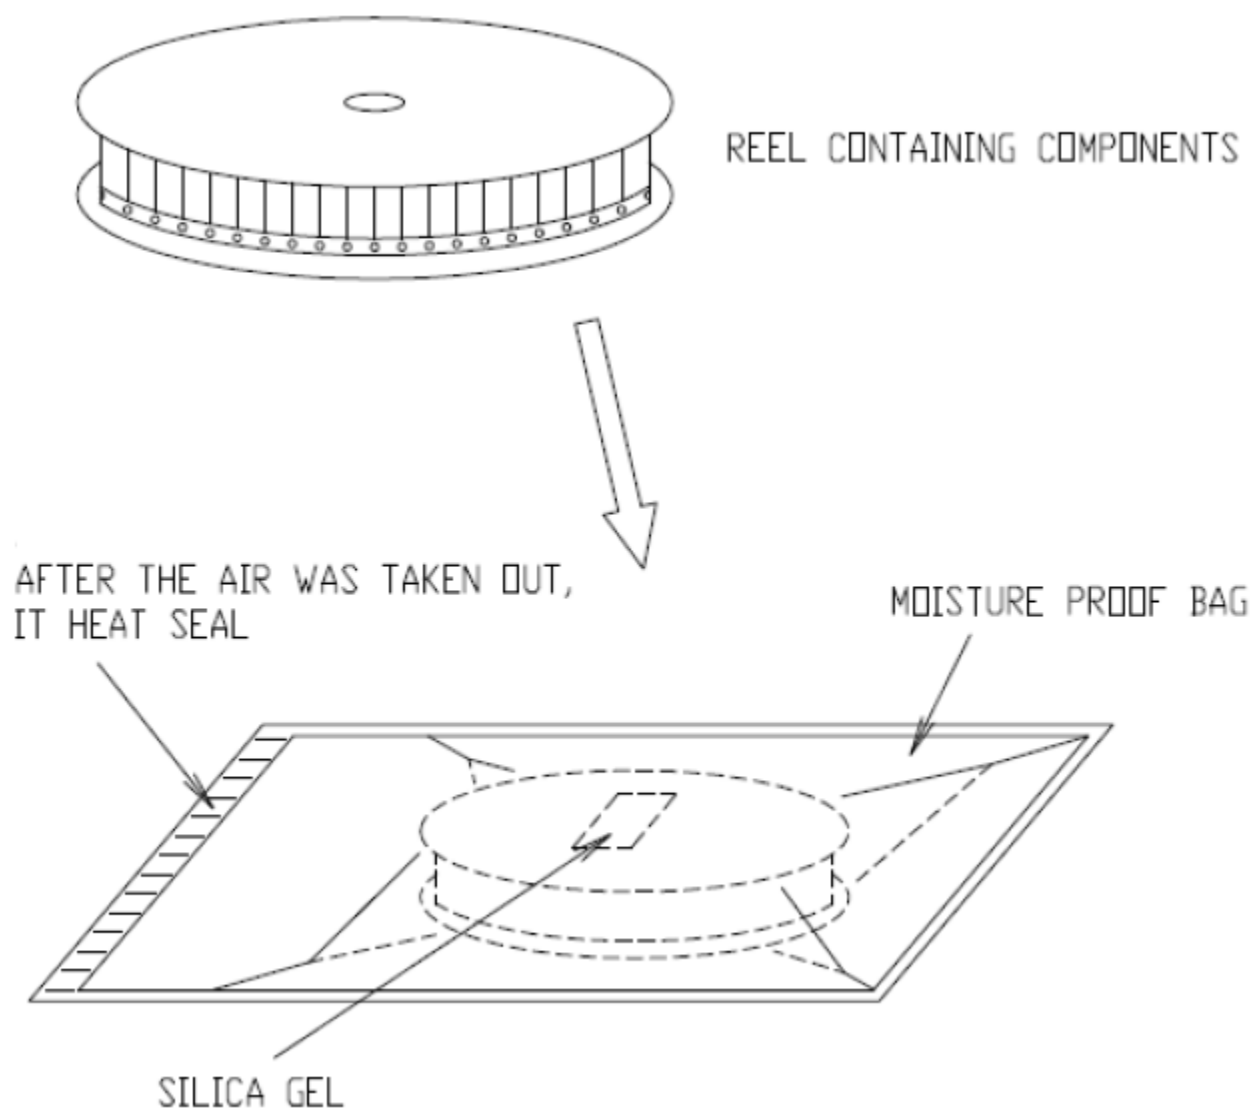


· BOX DIMENSION

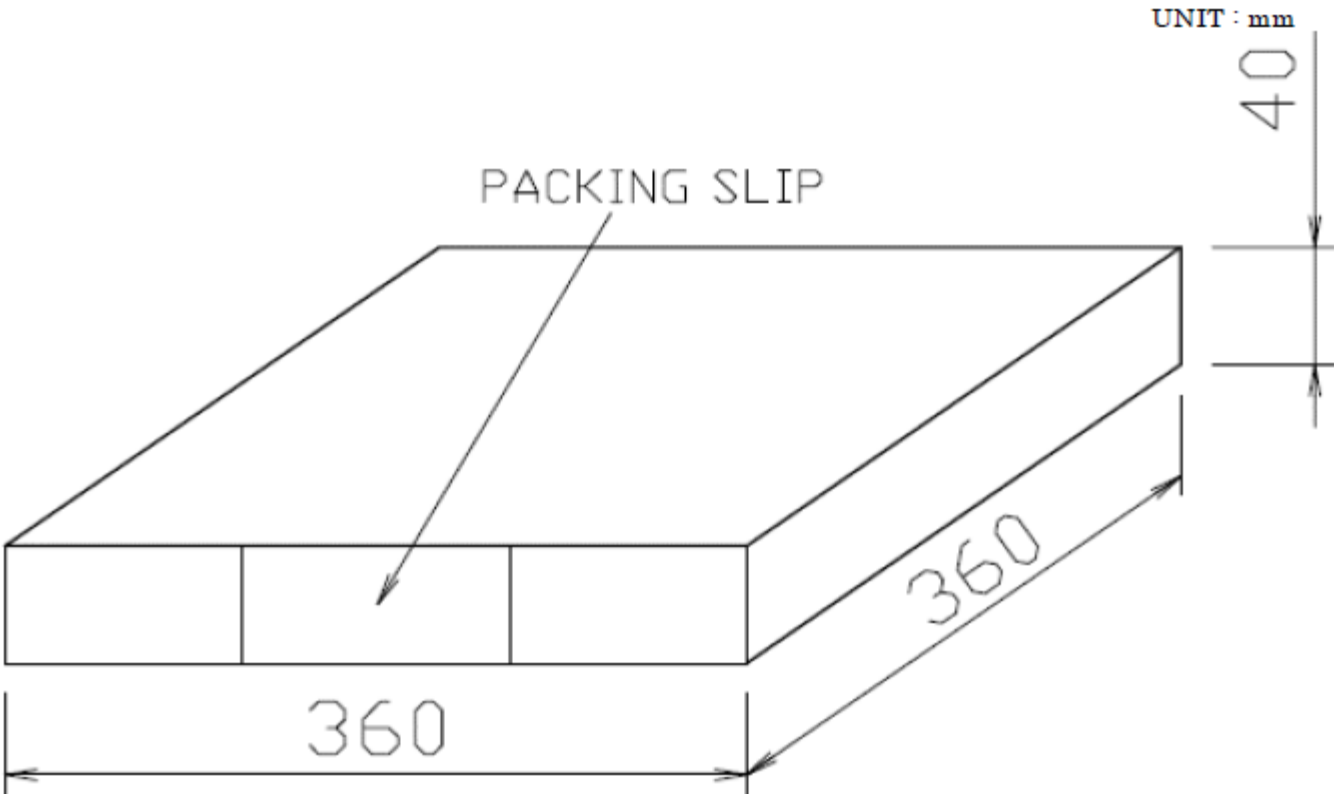

現 品 票 PACKING SLIP		
納入先 MESSRS.		1
品番 PART NO.		2
品名 DESCRIPTION		3
注番 P/O NO.		
特記 NOTE		4
TOTAL Q' TY/BOXES Q' TY/BOX		5
荷姿 箱口/ 巻		
DATE		
LOT NO.		6
R 番 SPEC. R.		

- MARK LOT NUMBER

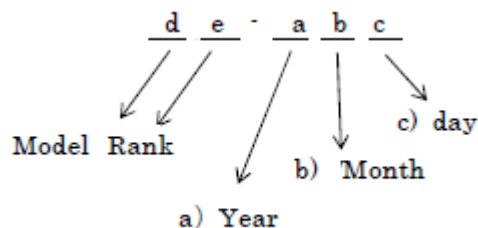


a)	Production year			
b)	Production month			
	month	marking	month	marking
	JAN	1	JUL	7
	FEB	2	AUG	8
	MAR	3	SEP	9
	APR	4	OCT	J
	MAY	5	NOV	K
	JUN	6	DEC	L
c)	Production day			
	day	marking	day	marking
	1	1	16	G
	2	2	17	H
	3	3	18	J
	4	4	19	K
	5	5	20	L
	6	6	21	M
	7	7	22	N
	8	8	23	P
	9	9	24	R
	10	A	25	S
	11	B	26	T
	12	C	27	U
	13	D	28	V
	14	E	29	W
	15	F	30	X
			31	Y

CONDITION FOR PACKAGE MOUNTING

Design example of mount pad

The dimension is for reference only and not guaranteed by design.


UNIT	mm
------	----

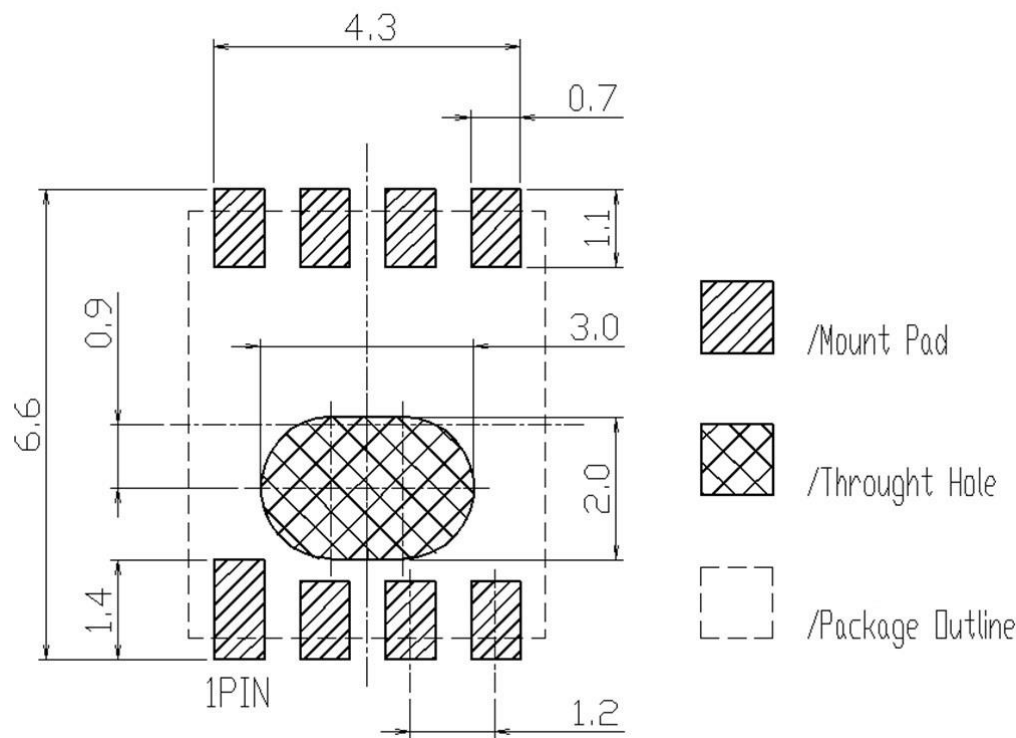

The dimension is for reference only and not guaranteed by design.

To design practically, correction should be made for optimized dimensions considering the effects of the board type to be mounted, mount (soldering) method, type and coating thickness of cream solder.

Pb-Free recommended profile condition

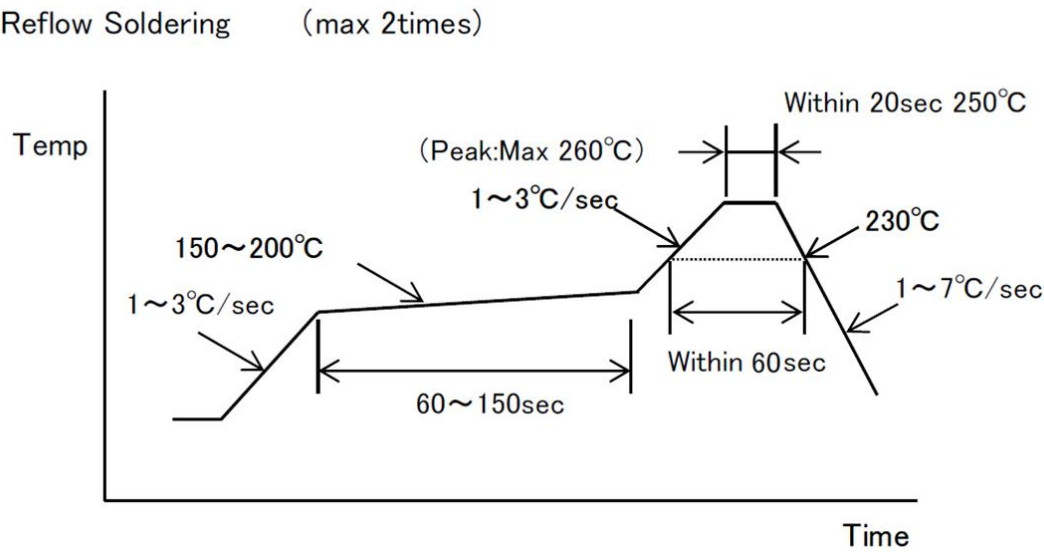

This profile gives recommended values, which are not guaranteed.
For mounting the package, evaluate the profile with the equipment, conditions, and materials to be used.

Mounting by flow soldering
Flow soldering cannot be used for mounting of this package.

Mounting by manual soldering
Manual soldering cannot be used for mounting of this package.

In the case of cleaning, please use cotton swab, and also please keep soldering-solution from entering into the pressure and atmospheric pressure opening. Please do not use ultrasonic cleaning (dipping).

Cleaning method

Cleaning solution	Isopropyl alcohol
Solvent temperature	Max 45°C
Cleaning time	Within 3 min

Note
When insert a tube to this package, please keep direction of a tube at right angle with this package.
Also, after mounting by reflow, please make sure not to insert a tube to package before finish cooling.
If place an extra strain on cover nozzle, it is possible that occur cover nozzle broken, interface delamination between cover nozzle and printed wiring board. It has the potential to become air-leak problem.

Storage method

Storage condition

Store the device under the following conditions.

Temperature: 5~30°C

Humidity: 40~70%RH

Storage life: 1year

For the product in the moisture-proof packaging, follow these conditions after unpacking.

Temperature: 5~30°C

Humidity: 40~70%RH

Storage life: 168hours

Do not store this device where a large amount of dust or harmful volatile gas exists, electrostatic is easily charged, condensation is generated, or changes in temperature and humidity are wide, or under the direct sunlight.

Baking

If the storage time specified above has passed, mounting by soldering may cause cracks on the moisture absorbed package. Before mounting, the package should be baked under the following conditions.

Temperature: 125°C

Treating time: 16 to 24 hours

Trays, embossing tapes and reels are not heat-resistant type.

Before baking, the device should be placed in a heat-resistant container.

In consideration of the time-consuming baking process and the possibility of deformed terminal, the device should be mounted promptly within the time observing the storage conditions.

If a long-term storage is needed, a desiccator or a dry box should be used.

Handling instructions

Shipping boxes must be handled with care because any drop or shock may damage the device.

Additionally, the device must be handled in the place with the protection against electrostatic charge and without extreme changes of temperature/humidity.

MITSUMI ELECTRIC CO., LTD.

Strategy Engineering Department Semiconductor Business Division

Tel: +81-46-230-3470 / <https://product.minebeamitsumi.com/en/contact/>

Notes:

Any products mentioned this datasheet are subject to any modification in their appearance and others for improvements without prior notification. The details listed here are not a guarantee of the individual products at the time of ordering. When using the products, you will be asked to check their specifications.

Disclaimers (Handling Precautions)

1. All the information described herein (product data, specifications, figures, tables, programs, algorithms and application circuit examples, etc.) is current as of publishing date of this document and is subject to change without notice.
2. The circuit examples and the usages described herein are for reference only, and do not guarantee the success of any specific mass-production design.
MITSUMI ELECTRIC CO., LTD. is not liable for any losses, damages, claims or demands caused by the reasons other than the products described herein (hereinafter "the products") or infringement of third-party intellectual property right and any other right due to the use of the information described herein.
3. MITSUMI ELECTRIC CO., LTD. is not liable for any losses, damages, claims or demands caused by the incorrect information described herein.
4. Be careful to use the products within their ranges described herein. Pay special attention for use to the absolute maximum ratings, operation voltage range and electrical characteristics, etc.
MITSUMI ELECTRIC CO., LTD. is not liable for any losses, damages, claims or demands caused by failures and / or accidents, etc. due to the use of the products outside their specified ranges.
5. Before using the products, confirm their applications, and the laws and regulations of the region or country where they are used and verify suitability, safety and other factors for the intended use.
6. When exporting the products, comply with the Foreign Exchange and Foreign Trade Act and all other export-related laws, and follow the required procedures.
7. The products are strictly prohibited from using, providing or exporting for the purposes of the development of weapons of mass destruction or military use. MITSUMI ELECTRIC CO., LTD. is not liable for any losses, damages, claims or demands caused by any provision or export to the person or entity who intends to develop, manufacture, use or store nuclear, biological or chemical weapons or missiles, or use any other military purposes.
8. The products are not designed to be used as part of any device or equipment that may affect the human body, human life, or assets (such as medical equipment, disaster prevention systems, security systems, combustion control systems, infrastructure control systems, vehicle equipment, traffic systems, in-vehicle equipment, aviation equipment, aerospace equipment, and nuclear-related equipment), excluding when specified for in-vehicle use or other uses by MITSUMI ELECTRIC CO., LTD. Do not apply the products to the above listed devices and equipment.
MITSUMI ELECTRIC CO., LTD. is not liable for any losses, damages, claims or demands caused by unauthorized or unspecified use of the products.
9. In general, semiconductor products may fail or malfunction with some probability. The user of the products should therefore take responsibility to give thorough consideration to safety design including redundancy, fire spread prevention measures, and malfunction prevention to prevent accidents causing injury or death, fires and social damage, etc. that may ensue from the products' failure or malfunction.
The entire system in which the products are used must be sufficiently evaluated and judged whether the products are allowed to apply for the system on customer's own responsibility.
10. The products are not designed to be radiation-proof. The necessary radiation measures should be taken in the product design by the customer depending on the intended use.
11. The products do not affect human health under normal use. However, they contain chemical substances and heavy metals and should therefore not be put in the mouth. The fracture surfaces of wafers and chips may be sharp. Be careful when handling these with the bare hands to prevent injuries, etc.
12. When disposing of the products, comply with the laws and ordinances of the country or region where they are used.
13. The information described herein contains copyright information and know-how of MITSUMI ELECTRIC CO., LTD.
The information described herein does not convey any license under any intellectual property rights or any other rights belonging to MITSUMI ELECTRIC CO., LTD. or a third party. Reproduction or copying of the information from this document or any part of this document described herein for the purpose of disclosing it to a third-party is strictly prohibited without the express permission of MITSUMI ELECTRIC CO., LTD.
14. For more details on the information described herein or any other questions, please contact MITSUMI ELECTRIC CO., LTD.'s sales representative.
15. This Disclaimers have been delivered in a text using the Japanese language, which text, despite any translations into the English language and the Chinese language, shall be controlling.