

Quartz Crystal "CX1612DB series"

KYOCERA Part Number : CX1612DB40000D0WLLCC

Note: This is a preliminary specification.

If you would like to know official specification and details specification, please contact us.

1.RATINGS				
Items	SYMB.	Rating	Unit	Rmarks
Operating Temperature Range	Topr	-30 to +85	°C	
Storage Temperature Range	Topr	-40 to +85	°C	

2.Electrical Characteristics							
Item	Electrical Specification					Test Conditions	Remarks
	SYMB.	Min.	Typ.	Max.	Unit		
Mode of Vibration		Fundamental					
Nominal FrequencyF0	F0		40		MHz		
Nominal Temperature	T _{NOM}		+25		°C		
Load Capacitance	CL	8.0			pF		
Frequency Tolerance	df/F	-20.0		+20.0	PPM	+25±3° C	by Measurement Conditions
Frequency Temperature Characteristics	df/F					-30 to +85° C	Based on an oscillation frequency at + 25 °C
Frequency Aging Rate						1 st year	+25±3°C
Egyuvalent Series Resistance	ESR			80	Ω		by Measurement Conditions
Drive Level	Pb	0.01		100	μW		
Insulation Resistance	IR	500			MΩ	100V(DC)	

3.Measurement Condition

Frequency measurement

Measuring instrument : IEC PI-Network Test Fixture

Load capacitance :8.0pF

Drive Level :10 μ W

Equivalent series resistance (ESR) measurement


Measuring instrument : IEC PI-Network Test Fixture

Load capacitance :Series

Drive Level :10 μ W

4.Dimensions

(Unit:mm)

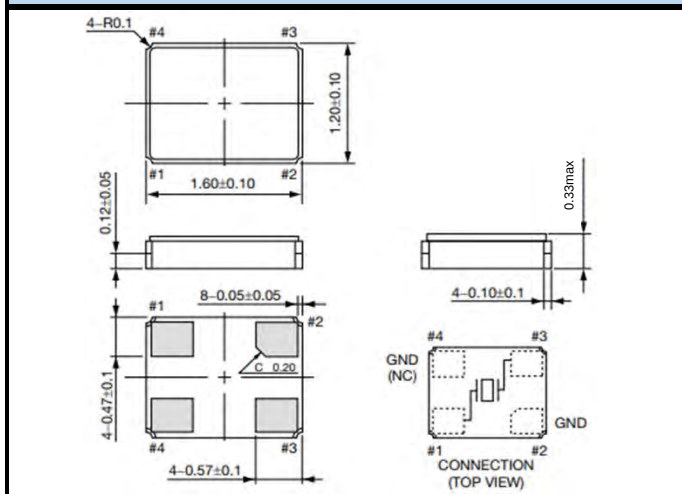

5.Recommended Land Pattern

(Unit:mm)

