

MAGICSTRAP® Technical Data Sheet


Murata part number : LXMS31ACNA / LXMS31ACNB

1. General Descriptions

Murata MAGICSTRAP® is an innovative RFID module with a wide range of RF features. It incorporates an industry standard IC.

[Features]


- 1-1. Compliant to EPC global Class1Gen2
- 1-2. Ultra small package (3.2X1.6X0.55mm typ.) ensuring high durability
- 1-3. Supports wide frequency range from 860MHz to 960MHz, allowing to cover all globally relevant UHF frequency bands with one single design.
- 1-4. Impedance transformation function for more accurate matching with various antenna designs
 - 4 different variants available, which allow perfect matching to antenna impedance
- 1-5. Inductive coupling with antenna even through non-conductive adhesive
- 1-6. Wide mechanical mounting tolerance for assembly into RFID tag or inlay
- 1-7. Compatible with plastic molding process (150°C max. over 2 hours)
- 1-8. Fully Compatible with conventional SMT process (Soldering/Reflow)
- 1-9. High ESD protection function up to 2kV (MM)
- 1-10. 100% green material for full RoHS compliance
- 1-11. Internal 512bit user memory available



2. Standard & Memory Capacity


Parameter MAGICSTRAP® P/N	EPC Memory	User Memory	TID Memory
LXMS31ACNA – 009, 010, 011, 012	Up to 240 bits	512 bits	64 bits inc. 32 bits serial #
LXMS31ACNB – 019, 020, 021, 022	Up to 240 bits	-	64 bits inc. 32 bits serial #

3. Block Diagram

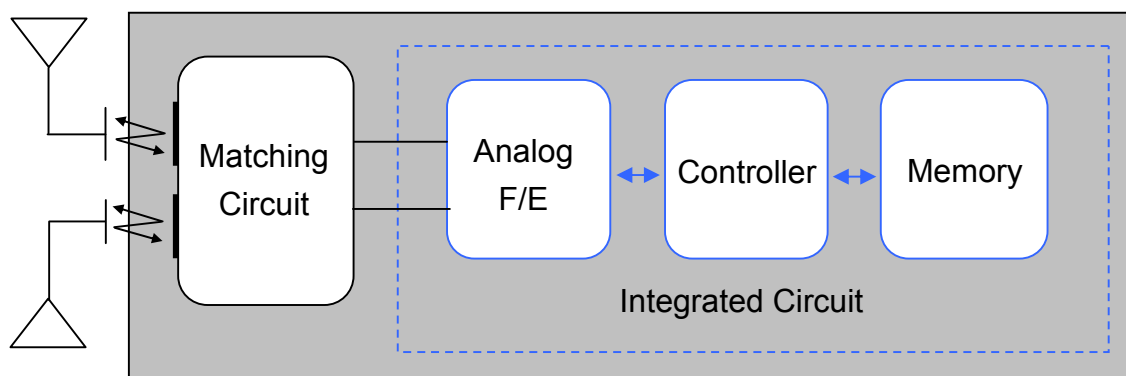


4. Mechanical Information


4-1. Dimensions

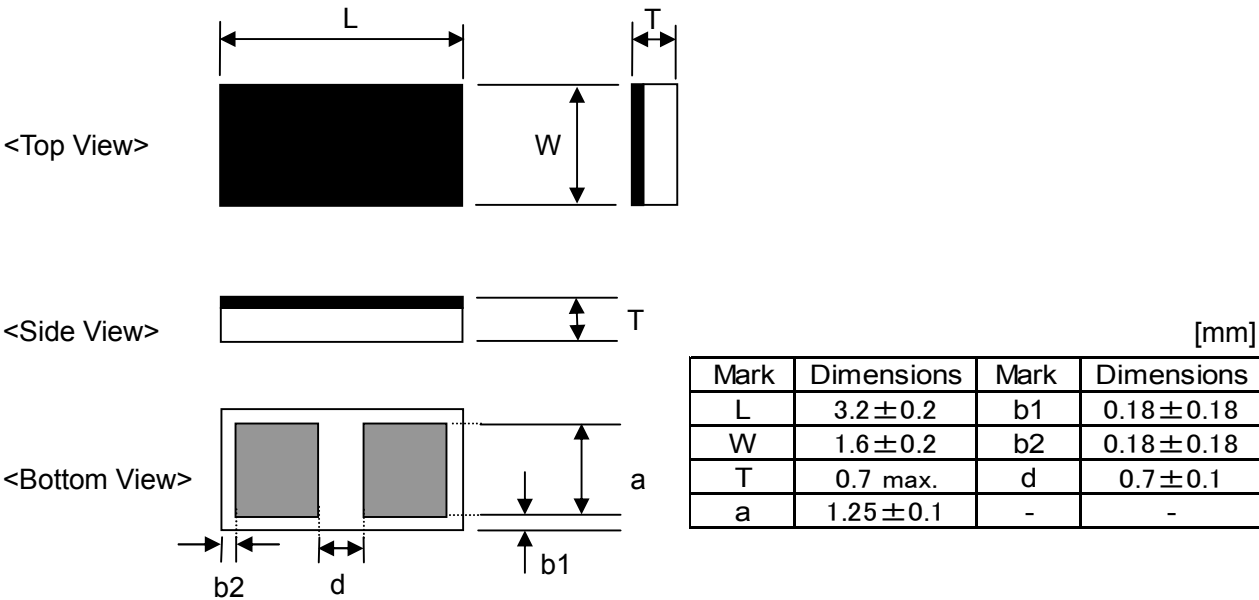

4-2. Recommended mounting pattern at antenna side for reflow soldering

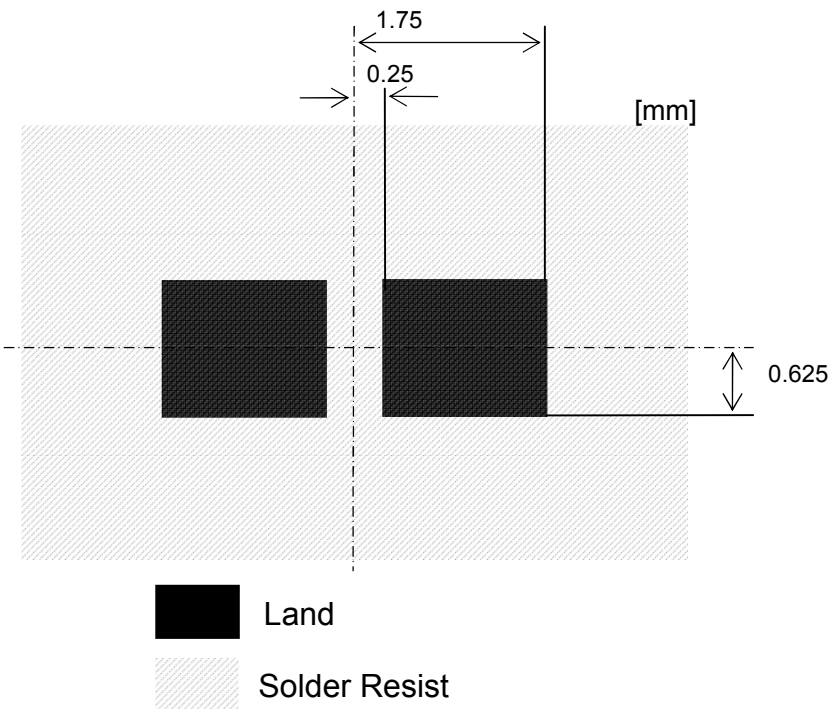

4-3. Recommended mounting pattern at antenna side for the attachment by adhesive

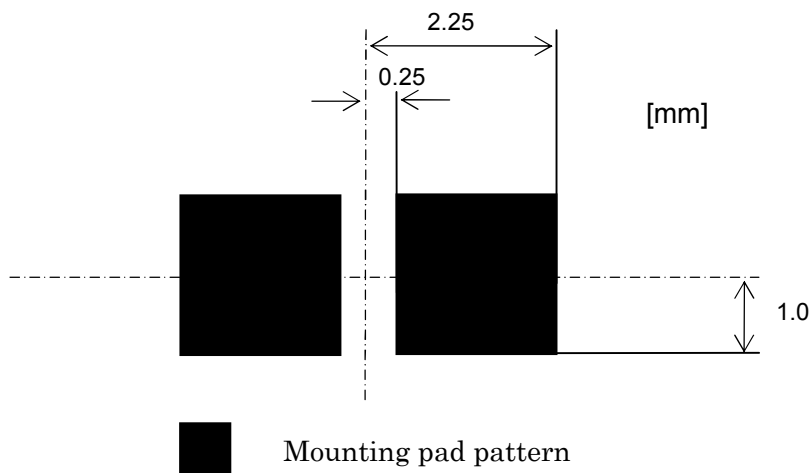

5. Electrical Performance

5-1. Frequency range

865 – 955 MHz


5-2. Minimum operating power

-8dBm

5-3. Electrical characteristics at minimum operating power (Ta=25°C, Unit : Ohm)

Parameter MAGICSTRAP® P/N			LXMS31ACNA - 009	LXMS31ACNA - 010	LXMS31ACNA - 011	LXMS31ACNA - 012
			LXMS31ACNB - 019	LXMS31ACNB - 020	LXMS31ACNB - 021	LXMS31ACNB - 022
Impedance value	@866.5 MHz	R	15	12	25	80
		X	-45	-107	-200	-405
	@915.0 MHz	R	25	12	25	80
		X	-45	-107	-200	-420
	@953.0 MHz	R	30	9	20	60
		X	-48	-105	-195	-425

5-4. Impedance Measurement Method

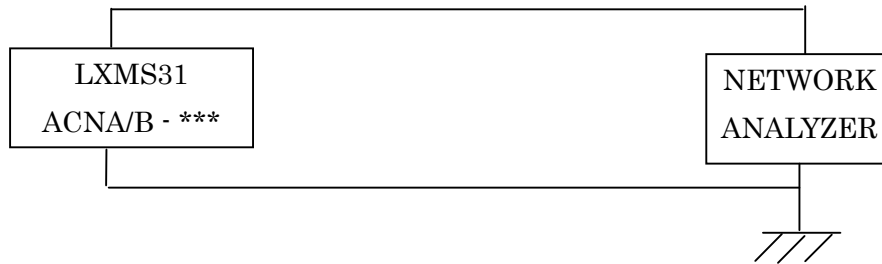

5-5. IC incorporated

NXP UCODE G2XM (PNs -009 to -012) or UCODE G2XL (PNs -019 to -022).

6. OPERATING TEMPERATURE

-40 °C ~ +85 °C

7. RoHS compliance

MAGICSTRAP® is compliant to RoHS directive.

8. Attachment of MAGICSTRAP®

MAGICSTRAP® has electrodes at the bottom side which enable an inductive coupling with the antenna pad when using a non-conductive adhesive as well as making a conductive connection with antenna.

< Note >

- This document is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.