Fair-Rite Products Corp.
Your Signal Solution®

Chip Beads (2506031017Y0)

Part Number: 2506031017Y0

MULTI-LAYER CHIP BEAD

Fair-Rite offers a broad selection of cost effective multi-layer chip beads to suppress conducted EMI signals. Chip beads can be used in an array of devices such as cellular phones, computers, laptops, pagers, etc. The small package sizes accommodate automated placements and allow for a dense packaging of circuit boards.

Chip Beads are available in standard, high and GHz signal speeds.

Recommended Soldering Profile

Packaging Options:
-All multi-layer chip beads are supplied taped and reeled, if required bulk packed chip beads can be provided.

The suggested land patterns are in accordance to the latest revision of IPC-7351.

Weight: 0.006 (g)

Package Size: 0603 (1608)

Dim	mm	mm tol	nominal inch	inch misc.
A	0.8	±0.15	0.031	_
B	0.8	±0.15	0.031	_
C	1.6	±0.15	0.063	_
D	0.4	±0.20	0.016	_

Reel Information				
Tape Width mm	Pitch mm	Parts 7" Reel	Parts 13" Reel	Parts 14" Reel
8	4	4000	10000	_

Downloaded from Arrow.com.

Land Patterns				
V	W	X	Y	Z
0.60 (0.024”)	1.70 (0.067”)	1.00 (0.039”)	1.10 (0.043”)	–

Chart Legend
+ Test frequency


Typical Impedance (Ω)	
50 MHz	68
100 MHz+	100 ±25%
500 MHz	140
1000 MHz+	-


Electrical Properties	
Max DCR (Ω)	0.15
Max Current (mA)	400

The impedance values listed are typical values. The nominal impedance with a +/- 25% tolerance is specified for the + marked 100 MHz. Chip beads are measured for impedance on the HP 4291A and fixture HP 16192A.
Chip beads are 100% tested for impedance and dc resistance.

Typical Impendance (Ω)	
50 MHz	77
100 MHz+	100 ±25%
500 MHz	144
1000 MHz+	–

Downloaded from Arrow.com.

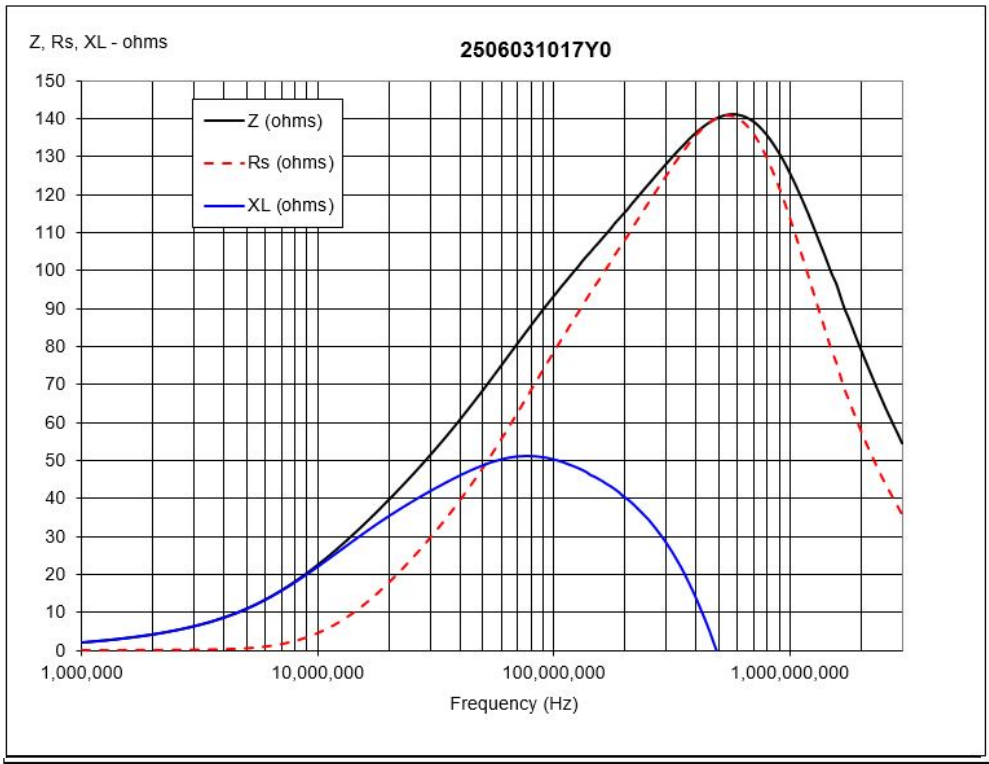

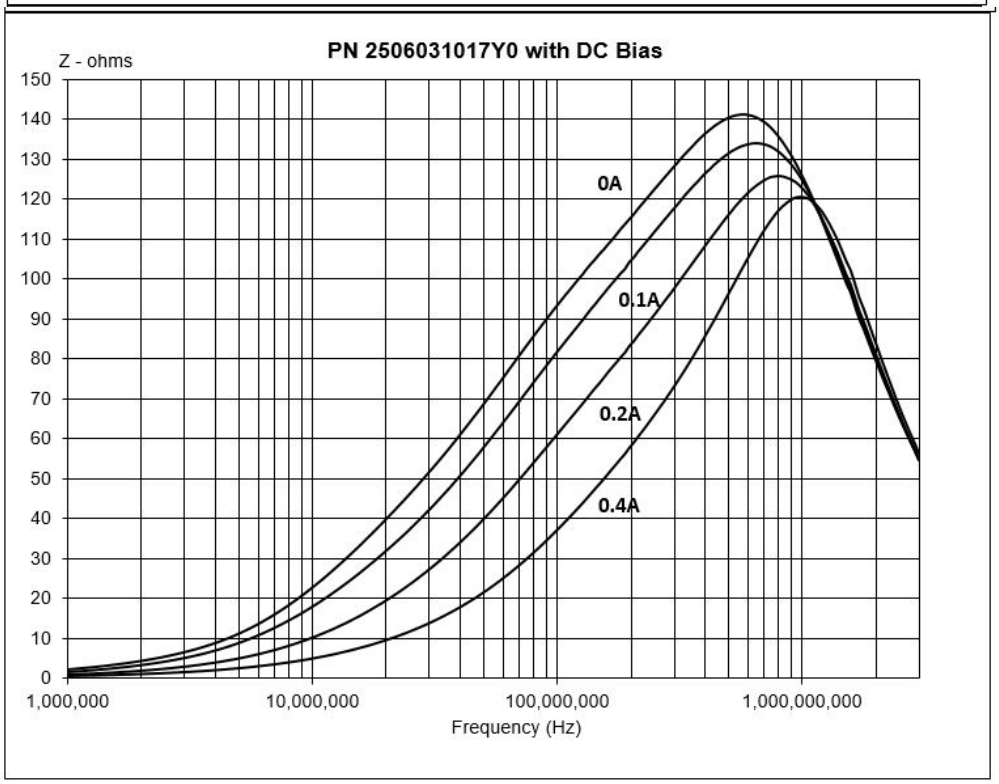

[CSV Download]

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com

Downloaded from Arrow.com.